

AGL - ROSALIND PARK GAS PLANT

LOT 35, MEDHURST ROAD, MENANGLE, NSW, 2586
ANNUAL NOISE COMPLIANCE MONITORING – 2020
RWDI # 2101682
January 11, 2021

SUBMITTED TO

David Mudd
Environmental Business Partner
NSW Gas Operations
DMudd@agl.com.au

SUBMITTED BY

Roman Haverkamp
Senior Engineer
roman.haverkamp@rwdi.com

RWDI Australia Pty Ltd (RWDI)

272 Pacific Highway – Level 4
Crows Nest, NSW, Australia, 2065
T: +61.2.9437.4611
E-mail: solutions@rwdi.com
ABN: 86 641 303 871



DOCUMENT CONTROL

Version	Status	Date	Prepared By	Reviewed By
A	Final	11 January 2021	Roman Haverkamp	John Wassermann

NOTE

All materials specified by RWDI Australia Pty Ltd (RWDI) have been selected solely on the basis of acoustic performance. Any other properties of these materials, such as fire rating, chemical properties etc. should be checked with the suppliers or other specialised bodies for fitness for a given purpose.

The information contained in this document produced by RWDI is solely for the use of the client identified on the front page of this report. Our client becomes the owner of this document upon full payment of our **Tax Invoice** for its provision. This document must not be used for any purposes other than those of the document's owner. RWDI undertakes no duty to or accepts any responsibility to any third party who may rely upon this document.

WILKINSON MURRAY

In October 2020, Wilkinson Murray Pty Limited merged with RWDI Group, a leading international consulting firm. Wilkinson Murrays core practise areas of noise, acoustics, vibration and air quality consulting built since 1962 servicing Australia and Asia-Pacific region will complement RWDI practise areas. Combined, RWDI+Wilkinson Murray is one of the largest teams globally specialising in the area of noise, acoustics, vibration and air quality.

RWDI

RWDI is a team of highly-specialised consulting engineers and scientists working to improve the built environment through three core areas of practice: building performance, climate engineering and environmental engineering. More information is available at www.rwdi.com.

QUALITY ASSURANCE

RWDI Australia Pty Ltd is committed to and implemented AS/NZS ISO 9001:2015 "Quality Management Systems – Requirements".



Quality
ISO 9001
SAI GLOBAL



TABLE OF CONTENTS

1	INTRODUCTION	1
2	SITE DESCRIPTION	1
3	NOISE LIMITS	1
4	MONITORING PROCEDURE	3
5	MONITORING RESULTS	4
6	CONCLUSION	7
	APPENDIX A: GLOSSARY OF ACOUSTIC TERMINOLOGY	8



1 INTRODUCTION

Noise monitoring of the AGL Upstream Investments Pty Ltd Rosalind Park Gas Plant (RPGP) was carried out by RWDI Australia Pty Ltd (RWDI) in order to assess compliance with the relevant noise limits set by the NSW Environment Protection Authority (EPA) Environment Protection Licence conditions (Licence No. 12003) and the Department of Planning and Environment's Conditions of Consent (DA No. 282-6-2003-i).

Noise monitoring was undertaken in accordance with the *NSW Industrial Noise Policy*.

This Annual Noise Compliance Monitoring Report is based on quarterly noise monitoring conducted by RWDI on Wednesday, 18 March 2020, Tuesday, 5 May 2020, Thursday, 6 August 2020, and Tuesday, 8 December 2020. The report has been prepared to satisfy the EPA's Licence Condition R1.9 (Licence No. 12003).

2 SITE DESCRIPTION

Two receiver locations were identified in the RPGP Environmental Impact Statement (EIS) as follows:

- R1: Medhurst Road, Gilead (approx. 0.9km north of RPGP)
- R7: Mount Gilead, Gilead (approx. 1.1km southeast of RPGP)

The approximate monitoring locations are shown in Figure 1.

3 NOISE LIMITS

The noise limits identified in the EPA's Licence Condition L5.1 (Licence No. 12003) apply to daytime, evening and night time periods and are expressed as $L_{Aeq,15min}$ noise levels. The noise limits are summarised in Table 1.

Table 1: Noise Limits (EPA Licence No. 12003)

Location	Daytime ($L_{Aeq,15min}$)	Evening ($L_{Aeq,15min}$)	Night ($L_{Aeq,15min}$)
R1 – Medhurst Road	35	35	35
R7 – Mount Gilead	37	36	36

Notes:

- Daytime = 7.00 am - 6.00 pm Monday-Saturday; 8.00 am - 6.00 pm Sunday.
- Evening = 6.00 pm - 10.00 pm.
- Night = 10.00 pm - 7.00 am Monday to Saturday; 10.00 pm - 8.00 am Sunday.

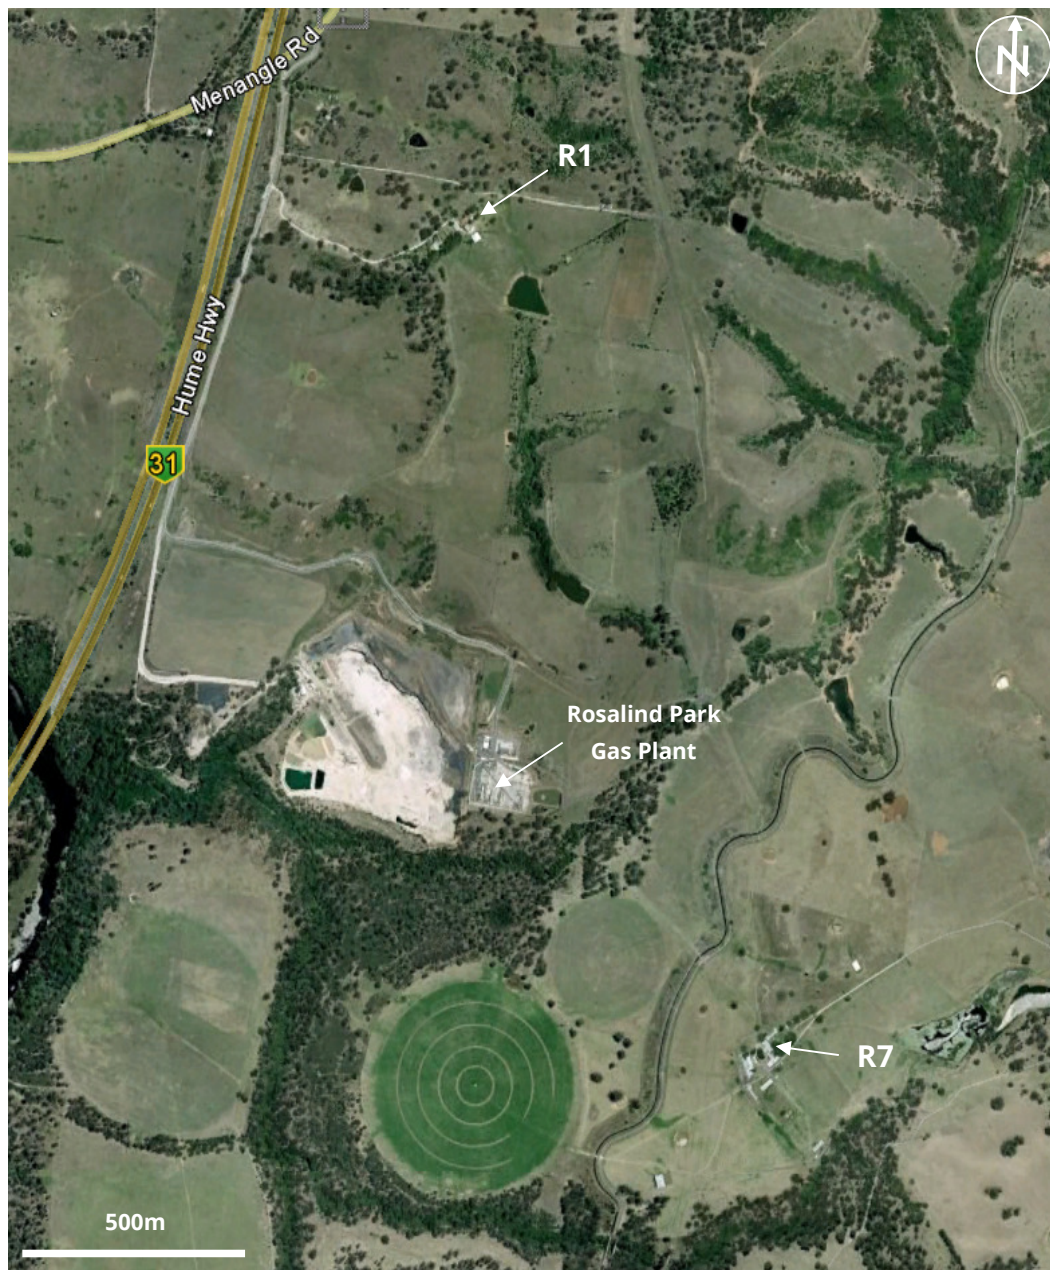


Figure 1: Noise Monitoring Locations



4 MONITORING PROCEDURE

Noise monitoring was conducted at both identified receivers for the three time periods defined in Table 1 in order to assess compliance for the day, evening and night time periods. The measurements were conducted in suitable meteorological conditions (low wind speeds and no rain). The percentage of cloud cover during each site visit is summarised in Table 2.

This Annual Noise Compliance Monitoring Report is based on quarterly noise monitoring conducted by RWDI on Wednesday, 18 March 2020, Tuesday, 5 May 2020, Thursday, 6 August 2020, and Tuesday, 8 December 2020. The report has been prepared to satisfy the EPA's Licence Condition R1.9 (Licence No. 12003).

Table 2: Summary of Cloud Cover during 2020 Noise Monitoring

Location	Assessment Period	% Cloud Cover
18 March 2020	Day	0 %
	Evening	0 %
	Night	0 %
5 May 2020	Day	25 %
	Evening	25 %
	Night	25 %
6 August 2020	Day	25 %
	Evening	25 %
	Night	50 %
8 December 2020	Day	5 %
	Evening	5 %
	Night	5 %

Notes:

- Daytime = 7.00 am - 6.00 pm.
- Evening = 6.00 pm - 10.00 pm.
- Night = 10.00 pm - 7.00 am.

All measurements were carried out during typical operating conditions with one compressor unit operating at the RPGP site.

All attended noise measurements were conducted at a location representative of the most affected point within the 30m-perimeter surrounding the house for both identified noise sensitive receiver locations as listed in Table 1.



5 MONITORING RESULTS

Table 3 summarises the 2020 noise results expressed as $L_{Aeq,15min}$ noise levels.

The plant was generally found to be inaudible or only barely audible. When the plant was barely audible, the measurement data was used to estimate the noise contribution from the plant.

It should be noted that noise emission limits identified in EPL 12003 apply under all meteorological conditions except:

- during rain and wind speeds (at 10 m height) greater than 3 m/s; and
- under "non-significant weather conditions".

Gilead is considered a non-arid area (annual average rainfall greater than 500mm) according to the *INP* and as such, strong temperature inversions (G-class Pasquill-Gillford stability category) are considered to be a "non-significant weather condition". Therefore, the noise limits set out in Table 1 do not strictly apply to strong temperature inversions (G-class Pasquill-Gilford stability category).

Local meteorological data sourced from the Campbelltown (Mount Annan) Bureau of Meteorology (BoM) weather station indicated that wind speeds at 10 m height were no greater than 3 m/s and high strength (G-Class) temperature inversions were not present during any of the monitoring.

ANNUAL NOISE COMPLIANCE MONITORING – 2020
AGL - ROSALIND PARK GAS PLANT

RWDI#2101682
 January 11, 2021



Table 3: Summary of 2020 Noise Monitoring

Quarterly Monitoring Date	Assessment Period	R1 Medhurst			R7 Mt Gilead		
		Measurement Period	Measured $L_{Aeq,15min}$ due to RPGP (dBA)	$L_{Aeq,15min}$ Criterion (dBA)	Measurement Period	Measured $L_{Aeq,15min}$ due to RPGP (dBA)	$L_{Aeq,15min}$ Criterion (dBA)
18 March 2020	Day	5.44 pm – 5.59 pm	Inaudible	35	4.58 pm – 5.13 pm	33	37
	Evening	9.04 pm – 9.19 pm	Inaudible	35	8.17 pm – 8.32 pm	34	36
	Night	10.49 pm – 11.04 pm	Inaudible	35	10.01 pm – 10.16 pm	32	36
5 May 2020	Day	4.48 pm – 5.03 pm	Inaudible	35	5.35 pm – 5.50 pm	32	37
	Evening	9.38 pm – 9.53 pm	Inaudible	35	6.00 pm – 6.15 pm	31	36
	Night	10.00 pm – 10.15 pm	Inaudible	35	11.03 pm – 11.18 pm	Inaudible	36
6 August 2020	Day	4.50 pm – 5.05 pm	Inaudible	35	5.44 pm – 5.59 pm	33	37
	Evening	9.44 pm – 9.59 pm	Inaudible	35	6.00 pm – 6.15 pm	31	36
	Night	10.00 pm – 10.15 pm	Inaudible	35	10.55 pm – 11.10 pm	Inaudible	36

ANNUAL NOISE COMPLIANCE MONITORING – 2020
AGL - ROSALIND PARK GAS PLANT

RWDI#2101682
 January 11, 2021



Quarterly Monitoring Date	Assessment Period	R1 Medhurst			R7 Mt Gilead		
		Measurement Period	Measured $L_{Aeq,15min}$ due to RPGP (dBA)	$L_{Aeq,15min}$ Criterion (dBA)	Measurement Period	Measured $L_{Aeq,15min}$ due to RPGP (dBA)	$L_{Aeq,15min}$ Criterion (dBA)
8 December 2020	Day	5.45 pm – 6.00 pm	Inaudible	35	4.56 pm – 5.11 pm	Inaudible	37
	Evening	8.53 pm – 9.08 pm	Inaudible	35	8.05 pm – 8.20 pm	31	36
	Night	10.44 pm – 10.59 pm	Inaudible	35	10.00 pm – 10.15 pm	33	36

Notes:

- Daytime = 7.00 am - 6.00 pm.
- Evening = 6.00 pm - 10.00 pm.
- Night = 10.00 pm - 7.00 am.



6 CONCLUSION

The results of the noise monitoring of the Rosalind Park Gas Plant conducted in 2020 in accordance with the *NSW Industrial Noise Policy* show compliance with the relevant operational noise limits set by the NSW EPA's Environment Protection Licence conditions (Licence No. 12003) and the Department of Planning and Environment's Conditions of Consent (DA No. 282-6-2003-i) at both receiver locations for day, evening and night time with typical operating conditions.



APPENDIX A: GLOSSARY OF ACOUSTIC TERMINOLOGY

Most environments are affected by environmental noise which continuously varies, largely as a result of road traffic. To describe the overall noise environment, a number of noise descriptors have been developed and these involve statistical and other analysis of the varying noise over sampling periods, typically taken as 15 minutes. These descriptors are here defined.

Maximum Noise Level (L_{Amax}) – The maximum noise level over a sample period is the maximum level, measured on fast response, during the sample period.

dB(A) – A-weighted decibels. The ear is not as effective in hearing low frequency sounds as it is hearing high frequency sounds. That is, low frequency sounds of the same dB level are not heard as loud as high frequency sounds. The sound level meter replicates the human response of the ear by using an electronic filter which is called the “A” filter. A sound level measured with this filter switched on is denoted as dB(A). Practically all noise is measured using the A filter.

Frequency – Frequency is synonymous to pitch. Sounds have a pitch which is peculiar to the nature of the sound generator. For example, the sound of a tiny bell has a high pitch and the sound of a bass drum has a low pitch. Frequency or pitch can be measured on a scale in units of Hertz or Hz.

Impulsive Noise – Having a high peak of short duration or a sequence of such peaks. A sequence of impulses in rapid succession is termed repetitive impulsive noise.

Intermittent Noise – The level suddenly drops to that of the background noise several times during the period of observation. The time during which the noise remains at levels different from that of the ambient is one second or more.

L_{A1} – The L_{A1} level is the noise level which is exceeded for 1% of the sample period. During the sample period, the noise level is below the L_{A1} level for 99% of the time.

L_{A10} – The L_{A10} level is the noise level which is exceeded for 10% of the sample period. During the sample period, the noise level is below the L_{A10} level for 90% of the time. The L_{A10} is a common noise descriptor for environmental noise and road traffic noise.

L_{A90} – The L_{A90} level is the noise level which is exceeded for 90% of the sample period. During the sample period, the noise level is below the L_{A90} level for 10% of the time. This measure is commonly referred to as the background noise level.

L_{Aeq} – The equivalent continuous sound level (L_{Aeq}) is the energy average of the varying noise over the sample period and is equivalent to the level of a constant noise which contains the same energy as the varying noise environment. This measure is also a common measure of environmental noise and road traffic noise.

ABL – The Assessment Background Level is the single figure background level representing each assessment period (daytime, evening and night time) for each day. It is determined by calculating the 10th percentile (lowest 10th percent) background level (L_{A90}) for each period.



RBL – The Rating Background Level for each period is the median value of the ABL values for the period over all of the days measured. There is therefore an RBL value for each period – daytime, evening and night time.

Sound Absorption – The ability of a material to absorb sound energy through its conversion into thermal energy.

Sound Level Meter – An instrument consisting of a microphone, amplifier and indicating device, having a declared performance and designed to measure sound pressure level.

Sound Pressure Level – The level of noise, usually expressed in decibels, as measured by a standard sound level meter with a microphone.

Tonal Noise – Containing a prominent frequency and characterised by a definite pitch.