

AGL Upstream Investments Pty Ltd

Waukivory Pilot Project Surface Water and Groundwater Monitoring Report to 30 September 2015

26 November 2015



Document information

Client: AGL Upstream Investments Pty Ltd
Title: Waukivory Pilot Project
Surface Water and Groundwater Monitoring Report to 30 September 2015
Document No: 2268523A-WAT-REP-004 RevB
Date: 26 November 2015

| Rev | Date | Details |
|-----|------------|-----------|
| A | 30/10/2015 | 1st Draft |
| B | 26/11/2015 | Final |

Author, Reviewer and Approver details

| | | | |
|--------------|---------------|------------------|--|
| Prepared by: | Becky Rollins | Date: 26/11/2015 | Signature:  |
| Reviewed by: | David Whiting | Date: 26/11/2015 | Signature:  |
| Approved by: | Sean Daykin | Date: 26/11/2015 | Signature:  |

Distribution

AGL Upstream Investments Pty Ltd, Parsons Brinckerhoff file, Parsons Brinckerhoff Library

©Parsons Brinckerhoff Australia Pty Limited 2015

Copyright in the drawings, information and data recorded in this document (the information) is the property of Parsons Brinckerhoff. This document and the information are solely for the use of the authorised recipient and this document may not be used, copied or reproduced in whole or part for any purpose other than that for which it was supplied by Parsons Brinckerhoff. Parsons Brinckerhoff makes no representation, undertakes no duty and accepts no responsibility to any third party who may use or rely upon this document or the information.

Document owner

Parsons Brinckerhoff Australia Pty Limited
ABN 80 078 004 798
Level 27 Ernst & Young Centre
680 George Street
Sydney NSW 2000
GPO Box 5394
Sydney NSW 2001
Australia
Tel: +61 2 9272 5100
Fax: +61 2 9272 5101
www.pbworld.com
Certified to ISO 9001, ISO 14001, OHSAS 18001

Contents

| | Page number |
|--|--------------------|
| Glossary | vi |
| Abbreviations | xi |
| Units | xiii |
| Executive summary | xiv |
| 1. Introduction | 1 |
| 1.1 Gloucester Gas Project | 1 |
| 1.2 Waukivory Pilot Project | 1 |
| 1.3 Pilot well testing | 2 |
| 1.4 Objectives | 3 |
| 1.5 Scope of works | 3 |
| 2. Site characterisation | 7 |
| 2.1 Site location | 7 |
| 2.2 Rainfall | 7 |
| 2.3 Surface hydrology | 9 |
| 2.4 Geological setting | 9 |
| 2.5 Hydrogeological setting | 13 |
| 3. Waukivory pilot project | 15 |
| 3.1 Introduction | 15 |
| 3.2 Waukivory pilot schedule and water volumes | 15 |
| 3.3 Monitoring network | 19 |
| 3.4 Water monitoring | 23 |
| 3.5 Key analytes: fracture stimulation additives | 27 |
| 3.6 Assessment criteria and trigger response | 29 |
| 4. Water levels | 31 |
| 4.1 Pilot well water levels | 31 |
| 4.2 Groundwater levels | 33 |
| 4.3 Surface water levels | 44 |
| 5. Water quality | 46 |

| | | |
|-----|-------------------------------------|----|
| 5.1 | Introduction | 46 |
| 5.2 | Fracture stimulation fluid | 46 |
| 5.3 | Pilot well (flowback) water quality | 47 |
| 5.4 | AST2 water quality | 54 |
| 5.5 | Groundwater quality | 57 |
| 5.6 | Surface water quality | 57 |
| 6. | Flowback | 62 |
| 7. | Beneficial use | 64 |
| 8. | Conclusions | 66 |
| 9. | Statement of limitations | 69 |
| 10. | References | 70 |

List of tables

| | Page number | |
|-----------|--|----|
| Table 2.1 | Stratigraphy of the Gloucester Basin | 10 |
| Table 2.2 | Four hydrogeological units – Gloucester Basin | 13 |
| Table 3.1 | Flowback volumes recovered up to 30 September 2015 | 18 |
| Table 3.2 | Perforation and fracture stimulation intervals | 20 |
| Table 3.3 | Current groundwater monitoring network | 21 |
| Table 3.4 | Surface water monitoring network | 23 |
| Table 3.5 | Monitoring schedule | 24 |
| Table 3.6 | Comprehensive suite of analytes | 26 |
| Table 3.7 | Fracture stimulation additives and breakdown constituents | 28 |
| Table 3.8 | Adopted thresholds for BTEX and hydrogen sulphide at AST2 | 29 |
| Table 4.1 | Water level response triggers | 35 |
| Table 5.1 | Summary of fracture stimulation fluid concentrations | 47 |
| Table 5.2 | Comparison of the EWMA to the 5 th and 95 th percentile for the current reporting period | 59 |
| Table 5.3 | Summary of trends in water quality data up to 30 September 2015 | 60 |
| Table 5.4 | Surface water monitoring sites and analytes that trigger further review | 61 |
| Table 6.1 | Flowback volumes recovered up to 30 September 2015 | 62 |
| Table 7.1 | Generalised beneficial use matrix, based on salinity and yield | 64 |
| Table 7.2 | Summary statistics for electrical conductivity during baseline, fracture stimulation and flowback water quality monitoring | 65 |

List of figures

| | Page number | |
|------------|---|---|
| Figure 1.1 | Regional location | 4 |
| Figure 1.2 | Regional groundwater and surface water monitoring network | 5 |

| | | |
|------------|---|----|
| Figure 1.3 | Waukivory groundwater and surface water monitoring network | 6 |
| Figure 2.1 | Long-term annual rainfall and cumulative deviation from annual mean (CDFM) rainfall at Gloucester Post Office BoM station 060015 (BoM 2015) | 8 |
| Figure 2.2 | Monthly rainfall and cumulative deviation from the monthly mean (CDFM) rainfall at the AGL Gloucester station since installation in July 2011 (AGL 2015b) | 8 |
| Figure 2.3 | Geological map of the Gloucester Basin | 11 |
| Figure 2.4 | Waukivory interpreted seismic section (from Parsons Brinckerhoff 2015d) (line of section is shown on Figure 1.3) | 12 |
| Figure 3.1 | Schematic of pilot wells, water gathering lines and storage tanks | 17 |
| Figure 3.2 | Dates of operation of the pilot wells | 18 |
| Figure 3.3 | Cumulative flowback volumes from the pilot wells | 18 |
| Figure 3.4 | Waukivory water quality sampling frequency | 25 |
| Figure 4.1 | Water levels and flowback volumes at the Waukivory pilot wells | 32 |
| Figure 4.2 | Groundwater levels and rainfall at the Waukivory monitoring bores | 37 |
| Figure 4.3 | Groundwater and trigger levels at the Waukivory alluvial and interburden monitoring bores | 38 |
| Figure 4.4 | Groundwater and trigger levels at the Waukivory shallow rock monitoring bores | 38 |
| Figure 4.5 | Schematic comparison of WK13 perforated intervals and WKMB05 monitored intervals | 40 |
| Figure 4.6 | Groundwater levels and rainfall at multizone monitoring well WKMB05 compared to water levels at WK13 | 41 |
| Figure 4.7 | Groundwater and trigger levels at multizone monitoring well WKMB05 | 42 |
| Figure 4.8 | Groundwater levels and rainfall at vibrating wire piezometer PL03 | 43 |
| Figure 4.9 | Surface water levels and rainfall at the Waukivory stream gauges | 45 |
| Figure 5.1 | Sodium, boron and BTEX vs TDS for formation water, fracture stimulation fluid and flowback water | 49 |
| Figure 5.2 | Laboratory electrical conductivity (EC) measurements and flowback volumes at the Waukivory pilot wells | 51 |
| Figure 5.3 | Monoethanolamine concentrations and flowback volumes at the Waukivory pilot wells | 52 |
| Figure 6.1 | Laboratory electrical conductivity measurements and flowback volumes at the Waukivory pilot wells | 63 |

List of appendices

| | |
|------------|--|
| Appendix A | Sampling dates, locations and rationale |
| Appendix B | Parsons Brinckerhoff sampling procedure and AGL pilot well and AST2 sampling procedure |
| Appendix C | Laboratory QC reports |
| Appendix D | Summary results of water quality |
| Appendix E | Pilot well analyte time-series hydrographs |
| Appendix F | AST2 analyte time-series hydrographs |
| Appendix G | Groundwater and surface water analyte time-series hydrographs |
| Appendix H | ALS and Envirolab Services laboratory reports |
| Appendix I | Groundwater and surface water trend analysis |

Glossary

| | |
|---------------------|--|
| Acid Wash | A technique to enhance formation permeability through the use of acid to dissolve sediments that may be blocking fractures and inhibiting permeability. |
| Alluvium | Unconsolidated sediments (clays, sands, gravels and other materials) deposited by flowing water. Deposits can be made by streams on river beds, floodplains, and alluvial fans. |
| Alluvial aquifer | Permeable zones that store and produce groundwater from unconsolidated alluvial sediments. Shallow alluvial aquifers are generally unconfined aquifers. |
| Aquifer | Rock or sediment in a formation, group of formations, or part of a formation that is saturated and sufficiently permeable to transmit economic quantities of water. |
| Baseline sampling | A period of regular water quality and water level measurements that are carried out over a period long enough to determine the variability in groundwater conditions. |
| Bore | A structure drilled below the surface to obtain water from an aquifer or series of aquifers. |
| Coal | A sedimentary rock derived from the compaction and consolidation of vegetation or swamp deposits to form a fossilised carbonaceous rock. |
| Coal seam | A layer of coal within a sedimentary rock sequence. |
| Coal seam gas (CSG) | Coal seam gas is a form of natural gas (predominantly methane) that is extracted from coal seams. |
| Concentration | The amount or mass of a substance present in a given volume or mass of sample, usually expressed as microgram per litre (water sample) or micrograms per kilogram (sediment sample). |
| Conceptual model | A simplified and idealised representation (usually graphical) of the physical hydrogeologic setting and the hydrogeological understanding of the essential flow processes of the system. This includes the identification and description of the geologic and hydrologic framework, media type, hydraulic properties, sources and sinks, and important aquifer flow and surface water-groundwater interaction processes. |
| Confining layer | Low permeability strata that may be saturated, however will not allow water to move through it under natural hydraulic gradients. |
| Datalogger | A digital recording instrument that is inserted in monitoring and pumping bores to record pressure measurements and water level variations. |
| Detection limit | The concentration below which a particular analytical method cannot determine, with a high degree of certainty, a concentration. |
| Drawdown | A lowering of the water table in an unconfined aquifer or the pressure surface of a confined aquifer caused by pumping of groundwater from bores and wells. |

| | |
|------------------------------|---|
| Electrical conductivity (EC) | A measure of a fluid's ability to conduct an electrical current and is an estimation of the total ions dissolved. It is often used as a measure of water salinity. |
| Flowback water | The return to surface of fracture stimulation fluids before transition to natural formation water (groundwater), after which water flowing from the well is termed produced water. |
| Fracture | Breakage in a rock or mineral along a direction or directions that are not cleavage or fissility directions. |
| Fracture stimulation | Fracture stimulation involves pumping a fluid under pressure through the perforated interval into the coal seam to open cracks or fractures, increasing the connectivity and enabling the flow of water and gas. |
| Fracture stimulation fluid | The fluid is typically a mixture of sand, water (raw water) and additives. |
| Fractured rock aquifer | These occur in sedimentary, igneous and metamorphosed rocks which have been subjected to disturbance, deformation, or weathering, and which allow water to move through joints, bedding planes, fractures and faults. Although fractured rock aquifers are found over a wide area, they generally contain much less groundwater than alluvial and porous sedimentary rock aquifers. |
| Groundwater | The water contained in interconnected pores or fractures located below the water table in the saturated zone. |
| Groundwater level | The water level measured in a bore; this may be at or close to the water table in unconfined aquifers, or represent the average piezometric level across the screened interval in confined aquifers. |
| Hydraulic conductivity | The rate at which water of a specified density and kinematic viscosity can move through a permeable medium (notionally equivalent to the permeability of an aquifer to fresh water). |
| Hydraulic fracturing | See fracture stimulation. |
| Hydraulic gradient | The change in total hydraulic head with a change in distance in a given direction. |
| Hydraulic head | A specific measurement of water pressure above a datum. It is usually measured as a water surface elevation, expressed in units of length. In an aquifer, it can be calculated from the depth to water in a monitoring bore. The hydraulic head can be used to determine a hydraulic gradient between two or more points. |
| Hydrogeology | The study of the interrelationships of geologic materials and processes with water, especially groundwater. |
| Hydrology | The study of the occurrence, distribution, and chemistry of all surface waters. |
| Ion | An ion is an atom or molecule where the total number of electrons is not equal to the total number of protons, giving it a net positive or negative electrical charge. |
| Lithology | The study of rocks and their depositional or formational environment on a large specimen or outcrop scale. |

| | |
|--------------------------------------|---|
| Major ions | Constituents commonly present in concentrations exceeding 10 milligram per litre. Dissolved cations generally are calcium, magnesium, sodium, and potassium; the major anions are sulphate, chloride, fluoride, nitrate, and those contributing to alkalinity, most generally assumed to be bicarbonate and carbonate. |
| Methane (CH ₄) | An odourless, colourless, flammable gas, which is the major constituent of natural gas. It is used as a fuel and is an important source of hydrogen and a wide variety of organic compounds. |
| Micro Siemens per centimetre (μS/cm) | A measure of water salinity commonly referred to as EC (see also electrical conductivity). Most commonly measured in the field with calibrated field meters. |
| Monitoring bore | A non-pumping bore, is generally of small diameter that is used to measure the elevation of the water table and/or water quality. Bores generally have a short well screen against a single aquifer through which water can enter. |
| Oxidation-reduction potential (ORP) | The redox potential is a measure (in volts) of the affinity of a substance for electrons – its electronegativity – compared with hydrogen (which is set at 0). Substances more strongly electronegative than (i.e. capable of oxidising) hydrogen have positive redox potentials. Substances less electronegative than (i.e. capable of reducing) hydrogen have negative redox potentials. Also known as reduction potential. |
| Percentile | The value below which a given percentage of observations fall. For example, the 5th percentile is the value below which five percent of observations are found. |
| Perforation | For pilot wells, perforation is holes punctured in the casing of a pilot well to gain access to the gas and water associated with the coal. |
| Permeable material | Material that permits water to move through it at perceptible rates under the hydraulic gradients normally present. |
| Permian | The last period of the Palaeozoic era that finished approximately 252 million years before present. |
| Petroleum Exploration Licence (PEL) | A Petroleum Exploration Lease (PEL) allows a company to exclusively explore a defined area for petroleum, including undertaking desktop studies, collecting samples and drilling. |
| Petroleum Production Lease (PPL) | A Petroleum Production Lease (PPL) allows a company exclusive rights to extract the resource within the area defined by the PPL. A PPL is only granted after a demonstration to the NSW Government that the resource is of benefit to the State and can be extracted safely and without damage to the environment or heritage areas and infrastructure. |
| pH | Potential of Hydrogen; the logarithm of the reciprocal of hydrogen-ion concentration in gram atoms per litre; provides a measure on a scale from 0 to 14 of the acidity or alkalinity of a solution (where 7 is neutral, greater than 7 is alkaline and less than 7 is acidic). |
| Piezometric pressure | See hydraulic head. |
| Produced water | Natural groundwater generated from coal seams during flow testing and production dewatering. |

| | |
|--------------------------|--|
| Pump commissioning | The period over which pumps are installed and tested, following fracture stimulation. |
| Raw water | Source water used in the fracture stimulation fluid mixture. |
| Recharge | The process which replenishes groundwater, usually by rainfall infiltrating from the ground surface to the water table and by river water reaching the water table or exposed aquifers. The addition of water to an aquifer. |
| Recharge area | A geographic area that directly receives infiltrated water from surface and in which there are downward components of hydraulic head in the aquifer. Recharge generally moves downward from the water table into the deeper parts of an aquifer then moves laterally and vertically to recharge other parts of the aquifer or deeper aquifer zones. |
| Recovery | The difference between the observed water level during the recovery period after cessation of pumping and the water level measured immediately before pumping stopped. |
| Salinity | The concentration of dissolved salts in water, usually expressed in EC units ($\mu\text{S}/\text{cm}$) or milligrams of total dissolved solids per litre (mg/L TDS). |
| Salinity classification | <p>Fresh water quality – water with a salinity $<800 \mu\text{S}/\text{cm}$.</p> <p>Marginal water quality – water that is more saline than freshwater and generally waters between 800 and 1,600 $\mu\text{S}/\text{cm}$.</p> <p>Brackish quality – water that is more saline than freshwater and generally waters between 1,600 and 4,800 $\mu\text{S}/\text{cm}$.</p> <p>Slightly saline quality – water that is more saline than brackish water and generally waters with a salinity between 4,800 and 10,000 $\mu\text{S}/\text{cm}$.</p> <p>Moderately saline quality – water that is more saline than slightly saline water and generally waters between 10,000 and 20,000 $\mu\text{S}/\text{cm}$.</p> <p>Saline quality – water that is almost as saline as seawater and generally waters with a salinity greater than 20,000 $\mu\text{S}/\text{cm}$.</p> <p>Seawater quality – water that is generally around 55,000 $\mu\text{S}/\text{cm}$.</p> |
| Sandstone | Sandstone is a sedimentary rock composed mainly of sand-sized minerals or rock grains (predominantly quartz). |
| Screen | A type of bore lining or casing of special construction, with apertures designed to permit the flow of water into a bore while preventing the entry of aquifer or filter pack material. |
| Sedimentary rock aquifer | These occur in consolidated sediments such as porous sandstones and conglomerates, in which water is stored in the intergranular pores, and limestone, in which water is stored in solution cavities and joints. These aquifers are generally located in sedimentary basins that are continuous over large areas and may be tens or hundreds of metres thick. In terms of quantity, they contain the largest volumes of groundwater. |
| Shut-in | A well is 'shut-in' when it is closed by operators to stop gas flow, either by closing valves at the surface or downhole. |

| | |
|---------------------------------------|---|
| Siltstone | A fine-grained rock of sedimentary origin composed mainly of silt-sized particles (0.004 to 0.06 mm). |
| Stratigraphy | The depositional order of sedimentary rocks in layers. |
| Surface water-groundwater interaction | This occurs in two ways: (1) streams gain water from groundwater through the streambed when the elevation of the water table adjacent to the streambed is greater than the water level in the stream; and (2) streams lose water to groundwater through streambeds when the elevation of the water table is lower than the water level in the stream. |
| Total dissolved solids (TDS) | A measure of the salinity of water, usually expressed in milligrams per litre (mg/L). |
| Trace element | An element found in only minor amounts (concentrations less than 10 milligram per litre) in water or sediment; includes heavy metals arsenic, cadmium, chromium, copper, lead, mercury, nickel, and zinc. |
| Water bearing zone | Geological strata that are saturated with groundwater, however not of sufficient permeability to be called an aquifer. |
| Water quality | Term used to describe the chemical, physical, and biological characteristics of water, usually in respect to its suitability for a particular purpose. |
| Water quality data | Chemical, biological, and physical measurements or observations of the characteristics of surface and ground waters, atmospheric deposition, potable water, treated effluents, and waste water and of the immediate environment in which the water exists. |
| Water table | The top of an unconfined aquifer. It is at atmospheric pressure and indicates the level below which soil and rock are saturated with water. |
| Well | Pertaining to a gas exploration well or gas production well. |

Abbreviations

| | |
|------------------|---|
| AGL | AGL Upstream Investments Pty Ltd |
| ANZECC | Australian and New Zealand Environment Conservation Council |
| ALS | Australian Laboratory Services |
| AST | Above ground storage tank |
| BTEX | Benzene, toluene, ethyl-benzene and xylenes |
| BoM | Bureau of Meteorology |
| BP | Before Present |
| CDFM | Cumulative deviation from mean |
| CSG | Coal seam gas |
| DO | Dissolved oxygen |
| EC | Electrical conductivity |
| EPA | Environment Protection Authority |
| EPL | Environment Protection Licence |
| EWMA | Exponentially weighted moving average |
| GDE | Groundwater Dependent Ecosystems |
| GFDA | Gas Field Development Area |
| GGP | Gloucester Gas Project |
| GMWL | Global Meteoric Water Line |
| GRL | Gloucester Resources Limited |
| H ₂ O | Water |
| H ₂ S | Hydrogen Sulphide |
| LMWL | Local Meteoric Water Line |
| LoR | Limit of reporting |
| LTA | Long term average |
| MEA | Monoethanolamine |

| | |
|-------|---|
| MGA | Map grid of Australia |
| NEPM | National Environment Protection Measures |
| NOW | NSW Office of Water (Department of Primary Industries (DPI) Water from 1 July 2015) |
| OCSG | Office of Coal Seam Gas |
| ORP | Oxidation-reduction potential |
| PEL | Petroleum Exploration Licence |
| PPL | Petroleum Production Lease |
| PQL | Practical quantification limit |
| QA/QC | Quality assurance/quality control |
| SGMP | Surface water and groundwater management plan |
| THPS | Tetrakis (hydroxymethyl) phosphonium sulphate |
| TPH | Total petroleum hydrocarbons |
| TRH | Total recoverable hydrocarbons |
| TDS | Total dissolved solids |
| TOC | Total organic carbon |
| UHS | Unionised hydrogen sulphide |
| UV | Ultraviolet |

Units

| | |
|-------------------|--------------------------------|
| °C | degrees Celsius |
| µg/L | micrograms per litre |
| µS/cm | microSiemens per centimetre |
| % | percent |
| kL | kilolitres |
| km | kilometres |
| km ² | square kilometres |
| kPa | kilopascal |
| L/s | litres per second |
| m | metres |
| m/d | metres per day |
| m ³ /s | cubic metres per second |
| mAHD | metres Australian Height Datum |
| mbgl | metres below ground level |
| mg/L | milligram per litre |
| ML | megalitres |
| mm | millimetres |
| mmol/L | millimol per litre |
| pCM | percent modern carbon |
| TU | tritium unit |
| V | volt |
| yrs BP | years before present |

Executive summary

This report presents the groundwater and surface water monitoring results and their interpretation for the Waukivory Pilot Project (the Project) (exploration) activities within the Stage 1 area of the Gloucester Gas Project (GGP) from 1 July to 30 September 2015 (reporting period). This report is the fourth monitoring report for the Project and provides results of monitoring data from the water monitoring network and flowback water quality and volumes recovered from the four Waukivory (WK) pilot wells: WK11, WK12, WK13 and WK14.

The reporting of this monitoring data is a requirement of Petroleum Exploration Licence (PEL) 285 and Environment Protection Licence (EPL) 20358. The monitoring program and subsequent reporting meets the requirements of the Surface and Groundwater Management Plan (SGMP) (AGL 2015a) and relevant sections of EPL 20358.

The scope of work for this report included:

- Interpretation of water level and water quality trends
- Assessment as to whether these trends are naturally occurring or potentially attributed to Project activities through the use of an analytical methodology that is consistent with the design requirements outlined in ANZECC (2000) and the SGMP (AGL 2015a)
- Assessment of key analytes associated with fracture stimulation additives defined in the SGMP.

The groundwater monitoring network at the Waukivory site consists of seven groundwater monitoring bores, one multizone monitoring well (six zones monitored), and one vibrating wire piezometer location (two zones monitored). There are three surface water monitoring sites at Waukivory located on the Avon River and Waukivory Creek.

Key results and conclusions from this program from 1 July 2015 to 30 September 2015 are as follows:

Pilot well water levels

The pilot well water levels showed an initial decline of between 450 and 800 m in response to recommencement of flowback on 29 June 2015. Water levels within the wells then remained relatively steady with fluctuations of approximately 50 to 100 m.

Pilot well water quality

During the current reporting period, the water quality data from WK11, WK12 and WK13 shows produced water characteristics (as depicted by produced water from CR06 and WK03), most notably stable salinity (EC).

EC data at WK14 continues to show a rising trend, which may indicate some residual dilution due to WK14 being one of the most recent wells to commence flowback, and has currently recovered a smaller fraction of the total volume injected compared to the other pilot wells

The salinity (EC) of the flowback water from all pilot wells is greater than the 5000 $\mu\text{S}/\text{cm}$ trigger for the transition from flowback to produced water as described in the SGMP (AGL 2015a).

BTEX concentrations in the flowback water from WK11, WK13 and WK14 are greater than those found in the produced water from CR06 and WK03 and this is likely due to the deeper target formations at the Waukivory site. The sum of BTEX concentrations in WK12 remains very low as this well is perforated at shallower intervals compared to WK11, WK13 and WK14.

Waukivory pilot well samples showed unionised hydrogen sulphide (UHS) concentrations below the Limit of Reporting (LoR), with the exception of three detections of UHS in the flowback water at WK12 and WK14 on 2 July and 3 July 2015, which were at the LoR of 0.1 mg/L. Such concentrations are considered insufficient to compromise well integrity due to corrosion.

Pilot well water volumes

The total flowback water volumes recovered from each well as of 30 September 2015 range from 271,240 to 1,093,255 L and water recovery as a percentage of total volume injected during fracture stimulation for individual wells ranges from 58.1% to 87.3%.

AST2 water quality

The sum of BTEX concentrations at AST2 ranged from non-detect to 42 µg/L during the current reporting period with BTEX concentrations less than the detection level throughout September 2015.

The concentration of BTEX compounds are several orders of magnitude below the adopted threshold values relating to human and environmental health (SGMP Table 6.2 (AGL 2015a)).

There were no detections of UHS at AST2 during the current reporting period.

Groundwater levels

Groundwater levels in Waukivory monitoring bores targeting the alluvium, shallow rock and upper interburden including the thrust fault zone have shown no response attributable to fracture stimulation or flowback from the pilot wells during the current reporting period.

The variation in groundwater levels has not exceeded the adopted triggers as defined in the SGMP (AGL 2015a) i.e. 2 m (outside of the normal range) decline in aquifers less than 75 m from the ground surface and 5 m (outside of the normal range) decline for deeper (non-coal) monitoring zones.

Groundwater levels in alluvial monitoring bores GR-P3 and WKMB06A show an overall decrease of approximately 0.3 m, and groundwater levels in the shallow rock monitoring bores WKMB01, WKMB02 and WKMB06B show an overall decrease of 0.1 to 0.3 m in response to the relatively dry conditions throughout July and August 2015.

Groundwater levels in monitoring bore WKMB03, screened in the interburden (and thrust fault zone), appear to show a subdued and delayed response to seasonal climatic variations most likely attributable to the very low hydraulic conductivity of the interburden/thrust fault zone. During the current reporting period groundwater levels at WKMB03 show a slight increasing trend.

Both WKMB03 and WKMB06B are screened across the thrust fault zone, and WKMB06A is screened within the alluvium above the thrust fault zone. Hydrographs from these three monitoring bores show no anomalous water level responses and therefore provide no evidence of connectivity between the fracture stimulation zones and the shallow groundwater system via the thrust fault zone.

It is possible that the slight decrease in piezometric level at WKMB05 sensor 2 (Cloverdale Coal Seam) represents a pressure response to flowback at WK13. The piezometric level at sensor 1 (Interburden) shows no net change since flowback commenced in December 2014.

WKMB05 sensors 3 and 4 continued to show a gradual decline until mid-August before increasing towards the end of the reporting period. This response is not considered to be attributable to flowback pumping as a decline in pressure has been observed throughout periods when flowback pumping has not occurred. There is uncertainty as to whether the piezometric levels in WKMB05 sensors 5 and 6 have reached equilibration following installation; this will be reviewed as additional monitoring data becomes available.

Groundwater quality

During the current reporting period there was no water quality sampling from groundwater monitoring sites as per the sampling frequency stipulated in the EPL.

Surface water levels

Water levels at stream gauge sites WKSW01 (Avon River upstream of the Project site), WKSW02 (Waukivory Creek upstream of the Project site) and WKSW03 (Avon River downstream of the Project site) show no change in water levels attributable to fracture stimulation or flowback from the pilot wells during the current reporting period.

Surface water levels showed a very gradual decline during the dry conditions experienced in July and August. Towards the end of the reporting period, surface water levels have shown a gradual increase with response to individual rainfall events.

Surface water quality

Surface water quality data shows that there were no adverse trends associated with Project activities.

Water Beneficial Use Conditions

Water beneficial use categories of domestic, stock, industrial and irrigation are based on yield and salinity characteristics. There has been no change in the beneficial use classification for the groundwater systems.

Actions to correct identified adverse trends

Analysis of monitoring results has not identified adverse trends that require corrective action.

1. Introduction

This report presents groundwater and surface water level and quality data collected during the Waukivory Pilot Project (the Project) between 1 July and 30 September 2015, and includes analysis of flowback water from the pilot wells. The Project is an exploration activity as distinct from broader activities associated with the development phase of the Gloucester Gas Project (GGP).

1.1 Gloucester Gas Project

AGL Upstream Investments Pty Ltd (AGL) is proposing to build the GGP which comprises several stages of development facilitating the extraction of coal seam gas (CSG) from the Gloucester Basin. Concept Plan and Project Approval (Part 3A Approval) for the Stage 1 Gas Field Development Area (GFDA) was granted on 22 February 2011 under Part 3A of the *Environmental Planning and Assessment Act (1979)* (EP&A Act). In addition the project received approval under the *Environment Protection and Biodiversity Conservation Act (1999)* (EPBC Act) (EPBC Approval) on 11 February 2013.

AGL holds Petroleum Exploration Licence (PEL) 285, under the *Petroleum (Onshore) Act 1991*, covering the whole of the Gloucester Basin, approximately 100 km north of Newcastle, NSW. PEL 285 expired on 15 April 2012 and was renewed on 6 August 2014. The Stage 1 GFDA in relation to the PEL 285 boundary is shown in Figure 1.1. The Stage 1 GFDA with AGL owned properties and the water monitoring network is shown in Figure 1.2.

The GGP will involve the depressurisation of deep groundwater and the extraction of gas from multiple coal seams within the Gloucester Coal Measures. Target coal seam depths will vary from site to site with an expected range of 250 to 1,000 metres below ground level (mbgl). The Stage 1 GFDA includes the construction, operation, and decommissioning of 110 CSG wells and associated infrastructure, including gas and water gathering lines.

A dedicated water monitoring network is in place which has enabled the collection of baseline water level and water quality data for the different groundwater and surface water systems within the Gloucester Basin. There are now more than 50 dedicated water monitoring locations and more than four years of baseline monitoring (water levels and water quality) across the Gloucester Basin.

1.2 Waukivory Pilot Project

AGL received approval for the Project from the NSW Office of Coal Seam Gas (OCSG) on 6 August 2014. The approval was included with the renewal of PEL 285 and permitted AGL to fracture stimulate and flow test four existing pilot wells located within the Stage 1 GFDA of the GGP (AGL 2015a). These four pilot wells were installed between 2 October and 24 November 2012. Fracture stimulation commenced on 27 October 2014, with the final fracture stimulation on 26 November 2014. The flowback phase (process of commissioning pumps and returning fracture stimulation fluids back to the surface) commenced on 16 December 2014.

The pilot wells (Waukivory 11 (WK11), Waukivory 12 (WK12), Waukivory 13 (WK13), and Waukivory 14 (WK14)) are located in the northern part of the Stage 1 GFDA on properties leased from Gloucester Resources Limited (GRL) (Figure 1.3). The four wells have been perforated and fracture stimulated within target coal seams ranging from approximately 370 to 960 mbgl.

A surface water and groundwater management plan (SGMP) was prepared by AGL (AGL 2015a) for the Project and approved by the OCSG and NSW Office of Water (NOW) prior to the commencement of the

Project. Accompanying the renewal of PEL 285, the NSW Environment Protection Authority (EPA) issued Environment Protection Licence (EPL) 20358 for the Gloucester Coal Seam Gas Project on 6 August 2014, the current version of the EPL is dated 17 September 2015. The SGMP provides a framework which describes how surface water and groundwater in the local Waukivory area will be monitored and assessed during fracture stimulation and flow testing (which includes dewatering) of the deep coal seams. EPL 20358 requires the monitoring of the concentration of analytes and pollutants at prescribed monitoring locations at given frequencies using appropriate sampling methods.

DPI Water (previously NOW) and EPA requirements for groundwater and surface water monitoring of CSG activities, applicable to this report, include:

- Establishment of baseline conditions
- Collection of periodic water level, water quality and volumetric data
- Reporting of data and trends.

This report complies with the reporting requirements outlined in Section 7.2 of the SGMP and addresses the general requirements of EPL 20358, Condition R5.3. There are some differences in the monitoring requirements (locations, frequencies and analytes) identified in the SGMP compared to those stipulated in the EPL. This technical report focuses on the requirements of the SGMP.

1.3 Pilot well testing

Pilot testing is an exploration activity that identifies potential gas resources by testing the composition, flow rate, and volume of gas in target coal seams. Pilot testing also assesses water production volumes (as the wells are depressurised to allow gas flow) and potential connectivity between shallow aquifers and the water bearing zones of the deep coal seams.

The following phases of testing are referred to in this report:

- Baseline sampling was undertaken to characterise the pre-Project groundwater and surface water conditions at the Waukivory site. The baseline sampling comprised four sampling events in March, June, September and October 2014 (prior to Pilot fracture stimulation).
- Fracture stimulation involves pumping a fluid under pressure through a zone of perforated steel well casing into the coal seam to open cracks or fractures, increasing the hydraulic conductivity and enabling the flow of water and gas (27 October 2014 to 26 November 2015). The fluid is typically a mixture of sand, water and additives.
- Flowback water is the return to surface (by pumping) of fracture stimulation fluids before transition to natural formation water (groundwater), after which, water flowing from the well is termed produced water. Flowback water includes water and fluids extracted during the short period of pump commissioning (ongoing since 27 November 2014).
- Produced water is formation water which is co-produced with gas, and follows the removal of the fracture stimulation fluid (flowback). Pumping groundwater from a coal seam reduces the pressure and allows the gas and 'produced' groundwater to flow into the well and up to the surface. The flow rate of produced water typically decreases over time.

The SGMP (Section 6.1, pages 33 – 34) states that:

- *The flowback water period is deemed to be finished when 100% of the volume of fracture stimulation fluids injected at each well is recovered AND a salinity trigger of 5,000 $\mu\text{S}/\text{cm}$ is reached (and maintained) for the return waters; and*
- *Produced water is deemed to be all deep groundwater that is pumped to surface after the flowback water trigger is achieved.*

It should however be noted that the chemical characteristics of the flowback water will start to migrate toward the characteristics of produced water prior to the volume criterion being met.

1.4 Objectives

The objectives of the quarterly reporting of water monitoring data for the Project are to meet the commitments stated in the approved SGMP (Section 7.2, pages 60 – 64), as follows:

“The quarterly reports will include:

- *Analysis and interpretation of monitoring results including trends; and*
- *Details of any triggers requiring specific management and actions to be undertaken.”*

This report is the fourth monitoring report for the Project, covering the period 1 July to 30 September 2015. Monitoring results include data obtained from groundwater and surface water monitoring points, and pilot well discharge (flowback water).

1.5 Scope of works

This quarterly report includes the following:

- Description of the monitoring program undertaken to 30 September 2015, which includes a description of the monitoring network, frequency of monitoring events, suite of analytes measured, sampling techniques, assessment criteria and quality assurance
- Presentation of groundwater and surface water levels and surface water quality data collected to 30 September 2015
- Presentation of water quality data collected from the flowback water from each pilot well during the Project
- Presentation of key analyte concentrations for monitoring fracture stimulation additives and comparison with background concentrations and fracture stimulation fluid
- Identification of trends associated with natural variations or Project activities
- Assessment of any changes to beneficial use of waters during baseline and pilot well activities as a trigger response for the Project
- Identification of exceedance of triggers, including adverse trends from pilot well activities and recommendations for management actions to be taken.


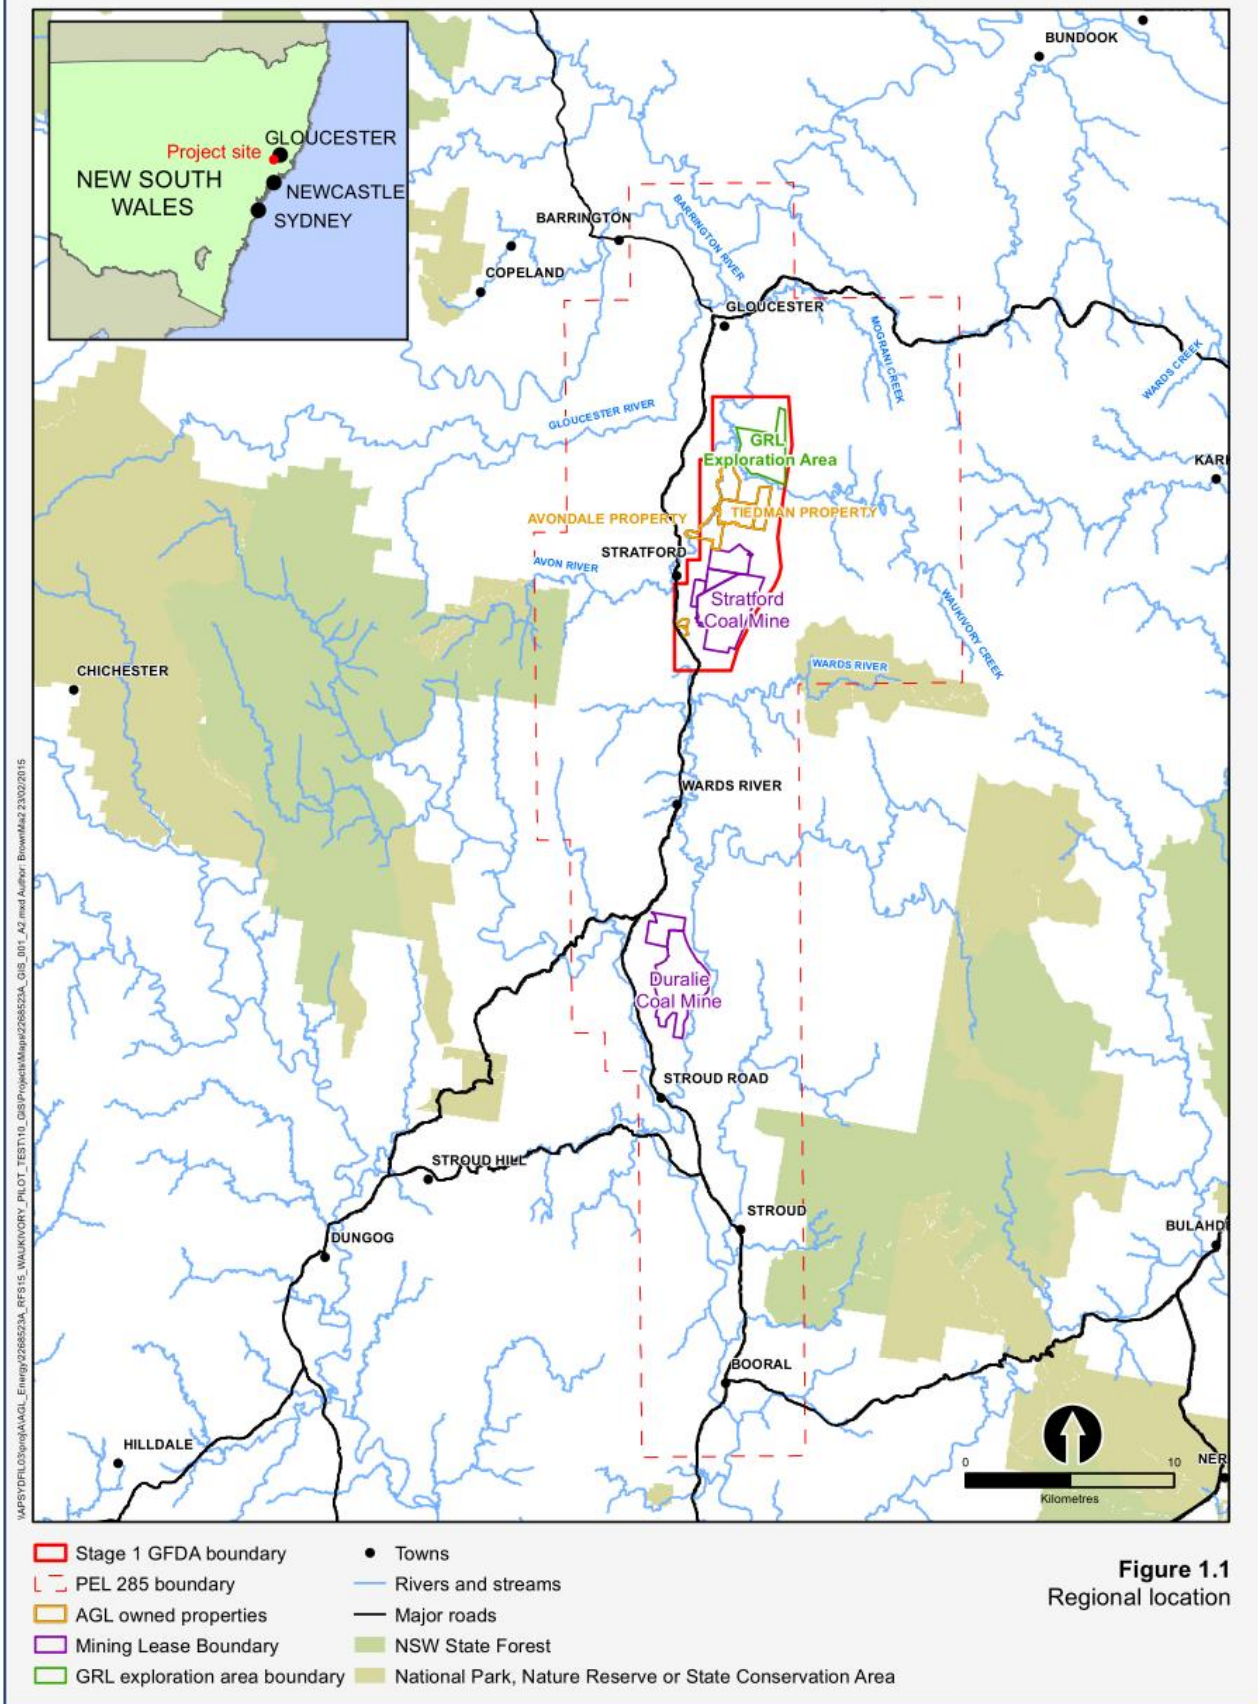



Figure 1.1 Regional location

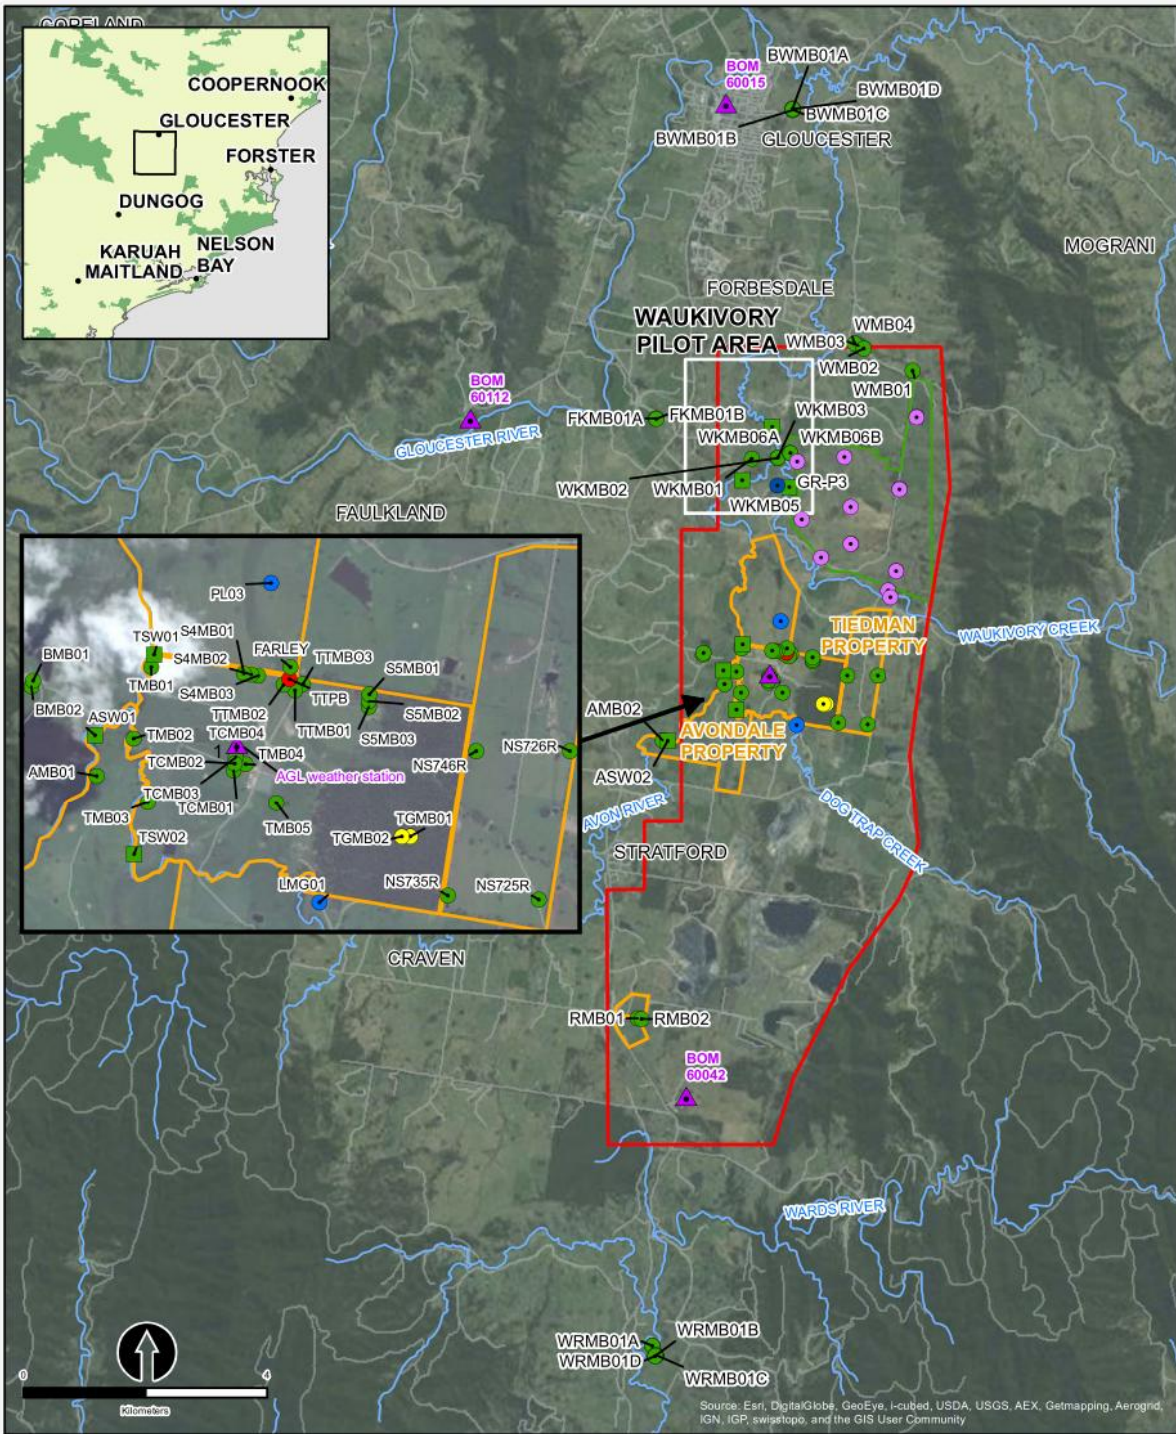

- GRL groundwater monitoring bore
- Multizone monitoring well
- Shallow gas monitoring bore
- Groundwater monitoring bore
- Test production bore
- VWP Monitoring Piezometers
- Stream gauge
- BOM Weather Station
- AGL owned properties
- GRL exploration area boundary
- Stage 1 GFDA boundary
- Rivers and streams
- Roads

Figure 1.2
 Groundwater and surface water monitoring network

Figure 1.2 Regional groundwater and surface water monitoring network

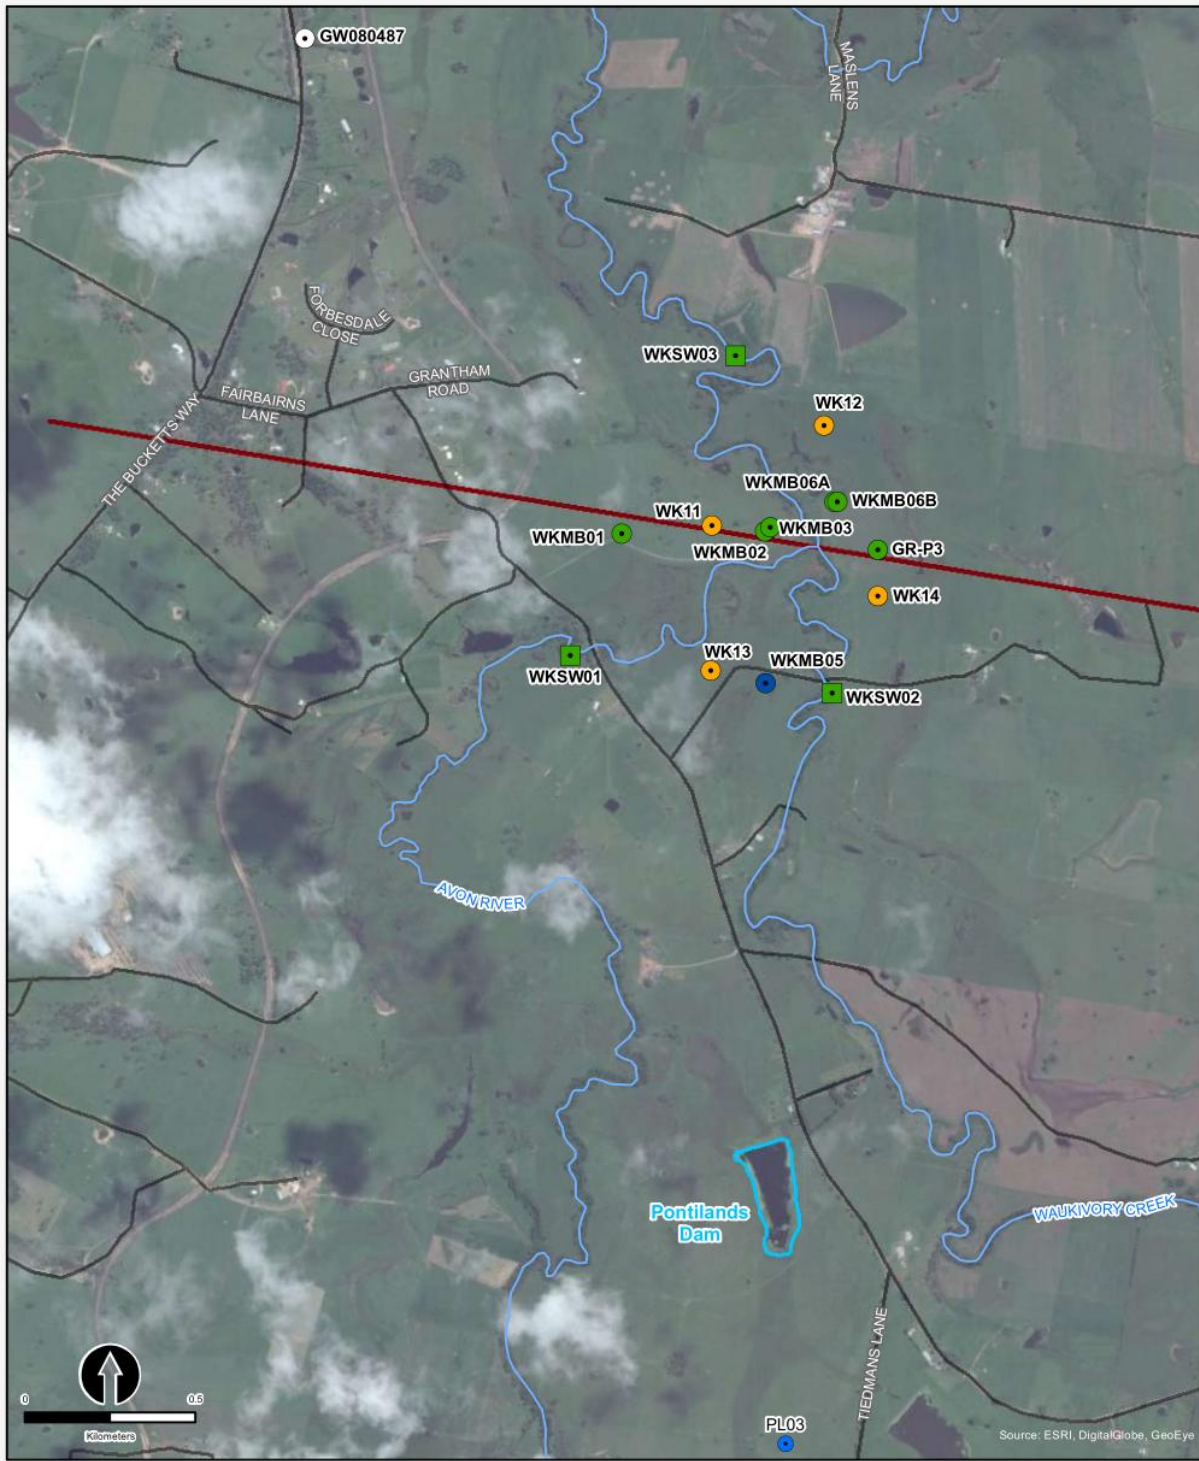

- | | | |
|--|--|--|
| ● Groundwater monitoring bore | ○ Private monitoring location | — Rivers and streams |
| ● Multizone monitoring well | Stream gauge | — Roads |
| ● Pilot gas well | ● VWP Monitoring Piezometers | — Waukivory seismic section line (see Figure 2.4) |

Figure 1.3
Waukivory monitoring network

Figure 1.3 Waukivory groundwater and surface water monitoring network

2. Site characterisation

2.1 Site location

The Project site is located approximately 6 km south of Gloucester, NSW, at 176 Fairbairns Lane, Forbesdale. The site is adjacent to the flood plain of the Avon River and is characterised by paddocks used for low intensity cattle grazing. The Avon River flows in a northerly direction through the Project site. The confluence of the Avon River and its eastern tributary, Waukivory Creek, is located toward the centre of the site (Figure 1.3).

2.2 Rainfall

AGL has operated a weather station on the Tiedman property just south of the Project site since July 2011. The closest Bureau of Meteorology (BoM) weather station to the Waukivory site, at Gloucester Post Office (60015), has been operational since 1888. The locations of the weather stations are shown in Figure 1.2.

Long-term average annual rainfall (1888 to 2014) at Gloucester Post Office is 981 mm. Rainfall is seasonal, with the highest mean monthly rainfall occurring in the summer months between January and March.

The long-term, annual cumulative deviation from mean (CDFM) rainfall for Gloucester Post Office is plotted in Figure 2.1. The long-term cumulative rainfall residual plots are formulated by subtracting the average annual rainfall for the recorded period from the actual annual rainfall and then accumulating these residuals over the assessment period. Periods of below average rainfall are represented as downward trending slopes while periods of above average rainfall are represented as upward trending slopes.

The cumulative deviation plot for Gloucester Post Office (Figure 2.1) shows that over the last 60 years, short (2 to 3 year) drought periods have occurred about every 10 to 15 years. However there have been no long-term deviations from mean conditions, such as the prolonged drought periods that characterised the first half of last century.

Rainfall data from the AGL weather station for the period July 2011 (installation) to September 2015 are presented in Figure 2.2. During the reporting period, rainfall was below the monthly average in July and August 2015 and above the monthly average in September 2015. Total annual rainfall in 2014 was 720 mm which is significantly below the long-term average for Gloucester.

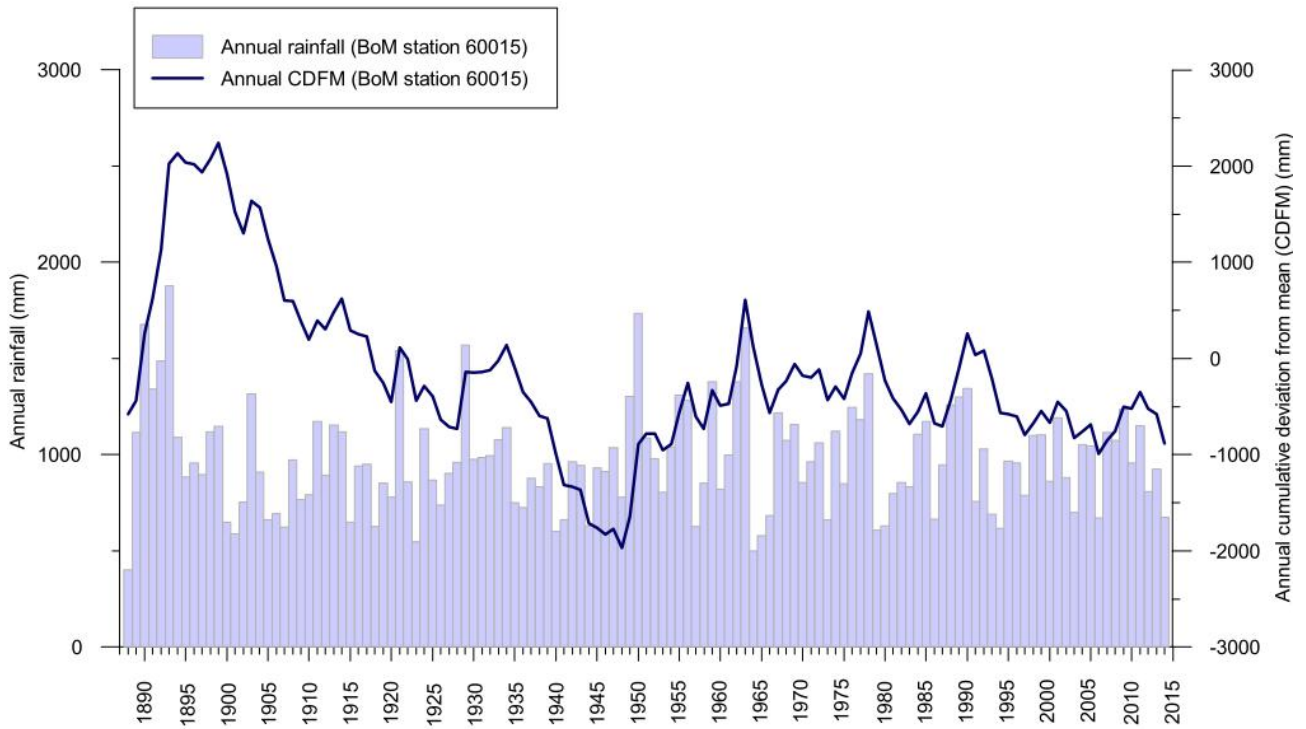


Figure 2.1 Long-term annual rainfall and cumulative deviation from annual mean (CDFM) rainfall at Gloucester Post Office BoM station 060015 (BoM 2015)

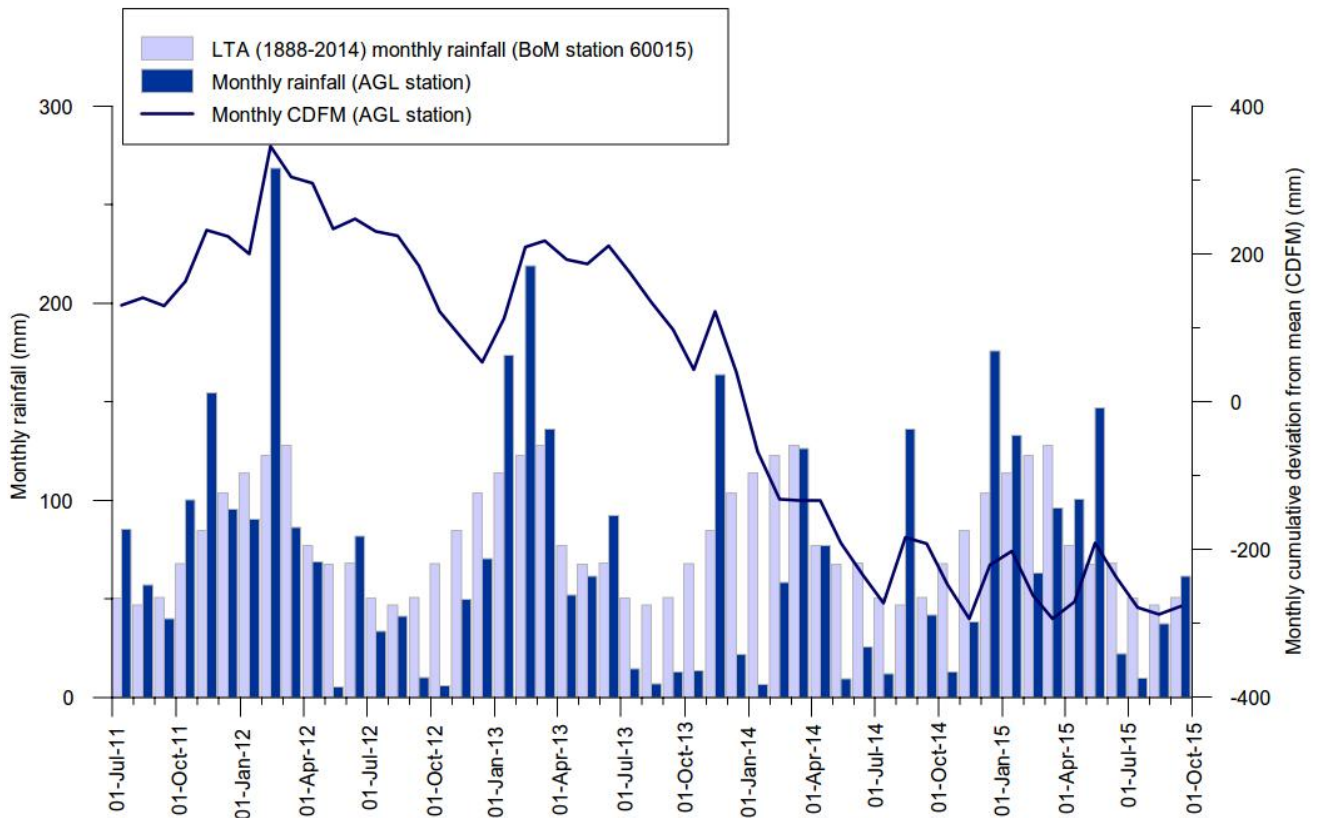


Figure 2.2 Monthly rainfall and cumulative deviation from the monthly mean (CDFM) rainfall at the AGL Gloucester station since installation in July 2011 (AGL 2015b)

2.3 Surface hydrology

The Gloucester Basin is a narrow, north-south trending, elongated geological basin approximately 40 km long and 10 km wide, extending from Gloucester in the north to Stroud in the south. The Gloucester Basin is located in the upper Manning River and Karuah River coastal catchments. The area occupied by the sedimentary rocks of the Basin (about 217 km²) is small in comparison to the size of these catchments.

There is a surface water divide between the Wards River catchment (part of the Karuah River catchment) and the Avon River catchment (part of the Manning River catchment). In the northern Avon River catchment, surface water flow is generally to the north. In the southern Wards River catchment, surface water flow is generally to the south.

The Avon River includes the tributaries of Dog Trap Creek and Waukivory Creek within the Stage 1 GFDA (Figure 1.2). The Gloucester River joins the Avon River in the north of the Gloucester Basin. Wards River flows to the south, and is located outside of the Stage 1 GFDA (Figure 1.2).

2.4 Geological setting

The Gloucester Basin comprises a thick succession of Permian sedimentary rocks representing deposition in both terrestrial and marine environments during a complex period of subsidence, uplift and relative sea level change (marine transgression and regression).

The Basin is a synclinal intermontane structure formed in part of the New England Fold Belt between a major Permian plate margin and the Sydney-Gunnedah Basin (Lennox 2009). The north-south trending synclinal nature of the Gloucester Basin resulted from the collision between the East Australian and Pacific Plates.

Following a period of extension during the Early Permian, the Gloucester Basin has undergone periods of normal and reverse faulting, with large scale tilting associated with late stage compressional movements towards the end of the Permian (Hughes 1984). Reverse faults dominate present day structure. A comparison with the contemporary horizontal stress field map (Hillis *et al* 1998) indicates the Basin is likely to be under compression in an east-west orientation.

The stratigraphy dips steeply (up to 90°) on the flanks of the Basin, dipping towards the north-south trending synclinal basin axis and flattening toward the centre of the Basin. Early Permian and Carboniferous hard resistive volcanics form the ridgelines of the Basin: the Mograni Range to the east; and the Gloucester and Barrington Tops to the west.

Overlying the Permian stratigraphy is a thin sequence of surficial Quaternary sedimentary deposits and regolith. The Quaternary sediments are non-uniform in thickness, and comprise unconsolidated alluvial sediments (sand, gravel, silt and clay) along the drainage channels and colluvial deposits across the rest of the floodplain sourced from the surrounding outcropping Permian deposits.

The Gloucester Basin is divided into three major Permian stratigraphic units each representing a distinct depositional setting: the Gloucester Coal Measures, the Dewrang Group, and the basal Alum Mountain Volcanics. The generalised stratigraphy of the Basin is summarised in Table 2.1. A geological map is shown in Figure 2.3. The development in the Stage 1 GFDA is targeting the intermediate and deep coal seams in the Gloucester Coal Measures generally below depths of 250 m to around 1,000 m.

The fault zones identified at the Project site are mostly reverse faults where older rock strata are thrust over younger strata. Figure 2.4 shows the trace of the major faults identified on a seismic section through the Waukivory pilot area.

Table 2.1 Stratigraphy of the Gloucester Basin

| Period | Group | Sub-group | Formation | Approx. thickness (m) | Coal seam | Depositional environment | Tectonic events | |
|---------------|--------------------------|--------------------------|-----------------------------|-----------------------|----------------|---|--|---|
| Upper Permian | Gloucester Coal Measures | Craven | Crowthers Road Conglomerate | 350 | | Marine regression, pro-gradation of alluvial fans | Uplift to west of Gloucester Basin | |
| | | | Leloma | 585 | Linden | | | |
| | | | | JD | | | | |
| | | | | Bindaboo | | | | |
| | | | | Deards | | | | |
| | | Jilleon | 175 | Cloverdale | | | | |
| | | | | Roseville | | | | |
| | | | | Tereel/Fairbairns | | | | |
| | | Wards River Conglomerate | Variable | | | | | |
| | | Wenham | 23.9 | Bowens Road | | | | |
| | | | Bowens Road Lower | | | | | |
| | | Speldon Formation | | | | | Marine transgression but also some progradation of alluvial fans in the west related to uplift | Extension (normal fault development) and regional subsidence. Uplift to west of Basin |
| | Avon | Dog Trap Creek | 126 | Glenview | | | | |
| | | Waukivory Creek | 326 | Avon | | | | |
| | | | Triple | | | | | |
| | | | Rombo | | | | | |
| | | | Glen Road | | | | | |
| | | | Valley View | | | | | |
| | | | Parkers Road | | | | | |
| Dewrang | Mammy Johnsons | | | 300 | Mammy Johnsons | Marine transgression, regression and further marine transgression | Extension (normal fault development) and regional subsidence | |
| | Weismantel | | | 20 | Weismantel | | | |
| | Duralie Road | | | 250 | | | | |
| Lower Permian | Alum Mountain Volcanics | | | | Clareval | Arc-related rift | Rift? | |
| | | | | | Basal | | | |

Modified from AECOM (2009) and SRK (2005).

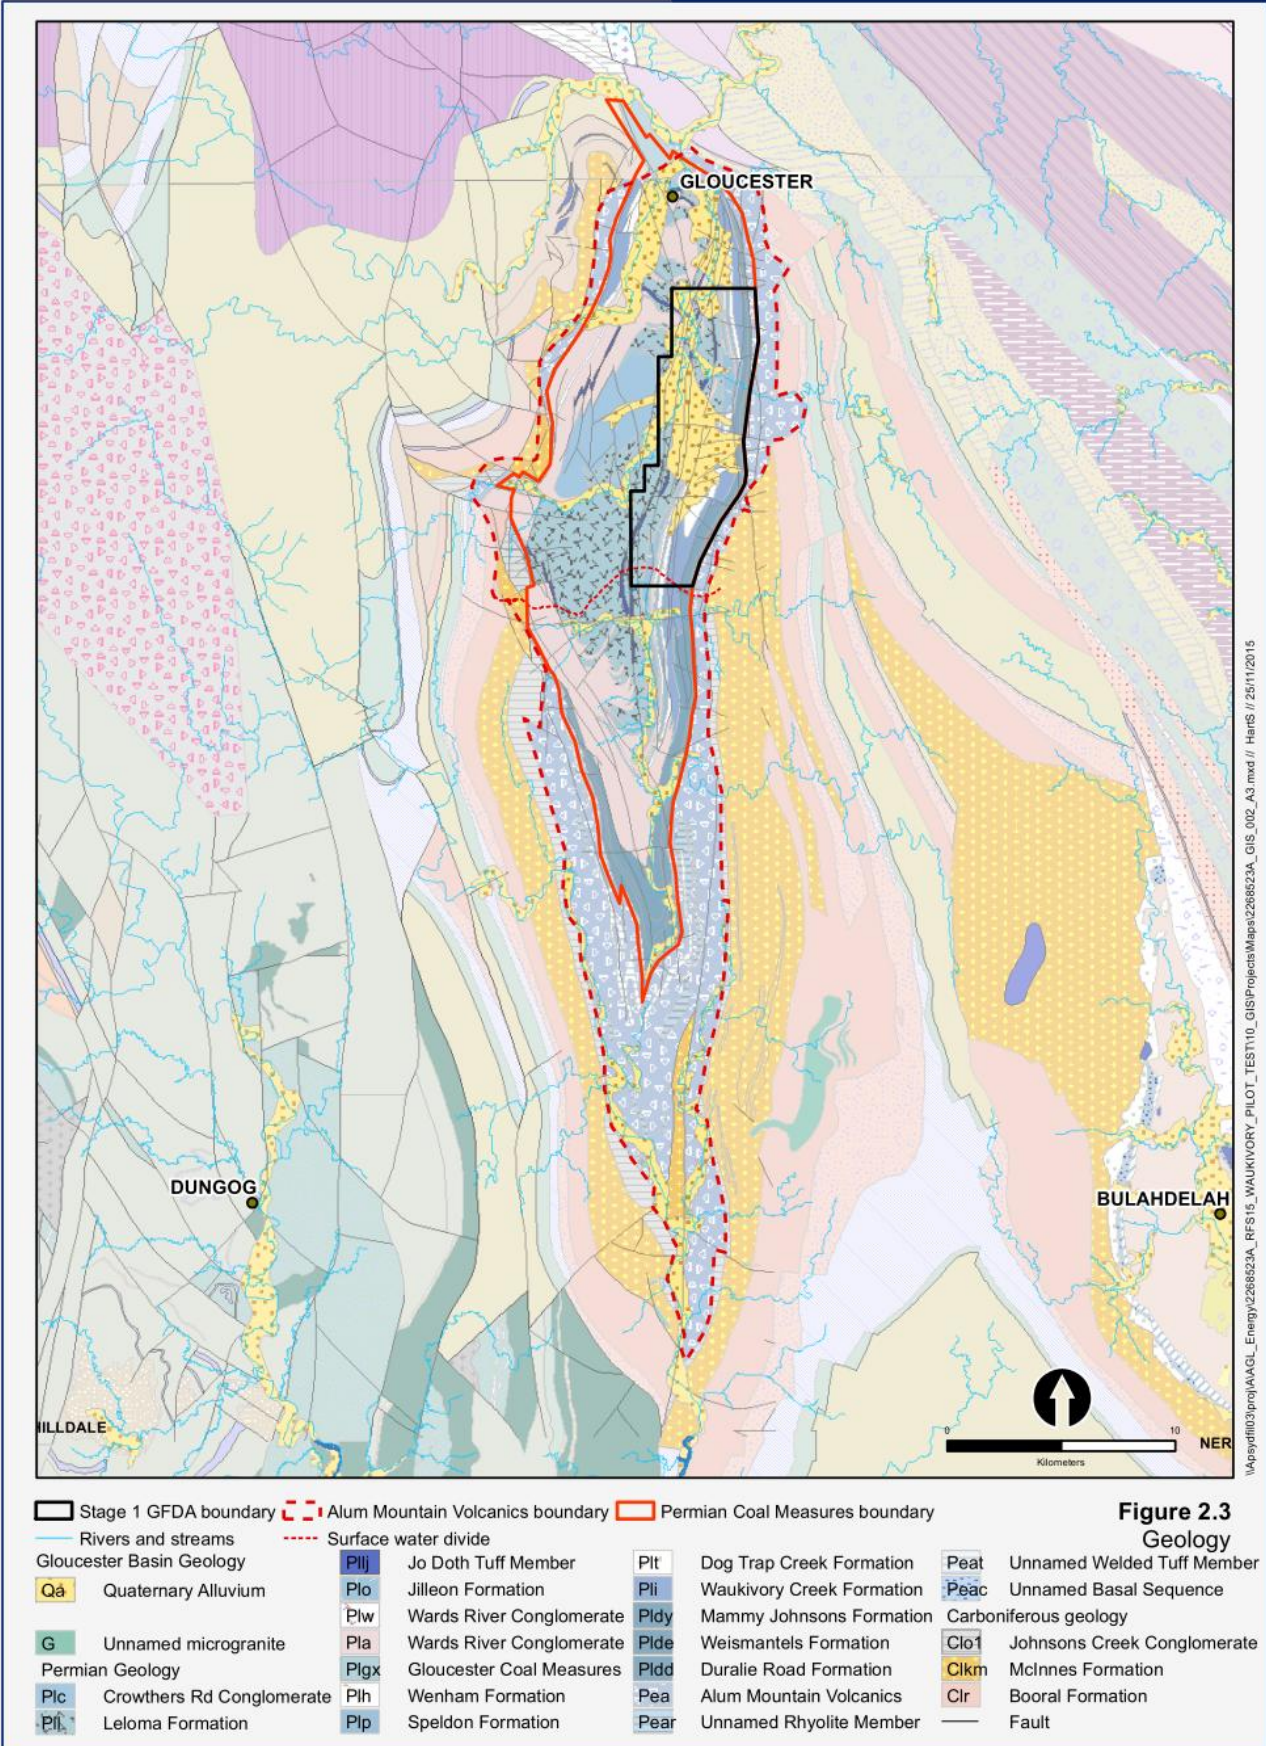


Figure 2.3 Geological map of the Gloucester Basin

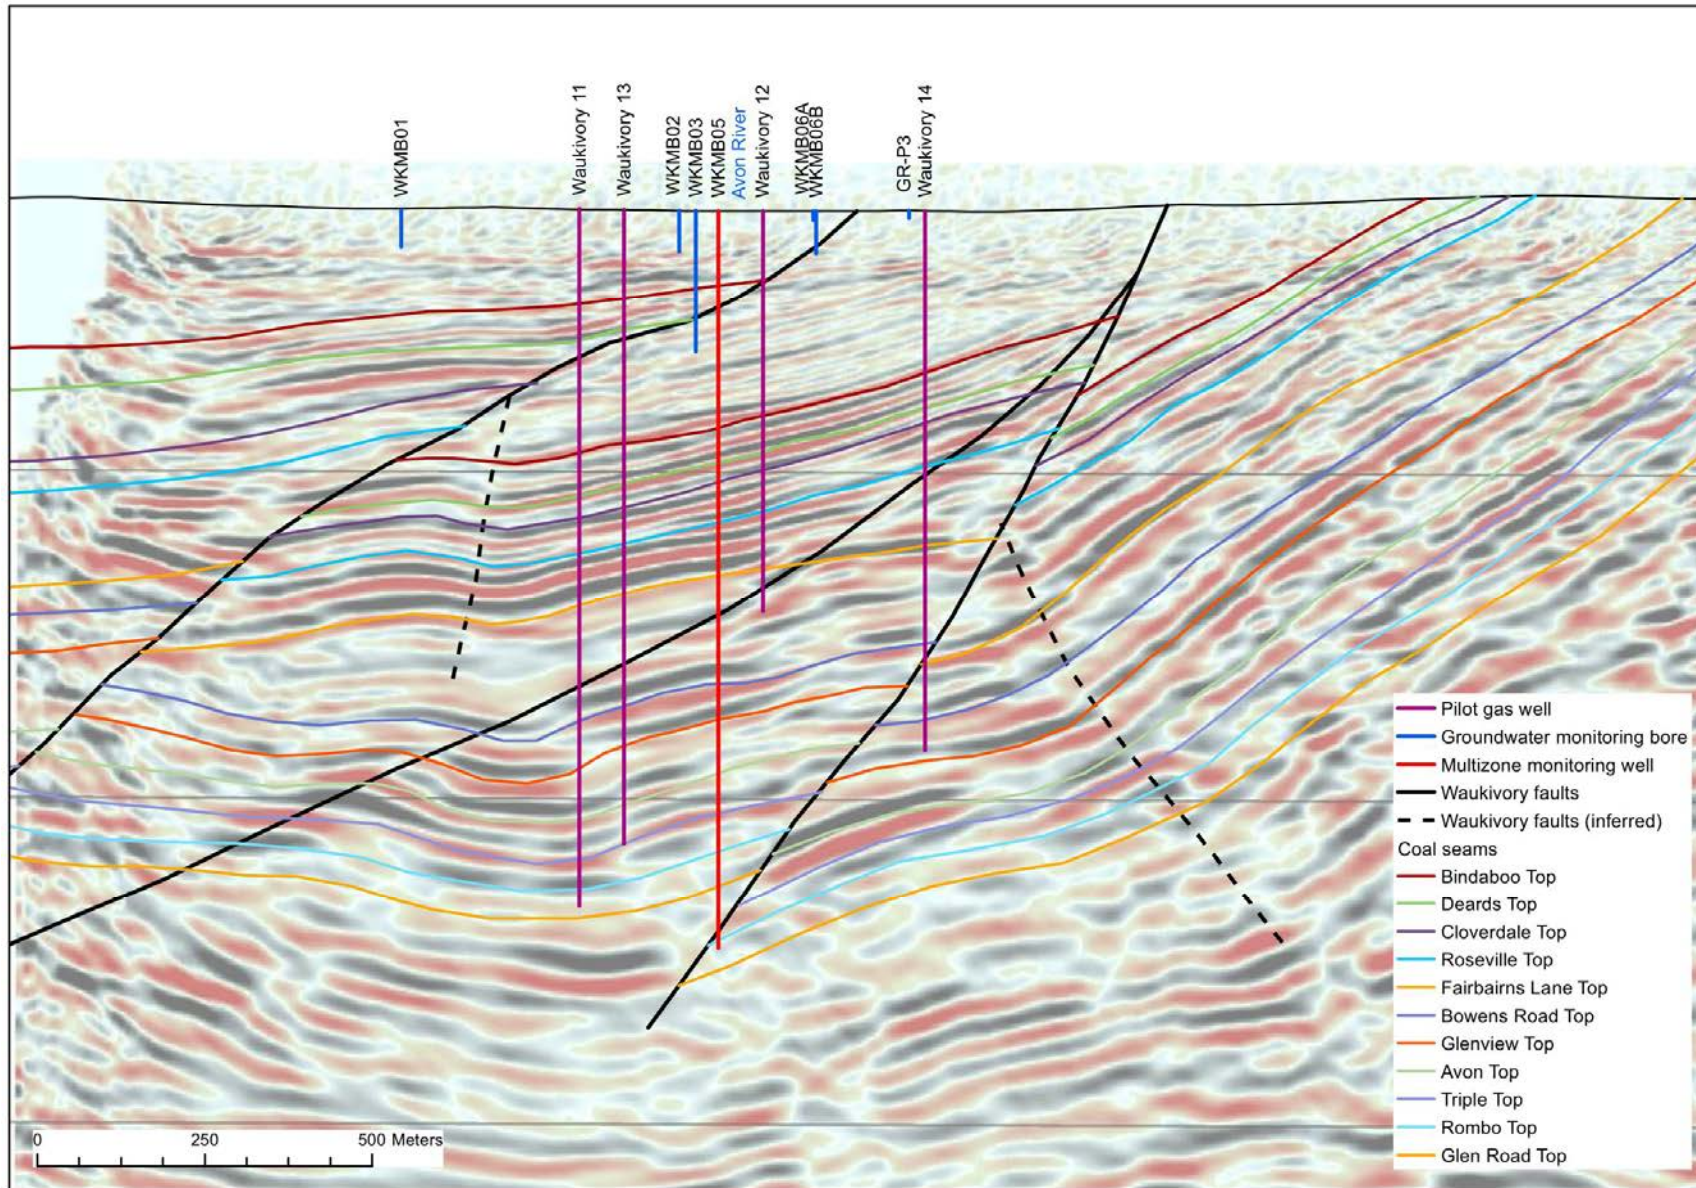


Figure 2.4 Waukivory interpreted seismic section (from Parsons Brinckerhoff 2015d) (line of section is shown on Figure 1.3)

2.5 Hydrogeological setting

Four broad hydrogeological units have been identified within the Gloucester Basin (Table 2.2). The permeability and groundwater flow characteristics of rocks within the Gloucester Basin are controlled by several factors including lithology, depth, and the degree of fracturing and faulting. In this sense hydrogeological units and flow systems do not always correspond with defined geological boundaries.

Table 2.2 Four hydrogeological units – Gloucester Basin

| Unit | Aquifer type | Formation name | General lithology | Hydraulic characteristics |
|-----------------------------------|---|--|--|--|
| Alluvial deposits | Semi-confined, clay capped, porous, granular | Quaternary alluvium | Clay/mixed gravels | Heterogeneous, highly variable permeability associated with varying lithology |
| Shallow Rock (<150 m) | Semi-confined, fractured rock | Upper Permian Coal Measures, Alum Mountain Volcanics | Interbedded sandstone/siltstone with bedding plane fractures | Heterogeneous, high and low permeability domains associated with fault zones and fracturing |
| Interburden of deep coal measures | Confined, fractured rock, aquitard | Upper Permian Coal Measures | Interbedded indurated sandstone/siltstone and claystone | Low permeability associated with sparse fractures, permeability decreases with depth |
| Deep coal Seams | Confined, fractured rock, water bearing zones | Upper Permian Coal Measures | Coal/shale | Low permeability associated with cleating and fractures in coal seams, permeability decreases with depth |

The four hydrogeological units are summarised as follows:

1. **Alluvial deposits** adjacent to major creeks and rivers comprising unconsolidated sand, gravel, and clay. The deposits are typically 12 to 15 m thick. These systems are heterogeneous but generally permeable with rapid recharge, through-flow, and discharge associated with interactions with streams, and to a lesser extent with the underlying less permeable shallow rock. Hydraulic conductivity measurements range from 0.3 to 300 metres per day (m/d), averaging around 10 m/d.
2. **Shallow rock** comprising variably weathered and fractured Permian rocks extending to approximately 150 m below the surface, across all sub-cropping Permian units. The shallow rock zone is heterogeneous with relatively impermeable domains separated by more permeable domains, but on the whole it is more permeable than the deeper coal measures. The domains of higher permeability are due to a higher density of fracturing associated with an irregular weathering profile and the near-surface expression of faulting. Aquifer zones observed during drilling occur within 75 m of the surface. Groundwater flow within this zone is more strongly controlled by weathering and fracturing than the attitude of geological strata. Hydraulic conductivity of the shallow rock ranges from 10 m/d to 1×10^{-6} m/d at a depth of 150 m, but is typically in the order of 10^{-3} to 10^{-4} m/d.
3. **Deep coal measures interburden.** Sandstone and siltstone units that form the interburden to coal seams are indurated and typically of very low permeability, forming aquitards and confining layers. The permeability of the interburden decreases with depth such that, at the maximum depth of CSG production, it is likely to be in the order of 10^{-5} to 10^{-7} m/d, or less.
4. **Deep coal seams.** Coal seams tend to be slightly more permeable than interburden and commonly form weak water bearing zones at depth. Permeability and storage are provided by small fractures and cleats in the coal. As with interburden, drill-stem tests clearly show that the permeability of coal seams generally decreases with depth. At the maximum depth of CSG production, the permeability of coal seams is very low (10^{-4} to 10^{-6} m/d), but may be an order of magnitude higher than the interburden.

The Alum Mountain Volcanics underlie the Permian Coal Measures, and form the impermeable base of the Gloucester Basin. The Alum Mountain Volcanics outcrop in the eastern and western boundaries of the Basin, forming the elevated topography of the Gloucester and Barrington Tops to the west, and the Mograni Range to the east.

3. Waukivory pilot project

3.1 Introduction

The following section provides an overview of pilot well activities and the monitoring program to date relating to the Waukivory Pilot Project. The monitoring program covers the following phases:

- **Baseline sampling:** Baseline sampling was undertaken to characterise the pre-Project groundwater and surface water conditions at the Waukivory site. The baseline sampling comprised four sampling events in March, June, September, and October 2014 (Parsons Brinckerhoff 2015a).
- **Fracture stimulation:** The fracture stimulation took place from 27 October 2014 to 26 November 2014 and the associated monitoring commitments were undertaken during November and December 2014 (Parsons Brinckerhoff 2015a).
- **Flowback water:** Flowback pumping commenced at WK12 and WK13 in December 2014 and flowback pumping commenced from WK11 and WK14 in January 2015 (Parsons Brinckerhoff 2015b).
- **Produced water:** The produced water phase had not commenced by 30 September 2015 according to the criteria outlined in the SGMP, which states the transition from flowback to produced water will be marked by a salinity (measured as electrical conductivity (EC)) of 5,000 $\mu\text{S}/\text{cm}$ or above and a total return to surface of flowback water equal to the volume of fluids injected during fracture stimulation. It is possible that water chemistry can show that flowback water is chemically indiscernible from produced water prior to the volume and EC criteria being met.

3.2 Waukivory pilot schedule and water volumes

Pumps were installed in each pilot well at the completion of fracture stimulation to enable flowback to surface of fracture stimulation fluids and later, produced water. Flowback water is transported from the well head in water gathering lines to an above ground storage tank (AST2) for storage and testing prior to disposal (Figure 3.1).

Flowback pumping commenced at WK12 and WK13 in December 2014 and flowback pumping commenced from WK11 and WK14 in January 2015. The periods of operation of the pumps in each pilot well to 30 September 2015 are shown in Figure 3.2. Pumps were periodically switched off for well workover interventions, maintenance and suspension of operations.

The details of the pumping schedule prior to 1 July 2015 are discussed in the preceding surface water and groundwater monitoring reports (Parsons Brinckerhoff 2015a, 2015b & 2015c).

AGL have engaged a third party contractor to transport flowback water stored in AST2 for disposal to a licenced facility.

At the start of the reporting period at 1 July 2015, all pilot wells were operational. WK11, WK13 and WK14 remained operational throughout the reporting period with only minor periods of pumping cessation, lasting less than a few days, which is consistent with standard pilot well operation. WK12 was suspended on 10 September 2015 for the remainder of the reporting period to conduct a well optimisation workover program designed to increase flow from the well by purging sediments from the fractures within the coal seams.

The volumes pumped from each pilot well to 30 September 2015 are shown in Figure 3.3. The total volume and percentage of flowback water recovered up to 30 September 2015 for each pilot well is provided in Table 3.1. The percentage recovered is relative to the total volume of fracture stimulation fluids injected at

each well. As of 30 September 2015, there was approximately 340,000 L of flowback water in storage in AST2 and 1,923,960 L (~1.92 ML) of flowback had been lawfully disposed offsite from AST2.

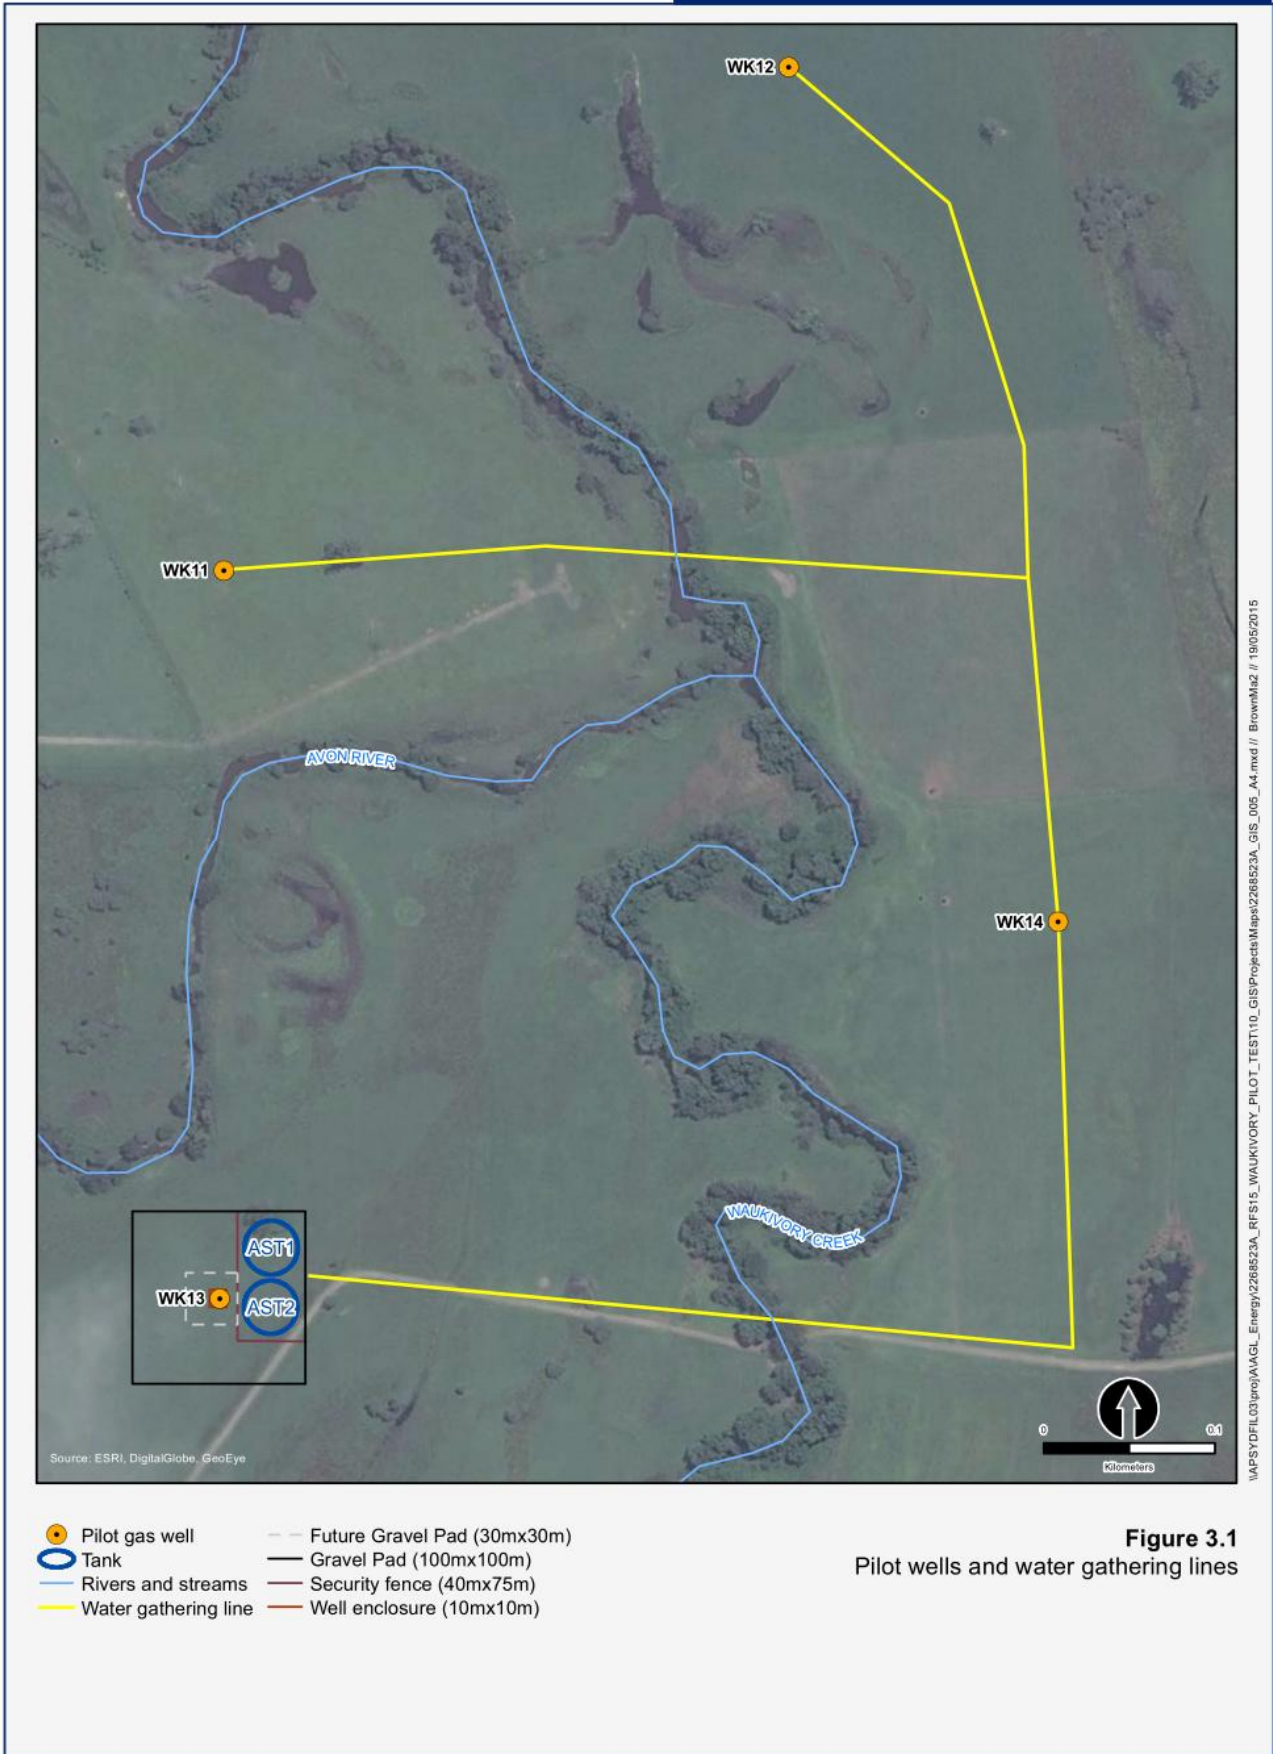


Figure 3.1 Schematic of pilot wells, water gathering lines and storage tanks

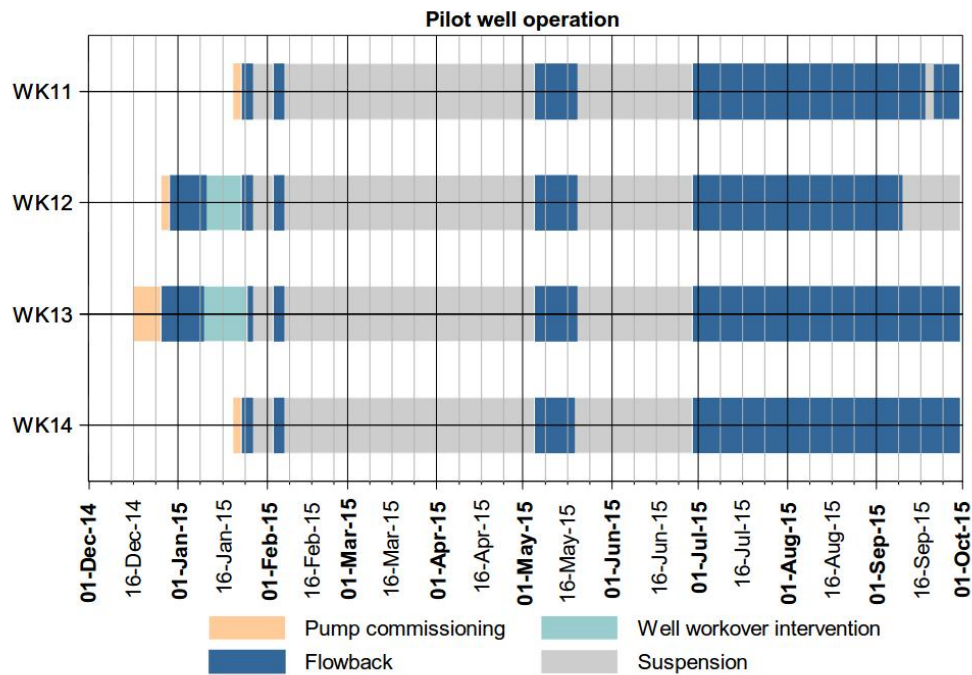


Figure 3.2 Dates of operation of the pilot wells

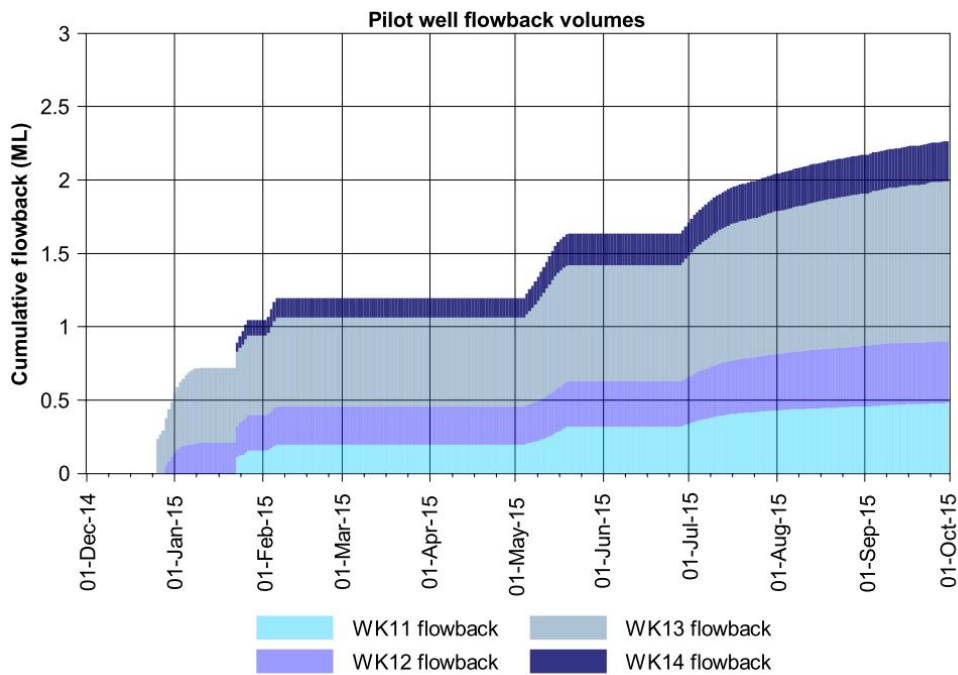


Figure 3.3 Cumulative flowback volumes from the pilot wells

Table 3.1 Flowback volumes recovered up to 30 September 2015

| | WK11 | | WK12 | | WK13 | | WK14 | |
|-------------------------------------|---------|------|---------|------|-----------|------|---------|------|
| | litres | % | litres | % | litres | % | litres | % |
| Volume recovered at 30 September 15 | 480,637 | 61.2 | 419,365 | 87.3 | 1,093,255 | 72.1 | 271,240 | 58.1 |

3.3 Monitoring network

AGL's groundwater and surface water monitoring network consists of more than 50 dedicated water monitoring locations across the Gloucester Basin, as shown in Figure 1.2. There are more than four years of baseline monitoring data (water levels and water quality), as reported in the 2014 Groundwater and Surface Water Monitoring Status report (Parsons Brinckerhoff 2014a). Samples are also collected from the pilot wells and storage tank AST2 as part of the Project; locations are shown in Figure 1.3.

3.3.1 Pilot wells

The flowback sampling locations at the Project site (Figure 3.1) are:

- Pilot well WK11
- Pilot well WK12
- Pilot well WK13
- Pilot well WK14
- Storage tank AST2

Details of the perforation and fracture stimulation intervals in each of the pilot wells are provided in Table 3.2 and indicate which coal seams the flowback water (and subsequent produced water) is sourced from. Pilot well WK12 targets mostly shallow coal seams from 371 to 597 mbgl while the other three pilot wells target mostly deeper coal seams from 404 to 964 mbgl.

3.3.2 Groundwater

The current groundwater monitoring network at the Project site (Figure 1.3) consists of:

- Five AGL groundwater monitoring bores (WKMB01, WKMB02, WKMB03, WKMB06A and WKMB06B)
- One AGL multizone monitoring well (WKMB05: six zones monitored)
- One AGL vibrating wire piezometer (PL03: two zones monitored)
- One GRL groundwater monitoring bore (GR-P3)
- One private groundwater monitoring bore (GW080487)

Details of the groundwater monitoring network are provided in Table 3.3. Construction logs for the AGL monitoring bores are provided in Parsons Brinckerhoff (2014b) and Parsons Brinckerhoff (2015a).

WKMB05 is a multizone groundwater monitoring well located 164 m east of WK13. The borehole was drilled to a depth of 1,100 m and initially installed with a geophone array to collect data during the fracture stimulation of WK13 to provide an understanding of fracture propagation.

Following the fracture stimulation of WK13, the geophone array was removed from WKMB05, six intervals were perforated, and an array of packers installed to isolate six horizons within the monitoring bore (Parsons Brinckerhoff 2015a). At each horizon a pressure transducer was installed to measure the piezometric level. The monitored horizons are provided in Table 3.3.

Table 3.2 Perforation and fracture stimulation intervals

| Zone | Coal seam | Perforation interval (mbgl) | Net coal thickness (m) |
|------------------|---------------------------------|---------------------------------------|------------------------|
| WK11 | | | |
| 1 | Avon | 928.7 – 964.25 | 9.36 |
| 2 | Glenview | 860.5 – 879.2 | 2.18 |
| 3 | Bowens Road and Fairbairns Lane | 806.6 – 838.0 | 2.46 |
| 4 | Fairbairns Lane | 709.1 – 741.9 | 2.06 |
| WK12 | | | |
| 1 | Fairbairns Lane | 590.4 – 597.0 | 1.33 |
| 2 | Roseville (lower) | 485.7 – 504.2 | 3.24 |
| 3 | Roseville (upper) | 406.0 – 424.1 | 2.93 |
| 4 | Cloverdale | 371.3 – 385.0 | 2.42 |
| WK13 | | | |
| 1 | Triple | 934.2 – 946.3 | 0.91 |
| 2 | Avon | 878.7 – 911.4 | 10.05 |
| 3 | Glenview | 812.5 – 826.5 | 2.35 |
| 4 | Glenview | Not perforated or fracture stimulated | |
| 5 | Fairbairns Lane (lower) | 694.1 – 738.3 | 2.75 |
| 6 | Fairbairns Lane (upper) | 612.2 – 628.8 | 5.93 |
| 7 | Roseville (lower) | 540.2 – 575.1 | 2.05 |
| 8 | Roseville (upper) | 514.5 – 523.3 | 2.79 |
| 9 | Cloverdale | 451.4 – 474.0 | 2.23 |
| 10 | Bindaboo | 404.5 – 408.4 | 0.75 |
| WK14 | | | |
| 1 | Avon | 774.5 – 805.8 | 7.5 ^(a) |
| 2 | Fairbairns Lane (lower) | 532.5 – 542.0 | 4.23 |
| 3 ^(b) | Fairbairns Lane (upper) | 473.8 – 490.8 | 3.81 |
| 4 ^(b) | Roseville | 453.3 – 459.7 | 2.05 |

(a) Estimated.

(b) WK14 zones 3 and 4 are acid wash intervals. The acid wash of zones 3 and 4 were conducted simultaneously.

Table 3.3 Current groundwater monitoring network

| Monitoring location | Monitoring type | EPA ID | Total depth (mbgl) | Monitored interval (mbgl) | Lithology | Formation | Hydro-geological unit | Date installed | Sampling method ^(e) |
|-----------------------|--------------------------|--------|--------------------|---------------------------|---------------------|--|---------------------------|----------------|--------------------------------|
| WKMB01 | Water levels and quality | 10 | 54.0 | 47.0 – 53.0 | Sandstone | Leloma Formation (upthrust) | Shallow rock | February 2012 | Micro-purge™ |
| WKMB02 | Water levels and quality | 11 | 61.0 | 51.0 – 60.0 | Sandstone/siltstone | Leloma Formation (upthrust) | Shallow rock | June 2012 | Micro-purge™ |
| WKMB03 | Water levels and quality | 12 | 210.0 | 200.0 – 209.0 | Sandstone | Leloma Formation | Interburden (fault zone) | June 2012 | Micro-purge™ |
| PL03 ^(a) | Piezometric levels | 14 | 966.3 | Sensor 2: 496 | Coal | Wenham Formation – Bowens Road Coal Seam | Coal | September 2013 | n/a |
| | | | | Sensor 3: 463 | Pebble conglomerate | Wards River conglomerate | Interburden | | |
| WKMB05 ^(b) | Piezometric levels | 85 | 1,100.0 | Sensor 1: 340.0 – 343.0 | Siltstone/sandstone | Leloma Formation | Interburden (aquitar) | November 2014 | n/a |
| | | | | Sensor 2: 426.0 – 429.0 | Coal | Jilleon Formation – Cloverdale Coal Seam | Coal seam | | |
| | | | | Sensor 3: 584.0 - 587.0 | Siltstone/sandstone | Jilleon Formation | Interburden (aquitar) | | |
| | | | | Sensor 4: 595.4 – 598.4 | Coal | Jilleon Formation – Fairbairns Coal Seam | Coal seam | | |
| | | | | Sensor 5: 698.5 – 701.5 | Siltstone/sandstone | Jilleon Formation | Interburden (aquitar) | | |
| | | | | Sensor 6: 711.0 – 714.0 | Siltstone/sandstone | Jilleon Formation | Interburden (fault zone) | | |
| WKMB06A | Water levels and quality | n/a | 13.4 | 6.4 – 12.4 | Mixed gravels | Alluvium | Alluvium | November 2014 | Submersible pump |
| WKMB06B | Water levels and quality | n/a | 63.0 | 52.0 – 61.0 | Siltstone/sandstone | Leloma Formation | Shallow rock (fault zone) | November 2014 | Micro-purge™ |

| Monitoring location | Monitoring type | EPA ID | Total depth (mbgl) | Monitored interval (mbgl) | Lithology | Formation | Hydro-geological unit | Date installed | Sampling method ^(e) |
|---------------------|--------------------------|--------|--------------------|---------------------------|---------------|-----------|-----------------------|----------------|--------------------------------|
| GR-P3 | Water levels and quality | 90 | 11.0 | 5.0 – 9.0 | Mixed gravels | Alluvium | Alluvium | March 2011 | Submersible pump |
| GW080487 | Water levels and quality | 91 | 60.0 | 48.0 – 60.0 | Shale | Leloma | Shallow rock | n/a | Submersible pump |

(a) PL03 is a vibrating wire piezometer. Piezometric level is measured at each sensor.

(b) WKMB05 is a multizone monitoring well. Each horizon is installed with a pressure transducer to measure the piezometric level.

3.3.3 Surface water

The surface water monitoring network at the Project site consists of three AGL stream gauge locations (refer to Figure 1.3). Details of these stream gauge locations are provided in Table 3.4.

Table 3.4 Surface water monitoring network

| Stream gauge | EPA ID | Easting (MGA, m) | Northing (MGA, m) | Location | Stream |
|--------------|--------|------------------|-------------------|-----------|----------------------------|
| WKSW01 | 9 | 402002 | 6452208 | Waukivory | Avon River (upstream) |
| WKSW02 | 8 | 402772 | 6452099 | Waukivory | Waukivory Creek (upstream) |
| WKSW03 | 7 | 402488 | 6453088 | Waukivory | Avon River (downstream) |

MGA – Map Grid of Australia.

3.4 Water monitoring

3.4.1 Pilot wells

At the pilot wells, flow meters are installed to measure flow rates of the flowback water (and subsequently produced water) and datalogger instrumentation is installed to monitor water levels and salinity.

3.4.2 Groundwater and surface water

Pressure transducers equipped with a datalogger are installed at all groundwater and surface water monitoring locations. Groundwater levels are recorded every six hours and surface water levels are recorded every 15 minutes. Data from a barometric datalogger are used to correct for the effects of changing barometric pressure on groundwater levels. To calibrate the level recorded by the dataloggers, manual level measurements are recorded prior to logger downloads, which occur every three months.

Dataloggers at the surface water monitoring locations and WKMB06A and WKMB06B also measure electrical conductivity (EC), which provide an indication of salinity, every 15 minutes. The logged EC measurements are checked for deviation in calibration every three months using a hand-held calibrated water quality meter.

Piezometric pressure is recorded every six hours at each of the six sensors in the multizone monitoring well WKMB05, and at the two vibrating wire piezometers in PL03.

Manual groundwater level measurements are recorded for private bore GW080487.

3.4.3 Water quality sampling frequency

The water quality monitoring conditions as stipulated in EPL 20358 are provided in Table 3.5. AGL has adopted a broader analytical suite for most sites (including BTEX); details are provided in the SGMP (AGL 2015a). The frequency of groundwater, surface water and flowback water quality sampling undertaken since Project inception in 2014 is presented in Figure 3.4. The dates and rationale for the sampling at the surface water and groundwater monitoring locations is provided in Appendix A, Table A1.1. The dates and rationale for sampling at the pilot wells and AST2 is provided in Appendix A, Table A1.2.

Sampling associated with the flowback phase of the Project was undertaken during the period 1 July to 30 September 2015. For the purpose of trend analysis, all data from the baseline sampling, fracture stimulation and flowback phases are also presented.

Table 3.5 Monitoring schedule

| Timeframe | Raw (source) water | Fracture stimulation fluid (raw water plus additives) | Surface water | Shallow ground-water | Flowback water | Produced water |
|--|--------------------|---|---------------|----------------------|----------------|----------------|
| During fracture stimulation (each pilot well) ^(a) | ✓ | ✓ | | | | |
| Within 24 hours of the completion of the fracture stimulation of each pilot well ^(a) | | | ✓ | ✓ | | |
| 1 week after the fracture stimulation of each pilot well ^(a) | | | ✓ | | | |
| 2 weeks after completion of the fracture stimulation program ^(a) | | | | ✓ | | |
| 4 weeks after completion of the fracture stimulation program ^(a) | | | | ✓ | | |
| 6 months after the cessation of fracture stimulation ^(a) , then monthly for the next 12 months ^(b) | | | ✓ | | | |
| 6 monthly ^(c) | | | | ✓ | | |
| Fortnightly from commencement of flowback for the first 8 weeks, then every 2 months ^(a) | | | | | ✓ | |
| Every 2 months from the transition to produced water to the cessation of the flow testing ^(a) | | | | | | ✓ |

- a) Stipulated in EPL dated 6 August 2014
- b) Stipulated in EPL dated 1 July 2015
- c) Stipulated in EPL dated 17 September 2015

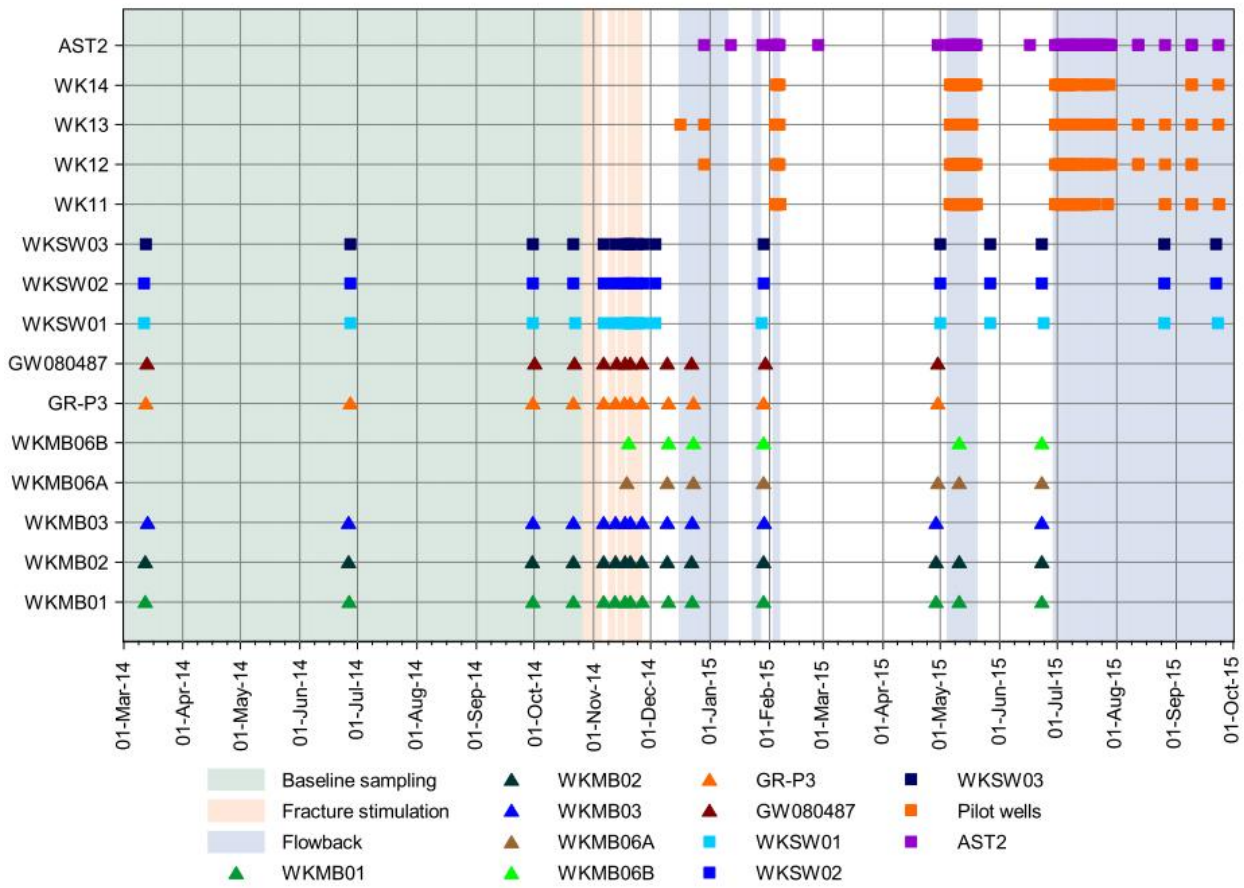


Figure 3.4 Waukivory water quality sampling frequency

3.4.4 Pilot well and AST2 sampling techniques

The techniques, equipment and procedures for water quality sampling from the pilot wells and AST2 are described in detail in the Parsons Brinckerhoff sampling procedure and the AGL pilot well and AST2 sampling procedure shown in Appendix B.

All work undertaken within the hazardous zone at the well surface facilities is conducted under the supervision and instruction of AGL personnel.

3.4.5 Groundwater and surface water sampling techniques

A range of methods is used to obtain groundwater quality samples from the monitoring bores. The most appropriate method for each bore has been selected based on the depth of the bore, the depth to groundwater, and the permeability of the screened formation. Higher yielding monitoring bores are purged and sampled using a submersible pump. Lower yielding bores are sampled using a low flow pump. Details of the sampling technique used at each monitoring location are provided in Table 3.3.

A telescopic sampler is used to collect grab samples from the surface water sites.

The following physico-chemical parameters of each water sample are measured in the field using calibrated hand-held devices:

- Electrical conductivity – $\mu\text{S}/\text{cm}$
- Temperature – $^{\circ}\text{C}$
- Dissolved oxygen (DO) – % saturation and mg/L

- Oxidation-reduction potential (ORP) – mV
- pH – pH units
- Total dissolved solids (TDS) – mg/L (calculated from EC)
- Free and total residual chlorine were recorded using a Hach Pocket Colorimeter

All sampling from the groundwater and surface water monitoring sites is carried out in accordance with the Parsons Brinckerhoff sampling procedure shown in Appendix B.

3.4.6 Chemical analysis of water

Samples are analysed for the comprehensive suite of analytes listed in Table 3.6. The comprehensive suite includes all analytes prescribed for the relevant monitoring points in EPL 20358, and the expanded list in the approved SGMP (AGL 2015a).

Table 3.6 Comprehensive suite of analytes

| Category | Suite of analytes | |
|---|--|---|
| Physico-chemical parameters (Field) | Electrical Conductivity (EC) Total Dissolved Solids (TDS) Temperature Free and total residual chlorine | pH Redox potential (ORP) Dissolved oxygen |
| Physico-chemical parameters (lab) | EC TDS (measured) | pH Total suspended solids |
| Major ions | Calcium Magnesium Sodium Potassium Fluoride | Chloride Carbonate Bicarbonate Sulphate |
| Dissolved metals and minor/trace elements | Aluminium Antimony Arsenic Barium Beryllium Boron Bromine Cadmium Chromium Cobalt Copper Iron | Lead Manganese Mercury Molybdenum Nickel Selenium Strontium Tin Uranium Vanadium Zinc |
| Other analytes | Total organic carbon (TOC) Silica Free and total residual chlorine | Monoethanolamine (MEA) Tetrakis (hydroxymethyl) phosphonium sulphate (THPS) ^a |
| Nutrients | Nitrate Nitrite Total nitrogen | Ammonia Total Kjeldahl Nitrogen Reactive and total phosphorus |
| Dissolved gases | Methane | Un-ionised hydrogen sulphide |
| Hydrocarbons | Phenolic compounds Polycyclic aromatic hydrocarbons (PAH) Total petroleum hydrocarbons (TPH) | Benzene, toluene, ethyl-benzene and xylenes (BTEX) Volatile organic compounds (VOC's) |

a) Removed from the EPL as of July 2015

Samples were sent to the following laboratories under chain-of-custody protocols:

- Australian Laboratory Service (ALS) Environmental Pty Ltd, Smithfield, Sydney (NATA accredited laboratory) – chemistry analysis
- Envirolab Services, Sydney NSW (NATA accredited laboratory) – THPS analysis.

3.4.7 Quality assurance and quality control

Data collection and data handling QA/QC

The quality assurance (QA) procedures during sampling and the quality control (QC) procedures during data handling are detailed in the Parsons Brinckerhoff sampling procedures and the AGL pilot well and AST2 sampling procedure shown in Appendix B. All sampling was undertaken in accordance with the Australia//New Zealand standards for water quality sampling (AS/NZS 5667).

Laboratory QA/QC

The laboratories conduct their own internal QA/QC program to assess the accuracy and precision of the analysis and reporting procedures. These programs include analysis of laboratory sample duplicates, spike samples, certified reference standards, surrogate standards/spikes and laboratory blanks. Laboratory QC reports are provided in Appendix C.

3.5 Key analytes: fracture stimulation additives

EPL 20358 currently specifies two compounds that may be present in fracture stimulation additives that are to be included in the analytical suite for all sites:

- Monoethanolamine (MEA) borate
- Sodium hypochlorite.

Sodium hypochlorite was not used as a fracture stimulation additive by AGL, however as discussed below, the constituents of sodium hypochlorite (free and total residual chlorine) were included in the analytical suite.

Choline chloride (clay stabiliser) was originally included in the list of fracture stimulation additives, however the EPA removed the compound from the EPL in November 2014 as choline chloride was not used as an additive in the fracture stimulation fluid for the Project.

THPS (bactericide, Tolcide) was also originally included in the list of fracture stimulation additives. This compound was removed from the EPL in July 2015 so there has been limited THPS data collection during the current reporting period.

A detailed discussion of the analytical method approval process for the key analytes is provided in the surface water and groundwater monitoring report to 31 March 2015 (Parsons Brinckerhoff 2015b). The analytical techniques and approval dates are summarised in Table 3.7.

Table 3.7 Fracture stimulation additives and breakdown constituents

| Analyte | Method approved by EPA | Laboratory Limit of Reporting | Rationale | Limitations as Indicator |
|-------------------------|------------------------|----------------------------------|--|--|
| Monoethanolamine (MEA) | 1 December 2014 | 1 µg/L | Indicator of monoethanolamine borate | Used in several other applications in industry, for example surfactant, detergents and textiles. Ethanolamine is also used in herbicides and is present in urine secreted by mammals, thus native animals and grazing livestock may be a source of detectable background concentrations in surface water and groundwater. |
| Free chlorine | Project commencement | 0.2 mg/L | Indicator of sodium hypochlorite | Free and total residual chlorine concentrations within fracture stimulation mix may typically be below detection limits. Free chlorine and total residual chlorine are products associated with the chlorination of water supplies and may influence concentrations within surface stream monitoring points where this product has been introduced. |
| Total residual chlorine | Project commencement | 0.2 mg/L | Indicator of sodium hypochlorite | |
| THPS ^a | 19 December 2014 | 50 µg/L (±50 µg/L ^b) | Compound – fracture stimulation additive | THPS degrades rapidly (within 7 days) through hydrolysis, oxidation, and photo-degradation. Degradation time in flowback water and produced water (deep groundwater) is expected to be longer. Oxidation and photolysis will effectively degrade THPS in surface waters. New methodology for analysis of THPS with high level of uncertainty at the PQL level (±50 µg/L ^b) |

a) Removed from the EPL as of July 2015

b) Envirolab (2015)

Groundwater and surface water monitoring data collected during 2014 showed that MEA, THPS and free and total residual chlorine were naturally present in the surrounding environment (Parsons Brinckerhoff 2015a). The EPA subsequently conducted independent investigations (EPA 2015a, 2015b and 2015d) into the occurrence of these analytes; the key conclusions of which are as follows:

- *“There is insufficient scientific information on monoethanolamine to determine whether the monoethanolamine concentrations recorded were due to natural or other causes. However the EPA did conclude that it was unlikely that the monoethanolamine detections were the result of hydraulic fracturing operations introducing the chemical to the groundwater”*
- *“It was unlikely that the sporadic THPS detections recorded were a result of contamination of aquifers and surface waters as a result of hydraulic fracturing operations”*
- *“it was concluded that although levels of THPS (as formaldehyde) were detected, this could not be attributed to actions by AGL”*
- *“There are many natural sources of formaldehyde (the immediate breakdown product of Tocide [THPS] and detected by the method) due to breakdown of organic compounds in nature. The validation report indicates the water samples used for method validation already had a background of formaldehyde, at ~ 30, 12 and 20 µg/L in drinking, creek and groundwater, respectively”*
- *The apparent detections of sodium hypochlorite (as free residual chlorine and total chlorine) were recorded both upstream and downstream of AGLs activities and before during and after hydraulic fracturing.*

- *The investigation confirmed the licensee did not use sodium hypochlorite (chlorine) in the hydraulic fracturing. The licensee had decided to use Tocide [THPS] for this purpose.*

Following these investigations, the EPL was revised to remove THPS and to remove the limits for MEA and sodium hypochlorite such that a detection does not constitute a license breach as MEA, chlorine and THPS are naturally occurring in the environment.

3.6 Assessment criteria and trigger response

The criteria used for the assessment of monitoring data follows the protocols provided in the SGMP. Specific analyte trigger values at this stage in the Project are not considered appropriate due to the natural variability in groundwater and surface water quality at different locations across the site and at different depths in the geological strata. There are also insufficient sampling events to build up enough confidence/statistical sample pool to enable setting trigger threshold values as described in ANZECC (2000). Instead, general trigger criteria are used to assess monitoring sites as follows:

- Water quality trends associated with fracture stimulation additives or relevant breakdown/elemental constituents as key analytes within surface water and groundwater are monitored as part of the flowback and produced water monitoring program. The fracture stimulation additives readily dissolve and dissociate into intermediate products or elemental constituents.
- The water quality triggers are defined as a distinct deviation from typical observed trends in groundwater and surface water quality that can be related back to pilot well activities, the analytical technique developed to identify such deviations is described in Section 5.5.
- Water level response, i.e. drawdown, is attributed to depressurisation activities and provides a measure of potential connectivity between deep coal seams and the overlying shallow rock and alluvial water resources. The assessment of monitoring data against response triggers is provided in Section 4.2.1. The SGMP (AGL 2015a) details the water level response triggers as follows:

'The adopted trigger is a water level decline of more than 2 m (outside of the normal range) in a monitoring bore in an aquifer less than 75 m from surface, or more than 5 m (outside of the normal range) for deeper (non-coal) monitoring zones. It is expected that at least three months of reliable water level data would be required to have confidence in any unusual water level trend.'

- Trigger levels for BTEX compounds and hydrogen sulphide at AST2 are based on the protection of human health and the environment, and are derived from an assessment of the latest water quality data, exposure pathways and chronic exposure levels. The trigger levels are shown in Table 3.8 and detailed in Table 6.2 of the SGMP (AGL 2015a).
- Change in beneficial use of an aquifer by applying the beneficial use matrix designed within the SGMP (AGL 2015a). The aquifer type refers to the alluvial and shallow fractured rock systems. The change in beneficial use is determined from a review of yield and EC (as an indicator of salinity) over the time period as detailed in Section 7.

Table 3.8 Adopted thresholds for BTEX and hydrogen sulphide at AST2

| Analyte | Threshold for investigation (µg/L) | Threshold for action (µg/L) |
|-------------------|------------------------------------|-----------------------------|
| Benzene | 1,900 | 19,000 |
| Toluene | 360,000 | 3,600,000 |
| Ethyl benzene | 160,000 | 1,600,000 |
| Xylenes | 150,000 | 1,500,000 |
| Hydrogen sulphide | 2,000 | 20,000 |

Source: Surface and groundwater management plan for the Waukivory Pilot Program Table 6.2 (AGL 2015a)

The SGMP (AGL 2015a) provides trigger management response protocols to be adopted for confirmed or possible changes in water resources or associated water level/water quality impacts arising from pilot well activities.

4. Water levels

4.1 Pilot well water levels

Water levels in the pilot wells are highly variable and dependent on pump operation, including fluctuating pumping rates and the build-up/release of gas pressure within the well casing above the water level. When pumping is taking place, water level declines (drawdown) are observed in the pilot wells and when pumping ceases the water levels re-equilibrate (recover) towards that of the target formations.

The pump commissioning and flowback phases comprise periods where the pumps have been in operation and periods where pumping has ceased (due to workover intervention or 'shut-in' during suspension). These periods and the corresponding water level response in the pilot wells are shown in Figure 4.1.

When the wells are shut-in the build-up of gas pressure within the casing above the water level can attenuate recovery or suppress water levels. The water level responses to the ongoing casing pressure management conducted by AGL are evident in the hydrographs presented in Figure 4.1 and discussed below.

At the start of the reporting period at 1 July 2015, water levels at all pilot wells had started to decline in response to the recommencement of flowback on 29 June 2015. Water levels declined approximately 800 m at WK11, 450 m at WK12, 600 m at WK13 and 500 m at WK14 by early/mid-July. From mid-July, water levels at all pilot wells have remained low in response to the continuation of flowback. Fluctuations in water levels of approximately 50 to 100 m are observed at all pilot wells throughout the reporting period.

The pilot wells remained on flowback at the end of the reporting period on 30 September 2015, with the exception of WK12. Flowback at WK12 was suspended on 10 September 2015 due to workover activities. The water level dataloggers were removed from WK12 for the duration of the workover.

Details of the pumping schedule and corresponding water levels prior to 1 July 2015 are discussed in the preceding surface water and groundwater monitoring reports (Parsons Brinckerhoff 2015a, 2015b & 2015c).

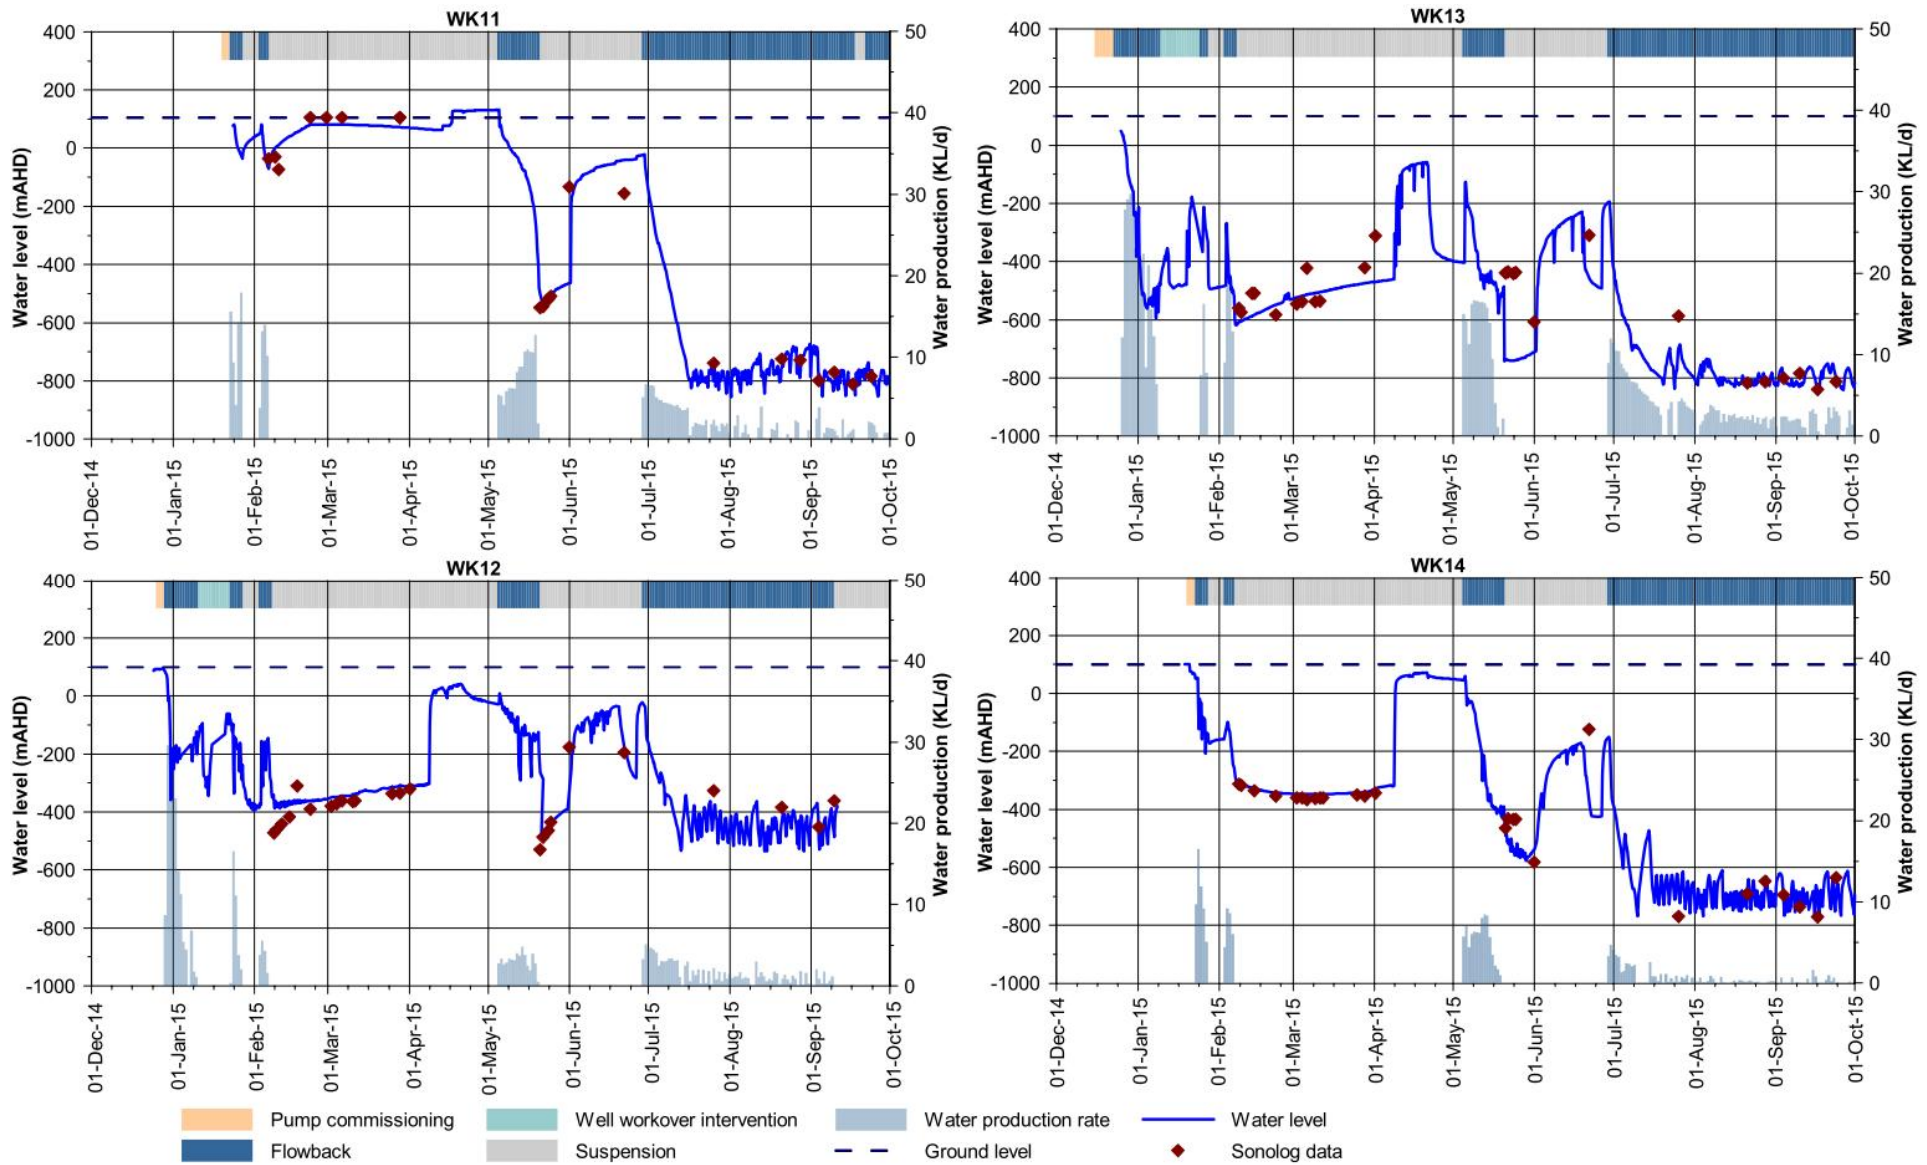


Figure 4.1 Water levels and flowback volumes at the Waukivory pilot wells

4.2 Groundwater levels

The figures that correspond to the discussion on groundwater levels for the Waukivory monitoring locations are as follows:

- WKMB01, WKMB02, WKMB03, WKMB06A, WKMB06B, GR-P3 and GW080487 for the period March 2014 to September 2015, including baseline monitoring, fracture stimulation and flowback (Figure 4.2a).
- WKMB01, WKMB02, WKMB03, WKMB06A and WKMB06B, GR-P3 and GW080487 for the period December 2014 to September 2015 covering the flowback phase in detail (Figure 4.2b).
- Alluvial (GR-P3 and WKMB06A) and interburden (WKMB03) water level response triggers compared to groundwater levels for the period December 2014 to September 2015 (Figure 4.3).
- Shallow rock (WKMB01, WKMB02 and WKMB06B) water level response triggers compared to groundwater levels for the period December 2014 to September 2015 (Figure 4.4).
- WKMB05 monitoring intervals and WK13 perforated intervals (Figure 4.5).
- Piezometric levels in multizone monitoring well WKMB05 compared to water levels in WK13 for the period November 2014 (installation) to September 2015 (Figure 4.6).
- WKMB05 water level response triggers compared to piezometric levels for the period November 2014 (installation) to September 2015 (Figure 4.7).
- Piezometric levels in vibrating wire piezometer PL03 for the period March 2014 to September 2015, including baseline monitoring, fracture stimulation and flowback (Figure 4.8).

Spikes depicting rapid groundwater level decline followed by recovery on the hydrographs are associated with water sampling events that have taken place from March 2014. This water level response has been the subject of an investigation by the EPA, which confirmed that the fluctuations are the result of groundwater sampling (EPA, 2015d).

Water level response triggers are described in Section 4.2.1. A description of the variation in groundwater levels in the different hydrogeological units during the flowback phase is provided below.

4.2.1 Water level response triggers

The SGMP (Section 6.4.1, pages 41 – 43) (AGL 2015a) states that:

'The adopted trigger is a water level decline of more than 2 m (outside of the normal range) in a monitoring bore in an aquifer that is less than 75 m from surface, or more than 5 m (outside the normal range) for deeper (non-coal) monitoring zones. It is expected that at least three months of reliable water level data would be required to have confidence in any unusual water level trend'.

Water level response triggers have been calculated as shown in Table 4.1. The normal range of water levels has been calculated based on the 5th and 95th percentile of historical data. Using these percentiles removes anomalous data that is outside of the normal range, for example, sampling events resulting in a decline in water levels are below the 5th percentile, and large rainfall events resulting in a significant increase in water levels are above the 95th percentile. The percentiles (and therefore water level response triggers) have been calculated for different historical date ranges for each monitoring bore based on the following rationale:

- WKMB01, WKMB02, WKMB03 and GR-P3 percentiles have been calculated from water level data for the period from monitoring bore installation through to the start of fracture stimulation (27 October 2014).

- WKMB06A and WKMB06B percentiles have been calculated for the period from water level data from monitoring bore installation (18 November 2014) through to the end of the previous reporting period (30 June 2015).
- WKMB05 sensors 1 and 3 percentiles have been calculated from piezometric level data since equilibration following well installation (1 December 2014) through to the end of the previous reporting period (30 June 2015).
- WKMB05 sensors 2 and 4 are monitoring piezometric levels in coal zones, and therefore water level response triggers are not applicable according to the SGMP.
- There is uncertainty as to whether the piezometric levels in WKMB05 sensors 5 and 6 have reached equilibration following installation. Consequently, there is less than three months of reliable water level data to calculate the normal range with certainty. Therefore water level response triggers are not currently considered applicable for the existing monitoring dataset, and will be reviewed as additional monitoring data becomes available.

In order to determine if a water level response trigger has been reached at any of the monitoring locations during the last reporting period, the 5th percentile has been calculated from water level data between 1 July 2015 and 30 September 2015 (Table 4.1). Using the 5th percentile removes misrepresentative water levels that are the result of sampling events.

Groundwater levels compared to the water level response triggers are plotted in Figures 4.3, 4.4 and 4.7, and discussed in Sections 4.2.2 to 4.2.6.

Table 4.1 Water level response triggers

| Monitoring location | Hydro-geological unit | Normal range | | | Trigger level (mAHD) | 1 Jul to 30 Sept 2015 | Comments |
|---------------------|--------------------------------|------------------------|--------------------------------------|-------------------------------------|----------------------|------------------------------------|--|
| | | Date range | 95 th percent -ile (mAHD) | 5 th percent -ile (mAHD) | | 5 th percent-ile (mAHD) | |
| WKMB01 | Shallow rock <75m | 9 Feb 12 – 27 Oct 14 | 96.0 | 95.3 | 93.3 | 95.5 | Trigger not reached, steady trend |
| WKMB02 | Shallow rock <75m | 4 Jun 12 – 27 Oct 14 | 96.7 | 96.0 | 94.0 | 96.2 | Trigger not reached, decreasing trend |
| WKMB03 | Interburden (fault zone) >75m | 4 Oct 13 – 27 Oct 14 | 98.9 | 97.9 | 92.9 | 98.4 | Trigger not reached, increasing trend |
| WKMB06A | Alluvium <75m | 18 Nov 14 – 30 June 15 | 97.5 | 96.2 | 94.2 | 96.8 | Trigger not reached, decreasing trend |
| WKMB06B | Shallow rock (fault zone) <75m | 18 Nov 14 – 30 June 15 | 97.3 | 96.4 | 94.4 | 97.1 | Trigger not reached, decreasing trend |
| GR-P3 | Alluvium <75m | 10 Mar 11 – 27 Oct 14 | 98.1 | 96.7 | 94.7 | 97.1 | Trigger not reached, decreasing trend |
| WKMB05 sensor 1 | Interburden >75m | 1 Dec 14 – 30 June 15 | 108.6 | 104.6 | 99.6 | 104.0 | Trigger not reached, steady trend |
| WKMB05 sensor 2 | Cloverdale Coal Seam >75m | 1 Dec 14 – 30 June 15 | 108.0 | 102.6 | n/a | 101.7 | Coal monitoring zone, therefore trigger not appropriate |
| WKMB05 sensor 3 | Interburden >75m | 1 Dec 14 – 30 June 15 | 113.0 | 112.2 | 107.2 | 111.8 | Trigger not reached, steady trend |
| WKMB05 sensor 4 | Fairbairns Coal Seam >75m | 1 Dec 14 – 30 June 15 | 116.9 | 116.7 | n/a | 116.6 | Coal monitoring zone, therefore trigger not appropriate |
| WKMB05 sensor 5 | Interburden >75m | 1 Feb 15 – 30 June 15 | 145.3 | 142.8 | tbd | 141.9 | Initial equilibration uncertain, <3 months reliable water level data available |
| WKMB05 sensor 6 | Interburden >75m | 1 Feb 15 – 30 June 15 | 171.5 | 169.8 | tbd | 168.5 | Initial equilibration uncertain, <3 months reliable water level data available |

tbd – to be determined

4.2.2 Alluvium

During the current reporting period (1 July 2015 to 30 September 2015) groundwater levels in alluvial monitoring bores GR-P3 and WKMB06A show a declining trend with an overall decrease of approximately 0.3 m in response to the relatively dry conditions experienced during July and August 2015. The rate of decline reduces towards the end of the reporting period due to the increase in rainfall during late August and September 2015, however a clear response to individual rainfall events is not apparent, which is likely to be due to a soil moisture deficit establishing during relatively dry periods and limiting the rate of recharge through the unsaturated zone.

Groundwater levels in alluvial monitoring bores GR-P3 and WKMB06A show no response attributable to flowback pumping. Groundwater levels in the alluvium do not exceed the water level response trigger (Table 4.1 and Figure 4.3).

4.2.3 Shallow rock

During the current reporting period (1 July 2015 to 30 September 2015) groundwater levels in the shallow rock monitoring bores WKMB01, WKMB02 and WKMB06B show an overall decrease of approximately 0.1 to 0.3 m in response to the relatively dry conditions experienced during July and August 2015. Due to the increase in rainfall during late August and September 2015 the rate of decline reduced and at WKMB01 and WKMB02 the water levels remained relatively steady towards the end of the reporting period (Figure 4.2b).

Groundwater levels in monitoring bores WKMB01, WKMB02 and WKMB06B show no response attributable to flowback pumping. Groundwater levels in the shallow rock do not exceed the water level response trigger (Table 4.1 and Figure 4.4).

Manual groundwater measurements at private monitoring bore GW080487 screened in the shallow rock do not show a significant change in groundwater levels over the reporting period. Groundwater levels in GW080487 show no response attributable to flowback pumping (Figure 4.2b).

4.2.4 Interburden of deeper coal measures


During the current reporting period (1 July 2015 to 30 September 2015) groundwater levels in monitoring bore WKMB03, screened in the interburden (and thrust fault zone), show a gradual increase of approximately 0.4 m (Figure 4.2b). The increasing trend in water levels is attributable to a delayed response to the higher than average rainfall during April and May 2015.

Groundwater levels at WKMB03 show a distinctive delayed recovery response to sampling events, which is indicative of very low hydraulic conductivity within the interburden/fault zone. Increasing groundwater levels at WKMB03 from January 2015 to September 2015 are due to a delayed recovery response after the high frequency groundwater sampling events carried out during the fracture stimulation period in late 2014 (Figure 4.2a).


Groundwater levels in monitoring bore WKMB03 show no response attributable to flowback pumping. Groundwater levels in the interburden do not exceed the water level response trigger (Table 4.1 and Figure 4.3).

4.2.5 Thrust fault zone

Both WKMB03 and WKMB06B are screened across the thrust fault zone, and WKMB06A is screened within the alluvium above the thrust fault zone. Hydrographs from these three monitoring bores show no anomalous water level responses and therefore provide no evidence of connectivity between the fracture stimulation zones and the shallow groundwater system via the thrust fault zone.

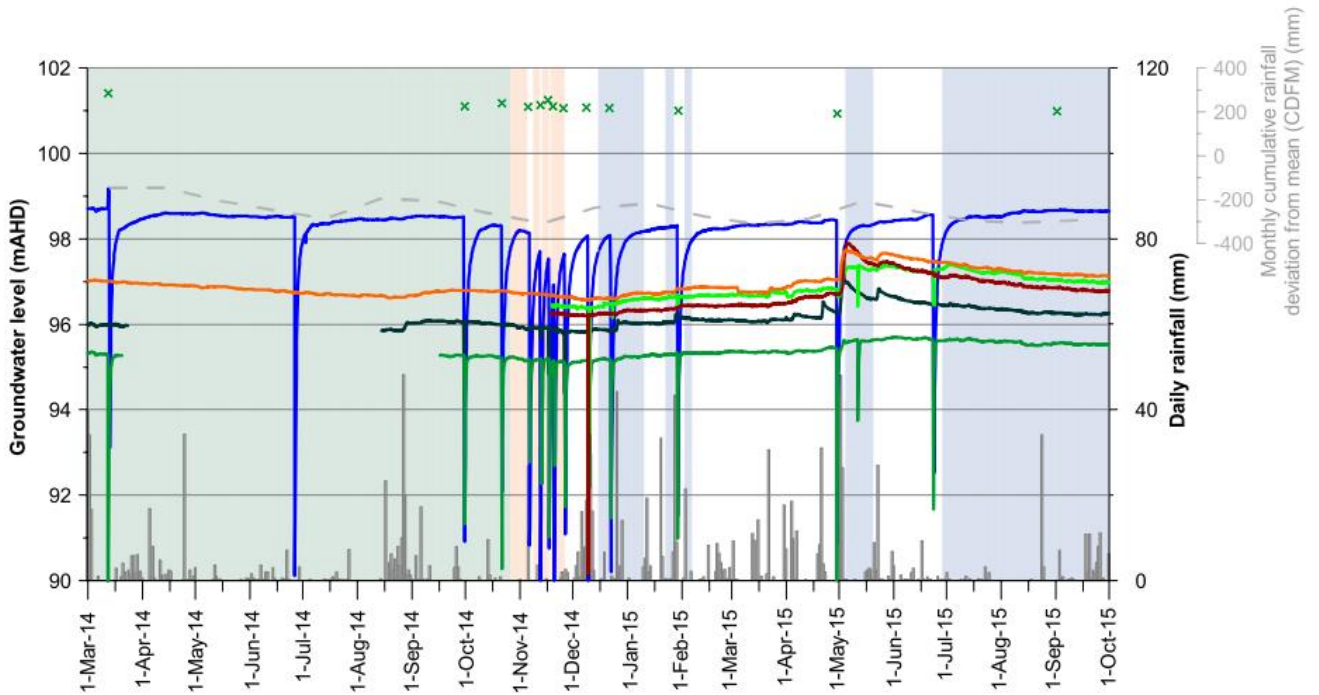

a. March 2014 to September 2015

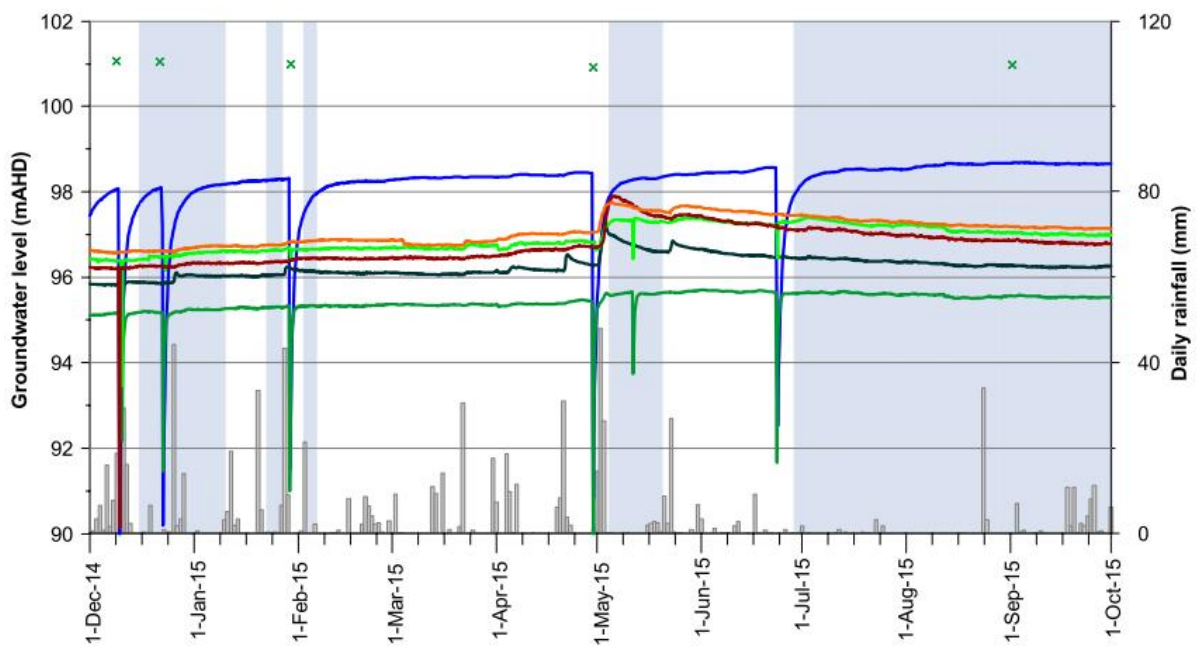

b. December 2014 to September 2015

- | | |
|-------------------------------|---|
| Daily rainfall | WKMB01 (47 - 53 mbgl) (Leloma Formation - Shallow Rock) |
| Monthly CDFM | WKMB02 (51 - 60 mbgl) (Leloma Formation - Shallow Rock) |
| Baseline sampling | WKMB03 (200 - 209 mbgl) (Leloma Formation - Interburden) |
| Fracture stimulation | WKMB06A (6.4 - 12.4 mbgl) (Alluvium) |
| Flowback | WKMB06B (52 - 61 mbgl) (Leloma Formation - Shallow Rock) |
| GR-P3 (5 - 9 mbgl) (Alluvium) | GW080487 (48 - 60 mbgl) (Leloma Formation - Shallow Rock) (manual readings) |

NB. Spikes depicting rapid groundwater level decline followed by recovery on the hydrographs are associated with water sampling events that have taken place from March 2014. This water level response has been the subject of an investigation by the EPA, which concluded that the fluctuations are the result of groundwater sampling (EPA 2015d).

Figure 4.2 Groundwater levels and rainfall at the Waukivory monitoring bores

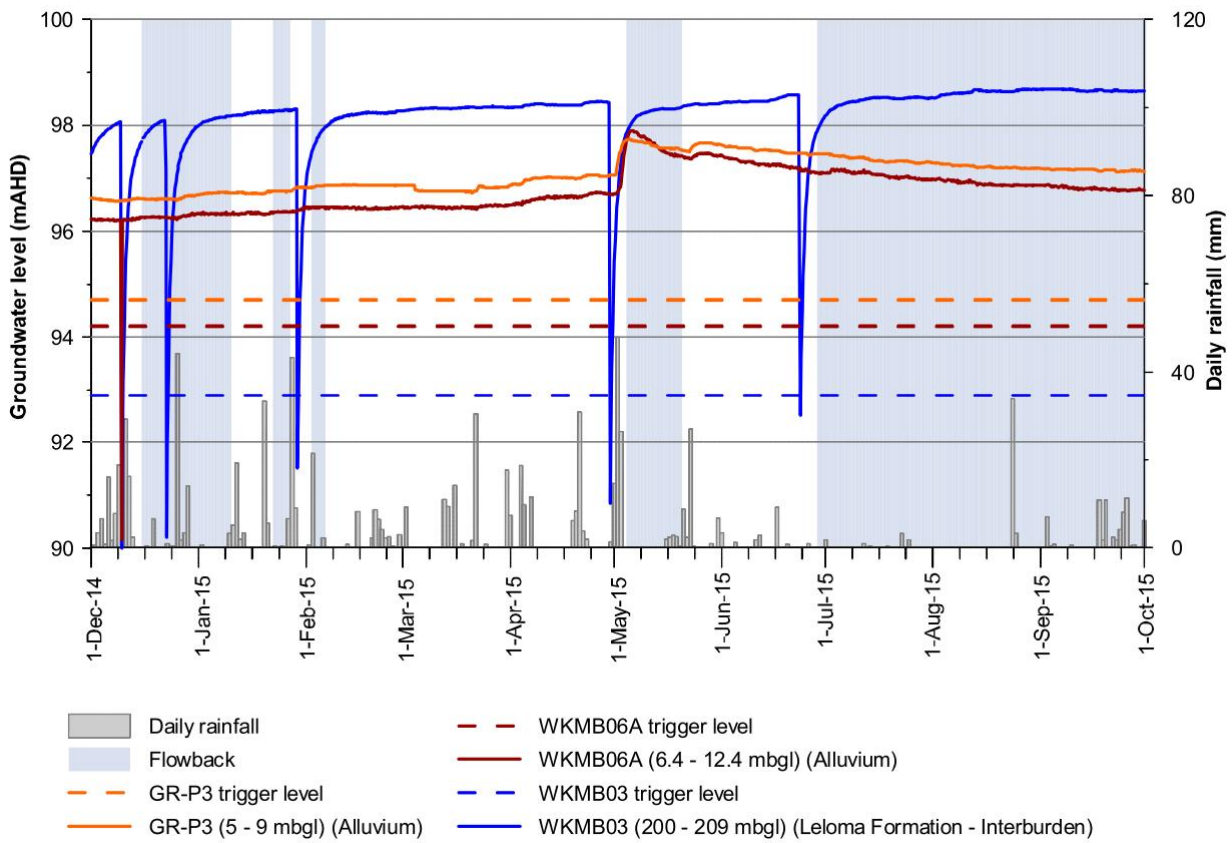


Figure 4.3 Groundwater and trigger levels at the Waukivory alluvial and interburden monitoring bores

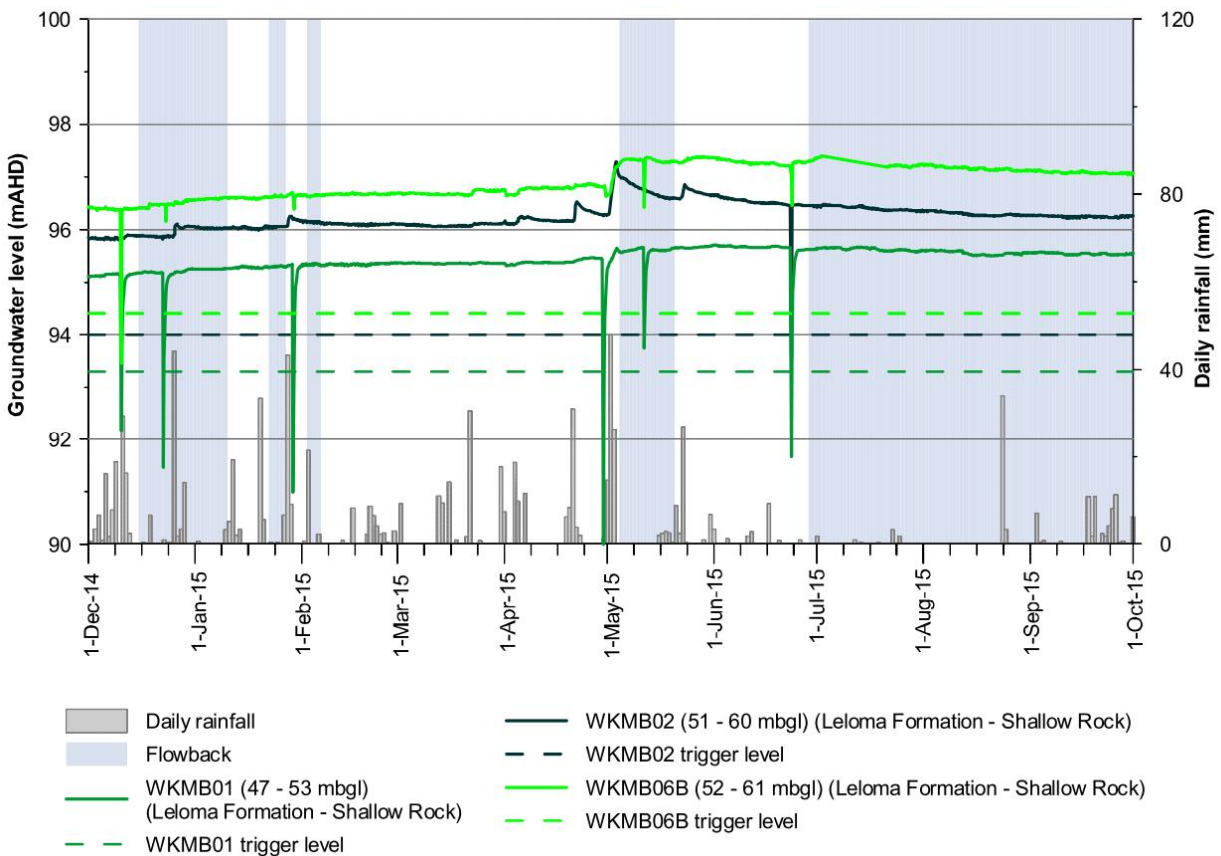


Figure 4.4 Groundwater and trigger levels at the Waukivory shallow rock monitoring bores

4.2.6 Deep groundwater systems

Deep groundwater (>300 mbgl) is monitored by WKMB05 (multizone monitoring well) and PL03 (vibrating wire piezometer). The monitored intervals are both deep coal seam water bearing zones and overlying aquitards.

WKMB05

A comparison of the WKMB05 monitored intervals to WK13 perforated intervals is shown in Figure 4.5. The westerly dip of geological strata is such that coal seams intersected by WKMB05 are intersected at a greater depth in WK13 which is located 164 m to the west.

Piezometric levels in WKMB05 for the period November 2014 (installation) to 30 September 2015 are shown in Figure 4.6. The rapid changes in the piezometric levels measured at all sensors on 25 November 2014 occurred during the commissioning of the packer system. There are divergent pressure trends at WKMB05 with different sensors showing downward and upward trends during the reporting period (1 July 2015 to 30 September 2015):

- Piezometric levels at sensor 1 decrease by about 0.6 m
- Piezometric levels at sensor 2 decrease by about 0.8 m
- Piezometric levels at sensor 3 decrease by about 0.05 m
- Piezometric levels at sensor 4 increase by about 0.5 m
- Piezometric levels at sensor 5 decrease by about 0.9 m
- Piezometric levels at sensor 6 decrease by about 1.2 m.

It is possible that the slight decrease in piezometric level at WKMB05 sensor 2 (Cloverdale coal seam) represents a pressure response to flowback at WK13. The piezometric level at sensor 1 has declined since March 2015; however, the piezometric level at the end of the current reporting period is similar to the piezometric level in December 2014. The variation in piezometric level at Sensor 1 during 2015 may be a natural occurrence and not a response to flowback since there has been almost no net change in piezometric level since flowback commenced in December 2014.

Sensors 3 and 4 continued to show a gradual decline until mid-August before increasing towards the end of the reporting period. This response is not considered to be attributable to flowback pumping because pumping continued until the end of September 2015 (Figure 4.6) whilst the gradual decline at sensors 3 and 4 continued until mid-August before the piezometric levels increased to the end of the reporting period. Furthermore, a decline in pressure has been observed since January 2015 throughout periods when flowback pumping has not occurred. There is uncertainty as to whether the piezometric levels in WKMB05 sensors 5 and 6 have reached equilibration following installation. A long recovery period following installation is widely observed in deep VWP installations in low permeability formations (Parsons Brinckerhoff, 2014c). The piezometric response will continue to be reviewed as additional monitoring data becomes available.

Piezometric levels in the deep groundwater systems do not exceed the water level response triggers shown in Table 4.1 and Figure 4.7.

Comparing each of the hydrographs at WKMB05 there is an apparent and pronounced upward gradient between the deepest zones (with the highest artesian pressures) and the shallowest zones (with the lowest artesian pressures). This data conforms to the conceptual model with upward flow in the centre of the Basin and aquitards confining the piezometric pressures of the underlying strata.

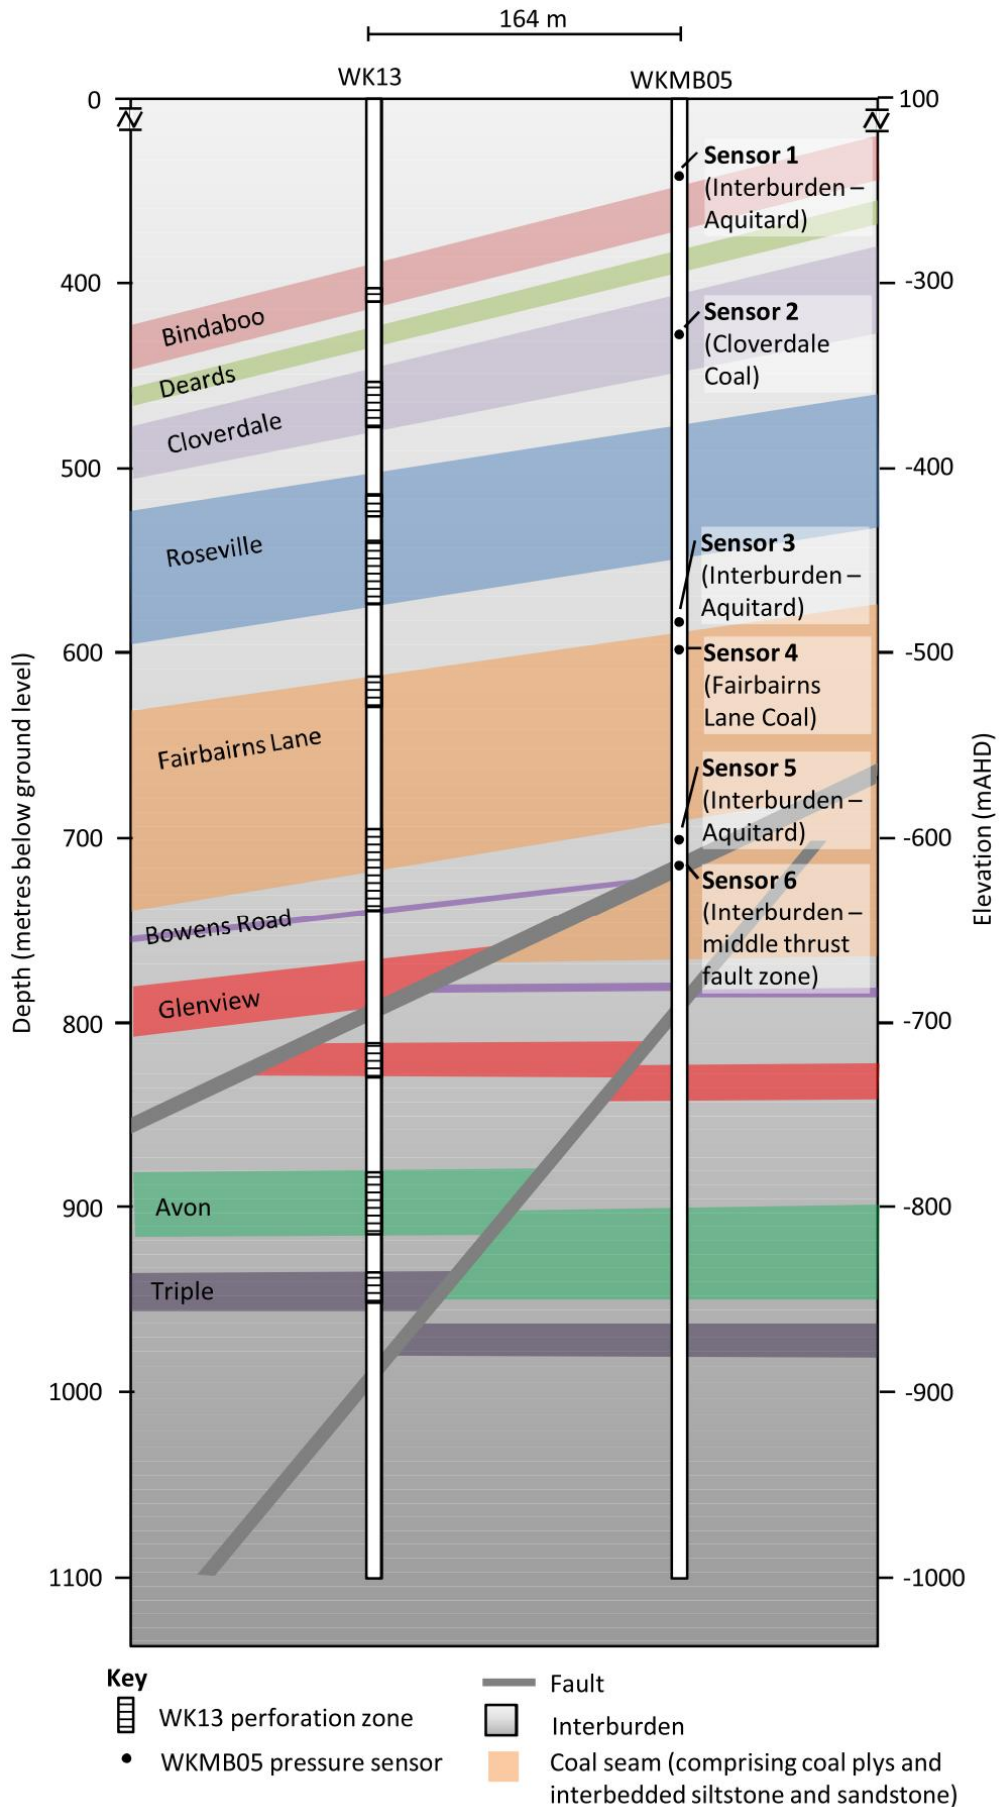


Figure 4.5 Schematic comparison of WK13 perforated intervals and WKMB05 monitored intervals

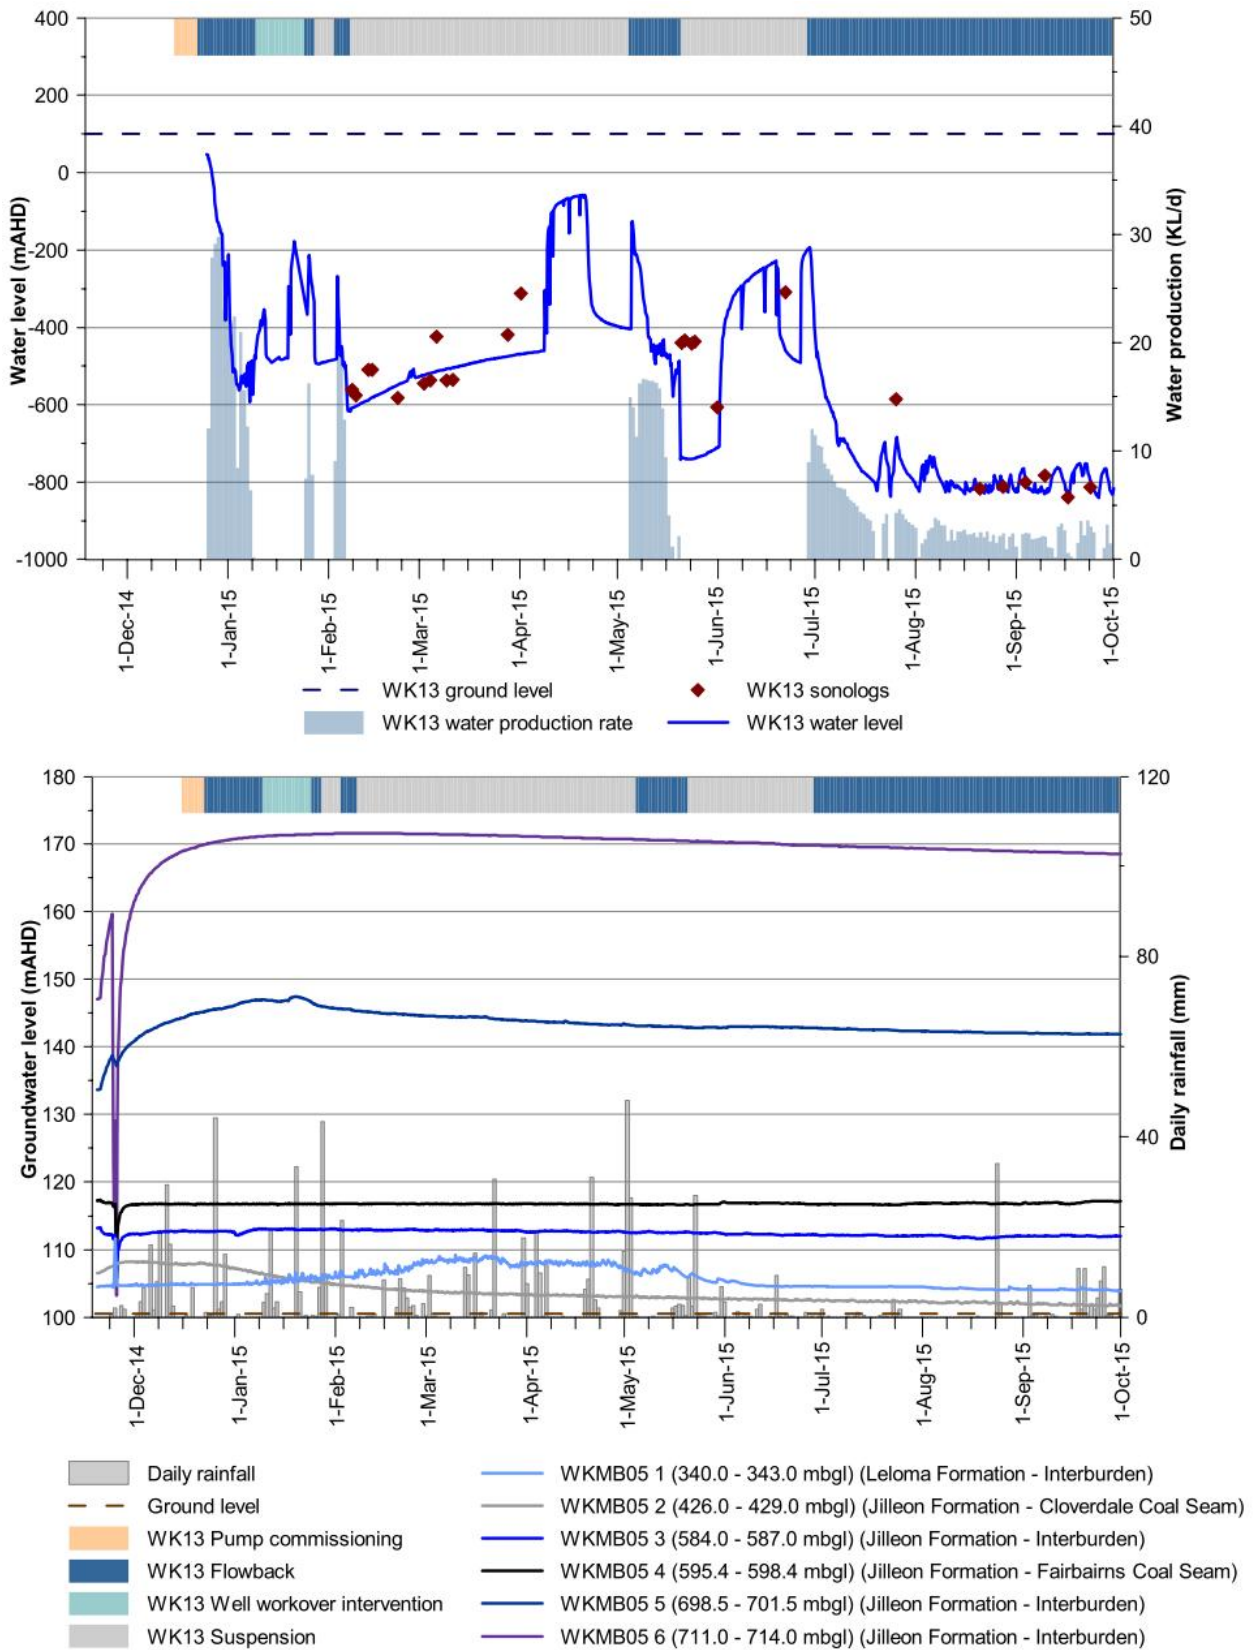


Figure 4.6 Groundwater levels and rainfall at multizone monitoring well WKMB05 compared to water levels at WK13

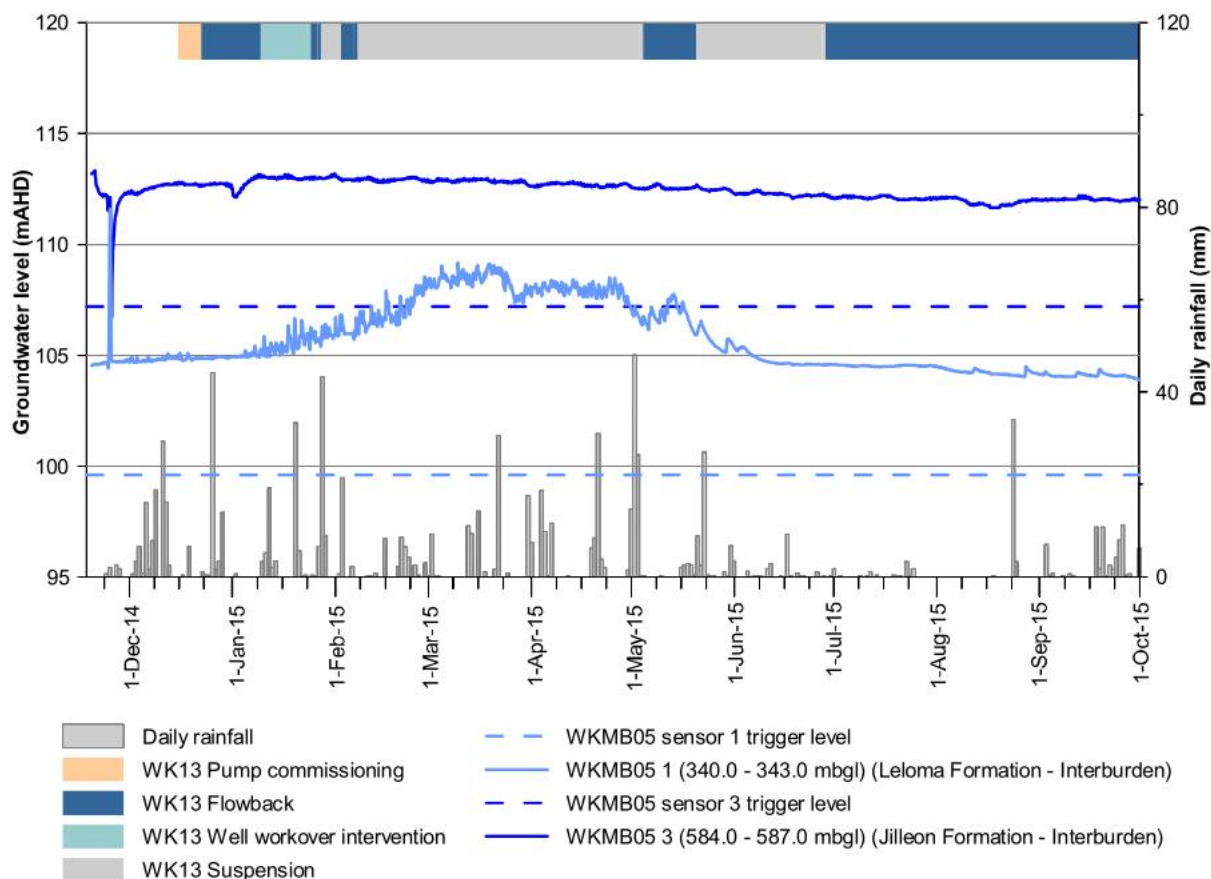


Figure 4.7 Groundwater and trigger levels at multizone monitoring well WKMB05

PL03

Vibrating wire piezometer PL03 was installed in September 2013. Sensor 2 (496 mbgl) located in the Bowens Road coal seam shows a decrease in piezometric pressure of approximately 20 m since installation with a steady declining trend. Sensor 3 (463 mbgl) located in interburden shows a decrease in piezometric pressure of approximately 60 m since installation. The declines in piezometric level may reflect the long term readjustment of pore pressure in the surrounding rock since installation and are not considered to represent natural trends. However, since February 2015 the piezometric level in sensor 3 has remained relatively constant, and shows equilibration.

A long equilibration period has been observed at VWP's installed at the AGL Hunter Gas Project. At that location, groundwater levels took over one year to equilibrate following installation (Parsons Brinckerhoff, 2014c) and was considered to reflect pore pressures in low permeability formations adjusting and recovering towards hydrostatic pressures following the local disturbance associated with installation.

During the reporting period (1 July 2015 to 30 September 2015) piezometric levels at PL03 sensor 2 have decreased by approximately 2 m and at PL03 sensor 3 have increased by about 0.5 m (Figure 4.8).

Despite the apparent equilibration, there is still uncertainty that the data from PL03 is representative of the target formations and consequently this monitoring site has not been included in the water level response trigger assessment at this stage.

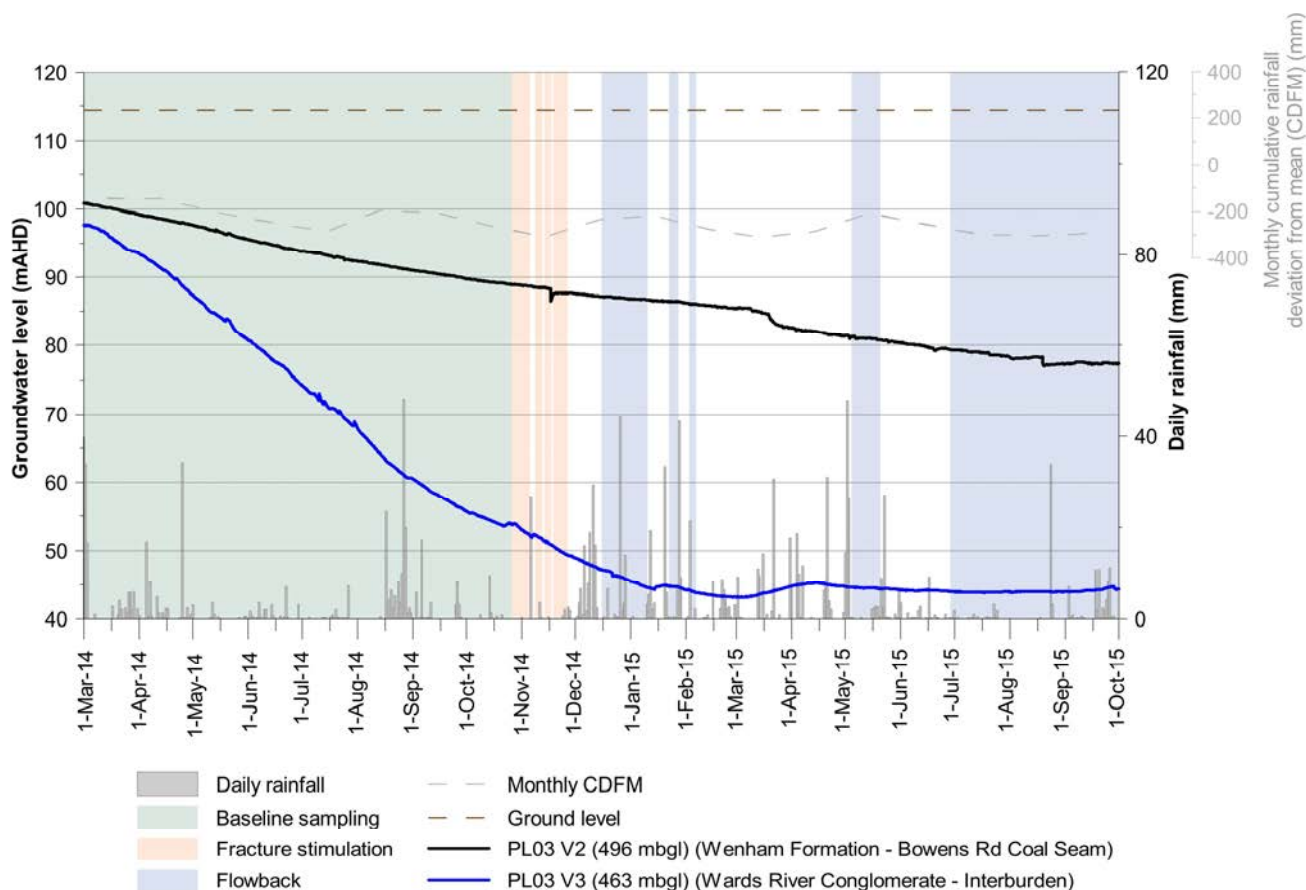


Figure 4.8 Groundwater levels and rainfall at vibrating wire piezometer PL03

4.2.7 Vertical hydraulic gradients

Groundwater levels at the WKMB06A and WKMB06B nested monitoring site show a very slight upward vertical gradient between the shallow rock and the alluvium. An upward vertical component of hydraulic gradient is characteristic of groundwater discharge areas. This is consistent with the conceptual hydrogeological model whereby deeper groundwater migrates through the shallow fractured rock and into the base of the alluvium before mixed shallow and deep groundwater discharges as baseflow to surface waters.

Groundwater levels at WKMB03 within the interburden of the deeper coal measures are higher than in the shallow rock monitoring bores WKMB01, WKMB02 and WKMB06B and indicate an upward vertical gradient and probable confining conditions attributed to the low permeability rock (Figure 4.2). Vertical seepage is likely to be limited and slow due to the low permeability of the interburden units. Furthermore, this data provides no indication that the upper thrust zone is a conduit for deep groundwater or that it is in hydraulic connection with shallow aquifers.

Piezometric levels at WKMB05 sensors 1 to 6 show an upward vertical gradient prior to any substantial flowback pumping in January 2015 (Figure 4.6). An upward trend in piezometric levels at WKMB05 sensor 1 and a downward trend in piezometric levels at sensor 2 from January 2015 to May 2015 have resulted in a reversal of this gradient. This trend may be related to flowback from WK13 leading to depressurisation of the Cloverdale coal seam (sensor 2).

WKMB05 sensors 5 and 6 show piezometric levels of approximately 45 m and 70 m respectively above ground level (Figure 4.6). Piezometric pressures at these depths and in the centre of the basin are expected to be artesian (above ground elevation); although initial numerical modelling suggests that the piezometric pressures at the deepest sensors should be approximately 10 to 20 m above ground level. There is

uncertainty as to whether the piezometric levels in WKMB05 sensors 5 and 6 have reached equilibration following installation; this will be reviewed as additional monitoring data becomes available.

4.3 Surface water levels

Surface water levels for the period September 2014 (installation) to 30 September 2015 are shown in Figure 4.9.

Water levels at stream gauge sites WKSW01 (Avon River upstream of the Project site), WKSW02 (Waukivory Creek upstream of the Project site) and WKSW03 (Avon River downstream of the Project site) show a slight overall increase in water levels over the reporting period (1 July 2015 to 30 September 2015).

Water levels in the Avon River (WKSW01 and WKSW03) show an increase of about 0.3 m in response to the rainfall event on 28 August 2015.

Water levels in Waukivory Creek (WKSW03) do not show a significant response to the rainfall event on 28 August 2015. There is an overall increase in water levels of about 0.3 m over the reporting period in response to rainfall in late-August and September.

Water levels at the Waukivory stream gauge sites show no response attributable to flowback pumping from the pilot wells (Figure 4.9).

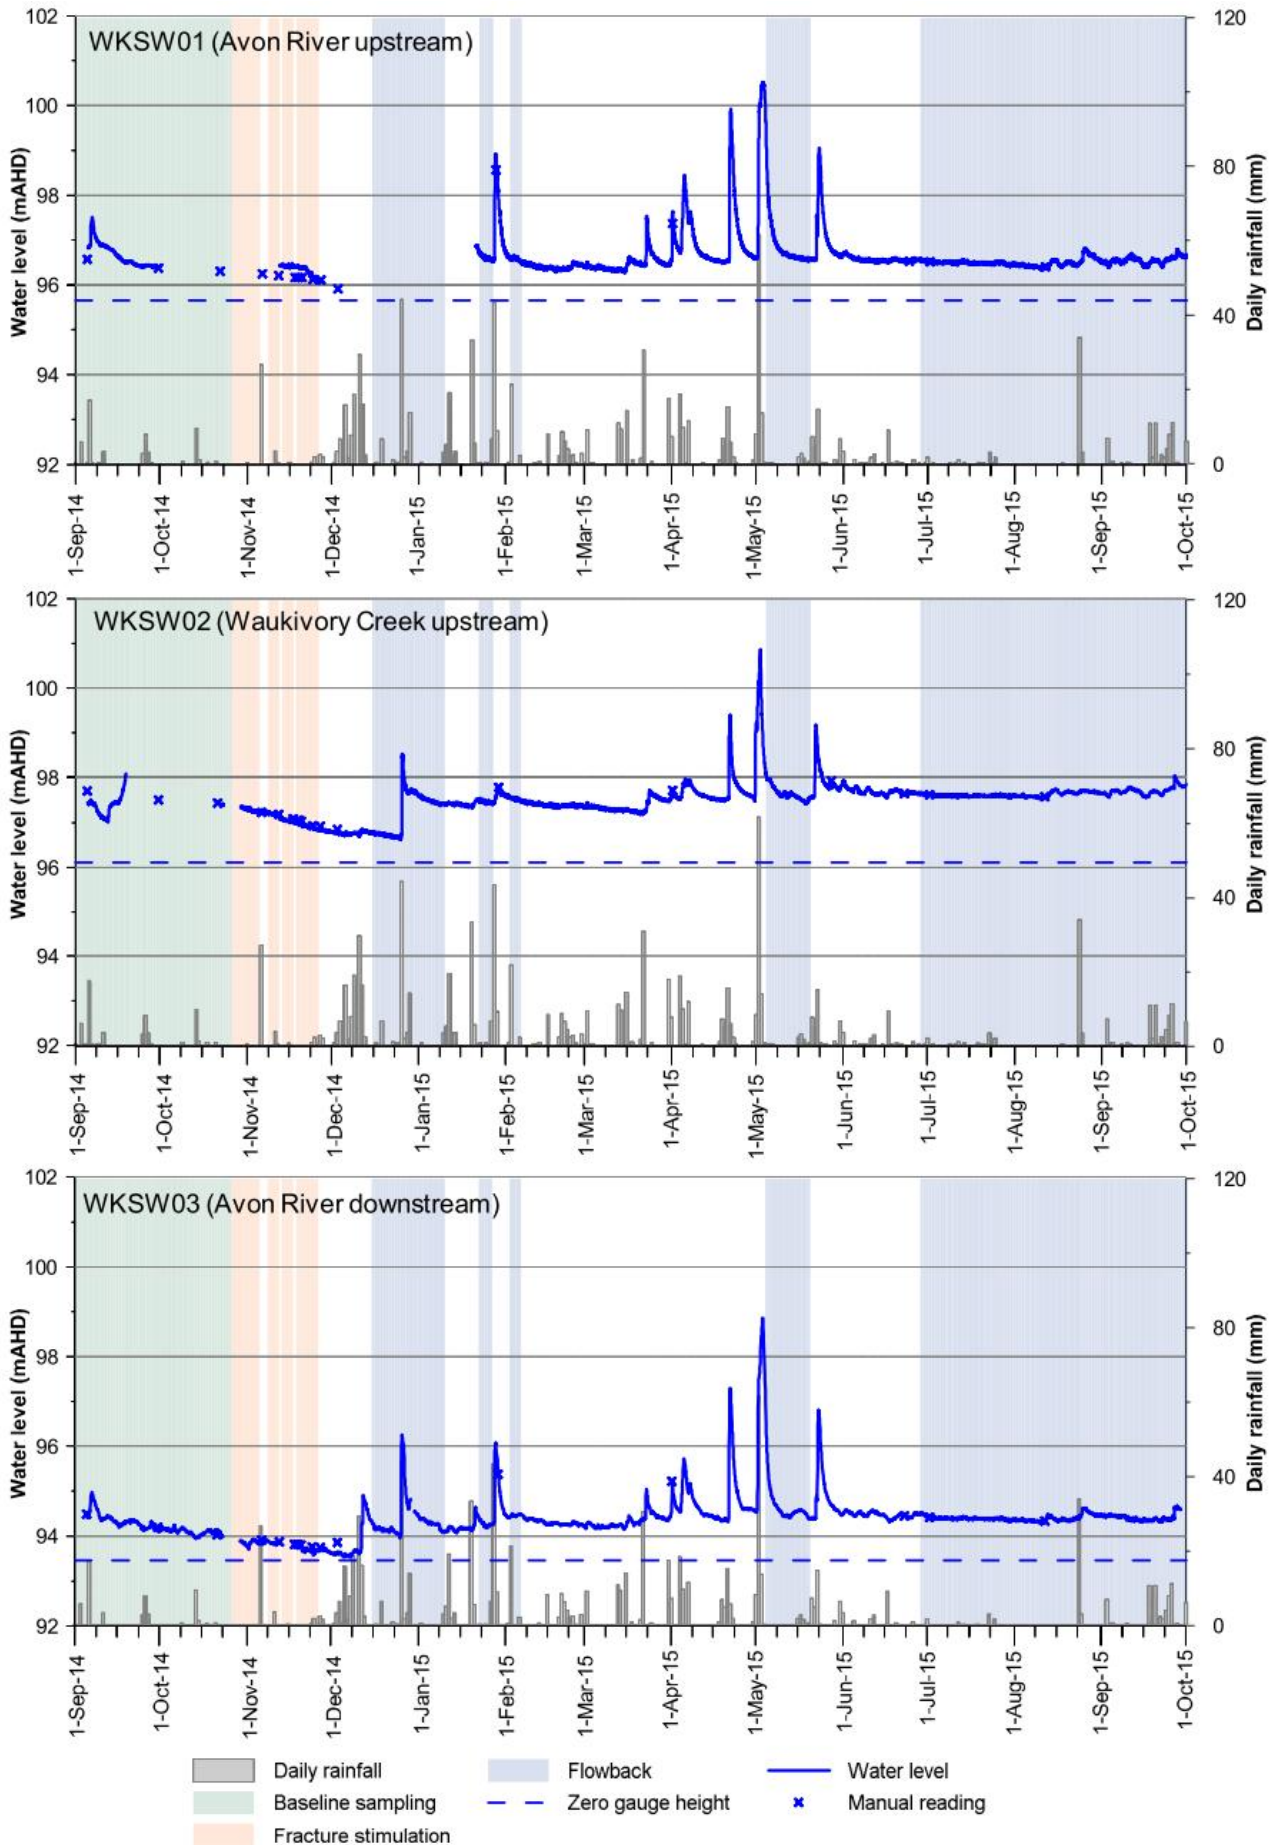


Figure 4.9 Surface water levels and rainfall at the Waukivory stream gauges

5. Water quality

5.1 Introduction

This section presents water quality monitoring data for the period 1 July 2015 to 30 September 2015.

For the purpose of identifying trends, data collected since baseline sampling commenced in March 2014 is also included in the time-series charts in this report. The water quality assessment is described for the following components within this chapter:

- Fracture stimulation fluid composition (for comparison to flowback water quality)
- Pilot well water quality monitoring results
- AST2 water quality monitoring results
- Surface water quality monitoring results

There has been no groundwater quality sampling during the current reporting period in accordance with the sampling schedule stipulated in EPL 20358 and the SGMP (AGL 2015a).

A comprehensive suite of elements and compounds were analysed in each sample (Section 3). Water quality results and analysis for all sampling sites are provided in the Appendices.

5.2 Fracture stimulation fluid

Chemical analysis of the fracture stimulation fluid is presented in Table 5.1, and further details are provided in the Waukivory Pilot Project Surface Water and Groundwater Monitoring Report to 31 December 2014 (Parsons Brinckerhoff 2015a). For context, summary findings of chemical analysis of waters during the fracture stimulation period in November 2014 were as follows:

- The injected fracture stimulation fluid contained lower concentrations of total dissolved solids, major ions, and trace metals than the Waukivory groundwater and surface water monitoring sites.
- BTEX and some phenolic compounds were detected in baseline groundwater data, but were not present in the fracture stimulation fluids. Total petroleum hydrocarbons (TPH) were detected in both groundwater and fracture stimulation fluid at low concentrations.
- Monoethanolamine (MEA) was present in concentrations that are 2 to 3 orders of magnitude higher in the fracture stimulation fluid than in surface water and groundwater; however the presence of MEA in groundwater (detected in baseline monitoring) prior to any fracture stimulation activities and raw water during fracture stimulation indicates an alternative source other than the fracture stimulation fluid.
- THPS was also present in the fracture stimulation fluid at concentrations 2 to 3 orders of magnitude higher than the surface water and groundwater. However, there are no confirmed detections of this analyte at the water monitoring sites which could be attributed to fracture stimulation activities.
- Free and total residual chlorine (constituents of sodium hypochlorite) detections occurred at selected surface water and groundwater sites. Sodium hypochlorite was not used as a fracture stimulation additive for the Project.

Groundwater and surface water monitoring data collected during 2014 showed that MEA, THPS and free and total residual chlorine were naturally present in the surrounding environment (Parsons Brinckerhoff 2015a). The EPA subsequently conducted independent investigations (EPA 2015a, 2015b and 2015c) into the occurrence of these analytes; the key conclusions are detailed in Section 3.5.

Table 5.1 Summary of fracture stimulation fluid concentrations

| Parameter | Fracture stimulation fluid |
|----------------------------------|---|
| Monoethanolamine (MEA) | Values ranged from 4,200 µg/L to 5,690 µg/L. |
| THPS | Values ranged from 7,800 µg/L to 13,000 µg/L. |
| Free and total residual chlorine | Below LoR (0.2 mg/L). |
| BTEX compounds | Below LoR (2 µg/L). |
| Boron | Values ranged from 82.5 mg/L to 115.0 mg/L. |
| Sulphate | Values ranged from <10 mg/L to 63 mg/L. |
| Total phosphorus | Values ranged from 7.1 mg/L to 16.0 mg/L. |
| Total nitrogen (as N) | Values ranged from 48.0 mg/L to 75.8 mg/L. |
| Salinity (EC) | 470 to 653 µS/cm |
| pH | Alkaline pH (8.16 to 9.09) |
| Major ions | Na -HCO ₃ -Cl |
| Dissolved metals | Below LoR: Sb, Be, Cd, Cr, Co, Hg, Se, U, V. Detected dissolved metal concentrations were typically higher than in the raw water (with the exception of Fe). |
| Nutrients | Ammonia, nitrate and nitrite concentrations (as N) ranged between the LoR (0.1 mg/L) and 0.34 mg/L. Total organic carbon concentrations ranged from 815 to 873 mg/L. |
| Dissolved methane | Below LoR (10 µg/L). |
| Petroleum hydrocarbons | Phenols and PAHs were below LORs. TPH C ₁₀ -C ₃₆ (sum) ranged from below LoR (50 µg/L) to 1,860 µg/L. |

5.3 Pilot well (flowback) water quality

The flowback water quality is influenced by the fracture stimulation fluid and the water quality of the target formations of the pilot well. During the flowback phase the flowback water quality will trend towards that of the formation and the concentration of the fracture stimulation additives will decrease to background levels.

A summary of fracture stimulation fluid chemistry is provided in Table 5.1, and further details are provided in the Waukivory Pilot Project Surface Water and Groundwater Monitoring Report to 31 December 2014 (Parsons Brinckerhoff 2015a).

Water quality data from deep coal seams (formation water) within the Gloucester Basin is available from flow testing of the Craven 06 and Waukivory 03 gas wells in 2013 (Parsons Brinckerhoff 2014d), and flow testing of the Craven 06 gas well in 2014 (Parsons Brinckerhoff 2015c).

In the previous Waukivory surface water and groundwater monitoring reports (Parsons Brinckerhoff 2015a, 2015b and 2015c) four analytes were selected as indicators of the migration of flowback water towards 'typical' Gloucester Basin coal seam formation water ('produced water'). As discussed in Section 3.5, THPS was removed from the EPL in July 2015 so the following assessment of the migration from flowback to produced water focusses on the following three analytes:

- Sodium and EC used as general indicators of salinity to illustrate the transition from flowback water (lower EC and sodium due to dilution by fracture stimulation fluid) to produced water (naturally higher EC and sodium).
- MEA borate as indicated by boron – although MEA was present in high concentrations in the fracture stimulation fluid compared to the baseline groundwater and surface water data; there is no baseline MEA data from the produced water from CR06 and WK03 prior to the Project. Consequently, boron is used as an indicator of fracture stimulation fluid in flowback water as boron was present in high concentrations in the fracture stimulation fluid compared to produced water monitoring undertaken prior to the Project (i.e. from CR06 and WK03).
- BTEX – naturally occurring in variable concentrations in deep coal seam formation water and not present in the fracture stimulation fluid.

The degree to which the flowback water quality has migrated towards that of 'typical' Gloucester Basin coal seam formation water ('produced water') is shown by the scatter plots presented in Figure 5.1.

These three analytes are presented relative to TDS in Figure 5.1 as TDS shows variation between the fracture stimulation fluid, flowback water and produced water, allowing the different water 'types' to be discerned.

Figure 5.1 shows that the flowback water quality is more similar to that of CR06 and WK03 (produced water) than that of the fracture stimulation fluid.

Sodium concentrations are considered to represent natural background variability for the target formations as the concentrations are significantly higher in flowback water compared to the fracture stimulation fluid. This indicates there is negligible influence from the fracture stimulation fluid on the flowback water. The peak concentrations of sodium at WK11, WK12 and WK14 as shown in Figure 5.1 occurred during the current reporting period.

Boron concentrations are typically high in the fracture stimulation fluid due to the presence of MEA borate. Boron concentrations in the flowback water during the current reporting period have shown variability consistent with background concentrations of this analyte, with a decreasing trend in variability emerging at WK11 and WK14 relative to previous reporting periods. The reduced variability in boron concentration is consistent with a transition from flowback to produced water and demonstrates removal of the fracture stimulation fluid and the natural breakdown of MEA.

There was intensive sampling for BTEX analysis at the pilot wells from 30 June to 29 July 2015 (inclusive) and therefore there is more BTEX data presented in Figure 5.1 compared to the other analytes. The large variation in BTEX concentrations as shown in Figure 5.1 is representative of the natural variability within the deep coal seams. As discussed in Section 5.3.1, BTEX concentrations decrease during the 30 June to 29 July investigation period and the lowest BTEX concentrations at WK11, WK13 and WK14 have been measured during the current reporting period; WK12 continues to show minimal or no BTEX detections due to shallower coal seams being targeted. The depth of the target formations is a key influence on BTEX concentrations and hence the difference between the BTEX data collected at WK11, WK13 and WK14 compared to WK12, CR06 and WK03.

The two primary indicators for the transition from flowback water to produced water remain as a) the removal of 100% of the volume of fracture stimulation fluids injected and b) water salinity (EC) of above 5,000 $\mu\text{S}/\text{cm}$.

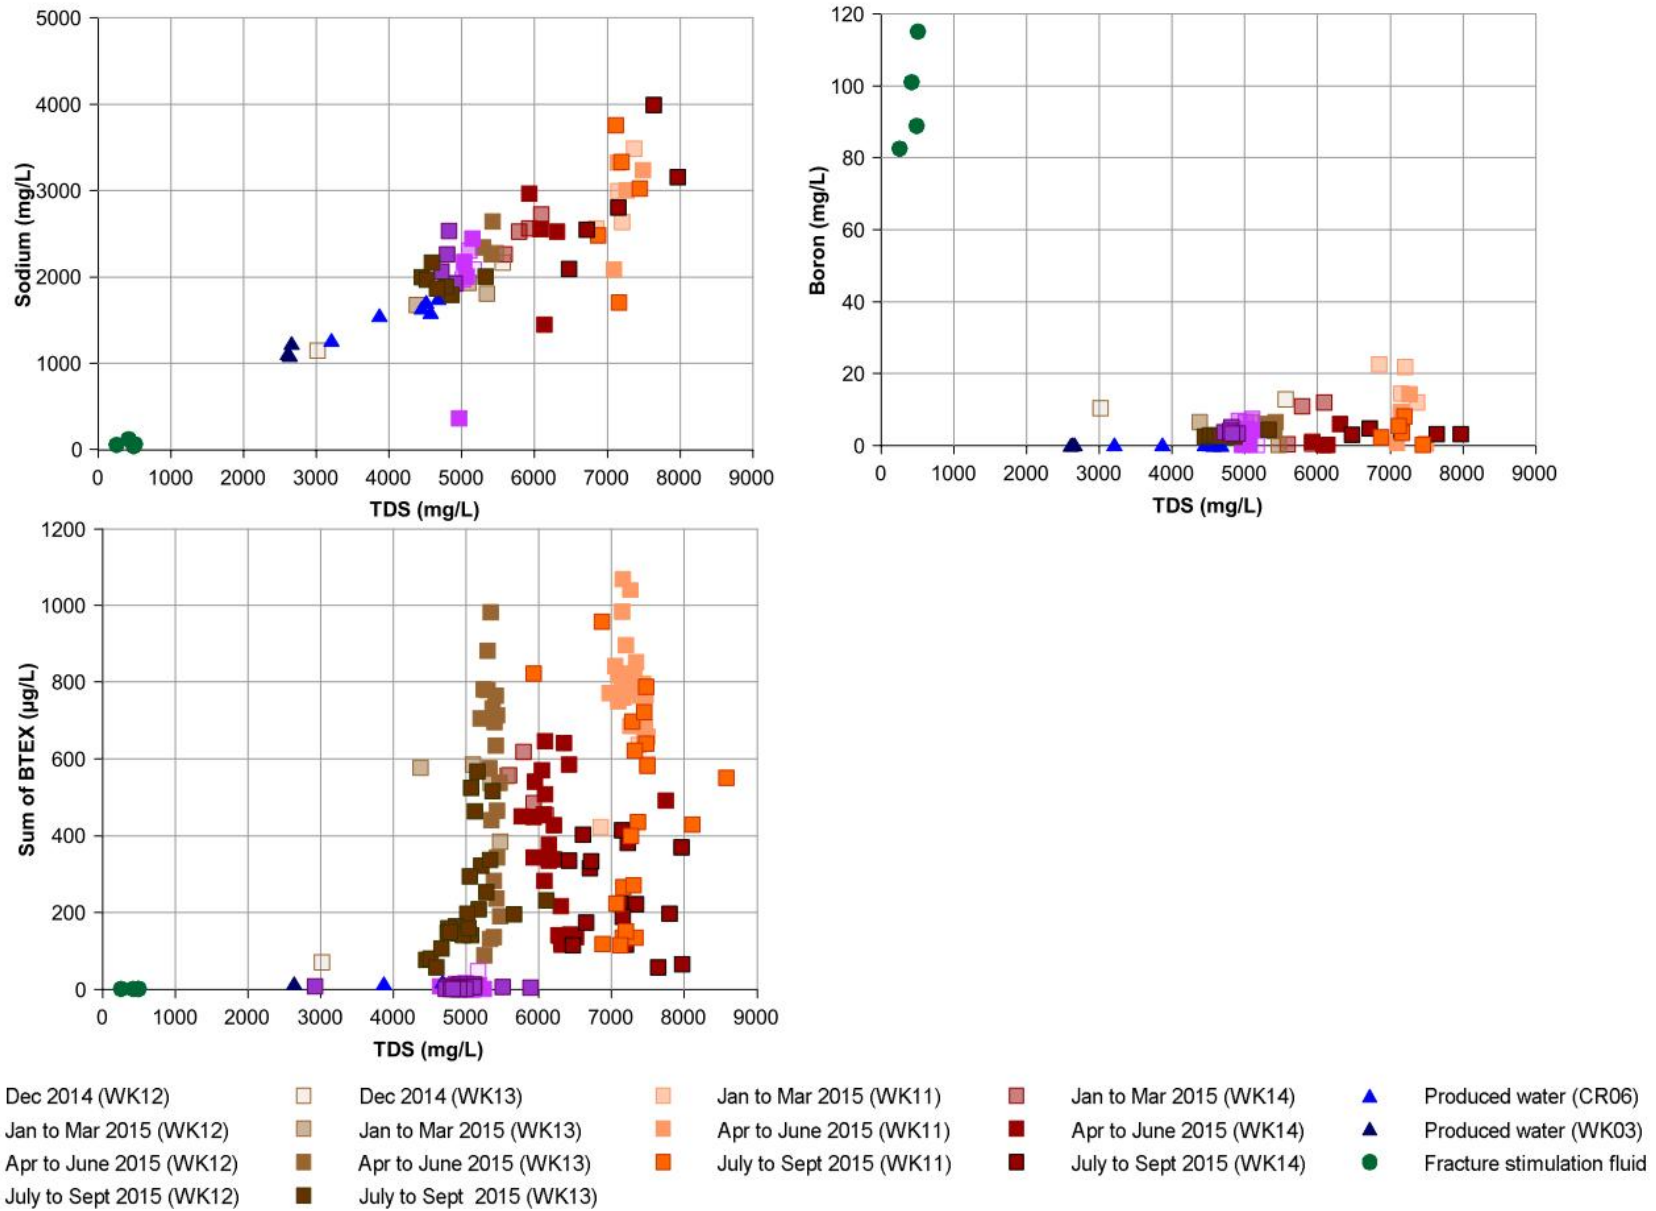


Figure 5.1 Sodium, boron and BTEX vs TDS for formation water, fracture stimulation fluid and flowback water

5.3.1 Results

Figures 5.2 to 5.4 show time series plots for EC, MEA and BTEX for each of the four pilot wells. The data has been plotted against the total flowback volume since pumping began shown as a fraction of the total volume of fracture stimulation fluid that was injected into the well during fracture stimulation. One of the two indicators of the transition from flowback to produced water is 100% of the volume of fracture stimulation fluids injected.

EC

Figure 5.2 shows that one of the indicators of the transition from flowback to produced water; an EC value above 5,000 $\mu\text{S}/\text{cm}$, has been met at all pilot wells. The EC at WK11, WK12 and WK13 has been relatively stable during the current reporting period with fluctuations that are considered to be within the natural variability of the target formation water quality. The EC at WK14 continues to show an overall upward trend; this is considered to be due to WK14 being one of the most recent wells to commence flowback, and has currently recovered a smaller fraction of the total volume injected compared to the other pilot wells (Section 6).

The latest sampling event (23 September 2015) shows the EC ranged from 7,190 to 12,300 $\mu\text{S}/\text{cm}$ across the four pilot wells.

MEA

Figure 5.3 shows the variation of MEA concentrations during the current reporting period. The data continues to show variability that is within an order of magnitude of natural groundwater and surface water background concentrations observed at Waukivory (Parsons Brinckerhoff 2015a). The latest sampling event from the pilot wells (9 September 2015 at WK12 and 23 September 2015 at WK11, WK13 and WK14) shows the MEA concentrations ranging from 7 to 44 $\mu\text{g}/\text{L}$.

The background MEA concentration range for Waukivory groundwater and surface water monitoring is 0 to 61 $\mu\text{g}/\text{L}$; therefore the current concentrations observed at the pilot wells are consistent with the background data, which is indicative that a transition from flowback to produced water is underway.

BTEX

Figure 5.4 shows the variation in the sum of BTEX throughout the current reporting period. There is an increase in BTEX concentrations following periods when the pumps were not operational, as evident at the beginning of the reporting period, which followed the period of suspension from 19 May to 30 June 2015. The increase in concentrations during such periods is due to BTEX compounds mobilising into solution from the coal seams and accumulating in the water within the pilot well and adjacent fractures. A reduction in BTEX concentrations was observed at all pilot wells upon re-commencement of pumping and the decline continued throughout the reporting period. The BTEX data presented in Figure 5.5 demonstrates that through continued pumping, the BTEX concentrations reduce to background levels for the target formations.

The sum of BTEX concentrations in WK12 are low ($< 12 \mu\text{g}/\text{L}$ during the current reporting period) compared to the other pilot wells. WK12 is perforated against shallower intervals (maximum depth of 597 mbgl at WK12, compared to 964 mbgl at WK11, 946 mbgl at WK13 and 805 mbgl at WK14). This data supports the findings of the investigation into the occurrence of BTEX compounds in flowback water carried out by AGL, the EPA and the DRE. The investigations concluded that the source of BTEX in the flowback water is from naturally occurring groundwater within the deep coal seams which are in excess of 600 metres below the surface (DRE, 2015 and EPA, 2015d).

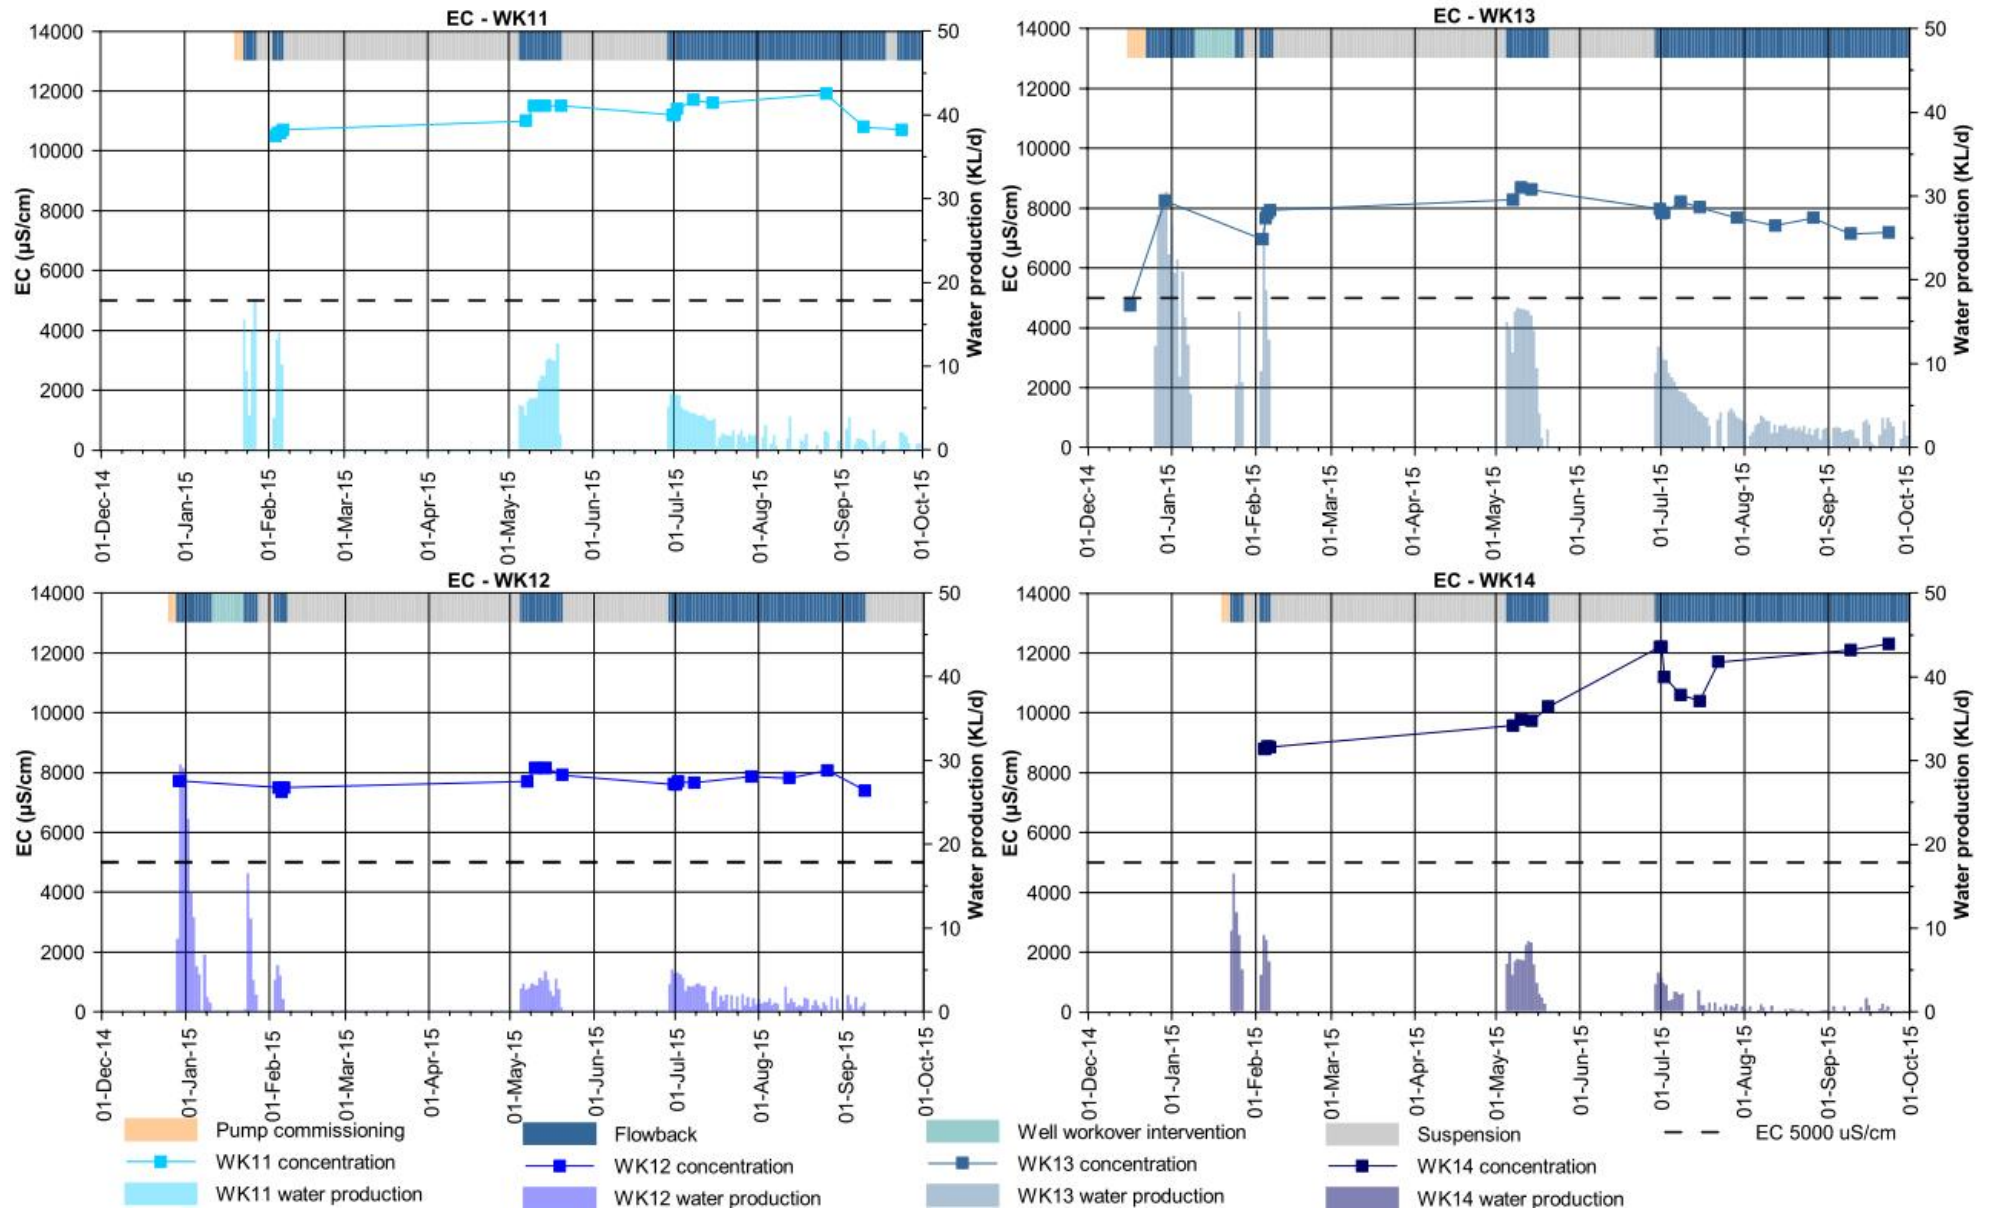


Figure 5.2 Laboratory electrical conductivity (EC) measurements and flowback volumes at the Waukivory pilot wells

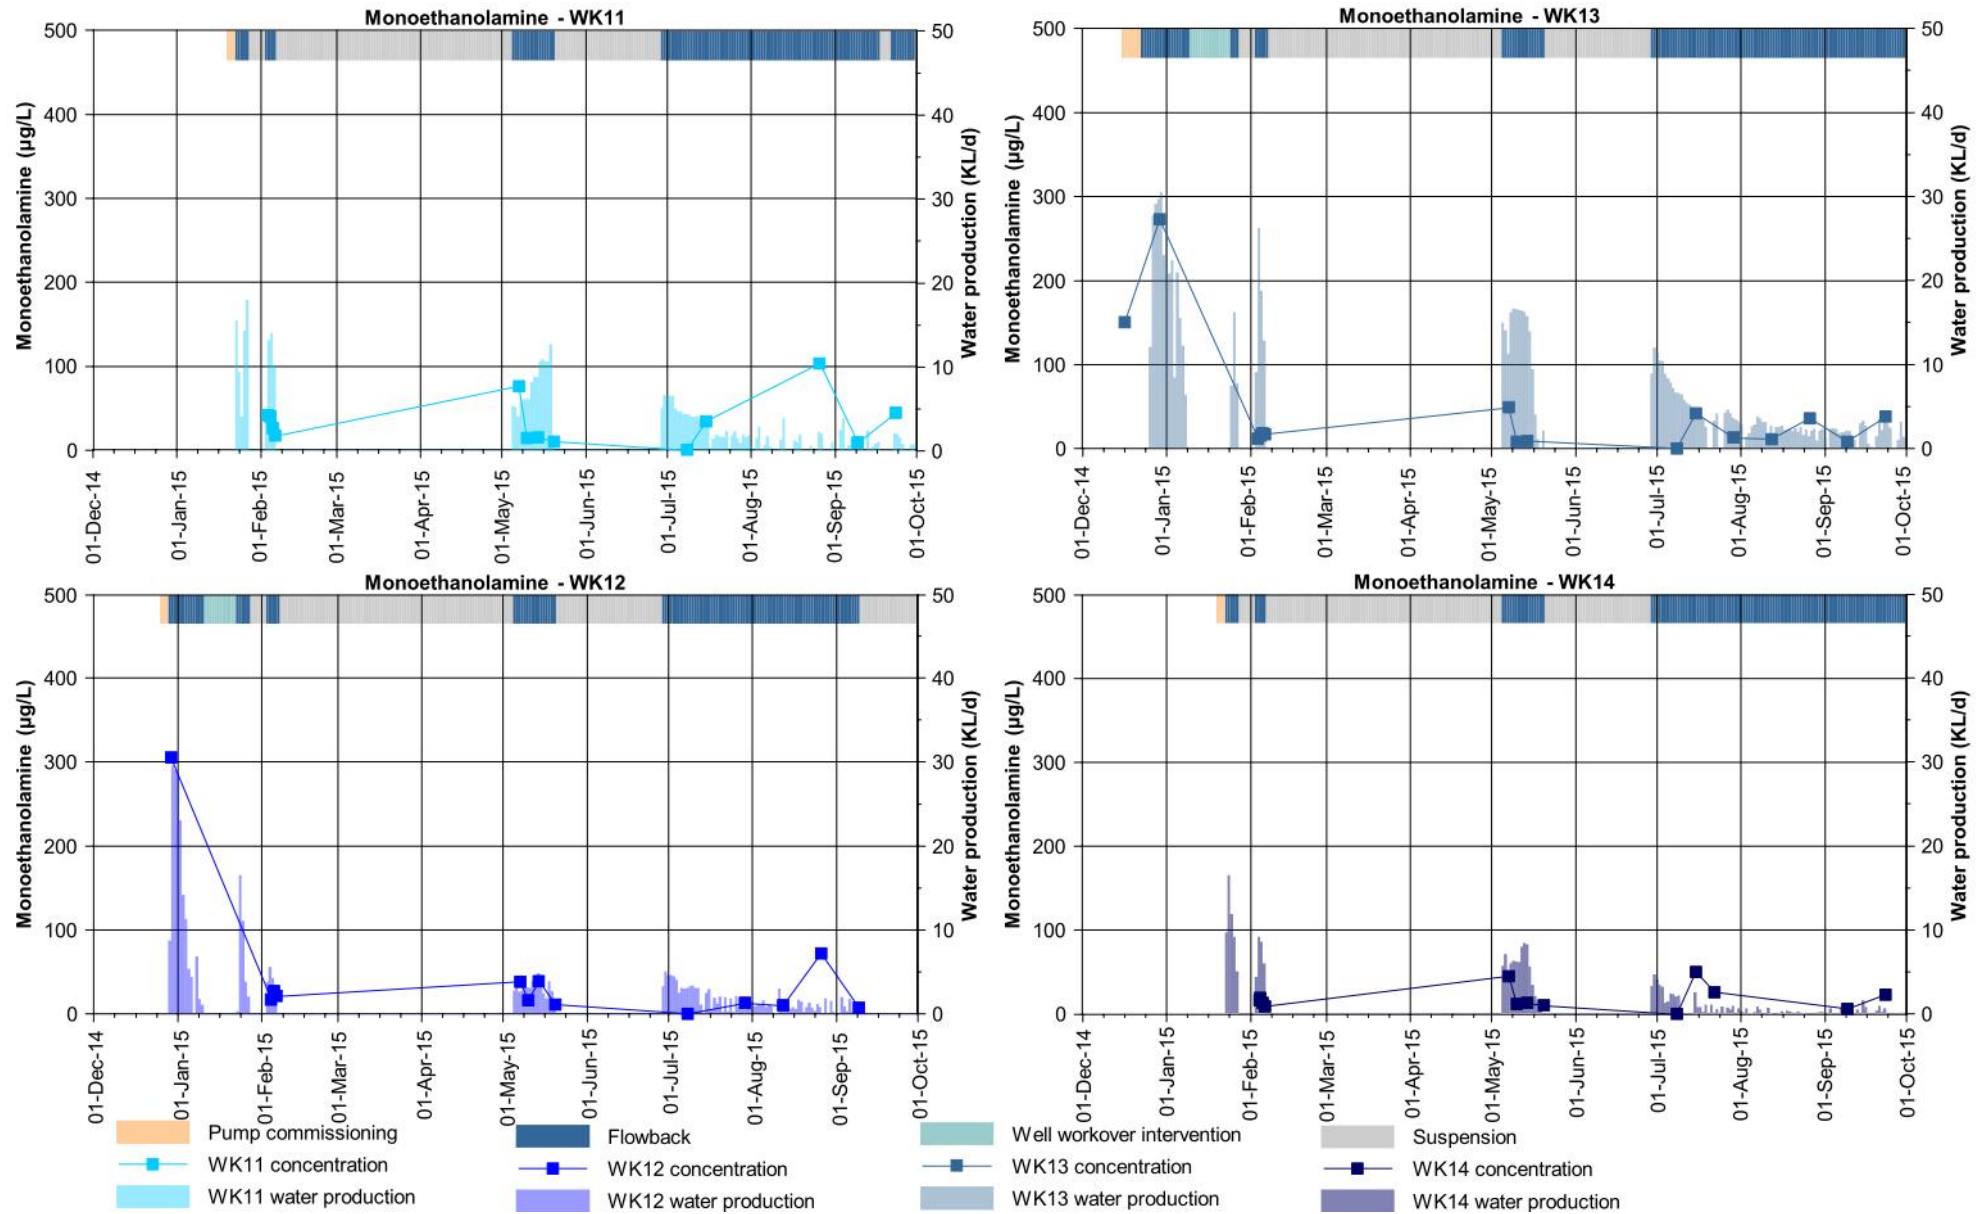


Figure 5.3 Monoethanolamine concentrations and flowback volumes at the Waukivory pilot wells

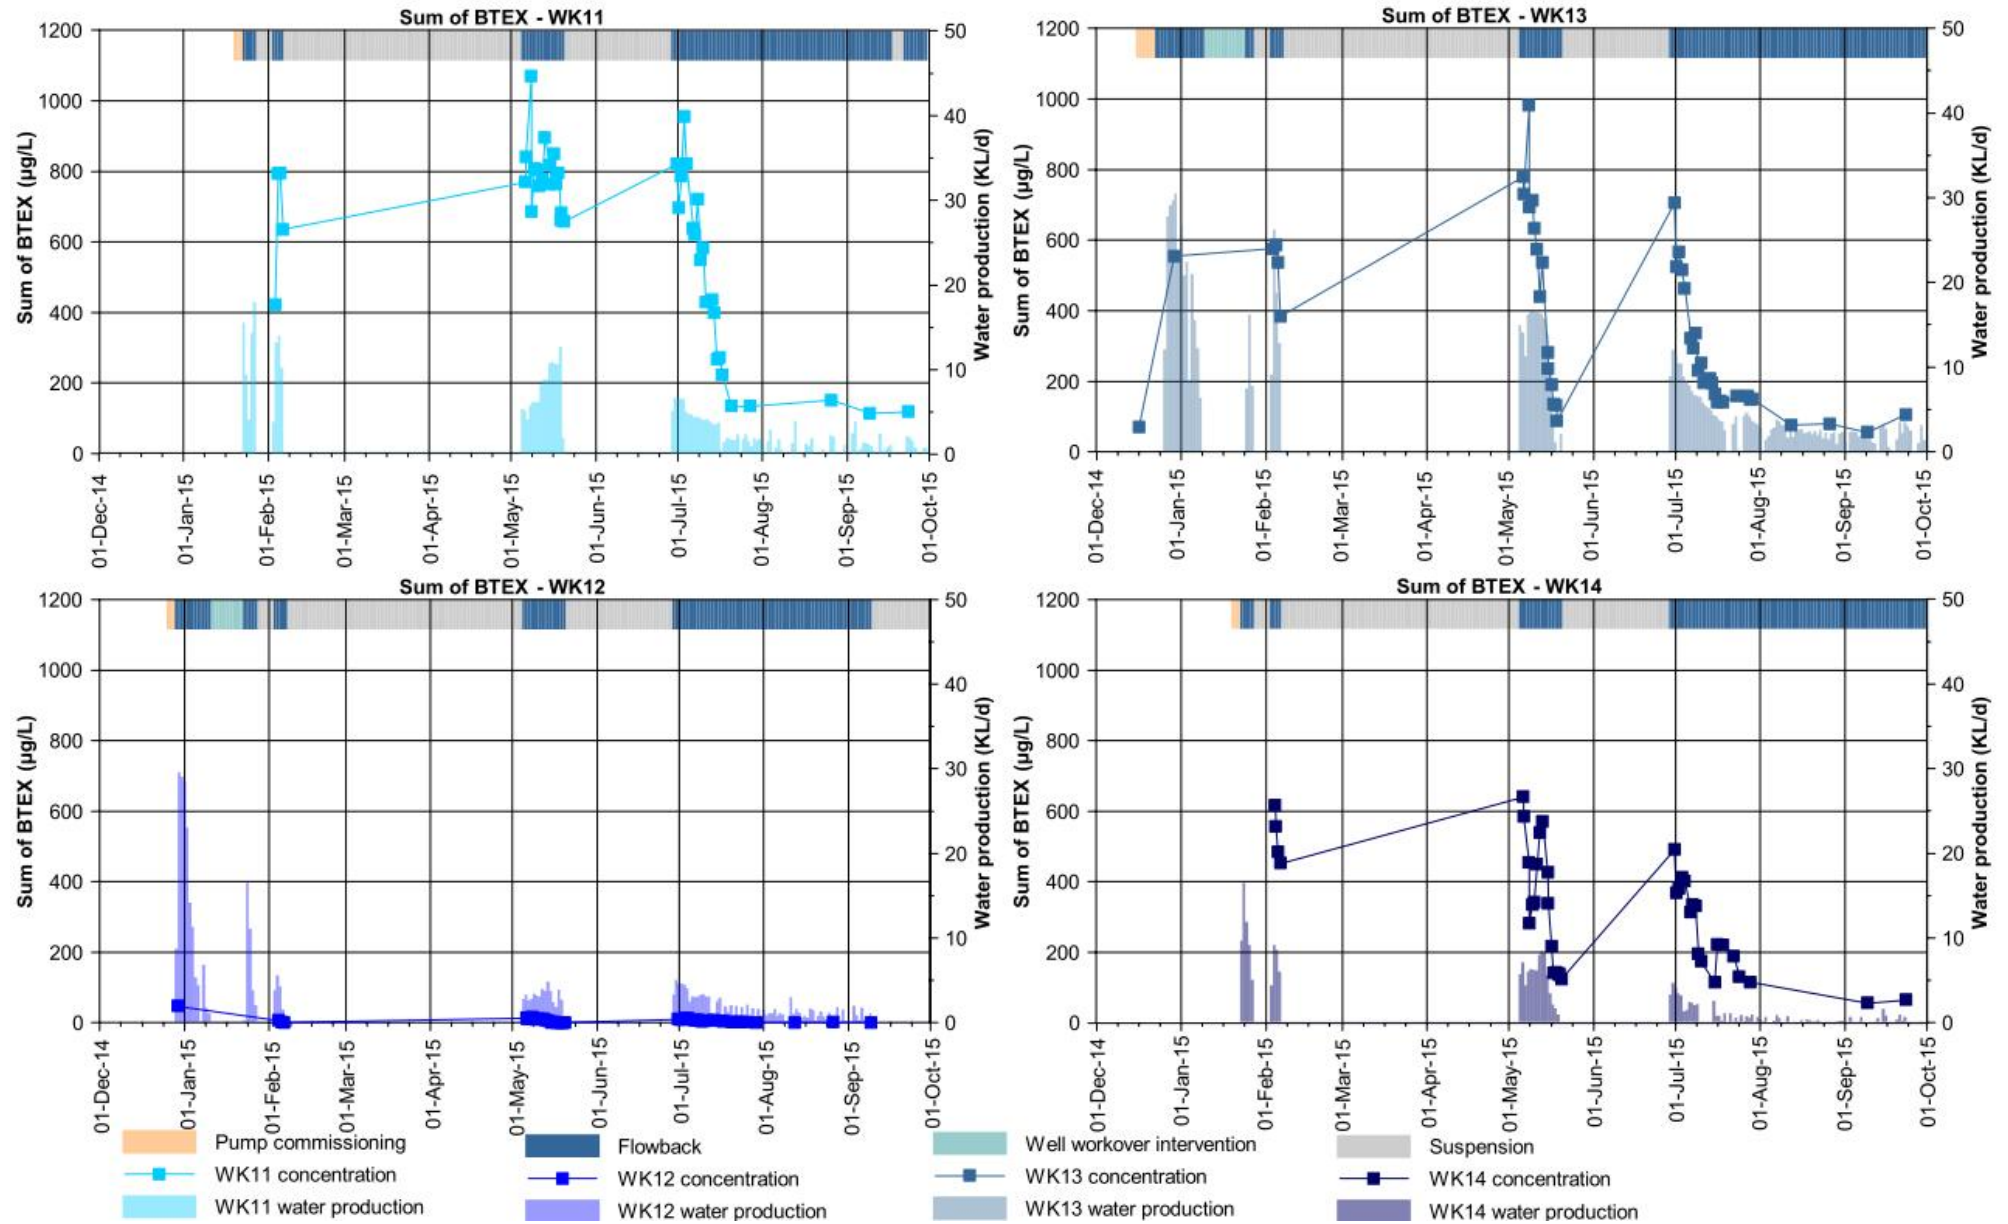


Figure 5.4 Sum of BTEX concentrations and flowback volumes at the Waukivory pilot wells

5.3.2 Unionised hydrogen sulphide

Hydrogen sulphide (H_2S), as indicated by the concentration of unionised hydrogen sulphide (UHS), is a metabolic by-product of sulphate reducing bacteria (SRB), which obtain energy by oxidizing organic compounds or molecular hydrogen while reducing sulphate to H_2S . UHS concentrations provide an indicator of the potential for corrosive processes of steel infrastructure.

SRB generally thrive in the absence of oxygen and highly reduced environments; however they can circulate in aerated waters and have been detected in surface water samples from WKS01, WKS02 and WKS03 and shallow rock monitoring bore WKMB06B during the previous reporting period (Parsons Brinckerhoff 2015c).

SRB are capable of causing corrosion because they produce enzymes which accelerate the reduction of sulphate compounds to produce corrosive H_2S , thus SRB act as a catalyst in the reduction reaction so the presence of SRB alone is not an indicator of corrosion risk. The microbiological, organic and inorganic chemistry must be reviewed to provide a complete understanding as in the absence of sulphate and with alkaline pH conditions; SRB cannot produce the corrosive H_2S .

All pilot well samples showed UHS concentrations below the LoR, with the exception of three detections of UHS in the flowback water at WK12 and WK14 on 2 July and 3 July 2015, which were at the LoR of 0.1 mg/L.

The pH of the flowback water varies between 7 and 9 and the sulphate concentration of the flowback water is typically low (<10 mg/L). Despite the presence of SRB (Parsons Brinckerhoff 2015c), the water chemistry has led to the concentrations of UHS being undetectable or at the LoR and hence insufficient to compromise well integrity due to corrosion.

5.4 AST2 water quality

AST2 is an open topped, 1.5 ML above ground storage tank situated adjacent to WK13 (Figure 3.1) receiving flowback water from the four pilot wells. Flowback water is stored in AST2 prior to disposal to a licenced facility. Monitoring at AST2 allows identification of changes in the flowback water chemistry over time and provides a water quality assessment for disposal purposes.

The water quality at AST2 will be influenced by the following factors:

- Quantity and quality of the flowback water
- Relative contributions from each gas well
- Meteorological conditions such as rainfall and evaporation
- Microbial activity
- Length of time the water has been standing.

Comprehensive water quality data and time series plots for AST2 are presented in Appendices D and F respectively. This section focuses on the results of BTEX analysis only in AST2 with respect to the trigger levels discussed in section 3.6.

5.4.1 BTEX

Figure 5.5 shows the variation in the sum of BTEX concentration during the current reporting period. BTEX concentrations increased at the beginning of the reporting period due to the recommencement of pumping from the pilot wells on 29 July 2015. Concentrations then declined as more flowback water was purged from each of the pilot wells (Figure 5.5). The sum of BTEX concentration at AST2 are generally an order of

magnitude less than that measured at the pilot wells due to the volatilisation of these compounds from the surface of the water in AST2 and dilution by rainfall. During the current reporting period the sum of BTEX concentration in AST2 ranged from 0 to 42 µg/L.

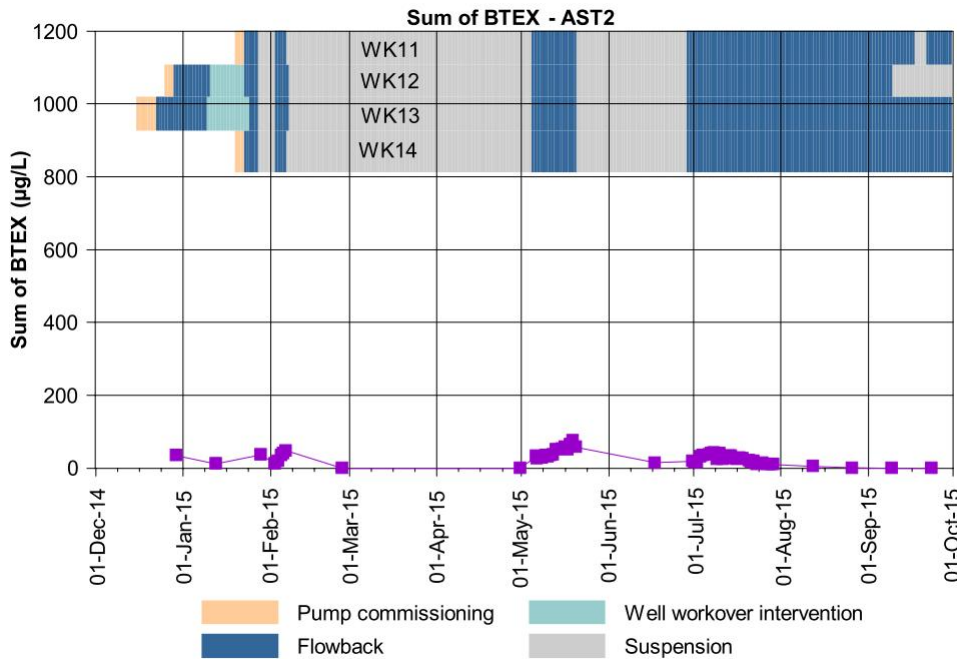


Figure 5.5 Sum of BTEX concentrations at AST2

Figure 5.6 shows the variation of the individual BTEX compounds during the current reporting period in relation to the adopted threshold values based on the protection of human health and the environment (Table 3.8). The concentration of BTEX compounds detected was several orders of magnitude below the adopted threshold values.

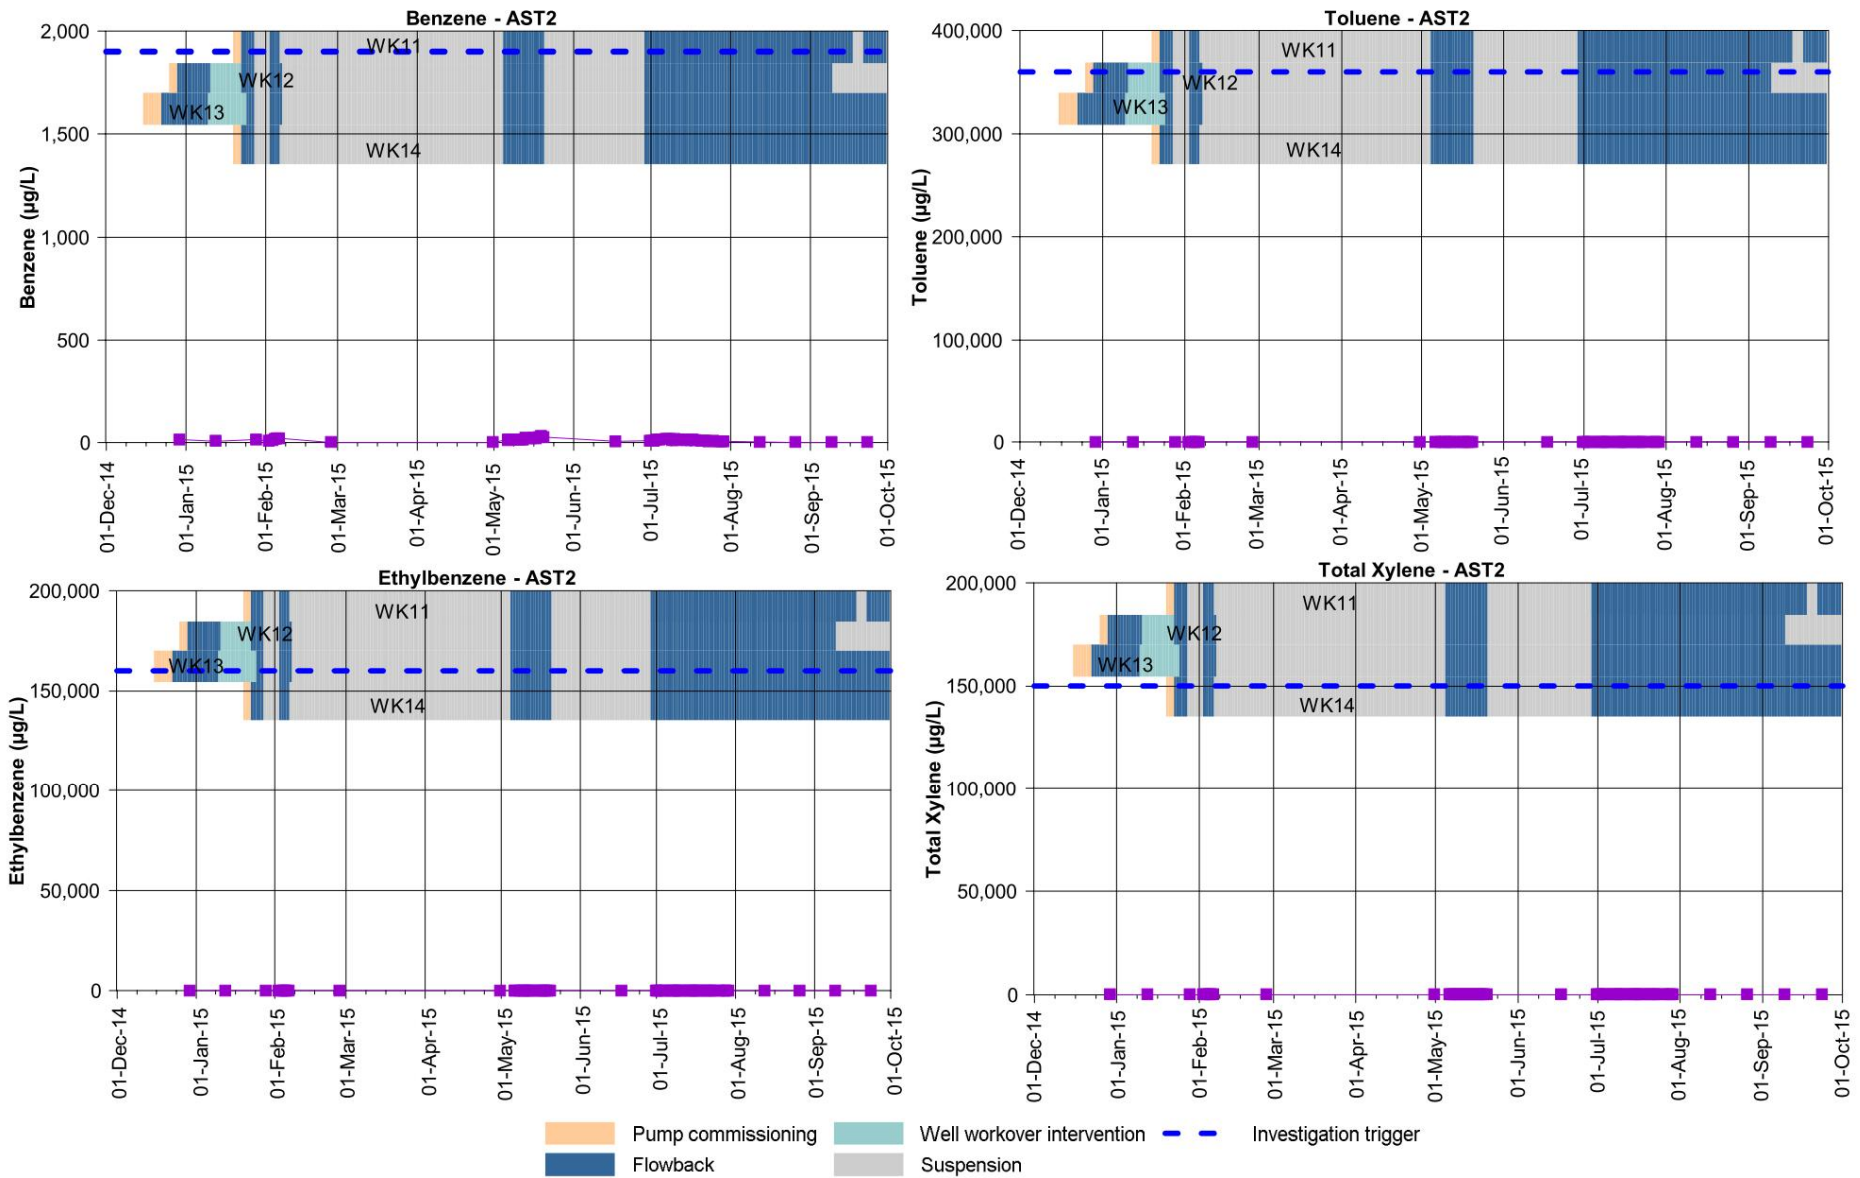


Figure 5.6 Benzene, Toluene, Ethylbenzene and Total Xylene concentrations at AST2

5.4.2 Unionised hydrogen sulphide

During the current reporting period there were no detections of UHS at AST2.

5.5 Groundwater quality

During the current reporting period there was no water quality sampling from any Waukivory groundwater monitoring bores as per the sampling frequency stipulated in the EPL and the SGMP (AGL 2015a)

5.6 Surface water quality

The following section presents the water quality data from the Waukivory surface water monitoring sites. The sampling events undertaken throughout the Project are shown in Figure 3.4.

5.6.1 Analysis methodology

The analytical methods selected for the groundwater and surface water quality data and the rationale for their use in this investigation are discussed in the monitoring report covering the period January to March 2015 (Parsons Brinckerhoff 2015b).

The methodology is consistent with the requirements of the environmental guidelines for fresh and marine water quality (ANZECC 2000) and the Surface and Groundwater Management Plan (SGMP) (AGL 2015a).

The analysis methodology is summarised as follows:

1. **Filter.** All analytes (187) were filtered to identify those for which there were no detections in any sample. Those analytes were not considered further. After removing a number of non-critical and duplicated analytes, a residual list of 64 analytes remained.
2. **Plot.** Time series plots of concentration for each detected analyte at each monitoring site were generated (Appendix I). A 5th and 95th percentile concentration was calculated for each time series, for all data *prior* to the current reporting period. These levels reflect the variation in the sample analyses and serve as '**indicator thresholds**' above (or below) which further assessment of the data may be required.
3. **Threshold test.** The exponentially weighted moving average (EWMA) was calculated for each time series. The EWMA is a moving average that is weighted in favour of the most recent sample; the weighting decreases exponentially for progressively older samples. The parameter alpha (α) controls the distribution of weighting (a value of 0.2 was used in the analysis). An *indicator threshold* (above) is triggered if one or more EWMA values for the reporting period (quarter) exceed the 95th percentile value. The trigger simply indicates a potential trend requiring further comment; it is not a regulatory exceedance.
4. **Trend test.** The Mann-Kendall rank correlation test (Kendall, 1938) was applied to each time series to identify if a statistically significant trend (or dependence) exists in the concentration of each analyte with respect to time. The test was applied to samples collected between the start of the fracture stimulation to the most recent sample. The level of significance was set at 95% (p -value ≤ 0.05). As above, a significant trend indicates that further review and comment is warranted.
5. **Action trigger.** On its own, a significant data trend (as determined by the Mann-Kendall test) or an exceedance of a 95th percentile indicator threshold does not necessarily indicate impact from a disturbance activity. Rather, it acts as a trigger for further data review and assessment to determine the cause of the trend. This is a data review action trigger and is different to the primary trigger levels and

the thresholds for action that AGL has adopted in the SGMP should there be a perceived risk to human health or the environment.

6. **Response:** Trends that trigger an indicator threshold will be further assessed to determine if:

- a) there is sufficient data to adequately define the natural variation in concentrations
- b) the trends are clearly related to Project activities
- c) there are other factors that may indicate enhanced connectivity between the gas well and the monitoring site.

If the further data assessment suggests that the trend is related to Project activities then the trend will be tracked more closely before the investigation and action levels in the SGMP are triggered and other management responses are required.

If it is concluded that the data suggests an adverse trend related to Project activities then an investigation and management response will be initiated as described in the SGMP.

5.6.2 Results

Time series plots of each analyte (for which at least one sample is > LoR) and for each monitoring site are shown in Appendix I. The plots show blue shading representing the 5th to 95th percentile range of concentration prior to the last quarter and the EMWA trend in red. The fracture stimulation periods are shown in pink shading. The Mann Kendall Statistic is also shown ('nan' is shown if there is insufficient data above LOR). An example of a time series plot used for trend assessment is shown in Figure 5.7.

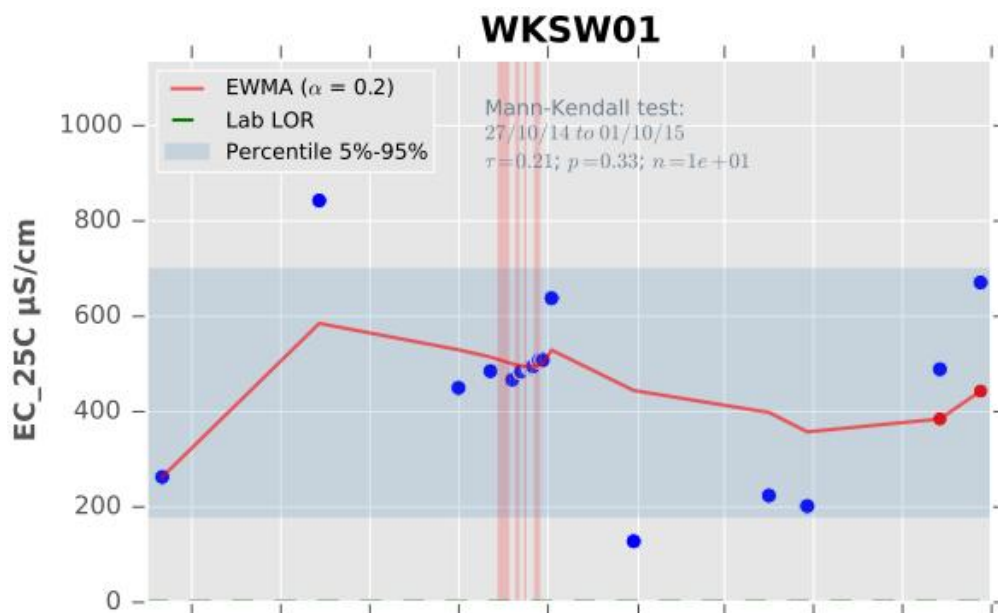


Figure 5.7 Example of time series plot used for trend analysis

Table 5.2 summarises sites and analytes for which at least one EMWA value in the last quarter has exceeded the 95th percentile (dark blue shading). Table 5.3 summarises locations and analytes for which the time series data define a significant trend. The table is colour-coded to signify the direction of the trend (reds = increasing, blues = decreasing) and the significance of the trend. The strongest coloured rectangles represent trends that are significant at the 95% level. Locations and analytes for which an indicator threshold has been triggered are further considered in Table 5.4 to assess whether additional investigation and management is required as listed in the SGMP (AGL 2015a).


Table 5.2 Comparison of the EWMA to the 5th and 95th percentile for the current reporting period

| | WКСW01 | WКСW02 | WКСW03 |
|------------------------|--------|--------|--------|
| EC_25C | | | |
| Diethanolamine | | | |
| Ethanolamine | | | |
| Methyldiethanolamine | | | |
| Boron | | | |
| Chlorine_free | | | |
| Chlorine_res | | | |
| Sum of BTEX | | | |
| Benzene | | | |
| Toluene | | | |
| Ethylbenzene | | | |
| Xylene Total | | | |
| TDS | | | |
| TSS | | | |
| pH_Field | | | |
| Redox_Field | | | |
| Alk_CaCO3 | | | |
| SO4_turb | | | |
| Chloride | | | |
| Calcium | | | |
| Sodium | | | |
| Potassium | | | |
| Magnesium | | | |
| Reactive Silica | | | |
| Ammonia as N | | | |
| Nitrate (as N) | | | |
| Nitrogen (Total) | | | |
| Reactive Phosphorus | | | |
| Phosphorus | | | |
| Bromine | | | |
| Aluminium | | | |
| Arsenic | | | |
| Barium | | | |
| Cadmium | | | |
| Chromium | | | |
| Copper | | | |
| Iron | | | |
| Lead | | | |
| Manganese | | | |
| Molybdenum | | | |
| Nickel | | | |
| Strontium | | | |
| Uranium | | | |
| Zinc | | | |
| Methane | | | |
| Ethane | | | |
| Butane | | | |
| Propane | | | |
| Total Organic Carbon | | | |
| TRH_C10-C36 | | | |
| TPH C6-C10 | | | |
| PAH_total | | | |
| Naphthalene | | | |
| Acenaphthene | | | |
| Fluorene | | | |
| Phenanthrene | | | |
| 2,4-dimethylphenol | | | |
| 2-methylphenol | | | |
| 3-&4-methylphenol | | | |
| Phenol | | | |
| 1,2,4-trimethylbenzene | | | |
| 2-butanone (MEK) | | | |
| Carbon disulfide | | | |

Note: Dark blue indicates sites and analytes for which at least one EWMA value in the last quarter has exceeded the 95th percentile (the P95 is calculated for data prior to the current reporting period).

Table 5.3 Summary of trends in water quality data up to 30 September 2015

| | WКСW01 | WКСW02 | WКСW03 |
|------------------------|------------|------------|------------|
| EC_25C | Light Blue | Light Blue | Light Blue |
| Diethanolamine | Light Blue | Light Blue | Light Blue |
| Ethanolamine | Light Blue | Light Blue | Light Blue |
| Methyldiethanolamine | Light Blue | Light Blue | Light Blue |
| Boron | Light Blue | Light Blue | Light Blue |
| Chlorine_free | Dark Blue | Dark Blue | Dark Blue |
| Chlorine_res | Dark Blue | Dark Blue | Dark Blue |
| Sum of BTEX | Light Blue | Light Blue | Light Blue |
| Benzene | Light Blue | Light Blue | Light Blue |
| Toluene | Light Blue | Light Blue | Light Blue |
| Ethylbenzene | Light Blue | Light Blue | Light Blue |
| Xylene Total | Light Blue | Light Blue | Light Blue |
| TDS | Light Blue | Light Blue | Light Blue |
| TSS | Dark Blue | Dark Blue | Dark Blue |
| pH_Field | Light Blue | Light Blue | Dark Blue |
| Redox_Field | Light Blue | Light Blue | Light Blue |
| Alk_CaCO3 | Light Blue | Light Blue | Light Blue |
| SO4_turb | Dark Blue | Light Blue | Dark Blue |
| Chloride | Light Blue | Light Blue | Light Blue |
| Calcium | Light Blue | Light Blue | Light Blue |
| Sodium | Light Blue | Light Blue | Light Blue |
| Potassium | Dark Blue | Light Blue | Dark Blue |
| Magnesium | Light Blue | Light Blue | Light Blue |
| Reactive Silica | Light Blue | Light Blue | Light Blue |
| Ammonia as N | Light Blue | Light Blue | Dark Blue |
| Nitrate (as N) | Light Blue | Light Blue | Dark Blue |
| Nitrogen (Total) | Light Blue | Light Blue | Light Blue |
| Reactive Phosphorus | Dark Blue | Light Blue | Light Blue |
| Phosphorus | Light Blue | Light Blue | Light Blue |
| Bromine | Light Blue | Light Blue | Light Blue |
| Aluminium | Light Blue | Light Blue | Light Blue |
| Arsenic | Dark Blue | Dark Blue | Dark Blue |
| Barium | Light Blue | Light Blue | Light Blue |
| Cadmium | Light Blue | Light Blue | Light Blue |
| Chromium | Light Blue | Light Blue | Light Blue |
| Copper | Light Blue | Light Blue | Light Blue |
| Iron | Dark Blue | Dark Blue | Light Blue |
| Lead | Light Blue | Light Blue | Light Blue |
| Manganese | Light Blue | Dark Blue | Dark Blue |
| Molybdenum | Light Blue | Light Blue | Light Blue |
| Nickel | Dark Blue | Light Blue | Light Blue |
| Strontium | Light Blue | Light Blue | Light Blue |
| Uranium | Light Blue | Light Blue | Light Blue |
| Zinc | Light Blue | Light Blue | Light Blue |
| Methane | Light Blue | Light Blue | Light Blue |
| Ethane | Light Blue | Light Blue | Light Blue |
| Butane | Light Blue | Light Blue | Light Blue |
| Propane | Light Blue | Light Blue | Light Blue |
| Total Organic Carbon | Dark Blue | Dark Blue | Dark Blue |
| TRH_C10-C36 | Light Blue | Light Blue | Light Blue |
| TPH C6-C10 | Light Blue | Light Blue | Light Blue |
| PAH_total | Light Blue | Light Blue | Light Blue |
| Naphthalene | Light Blue | Light Blue | Light Blue |
| Acenaphthene | Light Blue | Light Blue | Light Blue |
| Fluorene | Light Blue | Light Blue | Light Blue |
| Phenanthrene | Light Blue | Light Blue | Light Blue |
| 2,4-dimethylphenol | Light Blue | Light Blue | Light Blue |
| 2-methylphenol | Light Blue | Light Blue | Light Blue |
| 3-&4-methylphenol | Light Blue | Light Blue | Light Blue |
| Phenol | Light Blue | Light Blue | Light Blue |
| 1,2,4-trimethylbenzene | Light Blue | Light Blue | Light Blue |
| 2-butanone (MEK) | Light Blue | Light Blue | Light Blue |
| Carbon disulfide | Light Blue | Light Blue | Light Blue |

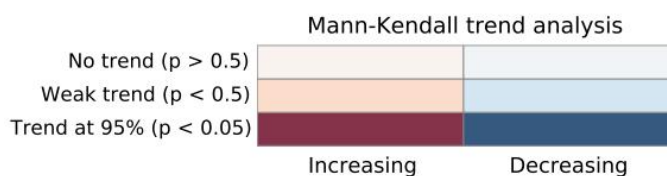

5.6.3 Surface water quality

Surface water monitoring sites and analyses for which time series data have triggered an indicator threshold are listed in Table 5.4. Each trigger event is assessed in line with the criteria in Section 5.5.1 to determine if further investigation of the data response is justified.

Table 5.4 Surface water monitoring sites and analytes that trigger further review

| Site | Analyte | Indicator type ¹ | Comment | Action |
|--------|------------------|-----------------------------|---|--------|
| WKSW01 | Sulphate | T | Rising trend evident since February 2015 and latest sample (37 mg/L) is above the 95 th percentile. This analyte is not related to Project activities. | No |
| WKSW03 | Field pH | T | Latest sample (8.69) was above 95 th percentile. Unrelated to Project activities. | No |
| | Sulphate | T | Two most recent samples (18 and 28 mg/L) were above 95 th percentile but within the historical range. Unrelated to Project activities | No |
| | Nitrate (as N) | T | Latest sample (0.15 mg/L) was above 95 th percentile; this analyte is unrelated to Project activities. | No |
| | Nitrogen (total) | E | Latest sample (5.8 mg/L) was above 95 th percentile; this analyte is unrelated to Project activities. | No |
| | Phosphorus | E | Latest sample (1.99 mg/L) was above 95 th percentile; this analyte is unrelated to Project activities. | No |
| | Ammonia (as N) | E&T | Latest sample (3.95 mg/L) was above 95 th percentile; this analyte is unrelated to Project activities. | No |

a) Indicator threshold type: E = EWMA outside the 5 – 95%; T = significant positive trend (Mann-Kendall $p \leq 0.05$)

5.6.3.1 Key analytes in surface water

There were no detections of key analytes in surface waters during the current reporting period.

5.6.3.2 Other analytes in surface water

The EWMA for nitrogen (total), phosphorous and ammonia (as N) at WKSW03 has exceeded the 95th percentile of the historic data and some analytes, mostly nutrients, are showing an upward trend according to the Mann Kendal trend analysis (Table 5.3) at WKSW01 and WKSW03. This is not considered to be related to project activities as an increase in nutrient concentrations within the Avon River is considered indicative of local land use practices such as the use of fertilisers and other upstream agricultural activities.

6. Flowback

The SGMP (Section 6.1, pages 33 – 34) (AGL 2015a) states that:

- *The flowback water period is deemed to be finished when 100% of the volume of fracture stimulation fluids injected at each well is recovered AND a salinity trigger of 5,000 $\mu\text{S}/\text{cm}$ is reached (and maintained) for the return waters; and*
- *Produced water is deemed to be all deep groundwater that is pumped to surface after the flowback water trigger is achieved.*

The total volume of fluid injected during fracture stimulation, and flowback volumes and percentage recovered up to 30 September 2015 are provided in Table 6.1. Flowback volumes are provided for all four pilot wells since commissioning in December 2014 (WK12 and WK13) and January 2015 (WK11 and WK12).

A comparison of cumulative flowback volumes recovered and laboratory electrical conductivity (EC) measurements in each of the four pilot wells is shown in Figure 6.1. At 30 September 2015 the salinity trigger of 5000 $\mu\text{S}/\text{cm}$ has been reached and maintained for the flowback waters at all wells. However, the Project is still in the flowback phase as 100% of the volume of fracture stimulation fluids injected at each well has not yet been recovered (Table 6.1).

Table 6.1 Flowback volumes recovered up to 30 September 2015

| | WK11 | | WK12 | | WK13 | | WK14 | |
|--|---------|------|---------|------|-----------|------|---------|------|
| | litres | % | litres | % | litres | % | litres | % |
| Total volume injected | 785,450 | - | 480,603 | - | 1,516,663 | - | 466,535 | - |
| Volume recovered at 30 September 2015 | 480,637 | 61.2 | 419,365 | 87.3 | 1,093,255 | 72.1 | 271,240 | 58.1 |
| Volume remaining to recover at 30 September 2015 | 304,813 | 38.8 | 61,238 | 12.7 | 423,408 | 27.9 | 195,295 | 41.9 |

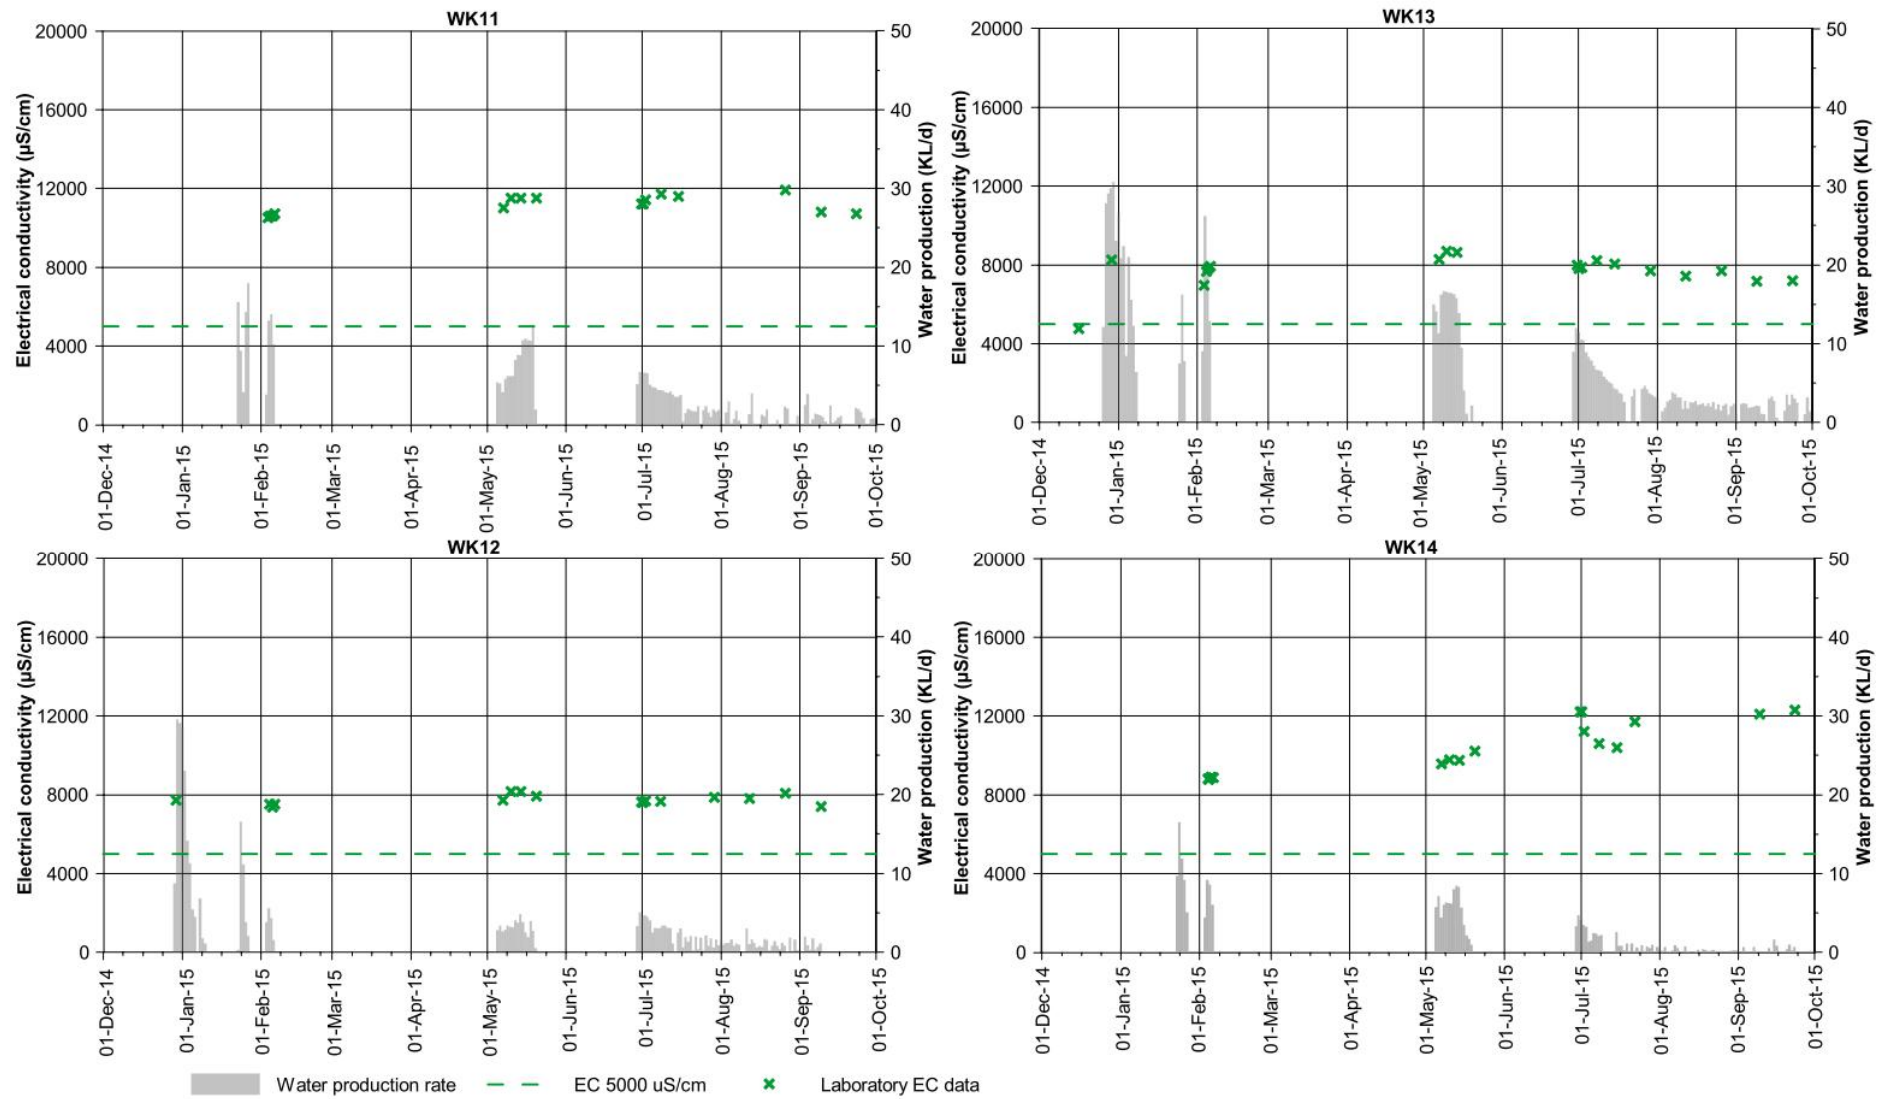


Figure 6.1 Laboratory electrical conductivity measurements and flowback volumes at the Waukivory pilot wells

7. Beneficial use

Water beneficial use categories of domestic, stock, industrial and irrigation are based on yield and salinity characteristics. A generalised beneficial use matrix is described in the SGMP (AGL 2015a). Each aquifer can be assigned one or more beneficial use categories (based on the matrix in Table 7.1). Beneficial use categories can vary spatially for each groundwater system.

The aquifers in the Waukivory area rarely yield water at a rate greater than 1 L/s and contain poor water quality with salinities greater than 1600 µS/cm (AGL 2015a). The beneficial use categories that apply across the Gloucester Basin are shown in Table 7.1.

Table 7.1 Generalised beneficial use matrix, based on salinity and yield

| | | Yield (L/s) | | | |
|------------------|-------------|-------------|--------|--------|---|
| | | <5 | 0.5-5 | <0.5 | |
| Salinity (µS/cm) | 0-800 | D+I+S | D+I+S | D+S | A |
| | 801-1600 | D+I+S | D+I+S | D+S+In | B |
| | 1601-4800 | I+S+In | I+S+In | S+In | C |
| | 4801-10000 | S+In | S+In | In | D |
| | 10001-20000 | In | In | In | E |
| | >20000 | | | | F |
| | | 1 | 2 | 3 | |

Key: D – domestic; I – irrigation; S – stock; In – industry

| | | | |
|---|-------------------------------|---|-----------------------------------|
|  | Alluvial baseline |  | Shallow rock baseline |
|  | Alluvial fracture stimulation |  | Shallow rock fracture stimulation |
|  | Alluvial flowback |  | Shallow rock flowback |

The salinity (EC) data on which the beneficial use classification for the Waukivory pilot area is based is summarised in Table 7.2. All data that is within the 10th percentile and the 90th percentile has been used in the beneficial use classification. A percentile is the value below which a given percentage of observations fall. For example, the 10th percentile is the value below which 10% of observations are found. The 10th and 90th percentiles presented in Table 7.2 are used as a method of discounting outlying values.

The yield data is assumed to remain unchanged from the assessment documented in the SGMP (AGL 2015a).

Table 7.2 Summary statistics for electrical conductivity during baseline, fracture stimulation and flowback water quality monitoring

| | | Electrical conductivity ($\mu\text{S/cm}$) | | | |
|-----------------------------|-----------------------------|--|------|--------------|------|
| | | Alluvial | | Shallow Rock | |
| | | Field | Lab | Field | Lab |
| Baseline | 10 th percentile | 3966 | 4105 | 880 | 912 |
| | Median | 4013 | 4215 | 3865 | 3970 |
| | 90 th percentile | 4248 | 4297 | 5644 | 5960 |
| Fracture stimulation | 10 th percentile | 2737 | 2754 | 884 | 862 |
| | Median | 3821 | 4090 | 3739 | 3870 |
| | 90 th percentile | 4013 | 4105 | 4920 | 5048 |
| Flowback | 10 th percentile | 2268 | 2284 | 895 | 895 |
| | Median | 3160 | 3160 | 1360 | 1360 |
| | 90 th percentile | 4178 | 4164 | 4465 | 4480 |

The following beneficial use categories can be assigned to each of the groundwater systems in the Waukivory area during the baseline reporting period, as shown in Table 7.1:

- Alluvial aquifers – C2, C3
- Shallow rock aquifers – B2, B3, C2, C3, D2, D3.

The following beneficial use categories can be assigned to each of the groundwater systems in the Waukivory area during the fracture stimulation period, as shown in Table 7.1:

- Alluvial aquifers – C2, C3
- Shallow rock aquifers – B2, B3, C2, C3, D2, D3.

The following beneficial use categories can be assigned to each of the groundwater systems in the Waukivory area during the flowback period, as shown in Table 7.1:

- Alluvial aquifers – C2, C3
- Shallow rock aquifers – B2, B3, C2, C3.

There has been no water quality data collection from the groundwater monitoring sites during the current reporting period, therefore the beneficial use assessment remains unchanged to that documented in the previous quarterly report (Parsons Brinckerhoff 2015c). That assessment is summarised as follows:

- Salinity (EC) data from the April to June reporting period show an apparent improvement compared to the baseline and fracture stimulation reporting periods. This is likely due to natural variation (such as rainfall recharge during the period) combined with the relatively limited data available during the flowback reporting period (three sampling events from the Waukivory groundwater monitoring sites). No management response is required.
- Water beneficial use categories of domestic, stock, industrial and irrigation are based on yield and salinity characteristics. There has been no change in the beneficial use classification of the different waters across the different phases of the Project.

8. Conclusions

The following conclusions are drawn from a review of the flowback water, groundwater and surface water monitoring data for the Waukivory site, during the period 1 July to 30 September 2015. The review included:

- Interpretation of water level and water quality trends
- Assessment as to whether trends are naturally occurring or potentially attributed to Project activities
- Assessment of key analytes associated with fracture stimulation additives defined in AGL's SGMP.

Pilot well water levels

Water levels in the pilot wells are highly variable and dependent on pump operation, including fluctuating pumping rates and the operational management of the gas wells influencing the build-up/release of gas pressure within the well casing above the water level.

During the current reporting period the pilot well water levels showed an initial decline of between 450 and 800 m in response to recommencement of flowback on 29 June 2015. Water levels within the wells then remained relatively steady with fluctuations of approximately 50 to 100 m reflecting pump operation.

Pilot well water quality

During the current reporting period, the water quality data from WK11, WK12 and WK13 shows produced water characteristics (as depicted by produced water from CR06 and WK03) (Parsons Brinckerhoff 2014d and 2015c), most notably stable salinity (EC).

The EC of the flowback water from all pilot wells is greater than the 5000 $\mu\text{S}/\text{cm}$ trigger for the transition from flowback to produced water.

EC data at WK14 continues to show a rising trend, this is considered to be due to WK14 being one of the most recent wells to commence flowback, and has currently recovered a smaller fraction of the total volume injected compared to the other pilot wells

MEA concentrations show no overall trend with variability similar to that observed in the background data from the groundwater and surface water monitoring sites. These observations are consistent with the removal of the fracture stimulation fluid during flowback and the natural breakdown of these compounds.

BTEX concentrations in the flowback water from WK11, WK13 and WK14 are greater than those found in the produced water from CR06 and WK03, and this is likely due to the deeper target formations at the Waukivory site. The sum of BTEX concentration in WK12 remains very low as this well is perforated against shallower intervals compared to WK11, WK13 and WK14.

All pilot well samples showed unionised hydrogen sulphide (UHS) concentrations below the LoR, with the exception of three detections of UHS in the flowback water at WK12 and WK14 on 2 July and 3 July 2015, which were at the LoR of 0.1 mg/L. Such concentrations are considered insufficient to compromise well integrity due to corrosion.

Pilot well water volumes

The total flowback water volumes recovered from each well as of 30 September 2015 range from 271,240 to 1,093,255 L.

The water recovery as a percentage of total volume injected during fracture stimulation for individual wells ranges from 58.1% to 87.3% as of 30 September 2015.

AST2 water quality

Sum of BTEX concentrations at AST2 ranged from non-detect to 42 µg/L during the current reporting period with BTEX concentrations less than the detection level throughout September 2015.

The sum of BTEX concentration is generally an order of magnitude less than that measured at the pilot wells due to the volatilisation of these compounds from the surface of the water in AST2 and dilution by rainfall.

The concentration of BTEX compounds are several orders of magnitude below the adopted threshold values relating to human and environmental health (SGMP Table 6.2 (AGL 2015a)).

There were no detections of UHS at AST2 during the current reporting period.

Groundwater levels

Groundwater levels in all Waukivory monitoring bores targeting the alluvium, shallow rock and upper interburden including the thrust fault zone have shown no response attributable to fracture stimulation or flowback from the pilot wells during the current reporting period.

The variation in groundwater levels has not exceeded the adopted triggers as defined in the SGMP (AGL 2015a) 2 m (outside of the normal range) decline in aquifers less than 75 m from the ground surface and 5 m (outside of the normal range) decline for deeper (non-coal) monitoring zones.

Groundwater levels in alluvial monitoring bores GR-P3 and WKMB06A show an overall decrease of approximately 0.3 m and groundwater levels in the shallow rock monitoring bores WKMB01, WKMB02 and WKMB06B show an overall decrease of 0.1 to 0.3 m in response to the relatively dry conditions throughout July and August 2015.

Groundwater levels in monitoring bore WKMB03, screened in the interburden (and thrust fault zone), appear to show a subdued and delayed response to seasonal climatic variations most likely attributable to the very low hydraulic conductivity of the interburden/thrust fault zone. During the current reporting period groundwater levels at WKMB03 show a slight increasing trend.

Both WKMB03 and WKMB06B are screened across the thrust fault zone, and WKMB06A is screened within the alluvium above the thrust fault zone. Hydrographs from these three monitoring bores show no anomalous water level responses and therefore provide no evidence of connectivity between the fracture stimulation zones and the shallow groundwater system via the thrust fault zone.

Groundwater levels at the WKMB06A and WKMB06B show a very slight upward vertical gradient between the shallow rock and the alluvium, which is characteristic of groundwater discharge areas.

It is possible that the slight decrease in piezometric level at WKMB05 sensor 2 (Cloverdale Coal Seam) represents a pressure response to flowback at WK13. The piezometric level at sensor 1 (Interburden) shows no net change since flowback commenced in December 2014.

WKMB05 sensors 3 and 4 continued to show a gradual decline until mid-August before increasing towards the end of the reporting period. This response is not considered to be attributable to flowback pumping as a decline in pressure has been observed throughout periods when flowback pumping has not occurred. There

is uncertainty as to whether the piezometric levels in WKMB05 sensors 5 and 6 have reached equilibration following installation; this will be reviewed as additional monitoring data becomes available.

The piezometric levels at all sensors in WKMB05 show an upward vertical gradient with the exception of sensors 1 and 2, which is considered to be a response to flowback at WK13. The upward vertical gradient is consistent with the conceptual hydrogeological model.

Surface water levels

Water levels at stream gauge sites WKSW01 (Avon River upstream of the Project site), WKSW02 (Waukivory Creek upstream of the Project site) and WKSW03 (Avon River downstream of the Project site) show no change in water levels attributable to fracture stimulation or flowback from the pilot wells during the current reporting period.

Surface water levels showed a very gradual decline during the dry conditions experienced in July and August. Towards the end of the reporting period, surface water levels have shown a gradual increase with response to individual rainfall events.

Surface water quality

Surface water quality data shows that there were no adverse trends associated with Project activities.

Water Beneficial Use Conditions

Water beneficial use categories of domestic, stock, industrial and irrigation are based on yield and salinity characteristics. There has been no change in the beneficial use classification for any of the groundwater systems.

Actions to correct identified adverse trends

Analysis of monitoring results has not identified adverse trends that require corrective action.

9. Statement of limitations

Scope of services

This second operational quarterly report (the report) has been prepared in accordance with the scope of services set out in the contract, or as otherwise agreed, between the client and Parsons Brinckerhoff (scope of services). In some circumstances the scope of services may have been limited by a range of factors such as time, budget, access and/or site disturbance constraints.

Reliance on data

In preparing the report, Parsons Brinckerhoff has relied upon data, surveys, analyses, designs, plans and other information provided by the client and other individuals and organisations, most of which are referred to in the report (the data). Except as otherwise stated in the report, Parsons Brinckerhoff has not verified the accuracy or completeness of the data. To the extent that the statements, opinions, facts, information, conclusions and/or recommendations in the report (conclusions) are based in whole or part on the data, those conclusions are contingent upon the accuracy and completeness of the data. Parsons Brinckerhoff will not be liable in relation to incorrect conclusions should any data, information or condition be incorrect or have been concealed, withheld, misrepresented or otherwise not fully disclosed to Parsons Brinckerhoff.

Environmental conclusions

In accordance with the scope of services, Parsons Brinckerhoff has relied upon the data and has conducted environmental field monitoring and/or testing in the preparation of the report. The nature and extent of monitoring and/or testing conducted is described in the report.

On all sites, varying degrees of non-uniformity of the vertical and horizontal soil or groundwater conditions are encountered. Hence no monitoring, common testing or sampling technique can eliminate the possibility that monitoring or testing results/samples are not totally representative of soil and/or water conditions encountered. The conclusions are based upon the data and the environmental field monitoring and/or testing and are therefore merely indicative of the environmental condition of the site at the time of preparing the report, including the presence or otherwise of contaminants or emissions.

Also, it should be recognised that site conditions, including the extent and concentration of contaminants, can change with time.

Within the limitations imposed by the scope of services, the monitoring, testing, sampling and preparation of this report have been undertaken and performed in a professional manner, in accordance with generally accepted practices and using a degree of skill and care ordinarily exercised by reputable environmental consultants under similar circumstances. No other warranty, expressed or implied, is made.

Report for benefit of client

The report has been prepared for the benefit of the client (and no other party). Parsons Brinckerhoff assumes no responsibility and will not be liable to any other person or organisation for or in relation to any matter dealt with or conclusions expressed in the report, or for any loss or damage suffered by any other person or organisation arising from matters dealt with or conclusions expressed in the report (including without limitation matters arising from any negligent act or omission of Parsons Brinckerhoff or for any loss or damage suffered by any other party relying upon the matters dealt with or conclusions expressed in the report). Parties other than the client should not rely upon the report or the accuracy or completeness of any conclusions and should make their own enquiries and obtain independent advice in relation to such matters.

Other limitations

Parsons Brinckerhoff will not be liable to update or revise the report to take into account any events or emergent circumstances or facts occurring or becoming apparent after the date of the report.

10. References

- AECOM 2009, 'Gloucester Gas Project Environmental Assessment - Volume 1', Report No. S70038_FNL_EA, dated 11 Nov 2009.
- AGL 2015a, Surface Water and Groundwater Management Plan for the Waukivory Pilot Project – Gloucester Gas Project dated 6 May 2015.
- AGL 2015b, Water Portal. <http://www.agl.com.au/waterportal>
- ANZECC 2000. Australian and New Zealand Guidelines for Fresh and Marine Water Quality Volumes 3 and 4. Australian and New Zealand Environment Conservation Council & Agriculture and Resource Management Council of Australia and New Zealand, Canberra.
- AS/NZS 5667. Australia/New Zealand Standard. Water quality – sampling.
- Bureau of Meteorology (BoM) 2015, *Climate Data Online*, viewed January 2015, <http://www.bom.gov.au/climate/data/>
- DRE 2015, Report in to BTEX Findings, media release, dated 19 May 2015, <http://www.resourcesandenergy.nsw.gov.au/landholders-and-community/coal-seam-gas/gloucester-gas-project>
- EnRiskS (2015) Flowback water trigger levels, dated 11 June 2015
- Envirolab 2015. THPS uncertainty queries. Letter to Sean Daykin, Parsons Brinckerhoff (20/01/2015).
- EPA 2015a. AGL Gloucester Gas Project – Monoethanolamine Detections in Surface and Groundwater Results. Letter to Jenny MacMahon, AGL Upstream Investments Pty Limited (15/05/2015).
- EPA 2015b. Letter to Jenny MacMahon regarding tolicide detection in Waukivory surface water quality results, AGL Upstream Investments Pty Limited (15/05/2015).
- EPA 2015c. AGL Gloucester Gas Project – Fluctuations in Groundwater Heights and other matters. Letter to Jenny MacMahon, AGL Upstream Investments Pty Limited (15/05/2015).
- EPA 2015d. Environment protection licence 20358 – Gloucester coal seam gas BTEX detection in flow-back waters. Letter to Jenny MacMahon, AGL Upstream Investments Pty Limited
- Hach 2015, <http://www.hach.com/DisinfectionSeries02>.
- Hillis, RR, Meyer, JJ & Reynolds, SD 1998, 'The Australian Stress Map', *Exploration Geophysics*, vol. 29, pp. 420-427.
- Lennox, M 2009, 'Stroud Gloucester Trough: Review of the Geology and Coal Development', Ashley Resources, Sydney, dated January 2009.
- NSW Environment Protection Authority 2015, Licence – 20358, Licence variation notice number 1533192, 17 September 2015.
- Parsons Brinckerhoff 2014a, '2014 Groundwater and Surface Water Monitoring Status report Gloucester Gas Project- 2201007A-RES-RPT-001 Rev C, dated 20 November 2014, Parsons Brinckerhoff, Sydney.
- Parsons Brinckerhoff 2014b, 'Drilling Completion Report: Waukivory groundwater monitoring bores - Gloucester Gas Project', 2162406C-WAT-RPT-7761 RevB, dated 30 July 2014, Parsons Brinckerhoff, Sydney.
- Parsons Brinckerhoff 2014c 'Hunter Groundwater and Surface Water Monitoring – Annual Status Report', Hunter Gas Project, 2201003A-RES-RPT-001 RevD, dated November 2014.

- Parsons Brinckerhoff 2014d, '2013 Flow Testing of Craven 06 and Waukivory 03 Gas Wells', 2162406C-WAT-RPT-7642 Rev D, Parsons Brinckerhoff, dated April 2015.
- Parsons Brinckerhoff 2015a, 'Waukivory Pilot Project: Surface and Groundwater Monitoring Report to 31 December 2014, 2268523A-WAT-RPT-001 RevF, Parsons Brinckerhoff, dated February 2015.
- Parsons Brinckerhoff 2015b, 'Waukivory Pilot Project: Surface and Groundwater Monitoring Report to 31 March 2015, 2268523A-WAT-RPT-002 RevD, Parsons Brinckerhoff, dated May 2015
- Parsons Brinckerhoff 2015c, 'Waukivory Pilot Project: Surface and Groundwater Monitoring Report to 30 June 2015, 2268523A-WAT-RPT-003 RevE, Parsons Brinckerhoff, dated August 2015
- Parsons Brinckerhoff 2015d, '2014 Flow Testing of Craven 06 Gas Well', 2162406C-WAT-RPT-001 RevD, Parsons Brinckerhoff, dated April 2015.
- Parsons Brinckerhoff 2015e (in preparation), 'Numerical groundwater modelling of the Gloucester Basin - Local scale fault modelling', 2193335A, Parsons Brinckerhoff, Sydney.
- SRK Consulting 2005, 'Gloucester Basin Geological Review', SRK Project Number GBA001.

Appendix A

Sampling dates, locations and rationale



Table A1.1 Monitoring dates and rationale for groundwater and surface water sampling

| | | Monitoring point | | | | | | | | | | Sampling rationale |
|---------------|-------------------------------------|------------------|--------|--------|---------|---------|-------|----------|-------|-------|-------|---|
| EPA ID | | 10 | 11 | 12 | na | na | 90 | 91 | 9 | 8 | 7 | |
| AGL Location | | WKMB01 | WKMB02 | WKMB03 | WKMB06A | WKMB06B | GR-P3 | GW080487 | WKS01 | WKS02 | WKS03 | |
| Sampling date | 11 Mar 14 12 Mar 14 13 Mar 14 | x | x | x | | | x | x | x | x | x | 2014 baseline #1 (pre-Waukivory Pilot) |
| | 26 Jun 14 27 Jun 14 | x | x | x | | | x | | x | x | x | 2014 baseline #2 (pre-Waukivory Pilot) |
| | 30 Sep 14 1 Oct 14 | x | x | x | | | x | x | x | x | x | 2014 baseline #3 (pre-Waukivory Pilot) |
| | 21 Oct 14 22 Oct 14 | x | x | x | | | x | x | x | x | x | 2014 baseline #4 (pre-Waukivory Pilot) |
| | 6 Nov 14 | x | x | x | | | x | x | x | x | x | within 24 hours of the completion of the fracture stimulation of WK13 |
| | 12 Nov 14 13 Nov 14 | x | x | x | | | x | x | x | x | x | within 24 hours of the completion of the fracture stimulation of zone 2 WK12, one week after fracture stimulation of WK13 for surface water samples |
| | 17 Nov 14 18 Nov 14 | x | x | x | | | x | x | x | x | x | within 24 hours of the completion of the fracture stimulation of WK14 |
| | 18 Nov 14 19 Nov 14 | | | | x | x | | | x | x | x | first sampling events following installation of the new bores, one week after fracture stimulation of zone 2 WK12 for surface water samples |

Monitoring point

| EPA ID | 10 | 11 | 12 | na | na | 90 | 91 | 9 | 8 | 7 | Sampling rationale |
|------------------------------------|--------|--------|--------|---------|---------|-------|----------|--------|--------|--------|--|
| AGL Location | WKMB01 | WKMB02 | WKMB03 | WKMB06A | WKMB06B | GR-P3 | GW080487 | WКСW01 | WКСW02 | WКСW03 | |
| 20 Nov 14 | x | x | x | | | x | x | x | x | x | within 24 hours of the completion of the fracture stimulation of WK12 |
| 24 Nov 14 | | | | | | | | x | x | x | one week after fracture stimulation of WK14 for surface water samples |
| 26 Nov 14 27 Nov 14 | x | x | x | | | x | x | x | x | x | within 24 hours of the completion of the fracture stimulation of WK11, one week after fracture stimulation of WK12 for surface water samples |
| 3 Dec 14 | | | | | | | | x | x | x | one week after fracture stimulation of WK13 for surface water samples |
| 9 Dec 14 10 Dec 14 | x | x | x | x | x | x | x | | | | two weeks after the completion of the fracture stimulation of WK11 |
| 22 Dec 14 23 Dec 14 | x | x | x | x | x | x | x | | | | four weeks after the completion of the fracture stimulation of WK11 |
| 29 Jan 15 30 Jan 15 | x | x | x | x | x | x | x | x | x | x | two weeks from commencement of flowback |
| 29 Apr 15 30 Apr 15 1 May 15 | x | x | x | x | | x | x | x | x | x | sampling prior to recommencement of flowback on 5 May. WKMB06B was not sampled on 30 April due to waterlogging, sample taken on 11 May 2015 |

| Monitoring point | | | | | | | | | | | |
|--------------------------|--------|--------|--------|---------|---------|-------|----------|--------|--------|--------|---|
| EPA ID | 10 | 11 | 12 | na | na | 90 | 91 | 9 | 8 | 7 | Sampling rationale |
| AGL Location | WKMB01 | WKMB02 | WKMB03 | WKMB06A | WKMB06B | GR-P3 | GW080487 | WKSW01 | WKSW02 | WKSW03 | |
| 11 May 15 | x | x | | x | x | | | | | | <p>sampling on 11 May 2015 from WKMB01, WKMB02 and WKMB06A at DRE request</p> <p>WKMB06B sampled due to waterlogging on 29 Apr to 1 May</p> |
| 27 May 15 | | | | | | | | x | x | x | <p>six months from cessation of fracture stimulation (surface water only)</p> |
| 23 Jun 15 24 Jun 15 | x | x | x | x | x | | | x | x | x | <p>sampling on 23 June 2015 as part of the periodic sampling of AGL's wider Gloucester Basin monitoring network</p> |
| 26 Aug 15 | | | | | | | | x | x | x | <p>monthly sampling (surface water only)</p> |
| 22 Sept 15 23 Sept 15 | | | | | | | | x | x | x | <p>monthly sampling (surface water only)</p> |

Table A1.2 Monitoring dates and rationale for flowback sampling

| | | Monitoring point | | | | | Sampling rationale |
|---------------|-----------|------------------|------|------|------|---|--|
| EPA ID | 92 | 86 | 87 | 88 | 89 | | |
| AGL Location | AST2 | WK11 | WK12 | WK13 | WK14 | | |
| Sampling date | 16 Dec 14 | | | | X | | commencement of flowback |
| | 29 Dec 14 | X | | X | X | | fortnightly sampling from the commencement of flowback |
| | 12 Jan 15 | X | | | | | fortnightly sampling from the commencement of flowback |
| | 28 Jan 15 | X | | | | | fortnightly sampling from the commencement of flowback |
| | 2 Feb 15 | X | | | | | BTEX investigation |
| | 3 Feb 15 | X | X | | X | | BTEX investigation |
| | 4 Feb 15 | X | X | X | X | XX | BTEX investigation |
| | 5 Feb 15 | X | X | X | X | X | BTEX investigation |
| | 6 Feb 15 | X | X | X | X | X | BTEX investigation |
| | 26 Feb 15 | X | | | | | AST2 water quality monitoring |
| | 30 Apr 15 | X | | | | | AST2 water quality monitoring |
| | 6 May 15 | XX | XX | XX | XX | XX | BTEX and UHS investigation DRE additional sampling |
| | 7 May 15 | X | X | X | X | X | Water quality monitoring , BTEX and UHS investigation |
| | 8 May 15 | X | XX | XX | XX | XX | BTEX and UHS investigation DRE additional sampling |
| | 9 May 15 | X | X | X | X | X | BTEX and UHS investigation |
| | 10 May 15 | X | X | X | X | X | Water quality monitoring, BTEX and UHS investigation |
| | 11 May 15 | X | X | X | X | X | BTEX and UHS investigation |
| | 12 May 15 | X | X | X | X | X | BTEX and UHS investigation |
| 13 May 15 | X | X | X | X | X | BTEX and UHS investigation | |
| 14 May 15 | X | X | X | X | X | Water quality monitoring, BTEX and UHS investigation | |
| 15 May 15 | X | XX | XX | XX | XX | BTEX and UHS investigation DRE additional sampling | |

| | Monitoring point | | | | | |
|--------------|------------------|------|------|------|------|--|
| EPA ID | 92 | 86 | 87 | 88 | 89 | Sampling rationale |
| AGL Location | AST2 | WK11 | WK12 | WK13 | WK14 | |
| 16 May 15 | X | X | X | X | X | BTEX and UHS investigation |
| 17 May 15 | X | X | X | X | X | BTEX and UHS investigation |
| 18 May 15 | X | X | X | XX | X | BTEX and UHS investigation. Second WK13 sample collected 18/05/15 in the afternoon |
| 19 May 15 | X | XX | XX | | XX | BTEX and UHS investigation |
| 20 May 15 | X | X | X | | X | Water quality monitoring, BTEX and UHS investigation |
| 17 Jun 15 | X | | | | | AST2 water quality monitoring |
| 30 Jun 15 | X | X | X | X | X | BTEX and UHS investigation |
| 1 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 2 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 3 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 4 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 6 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 7 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 8 Jul 15 | X | X | X | X | X | Water quality monitoring, BTEX and UHS investigation |
| 9 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 10 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 11 Jul 15 | X | X | X | X | | BTEX and UHS investigation |
| 13 Jul 15 | X | X | X | X | | BTEX and UHS investigation |
| 14 Jul 15 | X | X | | X | | BTEX and UHS investigation |
| 15 Jul 15 | X | X | | X | X | Water quality monitoring, BTEX and UHS investigation |
| 16 Jul 15 | X | X | X | X | X | BTEX and UHS investigation |
| 17 Jul 15 | X | X | X | X | | BTEX and UHS investigation |
| 18 Jul 15 | X | | | X | X | BTEX and UHS investigation |

| | Monitoring point | | | | | |
|--------------|------------------|------|------|------|------|--|
| EPA ID | 92 | 86 | 87 | 88 | 89 | Sampling rationale |
| AGL Location | AST2 | WK11 | WK12 | WK13 | WK14 | |
| 20 Jul 15 | X | X | X | | | BTEX and UHS investigation |
| 21 Jul 15 | X | | X | | | BTEX and UHS investigation |
| 22 Jul 15 | X | | | | X | Water quality monitoring, BTEX and UHS investigation |
| 23 Jul 15 | X | | X | X | | BTEX and UHS investigation |
| 24 Jul 15 | X | | | | X | BTEX and UHS investigation |
| 25 Jul 15 | X | | X | | | BTEX and UHS investigation |
| 27 Jul 15 | X | X | | X | | BTEX and UHS investigation |
| 28 Jul 15 | X | | | X | X | BTEX and UHS investigation |
| 29 Jul 15 | X | | X | X | | fortnightly sampling |
| 12 Aug 15 | X | | X | X | | fortnightly sampling |
| 26 Aug 15 | X | X | X | X | | fortnightly sampling |
| 9 Sept 15 | X | X | X | X | X | fortnightly sampling |
| 23 Sept 15 | X | X | | X | X | fortnightly sampling |

Appendix B

Parsons Brinckerhoff sampling procedure and AGL pilot well and
AST2 sampling procedure



Standard Operating Procedure Groundwater and Surface Water Sampling and logger download

Controlled Document – Change Register

| Revision | Section Changed | Change Description | Initial | Date |
|----------|-----------------|---------------------------------------|---------|------------|
| A | All | New document | AM | 01/02/15 |
| B | 3, 8, 9 | Enhance QA/QC procedures | SD | 28/09/15 |
| C | All | General review and update | CR | 30/9/2015 |
| D | 10, 11 | Sample handling and data QC procedure | SD | 16/10/2015 |

1. Introduction

This procedure outlines general protocols and work practices to be applied when collecting groundwater and surface water samples and downloading data loggers.

It is noted that other methods of groundwater and surface water sampling are possible and that deviation from this standard operating procedure (SOP) may be appropriate in some circumstances. The rationale for any deviations from this SOP should be discussed and agreed to with the Project Manager (PM) prior to undertaking the works and documented during the works.

1.1 Objectives

The objective of this procedure is to provide a framework to describe how WSP|Parsons Brinckerhoff will perform surface water and groundwater sampling and monitoring activities. The procedure includes:

- Sampling and monitoring equipment.
- Sampling techniques.
- Sample collection and preservation.
- Logger download
- Quality Assurance / Quality Control (QA/QC) procedures.
- Chain of custody documentation.

1.2 Responsibilities

WSP Parsons Brinckerhoff project managers are responsible for:

- Implementation and distribution of the procedure for field activities.
- Review of this procedure and client consultation to identify specific client requirements.
- Review of this procedure where any deviation to the procedure may exist and seek client confirmation of any adopted changes or recommendations.
- Ensuring that all staff undertaking the work have been trained appropriately and are familiar with sampling and equipment operating procedures.
- Ensuring all staff are inducted for site activities and are familiar with the project safety requirements.

Standard Operating Procedure Groundwater and Surface Water Sampling and logger download

All WSP Parsons Brinckerhoff staff are responsible for:

- Undertaking all groundwater and surface water activities in accordance with this procedure.
- Review of this procedure to reflect any recommendations or changes to procedure.
- The maintenance of equipment and ensuring that all equipment has been tested and tagged appropriately before use.

2. References

The following standards and guidelines have been considered and apply to this procedure:

- AS/NZS 5667.1:1998: Water quality - Sampling - Guidance on the design of sampling programs, sampling techniques and the preservation and handling of samples.
- AS/NZS 5667.11:1998: Water quality - Sampling - Guidance on sampling of groundwaters.
- AS/NZS 5667.6:1998: Water quality - Sampling - Guidance on sampling of rivers and streams.
- Australian and New Zealand Environmental Conservation Council, and Agricultural and Resource Management Council of Australia and New Zealand 2000 *Australian and New Zealand Guidelines for Fresh and Marine Water Quality* October 2000.
- Geoscience Australia 2009, *Groundwater Sampling and Analysis – a field guide*, Geoscience Australia, Record 2009/27 95 pp.

The following documents have been developed by WSP Parsons Brinckerhoff and should be referred to when undertaking all field activities for water quality sampling:

- Standard operating procedure – Groundwater and Surface Water Sampling (this document).
- Parsons Brinckerhoff safe work method statements (SWMS's) for the use of the micropurge control box, generator, air compressor, Grundfos and 12-volt pump.
- Parsons Brinckerhoff groundwater field parameters – field data recording form.
- Sample bottle checklist from template (WAN-CHK-001Rev.1).

3. Input documentation

- Site specific Health, Environment and Safety Plan (HESP), SWMS's and other related OHSE documents.
- Site specific access permits (if required).
- Authority to work (if required).
- Sample bottle checklist (WAN-CHK-001Rev.1).

4. Selection of groundwater sampling methods

A range of methods can be used to obtain groundwater quality samples from monitoring bores. The most appropriate method for each bore should be selected based on the depth of the bore, the diameter of the bore, the depth to groundwater, and the permeability of the screened formation. Higher yielding monitoring

Standard Operating Procedure Groundwater and Surface Water Sampling and logger download

bores are typically purged and sampled using a submersible (high-flow) pump. Lower yielding bores are typically sampled using a low-flow pump.

Submersible (high-flow) pump

High flow pumps (usually submersible pumps such as 12 volt pumps, Grundfos or Bennett pumps) are deployed in high yielding bores. Typically, three bore volumes are extracted before a water quality sample is collected, however abstracting this volume is not always required or possible so appropriate sampling protocols must be agreed at project inception.

Where high flow pumps can be deployed to the screened interval of the monitoring bore, three well volumes may not always be necessary (Refer to section 6.2.2).

4.1 Non-purge groundwater sampling

Low flow (MicroPurge[®]) groundwater sampling

Low flow sampling techniques (such as the MicroPurge[®] pump) allows groundwater to be drawn into the pump intake directly from the screened interval of the monitoring bore, eliminating the need to purge large volumes of groundwater from these bores.

Bailing

Bailed samples collect a discrete sample at depth. Double check bailers (with stop valves at the top and bottom of the bailer) can be lowered to the screened interval to collect a grab sample at a specified depth within the water column. Disposable bailers with a single stop valve are generally not suitable to collect samples from deep within the water column, as mixing of the collected water sample is likely when the bailer is retrieved.

Despite the double checks on the discrete depth bailer, it is possible for mixing to occur if a proper seal is not established or if the bailer is not raised from the well steadily enough. Reusable bailers should be rinsed between samples and decontaminated between sites.

Care must be taken to ensure sediment in the sump of the monitoring bore is not disturbed using this sampling method.

Other non-purge methods

No-purge samplers include diffusion samplers and grab samplers (e.g. HydraSleeve[®] and Snap Sampler[™]). Deploy and retrieve the no-purge sampler in the well in accordance with the manufacturer's instructions. No purging is required for this method of groundwater sampling. Ensure that a sufficient volume of groundwater can be recovered to enable the required analysis, and measurement of groundwater quality parameters, can be conducted.

5. Equipment

5.1 General water quality sampling equipment

The following equipment is used for the majority of sampling tasks and is applicable to groundwater and surface water sampling:

- Personal protective equipment and other safety equipment as identified in the HESP.

Standard Operating Procedure Groundwater and Surface Water Sampling and logger download

- Field data recording forms, chain-of-custody forms (COC), tablet and/or laptop.
- Water level meters (dipper), (electronic water level meters are not to be used where there is a requirement for equipment to be intrinsically safe, other manual methods (such as a “plover”) should be used instead).
- Multi-parameter water quality instruments and calibration solution.
- Appropriate sample containers as specified by the laboratory.
- Storage containers for the samples (such as an esky, ice (or ice bricks), or fridge).
- Decontamination equipment including clean buckets, phosphate free detergent e.g. Decon 90, potable water and deionised water (if required).
- Appropriately labelled storage containers to collect waste water discharge or transport.
- Nitrile gloves, syringes and water filters for filtered samples (e.g. dissolved metals, dissolved organic carbon, iron).
- Camera and mobile phone.

5.2 Groundwater sampling equipment

Groundwater sampling equipment is specific to the sampling methodology to be used for sample collection. Before staff use any groundwater sampling equipment they should be fully trained and competent in the use of the equipment, familiar with the operation and safe work method statements for the task to be performed. All equipment should be regularly maintained, tested and tagged appropriately before use.

The following list is provided as a guide for necessary equipment for the range of sampling methodologies and not intended as an exhaustive checklist.

Submersible pump (12 volt pumps)

- 12 volt submersible pump and reel.
- Power cable (12 volt) and connectors (ensure appropriate connectors are selected based on vehicle / power source connection).
- 12 volt power source (auxiliary battery).
- Extension hose for purged water discharge.
- Water discharge controllers where applicable.

Submersible pump (Grundfos)

- Grundfos pump and reel.
- Generator and residual control device (RCD).
- Water discharge control (variable speed control).
- Extension hose for purged water discharge.

Low flow techniques (Micro-purge®)

- Generator and residual control device (RCD).
- Air compressor.

Standard Operating Procedure Groundwater and Surface Water Sampling and logger download

- Micro-purge[®] control box
- Air hoses and fittings
- Extension hose for purged water discharge.
- Flow cells for water quality monitoring

5.3 Surface water sampling equipment

Surface water samples should be collected using the following:

- Nalgene sample collection container.
- Telescopic sampling pole.

Surface water samples can be collected directly into sample containers that do not contain preservatives, provided that a representative sample can be collected. The Nalgene sample container should be replaced between each sample.

5.4 Groundwater level monitoring equipment

Generally, Solinst Leveloggers have been deployed to continuously monitoring groundwater levels. Data loggers should be installed as follows:

- Data loggers should be suspended from the surface using stainless steel wire rope and stainless steel swages.
- Data loggers should be suspended below the standing water level. Potential groundwater level variations in the bore and individual logger specifications (different loggers have different pressure thresholds) should be considered before the depth at which the logger is to be installed is determined, as the logger must remain below the groundwater level.
- Program the data logger and then lower the data logger into a bore. Data logging intervals should be determined to satisfy client requirements and the resolution of data sought. Generally, 6 hourly intervals (00:00, 6:00, 12:00 and 18:00)

6. Sampling and monitoring

6.1 Water quality samples

- Prepare sample bottle checklist from template (WAN-CHK-001Rev.1). PM to familiarise field personnel with the sampling suite, holding times, sample security procedures and other project or site specific requirements regarding the sampling.
- Prepare suite of sampling containers as per the sample bottle checklist. Complete all fields on the checklist following the packing and filling of the containers.
- Complete all fields on the label of the container using a xylene free marker.
- Ensure sampling personnel are wearing a clean pair of disposable sampling gloves for each sample.
- Ensure that all bottles are filled and capped as quickly as practicable to reduce exposure of the sample to the atmosphere. Care should be taken when handling sample container lids to avoid contact with any surfaces that may compromise the integrity of the sample.

Standard Operating Procedure Groundwater and Surface Water Sampling and logger download

- Ensure that while collecting the sample, that no foreign object (such as the sampling hose) is inserted into the bottle, nor should anything touch the rim of the bottle.
- When collecting samples for volatile analysis, make sure all bottles are filled as far as practicable to minimise the headspace within the container and avoid potential loss of volatiles.
- Immediately place all samples into an esky pre-packed with ice or ice bricks, or a cooled field fridge. To reduce the potential for breakage, samples can be placed on the firm base of the esky with ice placed in a secure bag (to prevent leakage) on top. Samples should be arranged to minimise lateral movement during transport, and free space can be reduced by adding inert packing material (bubble wrap etc.) if required.
- Complete a quality control check of the labels of all samples submitted to the laboratory against the sample IDs on the COC.
- Transport all samples on ice (temperature below 4°C) to the laboratory as soon as practical with the completed and relinquished COC. The COC should include the following information: sample ID, date and time of sampling, project number, number of sample bottles, analysis requested, laboratory quote number, specific comments and remarks, name and signature of collector, date and time samples are relinquished and contact details.
- Any split replicate (triplicate) samples should be sent directly to the secondary laboratory in a separate esky from that containing the primary samples, with all other samples sent to the primary laboratory.
- Typically samples should not be frozen. Exceptions include samples for total phosphorus (AS/NZS 5667.1:1998) however advice must be sought from the laboratory.
- Where filtering of samples is required (e.g. dissolved metals and dissolved organic carbon) disposable disc filters (0.45µm) should be used with disposable syringes. Filtering equipment should not be reused between sampling locations.

6.2 Groundwater sampling and monitoring

6.2.1 Groundwater levels

Groundwater levels (or pressures, where appropriate) are collected either manually (by electronic water level meters) or by data loggers installed at each monitoring location (or a combination of both).

Prior to removing the data logger, manual water levels are recorded using the following procedure:

- Test the water level meter at the surface to ensure it is operational. Slowly lower the probe down the well and measure and record the depth to groundwater from the marked point at the top of the casing and record.
- If no marking is present, measure from the highest point of the casing, note this on the field data recording form and mark the casing for future monitoring.

The data logger can then be retrieved from the monitoring bore for data download by pulling the wire rope attached to the data logger. Data loggers are then downloaded using appropriate software for storage and data processing. The following diagnostics should be performed regularly to ensure data loggers are functioning properly:

- Visually inspect and clean the data logger if necessary.
- Inspect swages and connections to ensure the data logger is secured at the surface.
- Test run the data logger in air and submerged in a known depth of water and record real time data.

Standard Operating Procedure

Groundwater and Surface Water

Sampling and logger download

- Check real time data to ensure water levels recorded by the data logger are accurate before redeploying.
- Check data logger battery levels and record.

6.2.2 Deployment of groundwater sampling equipment and purging

- Calibrate the water quality meter daily and record details on the calibration sheet.
- Unstable parameters should be measured in the field, such as temperature, dissolved oxygen (DO), oxidation-reduction potential (redox), electrical conductivity (EC) and pH as purging progresses. Total dissolved solids and carbon dioxide can also be measured in the field if required.
- Continue purging until at least three consecutive sets of field parameters are obtained and monitor the changes in pH, temperature and EC. Do not sample until field parameters show no significant variations (< +/- 10%).
- Typically three bore volumes are removed from a bore prior to sampling (moderate to high yielding bores). Less than three bore volumes can be removed prior to sampling in the following circumstances:
 - ▶ A bore is purged dry and the recovery water is sampled.
 - ▶ Field parameters stabilise prior to the removal of three bore volumes, yet after the removal of at least one bore volume.
 - ▶ No-purge sampling equipment is used.
 - ▶ Low-flow groundwater pumps are used, with the intake at the screened section.
- Bore volumes can be estimated as follows:
 - ▶ Bore volume (L) = 2 x water column length (m) for 50 mm wells.
- Qualitatively assess and record the colour of purged water, turbidity, any odours and other observations and note this on the field data recording form.

6.3 Surface water samples

- Ensure that a representative water sample is collected from the water body as close to the thalweg as practicable. Consideration should be given to the choice of sampling location so that the water body is homogenous and any source mixing is complete.
- Take care to avoid disturbing sediment when collecting a sample. If there is a risk that sampling would have a downstream effects, sampling should be collected from a downstream location first, working upstream.
- Note and record the appearance of the surface water body, i.e. colour, turbidity, odour, surface crusts, films or floating material, algae, etc. Also note any other relevant observations such as dead or distressed vegetation, surface rubbish, surface sheen, etc.
- If sampling un-stratified surface waters, lower the surface water sampler carefully into the surface water body at a location well away from the edge. Collect the water sample from approximately 100 mm below the surface of the water body. Following collection, decant the surface water sample into the laboratory supplied sample containers. Use a dedicated sampling bottle for each location. Never submerge laboratory-supplied sample bottles that may contain acid or preservative, into the surface water body.
- If sampling stratified surface waters, lower a weighted sampler such as a bomb sampler or a Van Dorn sampler below the water surface to the depth required, and allow to fill until bubbles stop rising to the surface. When the bottle is full, gently remove it from the water.

Standard Operating Procedure Groundwater and Surface Water Sampling and logger download

7. Quality Assurance (QA) sample collection

The requirement for QA samples should be assessed depending on the project and client requirements. The following provides the types of QA samples that may be required and a suggested frequency:

- Field duplicate: 1 in 10 samples. This is a replicate sample collected for analysis from the same sample site at the same time. This provides information on the sampling error and a measure of sample precision.
- Label QA samples 'QA**_date' with the first QA sample labelled QA01 and the second labelled QA02 etc. in order of collection. This includes field duplicates as well as rinsate, trip and field blanks and trip spikes.
- When a QA sample is taken a note must be made on the field sheet of the parent sample.
- Ensure specified PPE is worn and correct sampling techniques are followed (refer to section 6) to avoid contamination of the sample from the surrounding environment.
- Other blanks and controls can be collected depending on client requirements. The requirements of a sampling program should be defined and documented in a sampling program prior to the sampling program commencing. Other quality control samples could include:
 - ▶ Field blanks – to estimate contamination of a sample during the collection procedure.
 - ▶ Transport blanks – to estimate contamination introduced during transport and storage of the sample.
 - ▶ Container blanks – to estimate contamination from the container and preservation technique during storage of a sample.
 - ▶ Field spikes – to determine the loss or cross-contamination of volatile materials.
- Blanks and controls should be collected in consultation with the laboratory engaged for analysis. Ensure that the storage of blanks and controls adheres to laboratory requirements.

8. Purged groundwater disposal

- Store and dispose of purged water appropriately. Purged water should not be disposed of onto the site surface or to sewer/stormwater without testing, unless approved by the client and appropriate procedures are in place to ensure that there is no adverse impact to the environment or human health.
- Purged water can be collected in appropriately labelled storage containers.

9. Output documentation

The following documents shall be placed on the electronic project file as soon as possible upon completion of the fieldwork:

- Field data recording forms.
- Logger data files.
- Completed bottle checklist.
- Completed COC.
- Signed HESP.

Standard Operating Procedure Groundwater and Surface Water Sampling and logger download

Field data recording forms

Field data recording forms include all necessary information that would enable a repetition of sampling to take place under identical conditions. The Parsons Brinckerhoff groundwater and surface water field parameters form should be completed in its entirety for every sampling event.

10. Sample storage, transit and delivery

- Complete all relevant fields on the CoC, if required, send to the lab prior to sampling for review to ensure that all required analyses are shown on the CoC
- Store samples upright, in new zip lock bags in an ice filled esky
- Samples should be stored in the tray of the vehicle whilst in transit, locked in the cab whilst parked if the vehicle is out of view and stored securely overnight in the accommodation or workplace
- Samples should be delivered by the trained water sampling technician to the laboratories where possible
- In the event that a courier is required, field staff will complete and send a Chain-of-Custody form with the sample for sample transport to the laboratory and seal each ice filled esky prior to pick up. Photographs to be taken of the open esky(s) and the closed, sealed esky(s)
- Complete the change of custodian fields on the CoC when samples are handed to courier or the lab

11. Laboratory liaison Data QC and data provision

- The standard communications from the laboratory to all email addresses in the reporting field of the CoC are as follows:
 - ▶ Scanned copy of the CoC with work order number assigned by the lab
 - ▶ Sample receipt notification (SRN). This document cross references the samples received with the data required and identifies any non-compliances regarding container(s), preservation, holding time and sample condition

The SRN must be reviewed and any non-compliances immediately followed up with the lab and actioned
 - ▶ Results are emailed in ESDat format with pdf certificate of analysis (CoA). The CoA must be reviewed to ensure all required data is present and samples and the front page displays the correct sampler names and dates
- Prior to use of the data in further analysis/reporting or provision to the client the data must undergo a Quality Control (QC) process:
 - ▶ Undertake the QC as soon as possible after receiving results to maximise the possibility of rectifying any data omissions
 - ▶ It is the responsibility of the PM to ensure all required data has been received from the lab
 - ▶ Responsibilities regarding identifying anomalous data, trend tracking and comparison against QA samples must be agreed at project inception
 - ▶ QC for the presence of data can be done visually by cross referencing the CoA with the scope for smaller data sets. For larger datasets, the use of an excel lookup table (or similar) is recommended
- The QC process should be agreed in writing between the client and the PM at project inception



Procedure for water sampling from pilot gas wells WK11, 12, 13, 14 & above ground flowback water storage tank

Daily pilot well sampling checklist

Date.....

Sampler.....

Signature.....

| STEP | Action | By Who | By When | Sampler initial |
|------|---|--------|----------------------------|-----------------|
| 1 | Order water sample bottles from ALS | PB | 1 week prior to sampling | |
| 2 | Have available sterile, single use, disposal sampling equipment such as syringes, Minisart 0.45 µm filters (individually packed and sterile) and nitrile gloves. | PB | 1 week prior to sampling | |
| 3 | Obtain from AGL Senior Hydrogeologist the sampling locations, sequence and analytical suite. The sampling order will be from asset with lowest (first) to highest (last) concentration of key analytes | PB | 24 hours prior to sampling | |
| 4 | Make up a pre diluted mixture of Decon 90 and water and have available to decontaminate the YSI water quality meter after each water sample. | PB | 24 hours prior to sampling | |
| 5 | Calibrate YSI water quality meter and record in the calibration log. If the YSI meter does not calibrate, sampling technicians should obtain AGL's YSI meter from the AGL Gloucester office to use as a back-up. | PB | Start of each field day | |
| 6 | Wear new nitrile gloves and safety glasses and other clean site specific PPE. | PB | Each sampling event | |
| 7 | Prepare and maintain clean and clear work surfaces | PB | Ongoing | |
| 8 | Avoid contact with the inside of the water sample bottle and the lid. Do not place the lid on surfaces that may result in contamination of the sample when filling the sample container | PB | Ongoing | |
| 9 | Inspect water sampling, handling and storage locations to primary containment (e.g. drip trays) is installed and has capacity. | PB | Prior to sampling | |
| 10 | Sample containers are to be inspected prior to sampling to ensure that sample container lids have remained in place during transit. Any containers that have lost their lids during transport should not be used. | PB | Prior to sampling | |
| 11 | Avoid contact with the inside of the water sample bottle and the lid. Do not place the lid on surfaces that may result in contamination of the sample when filling the sample container | PB | During sampling | |
| 12 | Sample containers should be filled in a controlled manner once the container lid has been removed to avoid the exposure time of the sample to the surrounding environment. Overfilling must be avoided. | PB | During sampling | |
| 13 | Sample containers to be filled to ensure minimal or zero head space as required. | PB | During sampling | |



Procedure for water sampling from pilot gas wells WK11, 12, 13, 14 & above ground flowback water storage tank

| STEP | Action | By Who | By When | Sampler initial |
|------|---|--|---------------------------------------|-----------------|
| 14 | Where subsampling is required, samples will be collected from the sample point in large single use glass and plastic bottles. Subsampling into laboratory bottles will go from glass to glass and plastic to plastic. | PB | During sampling | |
| 15 | If required, divide the sample amongst the specific sampling containers provided by the laboratory for the pre-determined analytical suite. This activity shall be undertaken within secondary containment to avoid loss of containment of water sample to the ground (e.g. sample dividing to be done over drip tray or duck pond or plastic sheeting as required). | PB | During sampling | |
| 16 | Complete all fields on sample container label using a xylene free marker pen. | PB | During sampling | |
| 17 | <ul style="list-style-type: none">• Advise if the water quality meter can be used next to the gas well.• If approved by AGL Operator, measure physico-chemical parameters using a YSI water quality meter and record data on field sheet.• After taking physico-chemical readings, rinse the YSI meter cup and probe in fresh/demineralised water | <ul style="list-style-type: none">• AGL Operator• PB• PB | During sampling | |
| 18 | Store individual laboratory samples upright in a snap lock bag and place in an ice filled esky and chilled as soon as possible | PB | At completion of sampling | |
| 19 | Collect solid waste in rubbish bags and kept separate from uncontaminated equipment and disposed of appropriately | PB | At completion of daily sampling event | |



Procedure for water sampling from pilot gas wells WK11, 12, 13, 14 & above ground flowback water storage tank

5.2 AST2

| STEP | Action | By Who | By When | Sampler initial |
|------|--|--|---------|-----------------|
| 1 | The 1.5 megalitre AST2 is situated at the WK13 pilot well site and is an open top tank with a single access point via a ladder securely mounted to the side of the tank. | | | |
| 2 | Sampling from AST2 requires climbing the ladder to a height of approximately 1.5 m above ground. A second technician should be located at the foot of the ladder to assist. Ensure three points of contact at all times and that ladder rungs are free from mud and excess water. Do not wear new nitrile gloves when climbing the ladder. | PB | Ongoing | |
| 3 | A telescopic sampling pole is to be used with a new 500 mL Nalgene bottle for each sample. The sampling pole and bottles should be passed up to the sampling technician by the second technician located on the ground. Once each bottle is filled the sampling technician should pass each filled bottle and finally the telescopic pole down to the second technician before stepping down the ladder. | PB | Ongoing | |
| 4 | If AST2 is less than half full, submerge the Nalgene bottle rim first to a depth of at least 30 cm below surface, invert the bottle at this depth and allow to fill completely. | PB | Ongoing | |
| 5 | If AST2 is over half full then a composite sample must be taken, which comprises two samples: <ul style="list-style-type: none"> Sample 1: submerge the Nalgene bottle (1) rim to a depth of at least 30 cm below surface, invert the bottle at this depth and allow to fill completely. Sample 2: submerge the Nalgene bottle (2) rim to a depth of at least 100 cm below surface, invert the bottle at this depth and allow to fill completely. Combine the two samples (50% each) into a representative composite sample Nalgene bottle (3). | PB | Ongoing | |
| 6 | <ul style="list-style-type: none"> Advise if the water quality meter can be used next to the AST2. If approved by AGL Operator, measure physico-chemical parameters using a YSI water quality meter and record on field sheet. After taking physico-chemical readings, rinse the YSI meter cup and probe in fresh/demineralised water | <ul style="list-style-type: none"> AGL Operator PB PB | Ongoing | |
| 7 | Divide the sample amongst the specific sampling containers provided by the laboratory for the pre-determined analytical suite | PB | Ongoing | |
| 8 | Rinse the YSI meter cup and probe with fresh, demineralised water after sampling. | PB | Ongoing | |
| 9 | Store AST2 liquid waste in a separate liquid container and when daily sampling event is complete, dispose waste water back to AST2. | PB | Ongoing | |



Procedure for water sampling from pilot gas wells WK11, 12, 13, 14 & above ground flowback water storage tank

5.3 Waukivory 11, 12, 13 and 14

| STEP | Action | By Who | By When | Sampler initial |
|------|--|--|--|-----------------|
| 1 | All work undertaken within the hazardous zone at the well surface facilities is to be conducted under the supervision and instruction of an AGL operator | AGL Operator | Ongoing | |
| 2 | Sampling technicians to obtain the two Swagelok stainless steel sampling spouts (figure 1) from the AGL Field Environment Manager | | | |
| 3 | Identify the sampling location at the well surface facilities | AGL Operator | Prior to sampling | |
| 4 | Assess LEL levels within the hazardous zone at well surface facilities using a calibrated gas (LEL) detector. The gas detector shall be located within 150mm of the sampling location. | AGL Operator | Immediately prior to, and during, sampling | |
| 5 | Confirm that drip trays and containers used for the collection of sample purge water will be located on secondary containment (eg a geofabric membrane bund or plastic sheeting) (figure 2). | PB | Prior to sampling | |
| 6 | Remove the Swagelok stainless steel isolation cap (the cap is fitted at all times while not sampling). Cap can be removed with a ¼ turn with a spanner and then loosened and removed by hand. | AGL Operator | Prior to sampling | |
| 7 | Install Swagelok stainless steel sampling spout (see figure 1). The spouts should be decontaminated with a pre-diluted mixture of Decon 90 and rinsed in fresh/demineralised water before each event. Two spouts will be kept by the AGL Field Environment Manager. | AGL Operator | Prior to sampling | |
| 8 | Open sample valve gently and slowly (in case of the presence of natural gas) | AGL Operator | Prior to sampling | |
| 9 | Purge at least 50 litres from the sample point prior to sampling. When there is no observable presence of sand or coal fines the sample may be taken, otherwise continue to purge to drip tray. In the event that 50 litres cannot be purged from the sample point (due to low flows) the sample technician should record the actual volume purged and flow rate from the sample point and advise the AGL Senior Hydrogeologist. | PB | Prior to sampling | |
| 10 | <ul style="list-style-type: none"> Advise if the water quality meter can be used next to the gas well. If approved by AGL Operator, measure physico-chemical parameters using a YSI water quality meter and record on field sheets. After taking physico-chemical readings, rinse the YSI meter cup and probe in fresh/demineralised water | <ul style="list-style-type: none"> AGL Operator PB PB | Ongoing | |
| 11 | The sample will be taken from a continuous stream of water from the sampling point (i.e. this avoids the opening and closing of the tap during the sampling procedure to avoid potential collection and dislodging of foreign particles). | PB | During sampling | |
| 12 | Where possible, samples will be collected from the sampling point directly into specific sampling containers provided by the laboratory for the pre-determined analytical suite. This may not be possible for small bottles or those that require zero headspace and will not be possible for the bottles that require field filtering. | PB | During sampling | |
| 13 | Where possible sample containers are to be filled from the flowing water and sub-sampling is to be minimised | PB | During sampling | |

Procedure for water sampling from pilot gas wells WK11, 12, 13, 14 & above ground flowback water storage tank

| STEP | Action | By Who | By When | Sampler initial |
|------|--|--------|---------------------------|-----------------|
| 14 | Advise AGL Operator and Senior Hydrogeologist when sampling event is complete | PB | When sampling is complete | |
| 15 | Return the two Swagelok stainless steel sampling spouts to the AGL Field Environment Manager | PB | When sampling is complete | |



Figure 1 - Swagelok stainless steel sampling spout (detachable)



Figure 2 - Swagelok stainless steel sampling spout with primary and secondary containment in place.



Procedure for water sampling from pilot gas wells WK11, 12, 13, 14 & above ground flowback water storage tank

5.4 Field Quality Control

| STEP | Action | By Who | By When | Sampler initial |
|------|---|--------|---------------------|-----------------|
| 1 | Include a field blank for each sampling event. The field blank(s) should be taken in both BTEX and SVOC bottles, filled to the top with laboratory supplied reagent water, and left to stand in the vicinity of the sampling location (separator and pump locations only) in order to monitor for the potential of ambient background concentrations of hydrocarbons in air potentially biasing the dissolved phase concentration data generated for these samples. | PB | Each sampling event | |
| 2 | Include additional sample bottles (notably 2 x BTEX vials and 1 x SVOC bottle) to allow for laboratory Quality Control to be performed on each AGL site sample, and allow for reanalysis from a undisturbed sample volume, should data anomalies occur. | PB | Each sampling event | |
| 3 | For every 1 in 10 water samples taken during the program, a duplicate sample comprising the full suite of one of the samples is to be taken. The duplicate should be taken from alternating locations on each occasion (ie duplicate #1 from WK11, #2 from WK12, etc). More specific sampling requirements may be necessary if the water samples are taken because of an actual or suspected contamination event or for environmental/health risk purposes. | PB | Each sampling event | |
| 4 | Ensure a daily check list covering all points included in this procedure is completed by the sampling technician for review by the AGL Senior Hydrogeologist on request. | PB | Each sampling event | |



Procedure for water sampling from pilot gas wells WK11, 12, 13, 14 & above ground flowback water storage tank

5.5 Sample storage, transit and delivery

| STEP | Action | By Who | By When | Sampler initial |
|------|---|---|-----------------------------------|-----------------|
| 1 | Ensure laboratories isolate AGL samples from all other through use of separate eskies during transport, to avoid potential for cross sample contamination | PB | Prior to transit | |
| 2 | Where ALS Laboratories are used for analysis, ensure ALS maintain the individual sample bagging protocol through transit via ALS Newcastle, re-batching and transit to ALS Sydney. | PB & ALS | Prior to transit | |
| 3 | Ensure laboratories retain the AGL BTEX sample bottles under controlled storage including refrigeration, for a period of at least two months to allow for subsequent reanalysis and resolution of data issues. | PB | Prior to transit | |
| 4 | Store samples bottles from the same sample location upright in new zip lock bags in an ice filled esky | PB | During sample storage and transit | |
| 5 | Deliver the water samples directly to the ALS and Envirolab laboratories where possible. Where this is not possible a courier should be used. | PB | During sample storage and transit | |
| 6 | Where possible storage of samples overnight shall be avoided. If necessary, for storage overnight, samples shall be refrigerated and secure. | PB & ALS | Prior to and during transit | |
| 7 | Prior to delivery to ALS laboratory, the sample container lids are to remain securely on the sample containers and are only to be removed by ALS laboratory staff at the time of analysis. Sample containers are not to be removed from the ice filled esky unless being stored and refrigerated overnight. | PB & ALS | During sample storage and transit | |
| 8 | <ul style="list-style-type: none"> • Include a hardcopy of the Chain of Custody (CoC) within a plastic zip lock bag within each esky, signed by the appropriate field staff, prior to closing each sample esky and applying security tape with signature. • Each esky will have its own individual COC that matches the samples contained within. • Note that the analytical specification does not have to be completed on this CoC. The laboratory staff then remove the CoC and sign, taking custody of the contents of the esky content. An electronic CoC is subsequently emailed to the laboratory. Ensure that the laboratory receive this emailed CoC prior to the samples arriving at the laboratory. | PB & ALS | During sample storage and transit | |
| 9 | <p>In the event that a courier is required:</p> <ul style="list-style-type: none"> • a Chain-of-Custody form will be prepared and sent with the samples for sample transport to the laboratory • each ice filled esky will be sealed prior to pick up. • Photographs to be taken of the open esky(s) and the closed, sealed esky(s). • the courier drivers must sign the CoC upon receipt of the samples from field staff. | <ul style="list-style-type: none"> • PB • PB • PB • Courier | During sample storage and transit | |

Appendix C

Laboratory QC reports



Appendix C

Laboratory QC reports summary table

| Report number | Date samples received | Lab Name |
|---------------|-----------------------|-----------|
| ES1525055 | 01-July-2015 | ALS |
| ES1525247 | 02-July-2016 | ALS |
| ES1525354 | 03-July-2016 | ALS |
| ES1525375 | 04-July-2016 | ALS |
| ES1525544 | 07-July-2015 | ALS |
| ES1525652 | 08-July-2015 | ALS |
| ES1525654 | 08-July-2015 | ALS |
| ES1525742 | 09-July-2015 | ALS |
| ES1525865 | 10-July-2015 | ALS |
| ES1525880 | 13-July-2015 | ALS |
| ES1526014 | 14-July-2015 | ALS |
| ES1526117 | 15-July-2015 | ALS |
| ES1526118 | 15-July-2015 | ALS |
| ES1526216 | 16-July-2015 | ALS |
| ES1526322 | 17-July-2015 | ALS |
| ES1526325 | 18-July-2015 | ALS |
| ES1526478 | 21-July-2015 | ALS |
| ES1526602 | 22-July-2015 | ALS |
| ES1526604 | 22-July-2015 | ALS |
| ES1526718 | 23-July-2015 | ALS |
| ES1526833 | 24-July-2015 | ALS |
| ES1526838 | 24-July-2015 | ALS |
| ES1527015 | 28-July-2015 | ALS |
| ES1527133 | 29-July-2015 | ALS |
| ES1527135 | 29-July-2015 | ALS |
| ES1528258 | 13-August-2015 | ALS |
| ES1528259 | 13-August-2015 | ALS |
| ES1529385 | 27-August-2015 | ALS |
| ES1529387 | 27-August-2015 | ALS |
| ES1529589 | 28-August-2015 | ALS |
| ES1530616 | 09-September-2015 | ALS |
| ES1530625 | 09-September-2015 | ALS |
| ES1531965 | 23-September-2015 | ALS |
| ES1532002 | 23-September-2015 | ALS |
| ES1532008 | 23-September-2015 | ALS |
| 130805 | 08-July-2015 | Envirolab |
| 131168 | 15-July-2015 | Envirolab |
| 131627 | 23-July-2015 | Envirolab |
| 131883 | 29-July-2015 | Envirolab |
| 132658 | 13-August-2015 | Envirolab |
| 133320 | 27-August-2015 | Envirolab |
| 134039 | 09-September-2015 | Envirolab |

QUALITY CONTROL REPORT

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525055 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 01-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 01-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 01-Jul-2015 |
| Site | : ---- | No. of samples received | : 6 |
| Quote number | : ---- | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 141914) | | | | | | | | | | |
| ES1525053-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7000 | 7030 | 0.433 | 0% - 20% | |
| ES1525055-005 | WK14 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 12200 | 12200 | 0.00 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 142024) | | | | | | | | | | |
| ES1525053-001 | Anonymous | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| ES1525055-005 | WK14 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 141834) | | | | | | | | | | |
| ES1525055-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 7 | 7 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 9 | 9 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 141914) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 104 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 142024) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 94.3 | 72 | 126 |
| EP080: BTEXN (QCLot: 141834) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 98.4 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 88.7 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 91.0 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 111 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 89.5 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 93.2 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 141834) | | | | | | | |
| ES1525055-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 92.6 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 98.0 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 99.4 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 118 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 99.3 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 94.3 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525055 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 01-Jul-2015 |
| Site | : ---- | Issue Date | : 01-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 6 |
| Order number | : ---- | No. of samples analysed | : 6 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 2 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 11 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 11 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 11 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-----------------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) | | | | | | | | |
| AST2, WK12, WK14, | WK11, WK13, QA1 | 01-Jul-2015 | ---- | ---- | ---- | 01-Jul-2015 | 29-Jul-2015 | ✓ |
| EP080: BTEXN | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) | | | | | | | | |
| AST2, WK12, WK14, | WK11, WK13, QA1 | 01-Jul-2015 | 01-Jul-2015 | 15-Jul-2015 | ✓ | 01-Jul-2015 | 15-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 2 | 0 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 11 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 11 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 11 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525247 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 02-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 02-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 02-Jul-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|---------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Edwandy Fadjar | Organic Coordinator | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 143179) | | | | | | | | | | |
| ES1525247-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7020 | 7060 | 0.582 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 143416) | | | | | | | | | | |
| ES1525247-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 143178) | | | | | | | | | | |
| ES1525247-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 7 | 6 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 9 | 8 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 143179) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 143416) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 87.1 | 72 | 126 |
| EP080: BTEXN (QCLot: 143178) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 75.0 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 76.1 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 76.0 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 81.0 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 75.6 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 79.5 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 143178) | | | | | | | |
| ES1525247-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 87.7 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 80.7 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 80.2 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 80.6 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 78.3 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 84.5 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525247 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 02-Jul-2015 |
| Site | : ---- | Issue Date | : 02-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|----------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2, WK12, WK14 | WK11, WK13, | 02-Jul-2015 | ---- | ---- | ---- | 02-Jul-2015 | 30-Jul-2015 | ✓ |
| EP080: BTEXN | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 | WK11, WK13, | 02-Jul-2015 | 02-Jul-2015 | 16-Jul-2015 | ✓ | 02-Jul-2015 | 16-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Regular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525354 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 03-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 03-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 03-Jul-2015 |
| Site | : ---- | No. of samples received | : 6 |
| Quote number | : ---- | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :

- Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
- CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
- LOR = Limit of reporting
- RPD = Relative Percentage Difference
- # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 144570) | | | | | | | | | | |
| ES1525354-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7120 | 7170 | 0.709 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 144685) | | | | | | | | | | |
| ES1525354-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 144454) | | | | | | | | | | |
| ES1525354-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 12 | 12 | 0.00 | 0% - 50% | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 4 | 4 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 16 | 15 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 144570) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 104 | 95 | 113 | |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 144685) | | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 101 | 72 | 126 | |
| EP080: BTEXN (QCLot: 144454) | | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 90.1 | 70 | 124 | |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 96.5 | 70 | 120 | |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 97.8 | 69 | 121 | |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 90.5 | 70 | 124 | |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 101 | 72 | 122 | |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 95.7 | 65 | 129 | |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|----------------------|---------------------|------|
| | | | | Spike Concentration | Spike Recovery(%) MS | Recovery Limits (%) | |
| | | | | | | Low | High |
| EP080: BTEXN (QCLot: 144454) | | | | | | | |
| ES1525354-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 93.7 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 105 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 106 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 93.8 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 108 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 101 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525354 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 03-Jul-2015 |
| Site | : ---- | Issue Date | : 03-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 6 |
| Order number | : ---- | No. of samples analysed | : 6 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 03-Jul-2015 | ---- | ---- | ---- | 03-Jul-2015 | 31-Jul-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK11, WK12, WK13, WK14, QA2 | 03-Jul-2015 | 03-Jul-2015 | 17-Jul-2015 | ✓ | 03-Jul-2015 | 17-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Regular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | |
|---|--|
| Work Order : ES1525375 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : CAROLINA SARDELLA Site : ---- Quote number : ---- | Page : 1 of 4 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 04-Jul-2015 Date Analysis Commenced : 06-Jul-2015 Issue Date : 06-Jul-2015 No. of samples received : 5 No. of samples analysed : 5 |
|---|--|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 145945) | | | | | | | | | | |
| ES1525375-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7000 | 7210 | 2.98 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 145583) | | | | | | | | | | |
| ES1525375-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 145588) | | | | | | | | | | |
| ES1525375-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 14 | 13 | 7.92 | 0% - 50% | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 4 | 4 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 17 | 16 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 145945) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 106 | 95 | 113 | |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 145583) | | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 99.4 | 72 | 126 | |
| EP080: BTEXN (QCLot: 145588) | | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 99.9 | 70 | 124 | |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 104 | 70 | 120 | |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 105 | 69 | 121 | |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 102 | 70 | 124 | |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 108 | 72 | 122 | |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 101 | 65 | 129 | |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|----------------------|---------------------|------|
| | | | | Spike Concentration | Spike Recovery(%) MS | Recovery Limits (%) | |
| | | | | | | Low | High |
| EP080: BTEXN (QCLot: 145588) | | | | | | | |
| ES1525375-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 96.1 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 109 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 108 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 99.5 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 111 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 99.6 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525375 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 04-Jul-2015 |
| Site | : ---- | Issue Date | : 06-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 04-Jul-2015 | ---- | ---- | ---- | 06-Jul-2015 | 01-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 WK11, WK13, | 04-Jul-2015 | 06-Jul-2015 | 18-Jul-2015 | ✓ | 06-Jul-2015 | 18-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525544 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 07-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 07-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 07-Jul-2015 |
| Site | : ---- | No. of samples received | : 11 |
| Quote number | : ---- | No. of samples analysed | : 11 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|---|----------------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA010P: Conductivity by PC Titrator (QC Lot: 147320) | | | | | | | | | |
| ES1525544-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7430 | 7420 | 0.135 | 0% - 20% |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 147460) | | | | | | | | | |
| ES1525544-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% |
| ES1525544-010 | WK14 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% |
| EP080: BTEXN (QC Lot: 147341) | | | | | | | | | |
| ES1525544-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 16 | 16 | 0.00 | 0% - 50% |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 4 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 18 | 18 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1525544-006 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 17 | 16 | 0.00 | 0% - 50% |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 4 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 19 | 18 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 147320) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 104 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 147460) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 84.0 | 72 | 126 |
| EP080: BTEXN (QCLot: 147341) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 98.6 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 91.0 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 90.8 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 97.5 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 93.6 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 96.6 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 147341) | | | | | | | |
| ES1525544-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 91.2 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 95.3 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 97.6 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 96.5 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 96.2 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 89.6 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525544 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 07-Jul-2015 |
| Site | : ---- | Issue Date | : 07-Jul-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 11 |
| Order number | : ---- | No. of samples analysed | : 11 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 2 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 11 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 11 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 11 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 06-Jul-2015 | ---- | ---- | ---- | 07-Jul-2015 | 03-Aug-2015 | ✓ |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 07-Jul-2015 | ---- | ---- | ---- | 07-Jul-2015 | 04-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 | 06-Jul-2015 | 07-Jul-2015 | 20-Jul-2015 | ✓ | 07-Jul-2015 | 20-Jul-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 | 07-Jul-2015 | 07-Jul-2015 | 21-Jul-2015 | ✓ | 07-Jul-2015 | 21-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 2 | 0 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 11 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 11 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 11 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1525652 | Page | : 1 of 17 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 08-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 08-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 02-Sep-2015 |
| Site | : ---- | No. of samples received | : 6 |
| Quote number | : ---- | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Alex Rossi | Organic Chemist | Sydney Organics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005P: pH by PC Titrator (QC Lot: 148741) | | | | | | | | | |
| ES1525596-001 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 8.15 | 8.21 | 0.733 | 0% - 20% |
| ES1525652-005 | WK14 | EA005-P: pH Value | ---- | 0.01 | pH Unit | 7.74 | 7.76 | 0.258 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 148740) | | | | | | | | | |
| ES1525621-004 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 1140 | 1130 | 0.788 | 0% - 20% |
| ES1525618-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 1300 | 1310 | 0.688 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 148743) | | | | | | | | | |
| ES1525652-005 | WK14 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 10600 | 10700 | 1.04 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 149055) | | | | | | | | | |
| ES1525648-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 627 | 617 | 1.61 | 0% - 20% |
| ES1525665-003 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 40900 | 39700 | 3.13 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 149056) | | | | | | | | | |
| ES1525648-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 91 | 90 | 0.00 | 0% - 50% |
| ES1525665-003 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | <5 | 0.00 | No Limit |
| ED009: Anions (QC Lot: 149830) | | | | | | | | | |
| ES1525651-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 260 | 261 | 0.215 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 148742) | | | | | | | | | |
| ES1525684-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 55 | 53 | 3.08 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 55 | 53 | 3.08 | 0% - 20% |
| ES1525652-005 | WK14 | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 4360 | 4360 | 0.00 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 4360 | 4360 | 0.00 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 148929) | | | | | | | | | |
| ES1525624-002 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 3210 | 3190 | 0.564 | 0% - 20% |
| ES1525652-001 | AST2 | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| ED045G: Chloride by Discrete Analyser (QC Lot: 148928) | | | | | | | | | |
| ES1525624-002 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 8330 | 8510 | 2.21 | 0% - 20% |
| ES1525652-001 | AST2 | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 621 | 618 | 0.381 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 150201) | | | | | | | | | |
| ES1525652-003 | WK12 | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 24 | 24 | 0.00 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 4 | 4 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 14 | 13 | 0.00 | 0% - 50% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 150201) - continued | | | | | | | | | |
| ES1525652-003 | WK12 | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 1840 | 1740 | 5.40 | 0% - 20% |
| ES1525640-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 59 | 59 | 0.00 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 32 | 31 | 4.37 | 0% - 20% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 3 | 2 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 65 | 64 | 0.00 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 150200) | | | | | | | | | |
| ES1525652-003 | WK12 | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0010 | <0.0010 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 5.58 | 5.47 | 1.99 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | 0.032 | 0.034 | 5.33 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.064 | 0.064 | 0.00 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.050 | <0.050 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 5.03 | 4.76 | 5.47 | 0% - 50% | | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 5.72 | 5.89 | 2.91 | 0% - 50% | | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <1.0 | <1.0 | 0.00 | No Limit | | |
| ES1525640-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.118 | 0.116 | 0.940 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | 0.001 | 0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.006 | 0.007 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 150200) - continued | | | | | | | | | |
| ES1525640-001 | Anonymous | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 0.05 | 0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.1 | 0.1 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 150202) | | | | | | | | | |
| ES1525640-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.608 | 0.610 | 0.447 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | 0.002 | 0.001 | 0.00 | No Limit |
| ES1525699-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.087 | 0.086 | 0.00 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 150199) | | | | | | | | | |
| ES1525610-002 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1525640-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 148931) | | | | | | | | | |
| ES1525652-001 | AST2 | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 21.1 | 20.9 | 0.969 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 149017) | | | | | | | | | |
| ES1525652-001 | AST2 | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 148739) | | | | | | | | | |
| ES1525618-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 1.3 | 1.4 | 7.46 | 0% - 50% |
| ES1525652-005 | WK14 | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 1.0 | 0.9 | 0.00 | No Limit |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 149348) | | | | | | | | | |
| ES1525664-004 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 148927) | | | | | | | | | |
| ES1525624-002 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 149347) | | | | | | | | | |
| ES1525652-005 | WK14 | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.01 | <0.01 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.04 | 0.04 | 0.00 | No Limit |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 149341) | | | | | | | | | |
| ES1525609-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 2.0 | 1.8 | 9.46 | 0% - 20% |
| ES1525652-006 | QA4 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 5.4 | 5.3 | 0.00 | 0% - 20% |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 149340) | | | | | | | | | |
| ES1525609-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.47 | 0.45 | 3.51 | 0% - 20% |
| ES1525652-006 | QA4 | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 2.14 | 2.10 | 1.87 | 0% - 20% |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 148930) | | | | | | | | | |

Page : 6 of 17
 Work Order : ES1525652 Amendment 1
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 148930) - continued | | | | | | | | | |
| ES1525652-001 | AST2 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.05 | 0.04 | 0.00 | No Limit |
| EP005: Total Organic Carbon (TOC) (QC Lot: 149660) | | | | | | | | | |
| ES1525477-001 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | 5000 | 6 | 0.00 | No Limit |
| ES1525577-017 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | 26 | 26 | 0.00 | 0% - 20% |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 149421) | | | | | | | | | |
| ES1525652-001 | AST2 | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | 119 | 120 | 0.00 | 0% - 50% |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 2660 | 2580 | 3.02 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | 18 | 18 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 149413) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074B: Oxygenated Compounds (QC Lot: 149413) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074B: Oxygenated Compounds (QC Lot: 149413) - continued | | | | | | | | | |
| ES1525652-001 | AST2 | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 149413) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 149413) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 149413) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 149413) - continued | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 149413) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|-------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 149413) - continued | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074G: Trihalomethanes (QC Lot: 149413) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 149414) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | 50 | 60 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 149414) | | | | | | | | | |
| ES1525707-003 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1525652-001 | AST2 | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | 50 | 60 | 0.00 | No Limit |
| EP262: Ethanolamines (QC Lot: 154733) | | | | | | | | | |
| ES1525652-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|--------|-------|--------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 148740) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 | |
| EA010P: Conductivity by PC Titrator (QCLot: 148743) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 149055) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 97.6 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 101 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 149056) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 92.7 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 91.5 | 84 | 110 | |
| ED009: Anions (QCLot: 149830) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 106 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 148742) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 102 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 148929) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 105 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 148928) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 109 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 107 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 150201) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 101 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 102 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 102 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 103 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 150200) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 90.1 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 90.2 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.4 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.9 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 88.4 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 92.2 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 91.7 | 85 | 115 | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 85.1 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|---|------------|--------|------|-----------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | Result | Spike | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 150200) - continued | | | | | | | | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.2 | 85 | 115 |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 89.8 | 85 | 115 |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 101 | 85 | 115 |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.7 | 85 | 115 |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 89.0 | 85 | 115 |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.4 | 85 | 115 |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 88.0 | 85 | 115 |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 95.5 | 85 | 115 |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.3 | 85 | 115 |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 89.7 | 85 | 115 |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 94.5 | 85 | 115 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 150202) | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.7 | 80 | 112 |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- |
| EG035F: Dissolved Mercury by FIMS (QCLot: 150199) | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 88.1 | 78 | 114 |
| EG052G: Silica by Discrete Analyser (QCLot: 148931) | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 103 | 94 | 114 |
| EK010/011: Chlorine (QCLot: 149017) | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- |
| EK040P: Fluoride by PC Titrator (QCLot: 148739) | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 100 | 75 | 119 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 149348) | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 101 | 90 | 114 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 148927) | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 97.2 | 82 | 114 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 149347) | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 102 | 91 | 113 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 149341) | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 91.5 | 69 | 101 |
| | | | | <0.1 | 1 mg/L | 93.6 | 70 | 118 |
| | | | | <0.1 | 5 mg/L | 101 | 74 | 118 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 149340) | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 92.1 | 71 | 101 |
| | | | | <0.01 | 0.442 mg/L | 95.3 | 72 | 108 |
| | | | | <0.01 | 1 mg/L | 104 | 78 | 118 |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|------|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 148930) | | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 105 | 85 | 117 | |
| EP005: Total Organic Carbon (TOC) (QCLot: 149660) | | | | | | | | | |
| EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | 10 mg/L | 91.4 | 76 | 120 | |
| EP020: Oil and Grease (O&G) (QCLot: 151311) | | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 114 | 80 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 149421) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 108 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 113 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 100 | 87 | 111 | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 103 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 88.5 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 108 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 109 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 149413) | | | | | | | | | |
| EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 101 | 71 | 121 | |
| EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 99.8 | 70 | 122 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 101 | 75 | 121 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 99.6 | 62 | 126 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 99.4 | 67 | 123 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 99.1 | 67 | 123 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 99.8 | 69 | 123 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 101 | 74 | 118 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 100 | 70 | 122 | |
| EP074B: Oxygenated Compounds (QCLot: 149413) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 90.0 | 74 | 130 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 86.9 | 65 | 137 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 87.5 | 61 | 139 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 93.4 | 61 | 134 | |
| EP074C: Sulfonated Compounds (QCLot: 149413) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 95.9 | 73 | 127 | |
| EP074D: Fumigants (QCLot: 149413) | | | | | | | | | |
| EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 94.7 | 69 | 117 | |
| EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 102 | 76 | 120 | |
| EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 100 | 61 | 119 | |
| EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 102 | 62 | 120 | |
| EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 99.3 | 61 | 119 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 149413) | | | | | | | | | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 149413) - continued | | | | | | | | | |
| EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 96.7 | 66 | 114 | |
| EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 98.7 | 61 | 119 | |
| EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 70 | 124 | |
| EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 97.1 | 75 | 123 | |
| EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 101 | 75 | 119 | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 98.0 | 69 | 123 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 101 | 73 | 119 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 97.3 | 74 | 128 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 91.3 | 66 | 136 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 95.4 | 78 | 122 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 94.0 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 91.1 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 98.5 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 95.4 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 93.5 | 67 | 130 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 101 | 77 | 117 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 87.8 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 100 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 89.7 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 101 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | 76.3 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 94.3 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 100 | 72 | 124 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 99.3 | 71 | 119 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 91.9 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 99.7 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 95.2 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 94.3 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 149413) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 96.2 | 67 | 125 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 99.5 | 60 | 126 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 99.4 | 77 | 117 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 99.0 | 74 | 120 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 99.4 | 72 | 120 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 102 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 99.9 | 71 | 121 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 98.1 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 98.3 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 149413) | | | | | | | | | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|----------------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074G: Trihalomethanes (QCLot: 149413) - continued | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 95.0 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 97.3 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 101 | 76 | 118 | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 93.6 | 65 | 115 | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 148772) | | | | | | | | | |
| EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 75.2 | 50 | 108 | |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 63.0 | 59 | 118 | |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 78.5 | 59 | 122 | |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 66.4 | 60 | 112 | |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 73.2 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | 64.0 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 65.5 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 79.3 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 64.1 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 67.3 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 62.0 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 36.8 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 148772) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 63.1 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 64.4 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 81.1 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 70.7 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 69.7 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | 5 µg/L | 74.1 | 62 | 119 | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 88.1 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 80.7 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 67.3 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 82.5 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | # 62.2 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 66.9 | 64 | 115 | |
| EP075(SIM): Indeno(1,2,3-cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 85.6 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 68.0 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 76.8 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 74.1 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 148773) | | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 93.6 | 59 | 129 | |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 90.0 | 71 | 131 | |



Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|------------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 148773) - continued | | | | | | | | | |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 99.8 | 62 | 120 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 149414) | | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 77.5 | 75 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 148773) | | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 86.9 | 59 | 131 | |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 92.2 | 74 | 138 | |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 72.8 | 67 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 149414) | | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 79.2 | 75 | 127 | |
| EP262: Ethanolamines (QCLot: 154733) | | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 93.3 | 50 | 130 | |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 74.6 | 50 | 130 | |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | | |
|--|------------------|--|------------|--------------------------|-------------------|-----|---------------------|--|
| | | | | Spike Concentration | Spike Recovery(%) | | Recovery Limits (%) | |
| | | | | | MS | Low | High | |
| ED009: Anions (QCLot: 149830) | | | | | | | | |
| ES1525651-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | # Not Determined | 70 | 130 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 148929) | | | | | | | | |
| ES1525624-002 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | # Not Determined | 70 | 130 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 148928) | | | | | | | | |
| ES1525624-002 | Anonymous | ED045G: Chloride | 16887-00-6 | 250 mg/L | # Not Determined | 70 | 130 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 150200) | | | | | | | | |
| ES1525610-002 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 108 | 70 | 130 | |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 104 | 70 | 130 | |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 92.2 | 70 | 130 | |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 102 | 70 | 130 | |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 87.0 | 70 | 130 | |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 102 | 70 | 130 | |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 83.4 | 70 | 130 | |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 150200) - continued | | | | | | | |
| ES1525610-002 | Anonymous | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 77.3 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 85.2 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 94.6 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 78.3 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 99.3 | 70 | 130 |
| EG035F: Dissolved Mercury by FIMS (QCLot: 150199) | | | | | | | |
| ES1525610-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 75.3 | 70 | 130 |
| EG052G: Silica by Discrete Analyser (QCLot: 148931) | | | | | | | |
| ES1525652-001 | AST2 | EG052G: Reactive Silica | ---- | 5 mg/L | # Not Determined | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 148739) | | | | | | | |
| ES1525320-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 99.2 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 149348) | | | | | | | |
| ES1525652-001 | AST2 | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 94.0 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 148927) | | | | | | | |
| ES1525624-002 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 103 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 149347) | | | | | | | |
| ES1525652-001 | AST2 | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 102 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 149341) | | | | | | | |
| ES1525610-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 96.6 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 149340) | | | | | | | |
| ES1525610-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 104 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 148930) | | | | | | | |
| ES1525652-001 | AST2 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 96.0 | 70 | 130 |
| EP005: Total Organic Carbon (TOC) (QCLot: 149660) | | | | | | | |
| ES1525477-002 | Anonymous | EP005: Total Organic Carbon | ---- | 100 mg/L | 94.5 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 149421) | | | | | | | |
| ES1525652-002 | WK11 | EP033: Butane | 106-97-8 | 102.18 µg/L | 90.1 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 90.1 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | # Not Determined | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 97.8 | 70 | 130 |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | # Not Determined | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 125 | 70 | 130 |



Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|--|------------------|---------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 149421) - continued | | | | | | | |
| ES1525652-002 | WK11 | EP033: Propene | 115-07-1 | 73.97 µg/L | 106 | 70 | 130 |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 149413) | | | | | | | |
| ES1525652-001 | AST2 | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 83.0 | 70 | 130 |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 95.5 | 70 | 130 |
| EP074F: Halogenated Aromatic Compounds (QCLot: 149413) | | | | | | | |
| ES1525652-001 | AST2 | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 98.7 | 70 | 130 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 149414) | | | | | | | |
| ES1525652-001 | AST2 | EP080: C6 - C9 Fraction | ---- | 325 µg/L | 110 | 70 | 130 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 149414) | | | | | | | |
| ES1525652-001 | AST2 | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 107 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 154733) | | | | | | | |
| ES1525652-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 71.4 | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 71.7 | 50 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|--|-------------------------|---------------------------------|
| Work Order | : ES1525652 | Page | : 1 of 12 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 08-Jul-2015 |
| Site | : ---- | Issue Date | : 02-Sep-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 6 |
| Order number | : ---- | No. of samples analysed | : 6 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- Laboratory Control outliers exist - please see following pages for full details.
- Matrix Spike outliers exist - please see following pages for full details.
- Surrogate recovery outliers exist for all regular sample matrices - please see following pages for full details.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|--|----------------------|------------------|--------------------------------|------------|----------------|---------|---|
| Laboratory Control Spike (LCS) Recoveries | | | | | | | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | QC-148772-002 | ---- | Fluoranthene | 206-44-0 | 62.2 % | 64-118% | Recovery less than lower control limit |
| Matrix Spike (MS) Recoveries | | | | | | | |
| ED009: Anions | ES1525651--001 | Anonymous | Chloride | 16887-00-6 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | ES1525624--002 | Anonymous | Sulfate as SO4 - Turbidimetric | 14808-79-8 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| ED045G: Chloride by Discrete Analyser | ES1525624--002 | Anonymous | Chloride | 16887-00-6 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EG052G: Silica by Discrete Analyser | ES1525652--001 | AST2 | Reactive Silica | ---- | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EP033: C1 - C4 Hydrocarbon Gases | ES1525652--002 | WK11 | Ethane | 74-84-0 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EP033: C1 - C4 Hydrocarbon Gases | ES1525652--002 | WK11 | Methane | 74-82-8 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Regular Sample Surrogates

Sub-Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|-----------------------------|----------------------|------------------|-----------------|------------|-------|----------|--|
| Samples Submitted | | | | | | | |
| EP075(SIM)T: PAH Surrogates | ES1525652-002 | WK11 | 4-Terphenyl-d14 | 1718-51-0 | 116 % | 32-112 % | Recovery greater than upper data quality objective |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 10 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 7 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 10 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 7 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA005P: pH by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA005-P) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 08-Jul-2015 | ✓ |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) WK11, WK13, QA4 WK12, WK14, | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 05-Aug-2015 | ✓ |
| EA015: Total Dissolved Solids | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 15-Jul-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 15-Jul-2015 | ✓ |
| ED009: Anions | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 05-Aug-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 22-Jul-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 05-Aug-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 05-Aug-2015 | ✓ |
| ED093F: Dissolved Major Cations | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 05-Aug-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 04-Jan-2016 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 04-Jan-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 14-Jul-2015 | 05-Aug-2015 | ✓ |
| EG052G: Silica by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 05-Aug-2015 | ✓ |
| EK010/011: Chlorine | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 08-Jul-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EK040P: Fluoride by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 05-Aug-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 05-Aug-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 10-Jul-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 05-Aug-2015 | ✓ |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | 09-Jul-2015 | 05-Aug-2015 | ✓ | 09-Jul-2015 | 05-Aug-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | 09-Jul-2015 | 05-Aug-2015 | ✓ | 09-Jul-2015 | 05-Aug-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 10-Jul-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 05-Aug-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|--|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 10-Jul-2015 | 05-Aug-2015 | ✓ | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 22-Jul-2015 | ✓ | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | 09-Jul-2015 | 15-Jul-2015 | ✓ | 10-Jul-2015 | 18-Aug-2015 | ✓ | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | 09-Jul-2015 | 22-Jul-2015 | ✓ | 09-Jul-2015 | 22-Jul-2015 | ✓ | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | 09-Jul-2015 | 15-Jul-2015 | ✓ | 10-Jul-2015 | 18-Aug-2015 | ✓ | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | 09-Jul-2015 | 22-Jul-2015 | ✓ | 09-Jul-2015 | 22-Jul-2015 | ✓ | |
| EP262: Ethanolamines | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) AST2, WK12, WK14, WK11, WK13, QA4 | 08-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 15-Jul-2015 | ✓ | |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 10 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 7 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 10 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH by PC Titrator | EA005-P | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 9 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | EP071 | 0 | 7 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 16 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 6 | 16.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 6 | 16.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 6 | 16.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 6 | 16.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 6 | 16.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 4.76 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 7 | 14.29 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 7 | 14.29 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 10 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 7 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH by PC Titrator | EA005-P | WATER | In house: Referenced to APHA 4500 H+ B. This procedure determines pH of water samples by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525654 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 08-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 08-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 08-Jul-2015 |
| Site | : ---- | No. of samples received | : 6 |
| Quote number | : ---- | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 148689) | | | | | | | | | | |
| ES1525654-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7140 | 7230 | 1.27 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 148665) | | | | | | | | | | |
| ES1525654-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 148540) | | | | | | | | | | |
| ES1525654-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 17 | 17 | 0.00 | 0% - 50% | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 5 | 4 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 20 | 19 | 7.52 | 0% - 50% | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 148689) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 104 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 148665) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 100 | 72 | 126 |
| EP080: BTEXN (QCLot: 148540) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 93.4 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 93.8 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 96.9 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 87.8 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 93.8 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 95.8 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | | |
| EP080: BTEXN (QCLot: 148540) | | | | | | | | |
| ES1525654-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 88.1 | 70 | 130 | |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 91.0 | 70 | 130 | |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 89.9 | 70 | 130 | |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 108 | 70 | 130 | |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 91.8 | 70 | 130 | |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 87.2 | 70 | 130 | |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525654 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 08-Jul-2015 |
| Site | : ---- | Issue Date | : 08-Jul-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 6 |
| Order number | : ---- | No. of samples analysed | : 6 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 08-Jul-2015 | ---- | ---- | ---- | 08-Jul-2015 | 05-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK11, WK12, WK13, WK14, QA4 | 08-Jul-2015 | 08-Jul-2015 | 22-Jul-2015 | ✓ | 08-Jul-2015 | 22-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Regular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525742 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 09-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 09-Jul-2015 |
| Sampler | : ---- | Issue Date | : 09-Jul-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|---------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Edwandy Fadjar | Organic Coordinator | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :

- Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
- CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
- LOR = Limit of reporting
- RPD = Relative Percentage Difference
- # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 149828) | | | | | | | | | | |
| ES1525742-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7350 | 7420 | 0.961 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 149971) | | | | | | | | | | |
| ES1525742-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 149767) | | | | | | | | | | |
| ES1525742-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 10 | 10 | 0.00 | 0% - 50% | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 3 | 3 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 11 | 11 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 149828) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 104 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 149971) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 96.6 | 72 | 126 |
| EP080: BTEXN (QCLot: 149767) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 84.6 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 83.6 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 79.9 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 95.1 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 90.2 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 78.8 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 149767) | | | | | | | |
| ES1525742-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 74.8 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 77.5 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 74.9 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 89.8 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 81.4 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 74.9 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525742 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 09-Jul-2015 |
| Site | : ---- | Issue Date | : 09-Jul-2015 |
| Sampler | : ---- | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 09-Jul-2015 | ---- | ---- | ---- | 09-Jul-2015 | 06-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 WK11, WK13, | 09-Jul-2015 | 09-Jul-2015 | 23-Jul-2015 | ✓ | 09-Jul-2015 | 23-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Regular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525865 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 10-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 10-Jul-2015 |
| Sampler | : ---- | Issue Date | : 10-Jul-2015 |
| Site | : ---- | No. of samples received | : 6 |
| Quote number | : ---- | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 151221) | | | | | | | | | | |
| ES1525865-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7430 | 7580 | 2.03 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 151167) | | | | | | | | | | |
| ES1525865-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 151018) | | | | | | | | | | |
| ES1525865-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 17 | 16 | 0.00 | 0% - 50% | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 4 | 4 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 19 | 19 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 151221) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 103 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 151167) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 97.4 | 72 | 126 |
| EP080: BTEXN (QCLot: 151018) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 99.5 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 94.7 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 94.4 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 92.8 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 96.1 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 98.8 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 151018) | | | | | | | |
| ES1525865-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 97.7 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 94.2 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 98.0 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 86.3 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 99.4 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 101 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525865 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 10-Jul-2015 |
| Site | : ---- | Issue Date | : 10-Jul-2015 |
| Sampler | : ---- | No. of samples received | : 6 |
| Order number | : ---- | No. of samples analysed | : 6 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2, QA5 | 10-Jul-2015 | ---- | ---- | ---- | 10-Jul-2015 | 07-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK11, WK12, WK13, WK14, QA5 | 10-Jul-2015 | 10-Jul-2015 | 24-Jul-2015 | ✓ | 10-Jul-2015 | 24-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1525880 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 13-Jul-2015 |
| Site | : ---- | Issue Date | : 13-Jul-2015 |
| Sampler | : ---- | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 4 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Dissolved Sulfide as S2- | 1 | 0 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 11-Jul-2015 | ---- | ---- | ---- | 13-Jul-2015 | 08-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK11, WK12, WK13 | 11-Jul-2015 | 13-Jul-2015 | 25-Jul-2015 | ✓ | 13-Jul-2015 | 25-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 4 | 25.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 4 | 25.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Sulfide as S2- | EK085F | 1 | 0 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 4 | 25.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 4 | 25.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525880 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 13-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 12-Jul-2015 |
| Sampler | : ---- | Issue Date | : 13-Jul-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 4 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 152271) | | | | | | | | | | |
| ES1525880-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7660 | 7690 | 0.404 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 152752) | | | | | | | | | | |
| ES1525880-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 152107) | | | | | | | | | | |
| ES1525880-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 10 | 10 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 3 | 3 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 12 | 11 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 152271) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 108 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 152752) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 116 | 72 | 126 |
| EP080: BTEXN (QCLot: 152107) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 90.7 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 92.7 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 92.3 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 99.5 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 89.8 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 88.1 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 152107) | | | | | | | |
| ES1525880-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 75.0 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 79.2 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 76.8 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 94.0 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 77.0 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 77.7 | 70 | 130 |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526014 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 14-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 14-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 14-Jul-2015 |
| Site | : ---- | No. of samples received | : 8 |
| Quote number | : ---- | No. of samples analysed | : 8 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 153990) | | | | | | | | | | |
| ES1526014-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7600 | 7530 | 0.957 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 153927) | | | | | | | | | | |
| ES1526014-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 153830) | | | | | | | | | | |
| ES1526014-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 14 | 14 | 0.00 | 0% - 50% | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 4 | 4 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 16 | 16 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 153990) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 153927) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 90.4 | 72 | 126 |
| EP080: BTEXN (QCLot: 153830) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 100 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 102 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 102 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 106 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 106 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 105 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 153830) | | | | | | | |
| ES1526014-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 90.6 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 104 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 104 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 99.9 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 106 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 98.4 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526014 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 14-Jul-2015 |
| Site | : ---- | Issue Date | : 14-Jul-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 8 |
| Order number | : ---- | No. of samples analysed | : 8 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 8 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 8 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 8 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 13-Jul-2015 | ---- | ---- | ---- | 14-Jul-2015 | 10-Aug-2015 | ✓ |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 14-Jul-2015 | ---- | ---- | ---- | 14-Jul-2015 | 11-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK11, WK12, WK13, QA6 | 13-Jul-2015 | 14-Jul-2015 | 27-Jul-2015 | ✓ | 14-Jul-2015 | 27-Jul-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK13 | 14-Jul-2015 | 14-Jul-2015 | 28-Jul-2015 | ✓ | 14-Jul-2015 | 28-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 8 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 8 | 12.50 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 8 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 8 | 12.50 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 8 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 8 | 12.50 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526117 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523A | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 15-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 15-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 15-Jul-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 155115) | | | | | | | | | | |
| ES1526117-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7490 | 7570 | 1.10 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 155078) | | | | | | | | | | |
| ES1526117-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 154969) | | | | | | | | | | |
| ES1526117-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 10 | 10 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 4 | 4 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 13 | 12 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: WATER

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 155115) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 107 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 155078) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 96.8 | 72 | 126 |
| EP080: BTEXN (QCLot: 154969) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 82.5 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 90.4 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 91.9 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 84.2 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 97.9 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 91.6 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | | |
| EP080: BTEXN (QCLot: 154969) | | | | | | | | |
| ES1526117-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 81.4 | 70 | 130 | |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 95.2 | 70 | 130 | |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 98.5 | 70 | 130 | |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 98.0 | 70 | 130 | |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 105 | 70 | 130 | |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 88.5 | 70 | 130 | |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526117 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523A | Date Samples Received | : 15-Jul-2015 |
| Site | : ---- | Issue Date | : 15-Jul-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|----------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 12-Aug-2015 | ✓ | |
| EP080: BTEXN | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | 15-Jul-2015 | 29-Jul-2015 | ✓ | 15-Jul-2015 | 29-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526118 | Page | : 1 of 17 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 15-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 15-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 02-Sep-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Alex Rossi | Organic Chemist | Sydney Organics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005P: pH by PC Titrator (QC Lot: 155203) | | | | | | | | | |
| ES1526093-001 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 7.76 | 7.88 | 1.53 | 0% - 20% |
| ES1526091-001 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 6.95 | 6.95 | 0.00 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 155201) | | | | | | | | | |
| ES1526093-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 291 | 291 | 0.00 | 0% - 20% |
| ES1526091-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 1910 | 1900 | 0.923 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 155204) | | | | | | | | | |
| ES1526118-002 | WK11 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 11600 | 11600 | 0.357 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 156152) | | | | | | | | | |
| ES1526112-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 1680 | 1760 | 4.52 | 0% - 20% |
| ES1526118-002 | WK11 | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 6490 | 6620 | 1.91 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 156153) | | | | | | | | | |
| ES1526112-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 302 | 268 | 12.0 | 0% - 20% |
| ES1526118-002 | WK11 | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 33 | 33 | 0.00 | No Limit |
| ED009: Anions (QC Lot: 155489) | | | | | | | | | |
| ES1526089-009 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 11.3 | 11.4 | 1.41 | 0% - 20% |
| ES1526166-006 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 8.97 | 8.89 | 0.974 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 155200) | | | | | | | | | |
| ES1526118-002 | WK11 | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 6180 | 6200 | 0.388 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 6180 | 6200 | 0.388 | 0% - 20% |
| ES1526091-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 666 | 666 | 0.00 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 666 | 666 | 0.00 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 155178) | | | | | | | | | |
| ES1526052-006 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 25 | 26 | 0.00 | 0% - 20% |
| ES1526051-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 28 | 27 | 0.00 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 155182) | | | | | | | | | |
| ES1526118-002 | WK11 | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <10 | <10 | 0.00 | No Limit |
| ED045G: Chloride by Discrete Analyser (QC Lot: 155177) | | | | | | | | | |
| ES1526051-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 100 | 116 | 14.8 | 0% - 20% |
| ES1526118-002 | WK11 | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 587 | 594 | 1.07 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 157258) | | | | | | | | | |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 157258) - continued | | | | | | | | | |
| ES1526237-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 21 | 20 | 0.00 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 15 | 15 | 0.00 | 0% - 50% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 3 | 3 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 32 | 32 | 0.00 | 0% - 20% |
| ES1526066-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 14 | 14 | 0.00 | 0% - 50% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 7 | 8 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 3 | 3 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 4 | 4 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 157255) | | | | | | | | | |
| ES1526237-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.033 | 0.032 | 3.22 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.003 | 0.003 | 0.00 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.014 | <0.005 | 94.0 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | 0.06 | 0.06 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 0.22 | 0.23 | 0.00 | 0% - 20% |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.2 | 0.1 | 0.00 | No Limit |
| ES1526066-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.030 | 0.030 | 0.00 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | 0.004 | 0.004 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.002 | 0.002 | 0.00 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 157255) - continued | | | | | | | | | |
| ES1526066-001 | Anonymous | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.054 | 0.054 | 0.00 | 0% - 20% |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.005 | 0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | 0.02 | 0.02 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 0.11 | 0.11 | 0.00 | No Limit |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 157256) | | | | | | | | | |
| ES1526066-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.026 | 0.026 | 0.00 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 157257) | | | | | | | | | |
| ES1526066-002 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1526239-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 155181) | | | | | | | | | |
| ES1526118-002 | WK11 | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 35.2 | 34.0 | 3.46 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 155057) | | | | | | | | | |
| ES1526118-001 | AST2 | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 155202) | | | | | | | | | |
| ES1526118-002 | WK11 | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 1.3 | 1.3 | 0.00 | 0% - 50% |
| ES1526091-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.6 | 0.6 | 0.00 | No Limit |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 155963) | | | | | | | | | |
| ES1526112-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.13 | 0.12 | 9.19 | 0% - 50% |
| ES1526118-001 | AST2 | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 155179) | | | | | | | | | |
| ES1526118-005 | QA7 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1526118-002 | WK11 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 155964) | | | | | | | | | |
| ES1526112-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 1.60 | 1.58 | 1.43 | 0% - 20% |
| ES1526118-001 | AST2 | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.04 | 0.04 | 0.00 | No Limit |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 155953) | | | | | | | | | |
| ES1526112-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 1.7 | 2.4 | 32.0 | 0% - 50% |
| ES1526118-002 | WK11 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 8.6 | 8.5 | 0.00 | 0% - 20% |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 155952) | | | | | | | | | |
| ES1526112-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 1.23 | 1.45 | 16.0 | 0% - 20% |
| ES1526118-002 | WK11 | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 3.15 | 3.12 | 0.930 | 0% - 20% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 155175) | | | | | | | | | |
| ES1526092-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1526051-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 156157) | | | | | | | | | |
| ES1526126-009 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | 88 | 91 | 3.22 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 1980 | 2110 | 6.43 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | 14 | 14 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 155023) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074B: Oxygenated Compounds (QC Lot: 155023) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074B: Oxygenated Compounds (QC Lot: 155023) - continued | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 155023) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 155023) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 155023) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 155023) - continued | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 155023) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|-------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 155023) - continued | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| EP074G: Trihalomethanes (QC Lot: 155023) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 155022) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | 50 | 50 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 155022) | | | | | | | | | |
| ES1526060-001 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1526118-001 | AST2 | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | 50 | 50 | 0.00 | No Limit |
| EP262: Ethanolamines (QC Lot: 155634) | | | | | | | | | |
| EB1522915-001 | Anonymous | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | 0.010 | 10 | 0.00 | 0% - 50% |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | 0.010 | 13 | 19.7 | 0% - 50% |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-------|-------|--------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 155201) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 | |
| EA010P: Conductivity by PC Titrator (QCLot: 155204) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 102 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 156152) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 95.7 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 111 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 156153) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 94.0 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 92.0 | 84 | 110 | |
| ED009: Anions (QCLot: 155489) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 103 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 155200) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 103 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 155178) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 114 | 86 | 122 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 155182) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 111 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 155177) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 110 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 84.7 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 157258) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 108 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 106 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 107 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 109 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 157255) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 95.2 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 85.4 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 105 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 97.4 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.6 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 108 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|---|------------|--------|------|-----------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | Result | Spike | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 157255) - continued | | | | | | | | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 96.6 | 85 | 115 |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.5 | 85 | 115 |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 103 | 85 | 115 |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 102 | 85 | 115 |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 104 | 85 | 115 |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.8 | 85 | 115 |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.6 | 85 | 115 |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 98.8 | 85 | 115 |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 106 | 85 | 115 |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 104 | 85 | 115 |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 95.9 | 85 | 115 |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 93.0 | 85 | 115 |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 105 | 85 | 115 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 157256) | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 102 | 80 | 112 |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- |
| EG035F: Dissolved Mercury by FIMS (QCLot: 157257) | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 87.5 | 78 | 114 |
| EG052G: Silica by Discrete Analyser (QCLot: 155181) | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 109 | 94 | 114 |
| EK010/011: Chlorine (QCLot: 155057) | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- |
| EK040P: Fluoride by PC Titrator (QCLot: 155202) | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 93.0 | 75 | 119 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 155963) | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 105 | 90 | 114 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 155179) | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 93.4 | 82 | 114 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 155964) | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 97.6 | 91 | 113 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 155953) | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 87.9 | 69 | 101 |
| | | | | <0.1 | 1 mg/L | 91.0 | 70 | 118 |
| | | | | <0.1 | 5 mg/L | 108 | 74 | 118 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 155952) | | | | | | | | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|------|------|------------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 155952) - continued | | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 92.4 | 71 | 101 | |
| | | | | <0.01 | 0.442 mg/L | 94.2 | 72 | 108 | |
| | | | | <0.01 | 1 mg/L | 109 | 78 | 118 | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 155175) | | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 108 | 85 | 117 | |
| EP020: Oil and Grease (O&G) (QCLot: 155526) | | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 110 | 80 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 156157) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 112 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 114 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 101 | 87 | 111 | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 105 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 88.1 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 110 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 112 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 155023) | | | | | | | | | |
| EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 87.5 | 71 | 121 | |
| EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 87.9 | 70 | 122 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 91.4 | 75 | 121 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 86.6 | 62 | 126 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 82.9 | 67 | 123 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 88.3 | 67 | 123 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 87.0 | 69 | 123 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 87.6 | 74 | 118 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 84.8 | 70 | 122 | |
| EP074B: Oxygenated Compounds (QCLot: 155023) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 83.3 | 74 | 130 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 85.3 | 65 | 137 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 80.9 | 61 | 139 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 82.4 | 61 | 134 | |
| EP074C: Sulfonated Compounds (QCLot: 155023) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 84.2 | 73 | 127 | |
| EP074D: Fumigants (QCLot: 155023) | | | | | | | | | |
| EP074: 1.2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 88.5 | 69 | 117 | |
| EP074: 1.2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 83.9 | 76 | 120 | |
| EP074: 2.2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 78.1 | 61 | 119 | |
| EP074: cis-1.3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 66.3 | 62 | 120 | |
| EP074: trans-1.3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 67.4 | 61 | 119 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 155023) | | | | | | | | | |
| EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 88.3 | 66 | 114 | |
| EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 84.5 | 61 | 119 | |
| EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 86.3 | 70 | 124 | |
| EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 92.0 | 75 | 123 | |
| EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 83.6 | 75 | 119 | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 85.9 | 69 | 123 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 85.3 | 73 | 119 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 102 | 74 | 128 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 77.9 | 66 | 136 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 98.3 | 78 | 122 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 92.0 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 84.1 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 93.7 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 83.6 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 70.1 | 67 | 130 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 91.5 | 77 | 117 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 81.5 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 61.3 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 102 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | 76.6 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 89.0 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 90.7 | 72 | 124 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 87.2 | 71 | 119 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 83.5 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 89.6 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 96.5 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 118 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 155023) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 96.5 | 67 | 125 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 92.8 | 60 | 126 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 91.6 | 77 | 117 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 90.0 | 74 | 120 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 90.7 | 72 | 120 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 85.8 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 85.7 | 71 | 121 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 89.8 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 93.7 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 155023) | | | | | | | | | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|----------------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074G: Trihalomethanes (QCLot: 155023) - continued | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 82.0 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 97.5 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 87.9 | 76 | 118 | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 88.1 | 65 | 115 | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 155459) | | | | | | | | | |
| EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 80.1 | 50 | 108 | |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 67.5 | 59 | 118 | |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 72.6 | 59 | 122 | |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 70.0 | 60 | 112 | |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 77.9 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | # 63.4 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 66.0 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 66.3 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 71.2 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 75.6 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 39.1 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 37.1 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 155459) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 75.7 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 81.1 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 86.9 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 77.1 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 89.3 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | 5 µg/L | 88.5 | 62 | 119 | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 83.2 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 93.8 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 99.7 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 87.2 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | 88.8 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 80.2 | 64 | 115 | |
| EP075(SIM): Indeno(1,2,3-cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 88.0 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 66.5 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 82.7 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 90.0 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 155022) | | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 80.5 | 75 | 127 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 155458) | | | | | | | | | |



Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | | Spike Concentration | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | | LCS | Low | High |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 155458) - continued | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 104 | 59 | 129 |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 97.8 | 71 | 131 |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 109 | 62 | 120 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 155022) | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 83.2 | 75 | 127 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 155458) | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 108 | 59 | 131 |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 96.8 | 74 | 138 |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 108 | 67 | 127 |
| EP262: Ethanolamines (QCLot: 155634) | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 71.2 | 50 | 130 |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 97.9 | 50 | 130 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|-----------------------|---------------------|------|
| | | | | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) | |
| | | | | | | Low | High |
| ED009: Anions (QCLot: 155489) | | | | | | | |
| ES1526089-009 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | 105 | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 155178) | | | | | | | |
| ES1526051-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | 78.5 | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 155182) | | | | | | | |
| ES1526118-002 | WK11 | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | 80.5 | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 155177) | | | | | | | |
| ES1526051-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 250 mg/L | 75.6 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 157255) | | | | | | | |
| ES1526066-002 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 130 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 127 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 128 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 130 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 123 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 130 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 128 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 118 | 70 | 130 |



Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 157255) - continued | | | | | | | |
| ES1526066-002 | Anonymous | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 126 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 130 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 123 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 127 | 70 | 130 |
| EG035F: Dissolved Mercury by FIMS (QCLot: 157257) | | | | | | | |
| ES1526066-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 85.6 | 70 | 130 |
| EG052G: Silica by Discrete Analyser (QCLot: 155181) | | | | | | | |
| ES1526118-002 | WK11 | EG052G: Reactive Silica | ---- | 5 mg/L | # Not Determined | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 155202) | | | | | | | |
| ES1526091-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 80.8 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 155963) | | | | | | | |
| ES1526112-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 73.1 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 155179) | | | | | | | |
| ES1526118-002 | WK11 | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 99.0 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 155964) | | | | | | | |
| ES1526112-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 112 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 155953) | | | | | | | |
| ES1526112-002 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 95.7 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 155952) | | | | | | | |
| ES1526112-002 | Anonymous | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 90.9 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 155175) | | | | | | | |
| ES1526051-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 102 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 156157) | | | | | | | |
| EB1522926-095 | Anonymous | EP033: Butane | 106-97-8 | 102.18 µg/L | 104 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 107 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 94.9 | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 96.4 | 70 | 130 |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | 77.7 | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 101 | 70 | 130 |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 100 | 70 | 130 |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 155023) | | | | | | | |
| ES1526060-001 | Anonymous | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 75.3 | 70 | 130 |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 93.0 | 70 | 130 |
| EP074F: Halogenated Aromatic Compounds (QCLot: 155023) | | | | | | | |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|--|------------------|--------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EP074F: Halogenated Aromatic Compounds (QCLot: 155023) - continued | | | | | | | |
| ES1526060-001 | Anonymous | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 103 | 70 | 130 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 155022) | | | | | | | |
| ES1526060-001 | Anonymous | EP080: C6 - C9 Fraction | ---- | 325 µg/L | 96.7 | 70 | 130 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 155022) | | | | | | | |
| ES1526060-001 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 97.5 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 155634) | | | | | | | |
| EB1522915-001 | Anonymous | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 69.1 | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 65.8 | 50 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526118 | Page | : 1 of 12 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 15-Jul-2015 |
| Site | : ---- | Issue Date | : 02-Sep-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- Laboratory Control outliers exist - please see following pages for full details.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|--|----------------------|------------------|-----------------|------------|----------------|---------|---|
| Laboratory Control Spike (LCS) Recoveries | | | | | | | |
| EP075(SIM)A: Phenolic Compounds | QC-155459-002 | ---- | 2-Chlorophenol | 95-57-8 | 63.4 % | 64-110% | Recovery less than lower control limit |
| Matrix Spike (MS) Recoveries | | | | | | | |
| EG052G: Silica by Discrete Analyser | ES1526118--002 | WK11 | Reactive Silica | ---- | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 18 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 18 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|----------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA005P: pH by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA005-P) | | | | | | | | |
| AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 15-Jul-2015 | ✓ |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) | | | | | | | | |
| WK11, WK14, | WK13, QA7 | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 12-Aug-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA015: Total Dissolved Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) AST2, WK13, QA7 | WK11, WK14 | 15-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 22-Jul-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) AST2, WK13, QA7 | WK11, WK14 | 15-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 22-Jul-2015 | ✓ |
| ED009: Anions | | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) AST2, WK13, QA7 | WK11, WK14 | 15-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 12-Aug-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) AST2, WK13, QA7 | WK11, WK14 | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 29-Jul-2015 | ✓ |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) AST2, WK13, QA7 | WK11, WK14 | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 12-Aug-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) AST2, WK13, QA7 | WK11, WK14 | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 12-Aug-2015 | ✓ |
| ED093F: Dissolved Major Cations | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) AST2, WK13, QA7 | WK11, WK14 | 15-Jul-2015 | ---- | ---- | ---- | 17-Jul-2015 | 12-Aug-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) AST2, WK13, QA7 | WK11, WK14 | 15-Jul-2015 | ---- | ---- | ---- | 17-Jul-2015 | 11-Jan-2016 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 17-Jul-2015 | 11-Jan-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 17-Jul-2015 | 12-Aug-2015 | ✓ |
| EG052G: Silica by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 12-Aug-2015 | ✓ |
| EK010/011: Chlorine | | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 15-Jul-2015 | ✓ |
| EK040P: Fluoride by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 12-Aug-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 12-Aug-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 17-Jul-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 12-Aug-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | 16-Jul-2015 | 12-Aug-2015 | ✓ | 16-Jul-2015 | 12-Aug-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | 16-Jul-2015 | 12-Aug-2015 | ✓ | 16-Jul-2015 | 12-Aug-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 15-Jul-2015 | 17-Jul-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 17-Jul-2015 | 12-Aug-2015 | ✓ |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 12-Aug-2015 | ✓ |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 29-Jul-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | 16-Jul-2015 | 22-Jul-2015 | ✓ | 17-Jul-2015 | 25-Aug-2015 | ✓ |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | 15-Jul-2015 | 29-Jul-2015 | ✓ | 15-Jul-2015 | 29-Jul-2015 | ✓ |



Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) | | | | | | | | |
| AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | 16-Jul-2015 | 22-Jul-2015 | ✓ | 16-Jul-2015 | 25-Aug-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) | | | | | | | | |
| AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | 15-Jul-2015 | 29-Jul-2015 | ✓ | 15-Jul-2015 | 29-Jul-2015 | ✓ |
| EP262: Ethanolamines | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) | | | | | | | | |
| AST2, WK13, QA7 | WK11, WK14, | 15-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 22-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 16 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 12 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 7 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 5 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH by PC Titrator | EA005-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 18 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 12 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 13 | 7.69 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 16 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 12 | 8.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER**

Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Ethanolamines by LCMSMS | EP262 | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | EP071 | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 12 | 8.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 12 | 8.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 6 | 16.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 4.76 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 12 | 8.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 16 | 6.25 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 12 | 8.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 7 | 14.29 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 18 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 12 | 8.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH by PC Titrator | EA005-P | WATER | In house: Referenced to APHA 4500 H+ B. This procedure determines pH of water samples by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526216 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 16-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 16-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 16-Jul-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :

- Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
- CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
- LOR = Limit of reporting
- RPD = Relative Percentage Difference
- # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 156485) | | | | | | | | | | |
| ES1526216-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7780 | 7870 | 1.19 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 156292) | | | | | | | | | | |
| ES1526216-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 156137) | | | | | | | | | | |
| ES1526216-003 | WK12 | EP080: Benzene | 71-43-2 | 1 | µg/L | 2 | 2 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 3 | 3 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 156485) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 106 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 156292) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 105 | 72 | 126 |
| EP080: BTEXN (QCLot: 156137) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 76.9 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 80.9 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 78.6 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 86.2 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 88.9 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 83.2 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|-------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery(%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 156137) | | | | | | | |
| ES1526216-003 | WK12 | EP080: Benzene | 71-43-2 | 25 µg/L | 86.4 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 93.2 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 88.2 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 93.8 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 97.5 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 86.7 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526216 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 16-Jul-2015 |
| Site | : ---- | Issue Date | : 16-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|----------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 16-Jul-2015 | ---- | ---- | ---- | 16-Jul-2015 | 13-Aug-2015 | ✓ | |
| EP080: BTEXN | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 | WK11, WK13, | 16-Jul-2015 | 16-Jul-2015 | 30-Jul-2015 | ✓ | 16-Jul-2015 | 30-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526322 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 17-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 17-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 17-Jul-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 157605) | | | | | | | | | | |
| ES1526322-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7430 | 7560 | 1.79 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 157480) | | | | | | | | | | |
| ES1526322-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 157400) | | | | | | | | | | |
| ES1526322-003 | WK12 | EP080: Benzene | 71-43-2 | 1 | µg/L | 2 | 2 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 2 | 2 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 157605) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 102 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 157480) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 106 | 72 | 126 |
| EP080: BTEXN (QCLot: 157400) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 90.0 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 86.4 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 88.3 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 88.2 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 89.4 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 89.5 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 157400) | | | | | | | |
| ES1526322-003 | WK12 | EP080: Benzene | 71-43-2 | 25 µg/L | 96.6 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 91.8 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 90.9 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 81.1 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 91.4 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 96.2 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526322 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 17-Jul-2015 |
| Site | : ---- | Issue Date | : 17-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 17-Jul-2015 | ---- | ---- | ---- | 17-Jul-2015 | 14-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, QA8 WK11, WK13, | 17-Jul-2015 | 17-Jul-2015 | 31-Jul-2015 | ✓ | 17-Jul-2015 | 31-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526325 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 18-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 20-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 20-Jul-2015 |
| Site | : ---- | No. of samples received | : 3 |
| Quote number | : ---- | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :

- Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
- CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
- LOR = Limit of reporting
- RPD = Relative Percentage Difference
- # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 158665) | | | | | | | | | | |
| ES1526325-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7910 | 7920 | 0.126 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 158517) | | | | | | | | | | |
| ES1526325-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 158399) | | | | | | | | | | |
| ES1526325-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 11 | 10 | 0.00 | 0% - 50% | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 4 | 4 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 12 | 12 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 158665) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 106 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 158517) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 94.6 | 72 | 126 |
| EP080: BTEXN (QCLot: 158399) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 94.1 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 98.7 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 101 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 99.3 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 104 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 93.1 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 158399) | | | | | | | |
| ES1526325-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 92.8 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 94.6 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 93.1 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 98.4 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 98.0 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 90.3 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526325 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 18-Jul-2015 |
| Site | : ---- | Issue Date | : 20-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 3 |
| Order number | : ---- | No. of samples analysed | : 3 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 18-Jul-2015 | ---- | ---- | ---- | 20-Jul-2015 | 15-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK14 | 18-Jul-2015 | 20-Jul-2015 | 01-Aug-2015 | ✓ | 20-Jul-2015 | 01-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526478 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 21-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 21-Jul-2015 |
| Sampler | : PAUL WATSON | Issue Date | : 21-Jul-2015 |
| Site | : ---- | No. of samples received | : 6 |
| Quote number | : ---- | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |

Page : 2 of 4
Work Order : ES1526478
Client : PARSONS BRINCKERHOFF AUST P/L
Project : 2268523B



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 160067) | | | | | | | | | | |
| ES1526478-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7650 | 7730 | 1.07 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 159984) | | | | | | | | | | |
| ES1526478-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 159949) | | | | | | | | | | |
| ES1526478-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 8 | 8 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 3 | 2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 10 | 10 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 160067) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 106 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 159984) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 100 | 72 | 126 |
| EP080: BTEXN (QCLot: 159949) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 91.7 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 95.5 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 94.9 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 89.6 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 98.6 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 98.4 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 159949) | | | | | | | |
| ES1526478-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 92.9 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 93.9 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 94.6 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 81.8 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 95.1 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 91.8 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526478 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 21-Jul-2015 |
| Site | : ---- | Issue Date | : 21-Jul-2015 |
| Sampler | : PAUL WATSON | No. of samples received | : 6 |
| Order number | : ---- | No. of samples analysed | : 6 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 20-Jul-2015 | ---- | ---- | ---- | 21-Jul-2015 | 17-Aug-2015 | ✓ |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 21-Jul-2015 | ---- | ---- | ---- | 21-Jul-2015 | 18-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK11, WK12, QA9 | 20-Jul-2015 | 21-Jul-2015 | 03-Aug-2015 | ✓ | 21-Jul-2015 | 03-Aug-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12 | 21-Jul-2015 | 21-Jul-2015 | 04-Aug-2015 | ✓ | 21-Jul-2015 | 04-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526602 | Page | : 1 of 16 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 22-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 22-Jul-2015 |
| Sampler | : DAVID WATSON, S DAYKIN | Issue Date | : 04-Sep-2015 |
| Site | : ---- | No. of samples received | : 2 |
| Quote number | : ---- | No. of samples analysed | : 2 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Alex Rossi | Organic Chemist | Sydney Organics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005P: pH by PC Titrator (QC Lot: 161191) | | | | | | | | | |
| ES1526567-001 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 7.17 | 6.99 | 2.54 | 0% - 20% |
| ES1526602-001 | AST2 | EA005-P: pH Value | ---- | 0.01 | pH Unit | 8.97 | 8.97 | 0.00 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 161192) | | | | | | | | | |
| ES1526581-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 1530 | 1530 | 0.00 | 0% - 20% |
| ES1526567-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 74 | 72 | 1.65 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 163688) | | | | | | | | | |
| ES1526602-001 | AST2 | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5240 | 4770 | 9.31 | 0% - 20% |
| EW1511013-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 215 | 216 | 0.00 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 163689) | | | | | | | | | |
| ES1526602-001 | AST2 | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 48 | 44 | 9.21 | No Limit |
| EW1511013-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 11 | 12 | 0.00 | No Limit |
| ED009: Anions (QC Lot: 163073) | | | | | | | | | |
| ES1526588-005 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 14.0 | 14.1 | 0.413 | 0% - 20% |
| ES1526601-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 87.6 | 88.4 | 0.896 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 161195) | | | | | | | | | |
| ME1510156-005 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 5 | 5 | 0.00 | No Limit |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 5 | 5 | 0.00 | No Limit |
| ES1526602-001 | AST2 | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 3320 | 3350 | 0.749 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 600 | 600 | 0.00 | 0% - 20% |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3920 | 3950 | 0.635 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 161327) | | | | | | | | | |
| ES1526497-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 43 | 43 | 0.00 | 0% - 20% |
| ES1526602-002 | WK14 | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <10 | <10 | 0.00 | No Limit |
| ED045G: Chloride by Discrete Analyser (QC Lot: 161325) | | | | | | | | | |
| ES1526497-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 74 | 74 | 0.00 | 0% - 20% |
| ES1526602-002 | WK14 | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 1280 | 1270 | 0.700 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 165987) | | | | | | | | | |
| ES1526727-004 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 21 | 21 | 0.00 | No Limit |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <10 | <10 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 49 | 48 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 5200 | 5090 | 2.24 | 0% - 20% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 165987) - continued | | | | | | | | | |
| ES1526602-001 | AST2 | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 24 | 25 | 5.16 | No Limit |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <10 | <10 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 15 | 15 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 2110 | 2100 | 0.165 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 165986) | | | | | | | | | |
| ES1526730-002 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 3.06 | 3.01 | 1.82 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| ES1526602-001 | AST2 | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 3.33 | 3.29 | 1.44 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 165988) | | | | | | | | | |
| ES1526693-009 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | 0.018 | 0.019 | 0.00 | 0% - 50% |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.781 | 0.779 | 0.272 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | 0.013 | 0.013 | 0.00 | 0% - 50% |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 5.83 | 5.73 | 1.64 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.002 | 0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.017 | 0.016 | 0.00 | 0% - 50% |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.017 | 0.017 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | 0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 2.99 | 3.06 | 2.04 | 0% - 20% |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 1.6 | 1.6 | 0.00 | 0% - 50% |
| ES1526602-001 | AST2 | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0010 | <0.0010 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 5.11 | 5.06 | 1.07 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.021 | 0.018 | 12.7 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 165988) - continued | | | | | | | | | |
| ES1526602-001 | AST2 | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.050 | <0.050 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 8.52 | 8.58 | 0.782 | 0% - 50% |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 0.55 | 0.52 | 5.53 | No Limit |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 3.3 | 3.2 | 0.00 | No Limit | | |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 165985) | | | | | | | | | |
| ES1526602-002 | WK14 | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1526693-008 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 161330) | | | | | | | | | |
| ES1526602-001 | AST2 | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 22.7 | 23.2 | 2.16 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 161222) | | | | | | | | | |
| ES1526541-001 | Anonymous | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| ME1510170-006 | Anonymous | EK010: Chlorine - Free | ---- | 0.2 | mg/L | 0.4 | 0.4 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | 0.5 | 0.5 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 161194) | | | | | | | | | |
| ES1526581-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.2 | 0.2 | 0.00 | No Limit |
| ES1526602-001 | AST2 | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 1.2 | 1.2 | 0.00 | 0% - 50% |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 163198) | | | | | | | | | |
| ES1526581-002 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.09 | 0.10 | 0.00 | No Limit |
| ES1526477-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 1210 | 1230 | 1.40 | 0% - 20% |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 161328) | | | | | | | | | |
| ES1526602-002 | WK14 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1526602-001 | AST2 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.09 | 159 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 163199) | | | | | | | | | |
| ES1526602-001 | AST2 | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.02 | 0.02 | 0.00 | No Limit |
| ES1526477-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.67 | 0.63 | 6.15 | 0% - 20% |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 163928) | | | | | | | | | |
| ES1526626-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 114 | 138 | 19.3 | 0% - 20% |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 163927) | | | | | | | | | |
| ES1526591-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1526729-007 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.36 | 0.36 | 0.00 | 0% - 20% |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 161329) | | | | | | | | | |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 161329) - continued | | | | | | | | | |
| ES1526602-001 | AST2 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.02 | 0.02 | 0.00 | No Limit |
| EP005: Total Organic Carbon (TOC) (QC Lot: 161132) | | | | | | | | | |
| ES1526416-002 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | 3230 | 3260 | 1.11 | 0% - 20% |
| ES1526575-004 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | 5 | 5 | 0.00 | No Limit |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 162223) | | | | | | | | | |
| EM1512285-001 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | 34 | 34 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 3070 | 2810 | 8.84 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP1512210-001 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 5880 | 5770 | 2.00 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 161084) | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074B: Oxygenated Compounds (QC Lot: 161084) | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 161084) | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 161084) | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074D: Fumigants (QC Lot: 161084) - continued | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 161084) | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 161084) | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |

Page : 8 of 16
 Work Order : ES1526602 Amendment 1
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|-----------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 161084) - continued | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074G: Trihalomethanes (QC Lot: 161084) | | | | | | | | | |
| ES1526602-001 | AST2 | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 161083) | | | | | | | | | |
| ES1526571-005 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1526602-001 | AST2 | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | 40 | 30 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 161083) | | | | | | | | | |
| ES1526571-005 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1526602-001 | AST2 | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | 40 | 30 | 0.00 | No Limit |
| EP262: Ethanolamines (QC Lot: 162157) | | | | | | | | | |
| EB1523400-001 | Anonymous | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | 0.046 | 38 | 18.9 | 0% - 20% |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <0.001 | <1 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|--------|-------|-----------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 161192) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 163688) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 99.6 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 105 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 163689) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 103 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 90.8 | 84 | 110 | |
| ED009: Anions (QCLot: 163073) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 100 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 161195) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 105 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 161327) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 99.9 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 161325) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 119 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 94.1 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 165987) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 97.9 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 105 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 101 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 110 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 165986) | | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 99.7 | 80 | 112 | |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 165988) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 91.9 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 114 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 109 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.5 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.5 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 93.1 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 90.0 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|--------|------|-----------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 165988) - continued | | | | | | | | | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.1 | 85 | 115 | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.2 | 85 | 115 | |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 106 | 85 | 115 | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 91.3 | 85 | 115 | |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 95.3 | 85 | 115 | |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.5 | 85 | 115 | |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 95.9 | 85 | 115 | |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 104 | 85 | 115 | |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 102 | 85 | 115 | |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.6 | 85 | 115 | |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 90.4 | 85 | 115 | |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 112 | 85 | 115 | |
| EG035F: Dissolved Mercury by FIMS (QCLot: 165985) | | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 98.0 | 78 | 114 | |
| EG052G: Silica by Discrete Analyser (QCLot: 161330) | | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 100 | 94 | 114 | |
| EK010/011: Chlorine (QCLot: 161222) | | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator (QCLot: 161194) | | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 92.0 | 75 | 119 | |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 163198) | | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 101 | 90 | 114 | |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 161328) | | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 96.6 | 82 | 114 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 163199) | | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 101 | 91 | 113 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 163928) | | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 76.0 | 69 | 101 | |
| | | | | <0.1 | 1 mg/L | 82.2 | 70 | 118 | |
| | | | | <0.1 | 5 mg/L | 88.4 | 74 | 118 | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 163927) | | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 76.2 | 71 | 101 | |
| | | | | <0.01 | 0.442 mg/L | 79.4 | 72 | 108 | |
| | | | | <0.01 | 1 mg/L | 86.8 | 78 | 118 | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 161329) | | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 105 | 85 | 117 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EP005: Total Organic Carbon (TOC) (QCLot: 161132) | | | | | | | | | |
| EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | 10 mg/L | 97.9 | 76 | 120 | |
| EP020: Oil and Grease (O&G) (QCLot: 167588) | | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 102 | 80 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 162223) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 98.9 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 98.8 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 98.4 | 87 | 111 | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 98.2 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 96.4 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 101 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 100 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 161084) | | | | | | | | | |
| EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 109 | 71 | 121 | |
| EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 108 | 70 | 122 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 109 | 75 | 121 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 104 | 62 | 126 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 107 | 67 | 123 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 107 | 67 | 123 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 109 | 69 | 123 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 112 | 74 | 118 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 108 | 70 | 122 | |
| EP074B: Oxygenated Compounds (QCLot: 161084) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 93.0 | 74 | 130 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 101 | 65 | 137 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 122 | 61 | 139 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 95.3 | 61 | 134 | |
| EP074C: Sulfonated Compounds (QCLot: 161084) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 90.8 | 73 | 127 | |
| EP074D: Fumigants (QCLot: 161084) | | | | | | | | | |
| EP074: 1.2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 100 | 69 | 117 | |
| EP074: 1.2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 112 | 76 | 120 | |
| EP074: 2.2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 84.3 | 61 | 119 | |
| EP074: cis-1.3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 92.6 | 62 | 120 | |
| EP074: trans-1.3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 95.2 | 61 | 119 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 161084) | | | | | | | | | |
| EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 66 | 114 | |
| EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 87.4 | 61 | 119 | |
| EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 113 | 70 | 124 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 161084) - continued | | | | | | | | | |
| EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 121 | 75 | 123 | |
| EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 109 | 75 | 119 | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 102 | 69 | 123 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 108 | 73 | 119 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 116 | 74 | 128 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 112 | 66 | 136 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 111 | 78 | 122 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 114 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 87.3 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 102 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 95.7 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 82.2 | 67 | 130 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 109 | 77 | 117 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 112 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 113 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 87.7 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 100 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | 71.8 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 96.7 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 109 | 72 | 124 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 108 | 71 | 119 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 107 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 110 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 98.9 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 95.5 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 161084) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 102 | 67 | 125 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 99.1 | 60 | 126 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 108 | 77 | 117 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 109 | 74 | 120 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 108 | 72 | 120 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 109 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 107 | 71 | 121 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 108 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 110 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 161084) | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 99.8 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 110 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 106 | 76 | 118 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074G: Trihalomethanes (QCLot: 161084) - continued | | | | | | | | | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 96.0 | 65 | 115 | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 161052) | | | | | | | | | |
| EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 76.6 | 50 | 108 | |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 75.9 | 59 | 118 | |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 77.3 | 59 | 122 | |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 78.4 | 60 | 112 | |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 80.6 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | 68.5 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 72.8 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 67.9 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 74.6 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 75.2 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 41.0 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 48.1 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 161052) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 79.8 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 83.2 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 86.4 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 83.0 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 89.7 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | 5 µg/L | 88.7 | 62 | 119 | |
| | 205-82-3 | | | | | | | | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 87.2 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 103 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 89.0 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 89.8 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | 88.2 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 85.7 | 64 | 115 | |
| EP075(SIM): Indeno(1,2,3-cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 90.3 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 74.3 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 85.6 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 89.2 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 161053) | | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 98.7 | 59 | 129 | |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 103 | 71 | 131 | |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 90.1 | 62 | 120 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 161083) | | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 75.8 | 75 | 127 | |



Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | | Spike Concentration | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | | LCS | Low | High |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 161053) | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 90.4 | 59 | 131 |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 92.4 | 74 | 138 |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 98.1 | 67 | 127 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 161083) | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 78.2 | 75 | 127 |
| EP262: Ethanolamines (QCLot: 162157) | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 104 | 50 | 130 |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 126 | 50 | 130 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|-----------------------|---------------------|-----|
| | | | | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) | |
| | | | | | Low | High | |
| ED009: Anions (QCLot: 163073) | | | | | | | |
| ES1526588-005 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | 106 | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 161327) | | | | | | | |
| ES1526497-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | # Not Determined | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 161325) | | | | | | | |
| ES1526497-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 250 mg/L | 79.7 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 165988) | | | | | | | |
| ES1526602-002 | WK14 | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 105 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | # Not Determined | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 99.0 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 100 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 96.8 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 106 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 102 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 94.2 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 97.6 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 98.7 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 99.6 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 111 | 70 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EG035F: Dissolved Mercury by FIMS (QCLot: 165985) | | | | | | | |
| ES1526602-001 | AST2 | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 75.9 | 70 | 130 |
| EG052G: Silica by Discrete Analyser (QCLot: 161330) | | | | | | | |
| ES1526602-001 | AST2 | EG052G: Reactive Silica | ---- | 5 mg/L | # Not Determined | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 161194) | | | | | | | |
| ES1526575-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 92.0 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 163198) | | | | | | | |
| ES1526477-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | # Not Determined | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 161328) | | | | | | | |
| ES1526602-001 | AST2 | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 99.2 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 163199) | | | | | | | |
| ES1526477-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 73.6 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 163928) | | | | | | | |
| ES1526628-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 80.2 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 163927) | | | | | | | |
| ES1526628-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 121 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 161329) | | | | | | | |
| ES1526602-001 | AST2 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 99.8 | 70 | 130 |
| EP005: Total Organic Carbon (TOC) (QCLot: 161132) | | | | | | | |
| ES1526416-003 | Anonymous | EP005: Total Organic Carbon | ---- | 100 mg/L | 100 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 162223) | | | | | | | |
| EP1512210-002 | Anonymous | EP033: Butane | 106-97-8 | 102.18 µg/L | 100 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 98.8 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 96.9 | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 96.5 | 70 | 130 |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | 88.8 | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 99.5 | 70 | 130 |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 95.7 | 70 | 130 |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 161084) | | | | | | | |
| ES1526602-001 | AST2 | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 80.9 | 70 | 130 |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 98.3 | 70 | 130 |
| EP074F: Halogenated Aromatic Compounds (QCLot: 161084) | | | | | | | |
| ES1526602-001 | AST2 | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 99.0 | 70 | 130 |

Page : 16 of 16
 Work Order : ES1526602 Amendment 1
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



Sub-Matrix: **WATER**

| | | | | <i>Matrix Spike (MS) Report</i> | | | |
|--|-------------------------|--------------------------|-------------------|---------------------------------|-------------------------|----------------------------|-------------|
| | | | | <i>Spike</i> | <i>SpikeRecovery(%)</i> | <i>Recovery Limits (%)</i> | |
| <i>Laboratory sample ID</i> | <i>Client sample ID</i> | <i>Method: Compound</i> | <i>CAS Number</i> | <i>Concentration</i> | <i>MS</i> | <i>Low</i> | <i>High</i> |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 161083) | | | | | | | |
| ES1526602-001 | AST2 | EP080: C6 - C9 Fraction | ---- | 325 µg/L | 98.2 | 70 | 130 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 161083) | | | | | | | |
| ES1526602-001 | AST2 | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 94.0 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 162157) | | | | | | | |
| EB1523400-001 | Anonymous | EP262: Diethanolamine | 111-42-2 | 10 µg/L | # Not Determined | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 71.0 | 50 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526602 | Page | : 1 of 11 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 22-Jul-2015 |
| Site | : ---- | Issue Date | : 04-Sep-2015 |
| Sampler | : DAVID WATSON, S DAYKIN | No. of samples received | : 2 |
| Order number | : ---- | No. of samples analysed | : 2 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|---|----------------------|------------------|--------------------------------|------------|----------------|--------|---|
| Matrix Spike (MS) Recoveries | | | | | | | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | ES1526497--001 | Anonymous | Sulfate as SO4 - Turbidimetric | 14808-79-8 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EG020F: Dissolved Metals by ICP-MS | ES1526602--002 | WK14 | Barium | 7440-39-3 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EG052G: Silica by Discrete Analyser | ES1526602--001 | AST2 | Reactive Silica | ---- | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EK055G: Ammonia as N by Discrete Analyser | ES1526477--001 | Anonymous | Ammonia as N | 7664-41-7 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EP262: Ethanolamines | EB1523400--001 | Anonymous | Diethanolamine | 111-42-2 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 14 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | 0 | 9 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 14 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | 0 | 9 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method | Sample Date | Extraction / Preparation | | | Analysis | | |
|---------------------------------|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| Container / Client Sample ID(s) | | | | | | | |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA005P: pH by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA005-P) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 22-Jul-2015 | ✓ |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 19-Aug-2015 | ✓ |
| EA015: Total Dissolved Solids | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 24-Jul-2015 | 29-Jul-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 24-Jul-2015 | 29-Jul-2015 | ✓ |
| ED009: Anions | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 24-Jul-2015 | 19-Aug-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 05-Aug-2015 | ✓ |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 19-Aug-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 19-Aug-2015 | ✓ |
| ED093F: Dissolved Major Cations | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 28-Jul-2015 | 19-Aug-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 28-Jul-2015 | 18-Jan-2016 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 28-Jul-2015 | 18-Jan-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 19-Aug-2015 | ✓ |
| EG052G: Silica by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 19-Aug-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EK010/011: Chlorine | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 22-Jul-2015 | ✓ |
| EK040P: Fluoride by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 19-Aug-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 24-Jul-2015 | 19-Aug-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 24-Jul-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 24-Jul-2015 | 19-Aug-2015 | ✓ |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) AST2, WK14 | 22-Jul-2015 | 24-Jul-2015 | 19-Aug-2015 | ✓ | 24-Jul-2015 | 19-Aug-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) AST2, WK14 | 22-Jul-2015 | 24-Jul-2015 | 19-Aug-2015 | ✓ | 24-Jul-2015 | 19-Aug-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 24-Jul-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 19-Aug-2015 | ✓ |
| EP020: Oil and Grease (O&G) | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 19-Aug-2015 | ✓ |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 23-Jul-2015 | 05-Aug-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) AST2, WK14 | 22-Jul-2015 | 22-Jul-2015 | 29-Jul-2015 | ✓ | 23-Jul-2015 | 31-Aug-2015 | ✓ |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK14 | 22-Jul-2015 | 22-Jul-2015 | 05-Aug-2015 | ✓ | 22-Jul-2015 | 05-Aug-2015 | ✓ |

Page : 5 of 11
 Work Order : ES1526602 Amendment 1
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EP075(SIM)T: PAH Surrogates | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) AST2, WK14 | 22-Jul-2015 | 22-Jul-2015 | 29-Jul-2015 | ✓ | 23-Jul-2015 | 31-Aug-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK14 | 22-Jul-2015 | 22-Jul-2015 | 05-Aug-2015 | ✓ | 22-Jul-2015 | 05-Aug-2015 | ✓ |
| EP262: Ethanolamines | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) AST2, WK14 | 22-Jul-2015 | ---- | ---- | ---- | 23-Jul-2015 | 29-Jul-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 2 | 12 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 14 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH by PC Titrator | EA005-P | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 9 | 22.22 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 9 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | EP071 | 0 | 9 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 9 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 12 | 8.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 2 | 50.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 9 | 33.33 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 17 | 17.65 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 12 | 8.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 2 | 50.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 4.76 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 15 | 6.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 15 | 6.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 13 | 7.69 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 14 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 13 | 7.69 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 9 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 15 | 6.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH by PC Titrator | EA005-P | WATER | In house: Referenced to APHA 4500 H+ B. This procedure determines pH of water samples by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|--|
| Work Order | : ES1526604 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 22-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 22-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 22-Jul-2015 |
| Site | : ---- | No. of samples received | : 2 |
| Quote number | : ---- | No. of samples analysed | : 2 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :

- Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
- CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
- LOR = Limit of reporting
- RPD = Relative Percentage Difference
- # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|---|----------------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA010P: Conductivity by PC Titrator (QC Lot: 161153) | | | | | | | | | |
| EN1512413-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 4130 | 4150 | 0.496 | 0% - 20% |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 161104) | | | | | | | | | |
| ES1526470-004 | Anonymous | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% |
| EP080: BTEXN (QC Lot: 160984) | | | | | | | | | |
| ES1526604-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 8 | 7 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 2 | 2 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 9 | 9 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 161153) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 104 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 161104) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 103 | 72 | 126 |
| EP080: BTEXN (QCLot: 160984) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 104 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 80.6 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 81.8 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 114 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 81.2 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 104 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 160984) | | | | | | | |
| ES1526604-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 83.8 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 83.1 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 85.7 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 72.0 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 84.0 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 83.8 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526604 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 22-Jul-2015 |
| Site | : ---- | Issue Date | : 22-Jul-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 2 |
| Order number | : ---- | No. of samples analysed | : 2 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 22-Jul-2015 | ---- | ---- | ---- | 22-Jul-2015 | 19-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK14 | 22-Jul-2015 | 22-Jul-2015 | 05-Aug-2015 | ✓ | 22-Jul-2015 | 05-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526718 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 23-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 23-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 23-Jul-2015 |
| Site | : ---- | No. of samples received | : 3 |
| Quote number | : ---- | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 162406) | | | | | | | | | | |
| ES1526718-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8000 | 8000 | 0.00 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 162307) | | | | | | | | | | |
| ES1526718-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 162213) | | | | | | | | | | |
| ES1526718-002 | WK12 | EP080: Benzene | 71-43-2 | 1 | µg/L | 1 | 1 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 162406) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 106 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 162307) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 100 | 72 | 126 |
| EP080: BTEXN (QCLot: 162213) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 94.6 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 86.6 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 86.6 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 91.2 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 97.1 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 87.7 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|-------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery(%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 162213) | | | | | | | |
| ES1526718-002 | WK12 | EP080: Benzene | 71-43-2 | 25 µg/L | 82.4 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 86.5 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 83.2 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 94.3 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 89.6 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 84.3 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526718 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 23-Jul-2015 |
| Site | : ---- | Issue Date | : 23-Jul-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 3 |
| Order number | : ---- | No. of samples analysed | : 3 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 23-Jul-2015 | ---- | ---- | ---- | 23-Jul-2015 | 20-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK13 | 23-Jul-2015 | 23-Jul-2015 | 06-Aug-2015 | ✓ | 23-Jul-2015 | 06-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526833 | Page | : 1 of 4 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 24-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 24-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 03-Aug-2015 |
| Site | : ---- | No. of samples received | : 3 |
| Quote number | : ---- | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |

Page : 2 of 4
Work Order : ES1526833 Amendment 1
Client : PARSONS BRINCKERHOFF AUST P/L
Project : 2268523B



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|---|----------------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA010P: Conductivity by PC Titrator (QC Lot: 163775) | | | | | | | | | |
| ES1526833-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7720 | 7930 | 2.62 | 0% - 20% |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 163720) | | | | | | | | | |
| ES1526833-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% |
| EP080: BTEXN (QC Lot: 163719) | | | | | | | | | |
| ES1526833-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 6 | 6 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 2 | 2 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 7 | 7 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | Result | Spike | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High |
| EA010P: Conductivity by PC Titrator (QCLot: 163775) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 104 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 163720) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 92.8 | 72 | 126 |
| EP080: BTEXN (QCLot: 163719) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 90.0 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 91.1 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 91.0 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 96.0 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 92.0 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 92.9 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------|---------------------|------|
| | | | | Spike | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | Concentration | MS | Low | High |
| EP080: BTEXN (QCLot: 163719) | | | | | | | |
| ES1526833-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 94.6 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 91.0 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 92.0 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 96.1 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 93.5 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 93.6 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526833 | Page | : 1 of 4 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 24-Jul-2015 |
| Site | : ---- | Issue Date | : 03-Aug-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 3 |
| Order number | : ---- | No. of samples analysed | : 3 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2, QA10 | 24-Jul-2015 | ---- | ---- | ---- | 24-Jul-2015 | 21-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK14, QA10 | 24-Jul-2015 | 24-Jul-2015 | 07-Aug-2015 | ✓ | 24-Jul-2015 | 07-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526838 | Page | : 1 of 4 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 24-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 27-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 03-Aug-2015 |
| Site | : ---- | No. of samples received | : 2 |
| Quote number | : ---- | No. of samples analysed | : 2 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 164879) | | | | | | | | | | |
| ES1526838-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8460 | 8500 | 0.519 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 164784) | | | | | | | | | | |
| ES1526838-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 164715) | | | | | | | | | | |
| ES1526838-002 | WK12 | EP080: Benzene | 71-43-2 | 1 | µg/L | 1 | 1 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 164879) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 110 | 95 | 113 | |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 164784) | | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 99.0 | 72 | 126 | |
| EP080: BTEXN (QCLot: 164715) | | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 94.6 | 70 | 124 | |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 94.8 | 70 | 120 | |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 97.5 | 69 | 121 | |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 91.6 | 70 | 124 | |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 98.3 | 72 | 122 | |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 97.6 | 65 | 129 | |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: WATER

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|----------------------|---------------------|------|
| | | | | Spike Concentration | Spike Recovery(%) MS | Recovery Limits (%) | |
| | | | | | | Low | High |
| EP080: BTEXN (QCLot: 164715) | | | | | | | |
| ES1526838-002 | WK12 | EP080: Benzene | 71-43-2 | 25 µg/L | 89.9 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 95.6 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 98.0 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 89.7 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 99.5 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 92.1 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1526838 | Page | : 1 of 4 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 24-Jul-2015 |
| Site | : ---- | Issue Date | : 03-Aug-2015 |
| Sampler | : DAVID WATSON | No. of samples received | : 2 |
| Order number | : ---- | No. of samples analysed | : 2 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 2 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 2 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 2 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 25-Jul-2015 | ---- | ---- | ---- | 27-Jul-2015 | 22-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12 | 25-Jul-2015 | 27-Jul-2015 | 08-Aug-2015 | ✓ | 27-Jul-2015 | 08-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER**

Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 2 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 2 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 2 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1527015 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 28-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 28-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 28-Jul-2015 |
| Site | : ---- | No. of samples received | : 6 |
| Quote number | : ---- | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|---|----------------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA010P: Conductivity by PC Titrator (QC Lot: 166339) | | | | | | | | | |
| ES1527015-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7220 | 7650 | 5.73 | 0% - 20% |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 166227) | | | | | | | | | |
| ES1527015-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% |
| EP080: BTEXN (QC Lot: 166261) | | | | | | | | | |
| ES1527015-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 5 | 5 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 6 | 6 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 166339) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 101 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 166227) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 89.8 | 72 | 126 |
| EP080: BTEXN (QCLot: 166261) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 79.7 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 88.8 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 91.8 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 83.7 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 88.1 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 89.6 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 166261) | | | | | | | |
| ES1527015-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 77.6 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 86.8 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 86.8 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 74.0 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 86.7 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 86.4 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1527015 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 28-Jul-2015 |
| Site | : ---- | Issue Date | : 28-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 6 |
| Order number | : ---- | No. of samples analysed | : 6 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 6 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 27-Jul-2015 | ---- | ---- | ---- | 28-Jul-2015 | 24-Aug-2015 | ✓ |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 28-Jul-2015 | ---- | ---- | ---- | 28-Jul-2015 | 25-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK13 | 27-Jul-2015 | 28-Jul-2015 | 10-Aug-2015 | ✓ | 28-Jul-2015 | 10-Aug-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP080) WK14, WK13 | 28-Jul-2015 | 28-Jul-2015 | 11-Aug-2015 | ✓ | 28-Jul-2015 | 11-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 6 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1527133 | Page | : 1 of 18 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 29-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 29-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 02-Sep-2015 |
| Site | : ---- | No. of samples received | : 3 |
| Quote number | : ---- | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005P: pH by PC Titrator (QC Lot: 167666) | | | | | | | | | |
| ES1527095-008 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 6.41 | 6.43 | 0.312 | 0% - 20% |
| ES1527133-001 | AST2 | EA005-P: pH Value | ---- | 0.01 | pH Unit | 9.18 | 9.18 | 0.00 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 167667) | | | | | | | | | |
| ES1527133-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8220 | 8190 | 0.374 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 168606) | | | | | | | | | |
| ES1527133-001 | AST2 | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5330 | 5220 | 2.08 | 0% - 20% |
| ES1527134-008 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 261 | 264 | 0.953 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 168607) | | | | | | | | | |
| ES1527133-001 | AST2 | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 42 | 38 | 9.40 | No Limit |
| ES1527134-008 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | <5 | 0.00 | No Limit |
| ED009: Anions (QC Lot: 169754) | | | | | | | | | |
| ES1527059-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 6.33 | 6.29 | 0.634 | 0% - 20% |
| ES1527116-007 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 26.6 | 26.6 | 0.282 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 167665) | | | | | | | | | |
| ES1527163-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 45 | 44 | 2.94 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 45 | 44 | 2.94 | 0% - 20% |
| ES1527095-008 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 33 | 32 | 0.00 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 33 | 32 | 0.00 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 167773) | | | | | | | | | |
| ES1527095-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 352 | 355 | 0.725 | 0% - 20% |
| ES1527095-008 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| ED045G: Chloride by Discrete Analyser (QC Lot: 167774) | | | | | | | | | |
| ES1527095-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 191 | 194 | 1.20 | 0% - 20% |
| ES1527095-008 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 3 | 3 | 0.00 | No Limit |
| ED093F: Dissolved Major Cations (QC Lot: 168892) | | | | | | | | | |
| ES1526961-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 6 | 6 | 0.00 | No Limit |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 4 | 4 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 3 | 3 | 0.00 | No Limit |
| ES1527095-003 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 33 | 33 | 0.00 | 0% - 20% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 168892) - continued | | | | | | | | | |
| ES1527095-003 | Anonymous | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 28 | 28 | 0.00 | 0% - 20% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 3 | 3 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 24 | 24 | 0.00 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 168896) | | | | | | | | | |
| ES1527133-003 | WK13 | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 11 | 10 | 16.1 | 0% - 50% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 2 | 2 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 11 | 11 | 0.00 | 0% - 50% |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 1880 | 1850 | 1.87 | 0% - 20% |
| ES1527158-005 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 8 | 7 | 0.00 | No Limit |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 4 | 4 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 4 | 3 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 10 | 8 | 18.0 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 168893) | | | | | | | | | |
| ES1526961-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.019 | 0.018 | 5.55 | 0% - 50% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | 0.002 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.008 | 0.007 | 14.6 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | 0.02 | 0.02 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| ES1527133-001 | AST2 | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | 0.006 | 0.004 | 45.5 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 5.91 | 6.04 | 2.22 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | 0.003 | 0.001 | 64.4 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 168893) - continued | | | | | | | | | |
| ES1527133-001 | AST2 | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.009 | 0.007 | 15.2 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.009 | 0.008 | 12.4 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.002 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.01 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 6.93 | 6.87 | 0.878 | 0% - 20% |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 0.30 | 0.19 | 42.7 | No Limit |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 1.4 | 1.3 | 7.90 | 0% - 50% | | |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 168895) | | | | | | | | | |
| ES1527133-001 | AST2 | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 3.74 | 3.77 | 0.660 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 168894) | | | | | | | | | |
| ES1527095-003 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1527158-005 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 167776) | | | | | | | | | |
| ES1527133-001 | AST2 | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 24.6 | 24.7 | 0.480 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 167969) | | | | | | | | | |
| ES1527133-001 | AST2 | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 167662) | | | | | | | | | |
| ES1527098-003 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 1.2 | 1.1 | 0.00 | 0% - 50% |
| ES1527047-002 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 2.8 | 2.9 | 0.00 | 0% - 20% |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 168488) | | | | | | | | | |
| ME1510208-003 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 8.58 | 8.05 | 6.35 | 0% - 20% |
| ES1527122-010 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.05 | 0.05 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 167775) | | | | | | | | | |
| ES1527133-001 | AST2 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1527095-008 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 168487) | | | | | | | | | |
| ES1527122-007 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.04 | 0.04 | 0.00 | No Limit |
| ES1527122-010 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.05 | 0.05 | 0.00 | No Limit |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 168480) | | | | | | | | | |
| ES1527133-002 | WK12 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 3.6 | 3.6 | 0.00 | 0% - 20% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 168480) - continued | | | | | | | | | |
| ES1527122-008 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 0.4 | 0.4 | 0.00 | No Limit |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 168479) | | | | | | | | | |
| ES1527133-002 | WK12 | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 1.55 | 1.57 | 0.956 | 0% - 20% |
| ES1527122-008 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 0.01 | 0.00 | No Limit |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 167771) | | | | | | | | | |
| ES1526956-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1526956-010 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EP005: Total Organic Carbon (TOC) (QC Lot: 168780) | | | | | | | | | |
| ES1527047-002 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | 8 | 9 | 14.1 | No Limit |
| ES1527133-003 | WK13 | EP005: Total Organic Carbon | ---- | 1 | mg/L | 81 | 82 | 1.27 | 0% - 20% |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 168632) | | | | | | | | | |
| EB1524134-002 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 5440 | 5010 | 8.06 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| ES1527110-009 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 6010 | 5650 | 6.23 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 168530) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1527133-002 | WK12 | EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 168530) - continued | | | | | | | | | |
| ES1527133-002 | WK12 | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074B: Oxygenated Compounds (QC Lot: 168530) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1527133-002 | WK12 | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 168530) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1527133-002 | WK12 | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 168530) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1527133-002 | WK12 | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 168530) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 168530) - continued | | | | | | | | | |
| ES1527110-001 | Anonymous | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| ES1527133-002 | WK12 | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 168530) - continued | | | | | | | | | |
| ES1527133-002 | WK12 | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 168530) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1527133-002 | WK12 | EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074G: Trihalomethanes (QC Lot: 168530) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1527133-002 | WK12 | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 168529) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1527133-002 | WK12 | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 168529) | | | | | | | | | |
| ES1527110-001 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |

Page : 10 of 18
 Work Order : ES1527133 Amendment 1
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



Sub-Matrix: **WATER**

| | | | | <i>Laboratory Duplicate (DUP) Report</i> | | | | | |
|---|-------------------------|--------------------------|-------------------|--|-------------|------------------------|-------------------------|----------------|----------------------------|
| <i>Laboratory sample ID</i> | <i>Client sample ID</i> | <i>Method: Compound</i> | <i>CAS Number</i> | <i>LOR</i> | <i>Unit</i> | <i>Original Result</i> | <i>Duplicate Result</i> | <i>RPD (%)</i> | <i>Recovery Limits (%)</i> |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 168529) - continued | | | | | | | | | |
| ES1527133-002 | WK12 | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| EP262: Ethanolamines (QC Lot: 168376) | | | | | | | | | |
| ES1527133-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | 20 | 17 | 13.8 | 0% - 50% |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-------|-------|--------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 167667) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 168606) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 96.1 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 99.3 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 168607) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 90.7 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 97.5 | 84 | 110 | |
| ED009: Anions (QCLot: 169754) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 103 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 167665) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 102 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 167773) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 96.7 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 167774) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 109 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 88.2 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 168892) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 96.4 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 98.1 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 98.0 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 90.3 | 82 | 118 | |
| ED093F: Dissolved Major Cations (QCLot: 168896) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 93.2 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 93.2 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 92.6 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 97.6 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 168893) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 96.8 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 90.9 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.3 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 86.1 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 86.3 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 88.2 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|---|------------|--------|------|-----------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | Result | Spike | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 168893) - continued | | | | | | | | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 87.6 | 85 | 115 |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 88.4 | 85 | 115 |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 88.3 | 85 | 115 |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.2 | 85 | 115 |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 90.6 | 85 | 115 |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 89.1 | 85 | 115 |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 96.7 | 85 | 115 |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.9 | 85 | 115 |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 87.0 | 85 | 115 |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 94.1 | 85 | 115 |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 95.6 | 85 | 115 |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 89.8 | 85 | 115 |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 88.0 | 85 | 115 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 168895) | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 85.8 | 80 | 112 |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- |
| EG035F: Dissolved Mercury by FIMS (QCLot: 168894) | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 91.5 | 78 | 114 |
| EG052G: Silica by Discrete Analyser (QCLot: 167776) | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 104 | 94 | 114 |
| EK010/011: Chlorine (QCLot: 167969) | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- |
| EK040P: Fluoride by PC Titrator (QCLot: 167662) | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 93.2 | 75 | 119 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 168488) | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 93.8 | 90 | 114 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 167775) | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 101 | 82 | 114 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 168487) | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 103 | 91 | 113 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 168480) | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 101 | 69 | 101 |
| | | | | <0.1 | 1 mg/L | 99.2 | 70 | 118 |
| | | | | <0.1 | 5 mg/L | 110 | 74 | 118 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 168479) | | | | | | | | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|---|------------|------|------|--------------------------|---------------------------------------|--------------------|---------------------|-----|
| | | | | Result | Spike Concentration | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | LCS | Low | High | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 168479) - continued | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 95.2 | 71 | 101 |
| | | | | <0.01 | 0.442 mg/L | 95.5 | 72 | 108 |
| | | | | <0.01 | 1 mg/L | 110 | 78 | 118 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 167771) | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 110 | 85 | 117 |
| EP005: Total Organic Carbon (TOC) (QCLot: 168780) | | | | | | | | |
| EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | 10 mg/L | 90.7 | 76 | 120 |
| EP020: Oil and Grease (O&G) (QCLot: 171895) | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 112 | 80 | 120 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 168632) | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 110 | 85 | 115 |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 110 | 83 | 115 |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 97.4 | 87 | 111 |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 102 | 87 | 111 |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 86.7 | 86 | 114 |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 97.1 | 84 | 112 |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 94.0 | 85 | 113 |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 168530) | | | | | | | | |
| EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 89.9 | 71 | 121 |
| EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 91.1 | 70 | 122 |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 87.9 | 75 | 121 |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 88.1 | 62 | 126 |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 87.4 | 67 | 123 |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 87.9 | 67 | 123 |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 89.7 | 69 | 123 |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 87.2 | 74 | 118 |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 88.9 | 70 | 122 |
| EP074B: Oxygenated Compounds (QCLot: 168530) | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 90.0 | 74 | 130 |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 83.5 | 65 | 137 |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 81.8 | 61 | 139 |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 79.1 | 61 | 134 |
| EP074C: Sulfonated Compounds (QCLot: 168530) | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 83.0 | 73 | 127 |
| EP074D: Fumigants (QCLot: 168530) | | | | | | | | |
| EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 88.2 | 69 | 117 |
| EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 85.2 | 76 | 120 |
| EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 84.1 | 61 | 119 |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074D: Fumigants (QCLot: 168530) - continued | | | | | | | | | |
| EP074: cis-1.3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 88.0 | 62 | 120 | |
| EP074: trans-1.3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 92.8 | 61 | 119 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 168530) | | | | | | | | | |
| EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 92.3 | 66 | 114 | |
| EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 87.7 | 61 | 119 | |
| EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 92.1 | 70 | 124 | |
| EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 87.2 | 75 | 123 | |
| EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 84.5 | 75 | 119 | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 91.6 | 69 | 123 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 84.1 | 73 | 119 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 93.1 | 74 | 128 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 91.1 | 66 | 136 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 89.4 | 78 | 122 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 89.1 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 97.8 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 91.5 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 118 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 105 | 67 | 130 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 88.3 | 77 | 117 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 81.4 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 83.9 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 87.0 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 89.8 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | 85.2 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 86.4 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 88.6 | 72 | 124 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 85.1 | 71 | 119 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 75.6 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 84.2 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 97.7 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 104 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 168530) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 88.4 | 67 | 125 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 86.6 | 60 | 126 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 90.8 | 77 | 117 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 91.4 | 74 | 120 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 72 | 120 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 84.8 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 90.5 | 71 | 121 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|--------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 168530) - continued | | | | | | | | | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 87.1 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 87.3 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 168530) | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 96.2 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 85.9 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 87.7 | 76 | 118 | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 86.0 | 65 | 115 | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 167619) | | | | | | | | | |
| EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 69.6 | 50 | 108 | |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 86.5 | 59 | 118 | |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 73.9 | 59 | 122 | |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 72.7 | 60 | 112 | |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 80.2 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | 68.8 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 72.5 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 83.7 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 70.7 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 72.1 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 46.6 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 35.7 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 167619) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 76.6 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 77.2 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 81.3 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 77.5 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 85.9 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | 5 µg/L | 66.7 | 62 | 119 | |
| | 205-82-3 | | | | | | | | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 76.8 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 88.4 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 87.7 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 85.4 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | 83.5 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 82.1 | 64 | 115 | |
| EP075(SIM): Indeno(1,2,3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 83.3 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 68.9 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 98.0 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 85.5 | 63 | 118 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | | Spike Concentration | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | | LCS | Low | High |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 167620) | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 95.9 | 59 | 129 |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 94.5 | 71 | 131 |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 98.0 | 62 | 120 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 168529) | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 95.0 | 75 | 127 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 167620) | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 90.9 | 59 | 131 |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 93.7 | 74 | 138 |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 103 | 67 | 127 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 168529) | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 95.6 | 75 | 127 |
| EP262: Ethanolamines (QCLot: 168376) | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 107 | 50 | 130 |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 95.5 | 50 | 130 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: WATER

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|-----------------------|---------------------|------|
| | | | | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) | |
| | | | | | | Low | High |
| ED009: Anions (QCLot: 169754) | | | | | | | |
| ES1527059-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | 102 | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 167773) | | | | | | | |
| ES1527095-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | # Not Determined | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 167774) | | | | | | | |
| ES1527095-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 250 mg/L | 73.1 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 168893) | | | | | | | |
| ES1526961-002 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 114 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 107 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 109 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 112 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 80.6 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 110 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 110 | 70 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 168893) - continued | | | | | | | |
| ES1526961-002 | Anonymous | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 80.3 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 121 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 107 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 94.7 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 115 | 70 | 130 |
| EG035F: Dissolved Mercury by FIMS (QCLot: 168894) | | | | | | | |
| ES1527091-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 89.4 | 70 | 130 |
| EG052G: Silica by Discrete Analyser (QCLot: 167776) | | | | | | | |
| ES1527133-001 | AST2 | EG052G: Reactive Silica | ---- | 5 mg/L | # Not Determined | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 167662) | | | | | | | |
| ES1527039-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 95.8 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 168488) | | | | | | | |
| ES1527122-010 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 87.4 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 167775) | | | | | | | |
| ES1527095-008 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 105 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 168487) | | | | | | | |
| ES1527122-010 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 100 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 168480) | | | | | | | |
| ES1527122-009 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 111 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 168479) | | | | | | | |
| ES1527122-009 | Anonymous | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 111 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 167771) | | | | | | | |
| ES1526956-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 111 | 70 | 130 |
| EP005: Total Organic Carbon (TOC) (QCLot: 168780) | | | | | | | |
| ES1527047-001 | Anonymous | EP005: Total Organic Carbon | ---- | 100 mg/L | 99.6 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 168632) | | | | | | | |
| ES1527110-001 | Anonymous | EP033: Butane | 106-97-8 | 102.18 µg/L | 100 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 99.0 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 102 | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 100 | 70 | 130 |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | 108 | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 104 | 70 | 130 |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 100 | 70 | 130 |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 168530) | | | | | | | |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|--|------------------|---------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 168530) - continued | | | | | | | |
| ES1527110-001 | Anonymous | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 74.1 | 70 | 130 |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 86.5 | 70 | 130 |
| EP074F: Halogenated Aromatic Compounds (QCLot: 168530) | | | | | | | |
| ES1527110-001 | Anonymous | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 93.7 | 70 | 130 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 168529) | | | | | | | |
| ES1527110-001 | Anonymous | EP080: C6 - C9 Fraction | --- | 325 µg/L | 108 | 70 | 130 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 168529) | | | | | | | |
| ES1527110-001 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 107 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 168376) | | | | | | | |
| ES1527133-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 85.3 | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 86.3 | 50 | 130 |

QA/QC Compliance Assessment for DQO Reporting

Work Order : **ES1527133**

Page : 1 of 11

Amendment : **1**

Client : **PARSONS BRINCKERHOFF AUST P/L**

Laboratory : Environmental Division Sydney

Contact : SEAN DAYKIN

Telephone : +61 2 8784 8503

Project : 2268523B

Date Samples Received : 29-Jul-2015

Site : ----

Issue Date : 02-Sep-2015

Sampler : CAROLINA SARDELLA

No. of samples received : 3

Order number : ----

No. of samples analysed : 3

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|---|----------------------|------------------|--------------------------------|------------|----------------|--------|---|
| Matrix Spike (MS) Recoveries | | | | | | | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | ES1527095--001 | Anonymous | Sulfate as SO4 - Turbidimetric | 14808-79-8 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EG052G: Silica by Discrete Analyser | ES1527133--001 | AST2 | Reactive Silica | ---- | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 10 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 10 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 10 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 10 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for **VOC in soils** vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA005P: pH by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA005-P) | | | | | | | |
| AST2, WK13 | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 29-Jul-2015 | ✓ |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) | | | | | | | |
| Wk12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 26-Aug-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA015: Total Dissolved Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 05-Aug-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 05-Aug-2015 | ✓ |
| ED009: Anions | | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 31-Jul-2015 | 26-Aug-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 12-Aug-2015 | ✓ |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 26-Aug-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 26-Aug-2015 | ✓ |
| ED093F: Dissolved Major Cations | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 26-Aug-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 25-Jan-2016 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 25-Jan-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 04-Aug-2015 | 26-Aug-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EG052G: Silica by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 26-Aug-2015 | ✓ |
| EK010/011: Chlorine | | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 29-Jul-2015 | ✓ |
| EK040P: Fluoride by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 26-Aug-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 26-Aug-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 31-Jul-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 26-Aug-2015 | ✓ |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) AST2, WK13 | WK12, | 29-Jul-2015 | 30-Jul-2015 | 26-Aug-2015 | ✓ | 30-Jul-2015 | 26-Aug-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) AST2, WK13 | WK12, | 29-Jul-2015 | 30-Jul-2015 | 26-Aug-2015 | ✓ | 30-Jul-2015 | 26-Aug-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 31-Jul-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 26-Aug-2015 | ✓ |



Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 03-Aug-2015 | 26-Aug-2015 | ✓ |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 12-Aug-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) AST2, WK13 | WK12, | 29-Jul-2015 | 30-Jul-2015 | 05-Aug-2015 | ✓ | 31-Jul-2015 | 08-Sep-2015 | ✓ |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK13 | WK12, | 29-Jul-2015 | 30-Jul-2015 | 12-Aug-2015 | ✓ | 30-Jul-2015 | 12-Aug-2015 | ✓ |
| EP075(SIM)T: PAH Surrogates | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) AST2, WK13 | WK12, | 29-Jul-2015 | 30-Jul-2015 | 05-Aug-2015 | ✓ | 31-Jul-2015 | 08-Sep-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK13 | WK12, | 29-Jul-2015 | 30-Jul-2015 | 12-Aug-2015 | ✓ | 30-Jul-2015 | 12-Aug-2015 | ✓ |
| EP262: Ethanolamines | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) AST2, WK13 | WK12, | 29-Jul-2015 | ---- | ---- | ---- | 30-Jul-2015 | 05-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 2 | 16 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 10 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 4 | 25.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 10 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH by PC Titrator | EA005-P | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 17 | 11.76 | 9.52 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 12 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | EP071 | 0 | 10 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 16 | 6.25 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|--------|----------|----------|------------|--|
| | | QC | Reular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 4 | 25.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 17 | 11.76 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 17 | 11.76 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 12 | 25.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 17 | 17.65 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 4 | 25.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Suspended Solids (High Level) | EA025H | 1 | 17 | 5.88 | 4.76 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 12 | 8.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 16 | 6.25 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 13 | 7.69 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 15 | 6.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 10 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 12 | 8.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 10 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH by PC Titrator | EA005-P | WATER | In house: Referenced to APHA 4500 H+ B. This procedure determines pH of water samples by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G.The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride.in the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1527135 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 29-Jul-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 29-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 29-Jul-2015 |
| Site | : ---- | No. of samples received | : 4 |
| Quote number | : ---- | No. of samples analysed | : 4 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |

Page : 2 of 4
Work Order : ES1527135
Client : PARSONS BRINCKERHOFF AUST P/L
Project : 2268523B



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|---|----------------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA010P: Conductivity by PC Titrator (QC Lot: 167392) | | | | | | | | | |
| EN1512466-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 3870 | 3640 | 6.20 | 0% - 20% |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 167458) | | | | | | | | | |
| ES1527135-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% |
| EP080: BTEXN (QC Lot: 167341) | | | | | | | | | |
| ES1527135-002 | WK12 | EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 167392) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 98.7 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 167458) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 102 | 72 | 126 |
| EP080: BTEXN (QCLot: 167341) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 79.1 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 80.9 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 78.5 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 84.8 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 84.0 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 76.9 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | | |
| EP080: BTEXN (QCLot: 167341) | | | | | | | | |
| ES1527135-002 | WK12 | EP080: Benzene | 71-43-2 | 25 µg/L | 76.4 | 70 | 130 | |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 83.2 | 70 | 130 | |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 76.9 | 70 | 130 | |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 81.8 | 70 | 130 | |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 84.4 | 70 | 130 | |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 74.9 | 70 | 130 | |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1527135 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 29-Jul-2015 |
| Site | : ---- | Issue Date | : 29-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 4 |
| Order number | : ---- | No. of samples analysed | : 4 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 4 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 29-Jul-2015 | ---- | ---- | ---- | 29-Jul-2015 | 26-Aug-2015 | ✓ |
| EP080: BTEXN | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK13, QA11 | 29-Jul-2015 | 29-Jul-2015 | 12-Aug-2015 | ✓ | 29-Jul-2015 | 12-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 4 | 25.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 4 | 25.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 2 | 50.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 4 | 25.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 4 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 4 | 25.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1528258 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 13-Aug-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 13-Aug-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 14-Aug-2015 |
| Site | : ---- | No. of samples received | : 3 |
| Quote number | : ---- | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |

Page : 2 of 4
Work Order : ES1528258
Client : PARSONS BRINCKERHOFF AUST P/L
Project : 2268523B



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 182154) | | | | | | | | | | |
| ES1528258-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 9020 | 8580 | 5.00 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 183206) | | | | | | | | | | |
| ES1528258-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 181843) | | | | | | | | | | |
| ES1528258-002 | WK12 | EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 182154) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 108 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 183206) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 116 | 72 | 126 |
| EP080: BTEXN (QCLot: 181843) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 86.7 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 96.2 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 95.7 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 91.9 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 92.4 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 93.6 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 181843) | | | | | | | |
| ES1528258-002 | WK12 | EP080: Benzene | 71-43-2 | 25 µg/L | 85.2 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 96.4 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 95.4 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 93.1 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 92.1 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 90.1 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1528258 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 13-Aug-2015 |
| Site | : ---- | Issue Date | : 14-Aug-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 3 |
| Order number | : ---- | No. of samples analysed | : 3 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 09-Sep-2015 | ✓ |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK13 | 12-Aug-2015 | 13-Aug-2015 | 26-Aug-2015 | ✓ | 13-Aug-2015 | 26-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 3 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|--|
| Work Order | : ES1528259 | Page | : 1 of 17 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 13-Aug-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 13-Aug-2015 |
| Sampler | : ---- | Issue Date | : 02-Sep-2015 |
| Site | : ---- | No. of samples received | : 3 |
| Quote number | : ---- | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Raymond Commodore | Instrument Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005P: pH by PC Titrator (QC Lot: 182314) | | | | | | | | | |
| ES1528234-001 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 7.38 | 7.40 | 0.271 | 0% - 20% |
| ES1528259-001 | AST2 | EA005-P: pH Value | ---- | 0.01 | pH Unit | 9.13 | 9.12 | 0.110 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 182313) | | | | | | | | | |
| ES1528234-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 1860 | 1870 | 0.571 | 0% - 20% |
| ES1528259-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8790 | 8800 | 0.121 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 186094) | | | | | | | | | |
| ES1528245-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 772 | 942 | 19.8 | 0% - 20% |
| EW1511333-005 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 1540 | 1500 | 2.63 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 186095) | | | | | | | | | |
| ES1528245-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 14 | 14 | 0.00 | No Limit |
| EW1511333-005 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 16 | 15 | 0.00 | No Limit |
| ED009: Anions (QC Lot: 184098) | | | | | | | | | |
| ES1528155-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 189 | 187 | 0.950 | 0% - 20% |
| ES1528205-002 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 31.7 | 31.8 | 0.390 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 182312) | | | | | | | | | |
| ES1528234-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 335 | 326 | 2.77 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 335 | 326 | 2.77 | 0% - 20% |
| ES1528259-001 | AST2 | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 3100 | 3080 | 0.810 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 700 | 700 | 0.00 | 0% - 20% |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3800 | 3780 | 0.660 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 182384) | | | | | | | | | |
| ES1528234-006 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 350 | 350 | 0.00 | 0% - 20% |
| ES1528234-011 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 38 | 38 | 0.00 | 0% - 20% |
| ED045G: Chloride by Discrete Analyser (QC Lot: 182385) | | | | | | | | | |
| ES1528234-006 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 217 | 218 | 0.00 | 0% - 20% |
| ES1528234-011 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 11 | 11 | 0.00 | 0% - 50% |
| ED093F: Dissolved Major Cations (QC Lot: 183349) | | | | | | | | | |
| ES1528173-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 109 | 105 | 3.82 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 61 | 59 | 3.92 | 0% - 20% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 2 | 2 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 71 | 71 | 0.00 | 0% - 20% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 183349) - continued | | | | | | | | | |
| ES1528283-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 107 | 107 | 0.00 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 181 | 174 | 4.13 | 0% - 20% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 34 | 33 | 0.00 | 0% - 20% |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 1890 | 1860 | 1.90 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 183347) | | | | | | | | | |
| ES1528173-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.202 | 0.201 | 0.00 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.001 | 0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.030 | 0.029 | 3.55 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 0.06 | 0.06 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.6 | 0.6 | 0.00 | No Limit | | |
| ES1528283-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | 0.024 | 0.023 | 5.25 | 0% - 20% |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.168 | 0.173 | 2.91 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.456 | 0.464 | 1.62 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.009 | 0.009 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.025 | 0.024 | 7.40 | 0% - 20% |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 183347) - continued | | | | | | | | | |
| ES1528283-001 | Anonymous | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 0.10 | 0.09 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 3.07 | 3.05 | 0.670 | 0% - 20% |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 8.2 | 8.3 | 0.00 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 183348) | | | | | | | | | |
| ES1528173-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.896 | 0.902 | 0.701 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | 0.002 | 0.002 | 0.00 | No Limit |
| ES1528283-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 1.51 | 1.57 | 3.74 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | 0.001 | 0.002 | 0.00 | No Limit |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 183350) | | | | | | | | | |
| ES1528202-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.1 | <0.0001 | 0.00 | No Limit |
| ES1528283-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 182379) | | | | | | | | | |
| ES1528190-004 | Anonymous | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 0.39 | 0.35 | 9.97 | No Limit |
| EK010/011: Chlorine (QC Lot: 183262) | | | | | | | | | |
| ES1527962-001 | Anonymous | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <200 | <0.2 | 0.00 | No Limit |
| ES1528374-001 | Anonymous | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 182315) | | | | | | | | | |
| ES1528259-001 | AST2 | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 1.7 | 1.7 | 0.00 | 0% - 50% |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 185358) | | | | | | | | | |
| ES1528259-001 | AST2 | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.04 | 0.04 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 182386) | | | | | | | | | |
| ES1528234-011 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 185359) | | | | | | | | | |
| ES1528259-001 | AST2 | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 185509) | | | | | | | | | |
| ES1527962-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 500 | 0.3 | 34.0 | No Limit |
| ES1528271-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 0.5 | 0.5 | 0.00 | No Limit |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 185510) | | | | | | | | | |
| ES1527962-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 60 | 0.04 | 22.2 | No Limit |
| ES1528271-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.09 | 0.09 | 0.00 | No Limit |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 182378) | | | | | | | | | |
| ES1528190-004 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 184041) | | | | | | | | | |
| EB1525605-001 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|----------|-----------------|------------------|---------|---------------------|------|----------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | | |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 184041) - continued | | | | | | | | | | | |
| EB1525605-001 | Anonymous | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 438 | 468 | 6.53 | 0% - 20% | | |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| ES1528259-001 | AST2 | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 462 | 499 | 7.62 | 0% - 20% | | |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | | | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 184479) | | | | | | | | | | | |
| ES1528408-004 | Anonymous | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| ES1528408-005 | Anonymous | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| EP074B: Oxygenated Compounds (QC Lot: 184479) | Anonymous | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | ES1528408-005 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | | | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074B: Oxygenated Compounds (QC Lot: 184479) - continued | | | | | | | | | |
| ES1528408-005 | Anonymous | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 184479) | | | | | | | | | |
| ES1528408-004 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1528408-005 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 184479) | | | | | | | | | |
| ES1528408-004 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1528408-005 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 184479) | | | | | | | | | |
| ES1528408-004 | Anonymous | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 184479) - continued | | | | | | | | | |
| ES1528408-004 | Anonymous | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1528408-005 | Anonymous | EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 184479) | | | | | | | | | |
| ES1528408-004 | Anonymous | EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|-------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 184479) - continued | | | | | | | | | |
| ES1528408-004 | Anonymous | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1528408-005 | Anonymous | EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074G: Trihalomethanes (QC Lot: 184479) | | | | | | | | | |
| ES1528408-004 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1528408-005 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 184478) | | | | | | | | | |
| ES1528408-004 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1528408-005 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 184478) | | | | | | | | | |
| ES1528408-004 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1528408-005 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| EP262: Ethanolamines (QC Lot: 182684) | | | | | | | | | |
| ES1528259-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | 3 | 3 | 0.00 | No Limit |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | 16 | 18 | 9.47 | 0% - 50% |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|--------|-------|-----------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 182313) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 186094) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 96.8 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 95.6 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 186095) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 110 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 96.8 | 84 | 110 | |
| ED009: Anions (QCLot: 184098) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 98.1 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 182312) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 89.1 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 182384) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 108 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 182385) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 112 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 106 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 183349) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 102 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 110 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 99.7 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 99.7 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 183347) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 91.6 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 87.0 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 89.1 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.7 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.0 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 94.0 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 90.3 | 85 | 115 | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.4 | 85 | 115 | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.5 | 85 | 115 | |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.5 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|---|------------|--------|------|--------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | Result | Spike Concentration | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | | LCS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 183347) - continued | | | | | | | | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 93.3 | 85 | 115 |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.3 | 85 | 115 |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 89.1 | 85 | 115 |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 100 | 85 | 115 |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 89.8 | 85 | 115 |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 87.6 | 85 | 115 |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.5 | 85 | 115 |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 89.6 | 85 | 115 |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 87.0 | 85 | 115 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 183348) | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 86.4 | 80 | 112 |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- |
| EG035F: Dissolved Mercury by FIMS (QCLot: 183350) | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 94.7 | 78 | 114 |
| EG052G: Silica by Discrete Analyser (QCLot: 182379) | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 112 | 94 | 114 |
| EK010/011: Chlorine (QCLot: 183262) | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- |
| EK040P: Fluoride by PC Titrator (QCLot: 182315) | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 104 | 75 | 119 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 185358) | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 100 | 90 | 114 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 182386) | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 103 | 82 | 114 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 185359) | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 99.6 | 91 | 113 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 185509) | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 98.5 | 69 | 101 |
| | | | | <0.1 | 1 mg/L | 110 | 70 | 118 |
| | | | | <0.1 | 5 mg/L | 110 | 74 | 118 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 185510) | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | # 109 | 71 | 101 |
| | | | | <0.01 | 0.442 mg/L | # 112 | 72 | 108 |
| | | | | <0.01 | 1 mg/L | 112 | 78 | 118 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 182378) | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 109 | 85 | 117 |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP020: Oil and Grease (O&G) (QCLot: 187024) | | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 118 | 80 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 184041) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 92.8 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 89.0 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 101 | 87 | 111 | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 102 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 110 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 98.7 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 95.6 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 184479) | | | | | | | | | |
| EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 95.8 | 71 | 121 | |
| EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 104 | 70 | 122 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 98.6 | 75 | 121 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 99.7 | 62 | 126 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 96.2 | 67 | 123 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 106 | 67 | 123 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 107 | 69 | 123 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 95.2 | 74 | 118 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 104 | 70 | 122 | |
| EP074B: Oxygenated Compounds (QCLot: 184479) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | # 72.8 | 74 | 130 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 73.3 | 65 | 137 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 84.3 | 61 | 139 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 96.4 | 61 | 134 | |
| EP074C: Sulfonated Compounds (QCLot: 184479) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 86.4 | 73 | 127 | |
| EP074D: Fumigants (QCLot: 184479) | | | | | | | | | |
| EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 101 | 69 | 117 | |
| EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 104 | 76 | 120 | |
| EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 88.4 | 61 | 119 | |
| EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 87.1 | 62 | 120 | |
| EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 80.3 | 61 | 119 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 184479) | | | | | | | | | |
| EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 94.1 | 66 | 114 | |
| EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 90.5 | 61 | 119 | |
| EP074: 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 104 | 70 | 124 | |
| EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 99.8 | 75 | 123 | |
| EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 104 | 75 | 119 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 184479) - continued | | | | | | | | | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 94.4 | 69 | 123 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 98.4 | 73 | 119 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 98.8 | 74 | 128 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 101 | 66 | 136 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 81.7 | 78 | 122 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 101 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 79.3 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 88.0 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 94.2 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 104 | 67 | 130 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 100 | 77 | 117 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 83.9 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 99.3 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 86.1 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 79.6 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | 91.2 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 107 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 87.3 | 72 | 124 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 104 | 71 | 119 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 82.9 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 98.4 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 90.2 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 81.6 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 184479) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 94.5 | 67 | 125 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 87.2 | 60 | 126 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 101 | 77 | 117 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 105 | 74 | 120 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 103 | 72 | 120 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 101 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 103 | 71 | 121 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 95.9 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 106 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 184479) | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 92.5 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 78.3 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 94.7 | 76 | 118 | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 91.3 | 65 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|----------------------|-----|------|--------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 182299) | | | | | | | | | |
| EP075(SIM): 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 75.9 | 50 | 108 | |
| EP075(SIM): 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 65.0 | 59 | 118 | |
| EP075(SIM): 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 62.2 | 59 | 122 | |
| EP075(SIM): 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 62.8 | 60 | 112 | |
| EP075(SIM): 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 70.6 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | 66.7 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 76.2 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 65.2 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 66.3 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 71.2 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 31.9 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 36.9 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 182299) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 64.4 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 73.0 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | # 61.9 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 65.8 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 65.5 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | 5 µg/L | 65.6 | 62 | 119 | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 67.6 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 69.6 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 72.5 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 69.2 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | # 63.5 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 69.5 | 64 | 115 | |
| EP075(SIM): Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 67.1 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 74.6 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 74.8 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 65.4 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 182300) | | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 91.7 | 59 | 129 | |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 82.0 | 71 | 131 | |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 95.9 | 62 | 120 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 184478) | | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 124 | 75 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 182300) | | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 88.9 | 59 | 131 | |



Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|------------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 182300) - continued | | | | | | | | | |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 108 | 74 | 138 | |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 112 | 67 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 184478) | | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 125 | 75 | 127 | |
| EP262: Ethanolamines (QCLot: 182684) | | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 76.0 | 50 | 130 | |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 115 | 50 | 130 | |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|--------------------------|---------------------|-----|
| | | | | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) | |
| | | | | Low | High | | |
| ED009: Anions (QCLot: 184098) | | | | | | | |
| ES1528155-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | # Not Determined | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 182384) | | | | | | | |
| ES1528234-011 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | 90.4 | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 182385) | | | | | | | |
| ES1528234-011 | Anonymous | ED045G: Chloride | 16887-00-6 | 250 mg/L | 110 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 183347) | | | | | | | |
| ES1528175-001 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 106 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 97.9 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 101 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 101 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 91.4 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 94.3 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 96.0 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 93.5 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 87.0 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 90.7 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 95.2 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 97.9 | 70 | 130 |
| EG035F: Dissolved Mercury by FIMS (QCLot: 183350) | | | | | | | |
| ES1528178-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 82.7 | 70 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|--|------------------|--------------------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EG052G: Silica by Discrete Analyser (QCLot: 182379) | | | | | | | |
| ES1528190-004 | Anonymous | EG052G: Reactive Silica | ---- | 5 mg/L | 99.3 | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 182315) | | | | | | | |
| ES1528259-001 | AST2 | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 118 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 185358) | | | | | | | |
| ES1528259-001 | AST2 | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 88.6 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 182386) | | | | | | | |
| ES1528234-011 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 103 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 185359) | | | | | | | |
| ES1528259-001 | AST2 | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 109 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 185509) | | | | | | | |
| ES1527962-002 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 103 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 185510) | | | | | | | |
| ES1527962-002 | Anonymous | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 113 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 182378) | | | | | | | |
| ES1528190-004 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 105 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 184041) | | | | | | | |
| ES1528251-003 | Anonymous | EP033: Butane | 106-97-8 | 102.18 µg/L | 96.5 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 128 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 97.1 | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 94.9 | 70 | 130 |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | # Not Determined | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 93.4 | 70 | 130 |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 91.1 | 70 | 130 |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 184479) | | | | | | | |
| ES1528408-004 | Anonymous | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 72.2 | 70 | 130 |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 93.0 | 70 | 130 |
| EP074F: Halogenated Aromatic Compounds (QCLot: 184479) | | | | | | | |
| ES1528408-004 | Anonymous | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 112 | 70 | 130 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 184478) | | | | | | | |
| ES1528408-004 | Anonymous | EP080: C6 - C9 Fraction | ---- | 325 µg/L | 114 | 70 | 130 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 184478) | | | | | | | |
| ES1528408-004 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 115 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 182684) | | | | | | | |

Page : 17 of 17
 Work Order : ES1528259 Amendment 1
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



Sub-Matrix: **WATER**

| | | | | <i>Matrix Spike (MS) Report</i> | | | |
|---|-------------------------|-------------------------|-------------------|---------------------------------|-------------------------|----------------------------|-------------|
| | | | | <i>Spike</i> | <i>SpikeRecovery(%)</i> | <i>Recovery Limits (%)</i> | |
| <i>Laboratory sample ID</i> | <i>Client sample ID</i> | <i>Method: Compound</i> | <i>CAS Number</i> | <i>Concentration</i> | <i>MS</i> | <i>Low</i> | <i>High</i> |
| EP262: Ethanolamines (QCLot: 182684) - continued | | | | | | | |
| ES1528259-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 109 | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 114 | 50 | 130 |

QA/QC Compliance Assessment for DQO Reporting

Work Order : **ES1528259**

Page : 1 of 12

Amendment : **1**

Client : **PARSONS BRINCKERHOFF AUST P/L**

Laboratory : Environmental Division Sydney

Contact : SEAN DAYKIN

Telephone : +61 2 8784 8503

Project : 2268523B

Date Samples Received : 13-Aug-2015

Site : ----

Issue Date : 02-Sep-2015

Sampler : ----

No. of samples received : 3

Order number : ----

No. of samples analysed : 3

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- Laboratory Control outliers exist - please see following pages for full details.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- Analysis Holding Time Outliers exist - please see following pages for full details.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: WATER

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|--|----------------------|------------------|-----------------------|------------|----------------|---------|---|
| Laboratory Control Spike (LCS) Recoveries | | | | | | | |
| EK067G: Total Phosphorus as P by Discrete Analyser | QC-MRG2-18550900 | ---- | Total Phosphorus as P | ---- | 109 % | 71-101% | Recovery greater than upper control limit |
| EK067G: Total Phosphorus as P by Discrete Analyser | QC-MRG2-18550900 | ---- | Total Phosphorus as P | ---- | 112 % | 72-108% | Recovery greater than upper control limit |
| EP074B: Oxygenated Compounds | QC-184479-002 | ---- | 2-Butanone (MEK) | 78-93-3 | 72.8 % | 74-130% | Recovery less than lower control limit |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | QC-182299-002 | ---- | Anthracene | 120-12-7 | 61.9 % | 64-116% | Recovery less than lower control limit |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | QC-182299-002 | ---- | Fluoranthene | 206-44-0 | 63.5 % | 64-118% | Recovery less than lower control limit |
| Matrix Spike (MS) Recoveries | | | | | | | |
| ED009: Anions | ES1528155--001 | Anonymous | Chloride | 16887-00-6 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EP033: C1 - C4 Hydrocarbon Gases | ES1528251--003 | Anonymous | Methane | 74-82-8 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Outliers : Analysis Holding Time Compliance

Matrix: WATER

| Method | Container / Client Sample ID(s) | Extraction / Preparation | | | Analysis | | |
|----------------------------------|---------------------------------|--------------------------|--------------------|--------------|---------------|------------------|--------------|
| | | Date extracted | Due for extraction | Days overdue | Date analysed | Due for analysis | Days overdue |
| EA005P: pH by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural | WK12, | ---- | ---- | ---- | 13-Aug-2015 | 12-Aug-2015 | 1 |
| AST2, WK13 | | | | | | | |
| EK010/011: Chlorine | | | | | | | |
| Clear Plastic Bottle - Natural | WK12, | ---- | ---- | ---- | 14-Aug-2015 | 12-Aug-2015 | 2 |
| AST2, WK13 | | | | | | | |

Outliers : Frequency of Quality Control Samples

Matrix: WATER

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 3 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 3 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 3 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA005P: pH by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA005-P) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 12-Aug-2015 | * |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) WK12, | WK13 | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 09-Sep-2015 | ✓ |
| EA015: Total Dissolved Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 18-Aug-2015 | 19-Aug-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 18-Aug-2015 | 19-Aug-2015 | ✓ |
| ED009: Anions | | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 17-Aug-2015 | 09-Sep-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 26-Aug-2015 | ✓ |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 09-Sep-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 09-Sep-2015 | ✓ |



Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| ED093F: Dissolved Major Cations | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 14-Aug-2015 | 09-Sep-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 14-Aug-2015 | 08-Feb-2016 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 14-Aug-2015 | 08-Feb-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 18-Aug-2015 | 09-Sep-2015 | ✓ |
| EG052G: Silica by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 09-Sep-2015 | ✓ |
| EK010/011: Chlorine | | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 14-Aug-2015 | 12-Aug-2015 | * |
| EK040P: Fluoride by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 09-Sep-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 18-Aug-2015 | 09-Sep-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 14-Aug-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 18-Aug-2015 | 09-Sep-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) AST2, WK13 | WK12, | 12-Aug-2015 | 18-Aug-2015 | 09-Sep-2015 | ✓ | 18-Aug-2015 | 09-Sep-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) AST2, WK13 | WK12, | 12-Aug-2015 | 18-Aug-2015 | 09-Sep-2015 | ✓ | 18-Aug-2015 | 09-Sep-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 13-Aug-2015 | 14-Aug-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 14-Aug-2015 | 09-Sep-2015 | ✓ |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 19-Aug-2015 | 09-Sep-2015 | ✓ |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 17-Aug-2015 | 26-Aug-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) AST2, WK13 | WK12, | 12-Aug-2015 | 14-Aug-2015 | 19-Aug-2015 | ✓ | 18-Aug-2015 | 23-Sep-2015 | ✓ |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK13 | WK12, | 12-Aug-2015 | 17-Aug-2015 | 26-Aug-2015 | ✓ | 17-Aug-2015 | 26-Aug-2015 | ✓ |
| EP075(SIM)T: PAH Surrogates | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) AST2, WK13 | WK12, | 12-Aug-2015 | 14-Aug-2015 | 19-Aug-2015 | ✓ | 18-Aug-2015 | 23-Sep-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK13 | WK12, | 12-Aug-2015 | 17-Aug-2015 | 26-Aug-2015 | ✓ | 17-Aug-2015 | 26-Aug-2015 | ✓ |

Page : 6 of 12
 Work Order : ES1528259 Amendment 1
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EP262: Ethanolamines | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) AST2, WK13 | WK12, | 12-Aug-2015 | ---- | ---- | ---- | 14-Aug-2015 | 19-Aug-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 6 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 10 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 2 | 6 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 7 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 3 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH by PC Titrator | EA005-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 9 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 7 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 12 | 16.67 | 9.52 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 12 | 16.67 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | EP071 | 0 | 3 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 16 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Ethanolamines by LCMSMS | EP262 | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 12 | 16.67 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 12 | 16.67 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 19 | 15.79 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 19 | 15.79 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 6 | 16.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 6 | 16.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 1 | 12 | 8.33 | 4.76 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 12 | 8.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 6 | 16.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 8 | 12.50 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 7 | 14.29 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 3 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 7 | 14.29 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 3 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH by PC Titrator | EA005-P | WATER | In house: Referenced to APHA 4500 H+ B. This procedure determines pH of water samples by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1529385 | Page | : 1 of 20 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 27-Aug-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 28-Aug-2015 |
| Sampler | : ---- | Issue Date | : 14-Oct-2015 |
| Site | : ---- | No. of samples received | : 3 |
| Quote number | : ---- | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Raymond Commodore | Instrument Chemist | Sydney Inorganics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005P: pH by PC Titrator (QC Lot: 197028) | | | | | | | | | |
| ES1529385-001 | WKSW01 | EA005-P: pH Value | ---- | 0.01 | pH Unit | 7.38 | 7.50 | 1.61 | 0% - 20% |
| ES1529535-007 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 8.22 | 8.19 | 0.366 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 197027) | | | | | | | | | |
| ES1529385-001 | WKSW01 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 489 | 493 | 0.768 | 0% - 20% |
| ES1529535-007 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 749 | 750 | 0.00 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 198216) | | | | | | | | | |
| ES1529236-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 556 | 542 | 2.37 | 0% - 20% |
| ES1529328-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 7680 | 8040 | 4.64 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 198217) | | | | | | | | | |
| ES1529236-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 61 | 58 | 4.61 | 0% - 50% |
| ED009: Anions (QC Lot: 195954) | | | | | | | | | |
| ES1529279-013 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 98.1 | 97.9 | 0.284 | 0% - 20% |
| ES1529387-004 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 675 | 675 | 0.00 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 197025) | | | | | | | | | |
| ES1529349-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 14 | 17 | 15.7 | 0% - 50% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 14 | 17 | 15.7 | 0% - 50% |
| ES1529385-001 | WKSW01 | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 52 | 53 | 0.00 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 52 | 53 | 0.00 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 197004) | | | | | | | | | |
| ES1529535-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 18 | 17 | 0.00 | 0% - 50% |
| ES1529385-001 | WKSW01 | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 25 | 25 | 0.00 | 0% - 20% |
| ED045G: Chloride by Discrete Analyser (QC Lot: 197002) | | | | | | | | | |
| ES1529349-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 12 | 13 | 0.00 | 0% - 50% |
| ES1529385-001 | WKSW01 | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 66 | 67 | 1.55 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 197679) | | | | | | | | | |
| ES1529258-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 1040 | 1060 | 1.84 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 1090 | 1140 | 4.17 | 0% - 20% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 14 | 14 | 0.00 | 0% - 50% |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 6370 | 6480 | 1.67 | 0% - 20% |
| ES1529386-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 15 | 15 | 0.00 | 0% - 50% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 197679) - continued | | | | | | | | | |
| ES1529386-001 | Anonymous | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 9 | 9 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 4 | 4 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 41 | 41 | 0.00 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 197676) | | | | | | | | | |
| ES1529258-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0010 | <0.0010 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.138 | 0.148 | 6.92 | 0% - 50% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 1.36 | 1.37 | 0.836 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.046 | 0.038 | 19.1 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.166 | 0.176 | 5.48 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 1.30 | 1.35 | 4.16 | 0% - 50% |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 29.0 | 31.0 | 6.77 | 0% - 20% | | |
| ES1529386-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.049 | 0.051 | 2.85 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.040 | 0.040 | 0.00 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.01 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |

Page : 5 of 20
 Work Order : ES1529385 Amendment 1
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 197676) - continued | | | | | | | | | |
| ES1529386-001 | Anonymous | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 0.24 | 0.24 | 0.00 | No Limit |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.2 | 0.2 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 197677) | | | | | | | | | |
| ES1529258-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 29.1 | 31.2 | 6.99 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | 0.016 | 0.011 | 32.6 | No Limit |
| ES1529386-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.192 | 0.206 | 7.13 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 197678) | | | | | | | | | |
| ES1529258-002 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1529387-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 197005) | | | | | | | | | |
| ES1529522-001 | Anonymous | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 8.46 | 8.33 | 1.46 | 0% - 20% |
| ES1529385-001 | WKS01 | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 6.11 | 6.00 | 1.76 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 197340) | | | | | | | | | |
| ES1528883-001 | Anonymous | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <200 | <0.2 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 197026) | | | | | | | | | |
| ES1529385-001 | WKS01 | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.1 | <0.1 | 0.00 | No Limit |
| ES1529535-007 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.6 | 0.7 | 0.00 | No Limit |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 198629) | | | | | | | | | |
| ES1529385-001 | WKS01 | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.01 | 0.02 | 0.00 | No Limit |
| ES1529389-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.04 | 0.03 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 197006) | | | | | | | | | |
| ES1529393-002 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1529385-001 | WKS01 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 198628) | | | | | | | | | |
| ES1529385-001 | WKS01 | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.01 | 0.01 | 0.00 | No Limit |
| ES1529389-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.11 | 0.11 | 0.00 | 0% - 50% |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 198619) | | | | | | | | | |
| ES1529385-001 | WKS01 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 0.4 | 0.3 | 0.00 | No Limit |
| ES1529389-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 1.4 | 1.5 | 7.58 | 0% - 50% |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 198618) | | | | | | | | | |
| ES1529385-001 | WKS01 | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.02 | 0.02 | 0.00 | No Limit |
| ES1529389-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.15 | 0.16 | 0.00 | 0% - 50% |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 197003) | | | | | | | | | |
| ES1529393-002 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1529385-001 | WKSW01 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EP005: Total Organic Carbon (TOC) (QC Lot: 196523) | | | | | | | | | |
| ES1529258-001 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| ES1529399-020 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 196401) | | | | | | | | | |
| ES1529385-001 | WKSW01 | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 11 | 11 | 0.00 | No Limit |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit | | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| ES1529387-002 | Anonymous | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| EP074B: Oxygenated Compounds (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074B: Oxygenated Compounds (QC Lot: 197979) - continued | | | | | | | | | |
| ES1529387-002 | Anonymous | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 197979) - continued | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|-------------------------------------|------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 197979) - continued | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074G: Trihalomethanes (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP075(SIM)A: Phenolic Compounds (QC Lot: 196365) | | | | | | | | | |
| ES1529387-001 | Anonymous | EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | <2.0 | 0.00 | No Limit |
| | | EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | 0.00 | No Limit |
| | | ES1529387-005 | Anonymous | EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | | | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | | | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | | | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | | | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | | |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|--|------------------|-------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EP075(SIM)A: Phenolic Compounds (QC Lot: 196365) - continued | | | | | | | | | | |
| ES1529387-005 | Anonymous | EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | 28.1 | 28.2 | 0.00 | 0% - 50% | |
| | | EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | 0.00 | No Limit | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QC Lot: 196365) | | | | | | | | | | |
| ES1529387-001 | Anonymous | EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | 0.00 | No Limit | |
| | | EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | | 205-82-3 | | | | | | | |
| | | EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | | | |
| ES1529387-005 | Anonymous | EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | 0.00 | No Limit | |
| | | EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | | 205-82-3 | | | | | | | |
| | | EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QC Lot: 196365) - continued | | | | | | | | | |
| ES1529387-005 | Anonymous | EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 196366) | | | | | | | | | |
| ES1529387-001 | Anonymous | EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1529387-005 | Anonymous | EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 197980) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | 160 | 180 | 13.1 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 196366) | | | | | | | | | |
| ES1529387-001 | Anonymous | EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| ES1529387-005 | Anonymous | EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 197980) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | 150 | 170 | 13.0 | No Limit |
| EP080: BTEXN (QC Lot: 197980) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | | 106-42-3 | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| ES1529387-002 | Anonymous | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP080: Benzene | 71-43-2 | 1 | µg/L | 66 | 73 | 10.7 | 0% - 20% |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | 10 | 12 | 11.1 | No Limit |
| | | | 106-42-3 | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | 2 | 2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 48 | 57 | 17.0 | 0% - 20% |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP262: Ethanolamines (QC Lot: 201869) | | | | | | | | | |
| ES1529385-001 | WKSU01 | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|--------|-------|--------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 197027) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 198216) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 96.8 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 89.1 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 198217) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 97.7 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 96.3 | 84 | 110 | |
| ED009: Anions (QCLot: 195954) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 103 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 197025) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 86.3 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 197004) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 98.4 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 197002) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 110 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 90.7 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 197679) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 105 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 107 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 106 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 103 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197676) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 91.9 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 91.6 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 97.9 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 97.2 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.8 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 99.8 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 97.6 | 85 | 115 | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 99.8 | 85 | 115 | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 100 | 85 | 115 | |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 103 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|--------|------|-----------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197676) - continued | | | | | | | | | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 94.2 | 85 | 115 | |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 96.3 | 85 | 115 | |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 100 | 85 | 115 | |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.5 | 85 | 115 | |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 98.3 | 85 | 115 | |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 95.2 | 85 | 115 | |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.6 | 85 | 115 | |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 101 | 85 | 115 | |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 94.1 | 85 | 115 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197677) | | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.4 | 80 | 112 | |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS (QCLot: 197678) | | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 93.7 | 78 | 114 | |
| EG052G: Silica by Discrete Analyser (QCLot: 197005) | | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 103 | 94 | 114 | |
| EK010/011: Chlorine (QCLot: 197340) | | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator (QCLot: 197026) | | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 99.6 | 75 | 119 | |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 198629) | | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 98.9 | 90 | 114 | |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 197006) | | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 93.8 | 82 | 114 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 198628) | | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 98.8 | 91 | 113 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 198619) | | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 84.3 | 69 | 101 | |
| | | | | <0.1 | 1 mg/L | 95.2 | 70 | 118 | |
| | | | | <0.1 | 5 mg/L | 106 | 74 | 118 | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 198618) | | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 87.0 | 71 | 101 | |
| | | | | <0.01 | 0.442 mg/L | 87.8 | 72 | 108 | |
| | | | | <0.01 | 1 mg/L | 104 | 78 | 118 | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 197003) | | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 101 | 85 | 117 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP005: Total Organic Carbon (TOC) (QCLot: 196523) | | | | | | | | | |
| EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | 10 mg/L | 85.7 | 76 | 120 | |
| EP020: Oil and Grease (O&G) (QCLot: 200813) | | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 91.3 | 80 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 196401) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 99.3 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 98.0 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 104 | 87 | 111 | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 105 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 112 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 107 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 99.5 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 197979) | | | | | | | | | |
| EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 91.3 | 71 | 121 | |
| EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 91.5 | 70 | 122 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 75 | 121 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 86.0 | 62 | 126 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 88.4 | 67 | 123 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 89.5 | 67 | 123 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 69 | 123 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 95.1 | 74 | 118 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 90.1 | 70 | 122 | |
| EP074B: Oxygenated Compounds (QCLot: 197979) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 93.0 | 74 | 130 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 109 | 65 | 137 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 111 | 61 | 139 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 93.2 | 61 | 134 | |
| EP074C: Sulfonated Compounds (QCLot: 197979) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 82.2 | 73 | 127 | |
| EP074D: Fumigants (QCLot: 197979) | | | | | | | | | |
| EP074: 1.2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 88.2 | 69 | 117 | |
| EP074: 1.2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 93.3 | 76 | 120 | |
| EP074: 2.2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 88.8 | 61 | 119 | |
| EP074: cis-1.3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 80.4 | 62 | 120 | |
| EP074: trans-1.3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 97.8 | 61 | 119 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 197979) | | | | | | | | | |
| EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 86.6 | 66 | 114 | |
| EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 91.4 | 61 | 119 | |
| EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 104 | 70 | 124 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 197979) - continued | | | | | | | | | |
| EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 100 | 75 | 123 | |
| EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 89.6 | 75 | 119 | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 87.1 | 69 | 123 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 88.0 | 73 | 119 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 101 | 74 | 128 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 93.3 | 66 | 136 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 96.0 | 78 | 122 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 104 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 93.5 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 90.6 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 83.2 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 73.5 | 67 | 130 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 92.9 | 77 | 117 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 86.0 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 97.4 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 72.8 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 81.6 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | 79.9 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 96.7 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 86.8 | 72 | 124 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 89.2 | 71 | 119 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 89.5 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 91.6 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 89.3 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 89.5 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 197979) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 87.8 | 67 | 125 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 81.3 | 60 | 126 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 91.1 | 77 | 117 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 74 | 120 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 89.9 | 72 | 120 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 91.2 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 91.6 | 71 | 121 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 92.8 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 93.2 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 197979) | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 86.2 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 99.6 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 91.3 | 76 | 118 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074G: Trihalomethanes (QCLot: 197979) - continued | | | | | | | | | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 96.5 | 65 | 115 | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 196365) | | | | | | | | | |
| EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 67.2 | 50 | 108 | |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 61.6 | 59 | 118 | |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 62.1 | 59 | 122 | |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 68.5 | 60 | 112 | |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 72.4 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | 66.6 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 70.0 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 71.3 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 77.2 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 63.7 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 15.2 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 38.0 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 196365) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 68.2 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 66.5 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 69.4 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 72.9 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 71.9 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | 5 µg/L | 80.4 | 62 | 119 | |
| | 205-82-3 | | | | | | | | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 67.4 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 80.4 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 72.6 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 68.1 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | 69.7 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 69.6 | 64 | 115 | |
| EP075(SIM): Indeno(1,2,3-cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 63.7 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 72.7 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 75.0 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 81.4 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 196366) | | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 100 | 59 | 129 | |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 101 | 71 | 131 | |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 104 | 62 | 120 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 197980) | | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 78.8 | 75 | 127 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|----------------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 196366) | | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 99.0 | 59 | 131 | |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 102 | 74 | 138 | |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 98.0 | 67 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 197980) | | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 78.7 | 75 | 127 | |
| EP080: BTEXN (QCLot: 197980) | | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 82.3 | 70 | 124 | |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 93.2 | 70 | 120 | |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 94.6 | 69 | 121 | |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 93.3 | 70 | 124 | |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 94.3 | 72 | 122 | |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 80.9 | 65 | 129 | |
| EP262: Ethanolamines (QCLot: 201869) | | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 106 | 50 | 130 | |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 97.4 | 50 | 130 | |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: WATER

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|----------------------|---------------------|------|
| | | | | Spike Concentration | Spike Recovery(%) MS | Recovery Limits (%) | |
| | | | | | | Low | High |
| ED009: Anions (QCLot: 195954) | | | | | | | |
| ES1529279-013 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | # Not Determined | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 197004) | | | | | | | |
| ES1529385-001 | WKSW01 | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | 83.1 | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 197002) | | | | | | | |
| ES1529385-001 | WKSW01 | ED045G: Chloride | 16887-00-6 | 250 mg/L | 114 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197676) | | | | | | | |
| ES1529258-002 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 101 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 72.6 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 94.1 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 97.2 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 94.2 | 70 | 130 |



Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197676) - continued | | | | | | | |
| ES1529258-002 | Anonymous | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 95.2 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 93.8 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 90.0 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 96.2 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 91.9 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 95.8 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 75.9 | 70 | 130 |
| EG035F: Dissolved Mercury by FIMS (QCLot: 197678) | | | | | | | |
| ES1529258-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 82.0 | 70 | 130 |
| EG052G: Silica by Discrete Analyser (QCLot: 197005) | | | | | | | |
| ES1529385-001 | WKSW01 | EG052G: Reactive Silica | ---- | 5 mg/L | 90.3 | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 197026) | | | | | | | |
| ES1529385-001 | WKSW01 | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 105 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 198629) | | | | | | | |
| ES1529385-001 | WKSW01 | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 88.3 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 197006) | | | | | | | |
| ES1529385-001 | WKSW01 | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 99.6 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 198628) | | | | | | | |
| ES1529385-001 | WKSW01 | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 100 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 198619) | | | | | | | |
| ES1529385-002 | WKSW02 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 94.6 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 198618) | | | | | | | |
| ES1529385-002 | WKSW02 | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 92.0 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 197003) | | | | | | | |
| ES1529385-001 | WKSW01 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 86.9 | 70 | 130 |
| EP005: Total Organic Carbon (TOC) (QCLot: 196523) | | | | | | | |
| ES1529258-002 | Anonymous | EP005: Total Organic Carbon | ---- | 100 mg/L | 104 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 196401) | | | | | | | |
| ES1529385-002 | WKSW02 | EP033: Butane | 106-97-8 | 102.18 µg/L | 86.4 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 86.5 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 91.3 | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 92.2 | 70 | 130 |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | 105 | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 93.1 | 70 | 130 |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 89.9 | 70 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|--|------------------|-------------------------------------|----------------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 197979) | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 75.2 | 70 | 130 |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 82.1 | 70 | 130 |
| EP074F: Halogenated Aromatic Compounds (QCLot: 197979) | | | | | | | |
| EB1526728-001 | Anonymous | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 82.7 | 70 | 130 |
| EP075(SIM)A: Phenolic Compounds (QCLot: 196365) | | | | | | | |
| ES1529387-002 | Anonymous | EP075(SIM): 2-Chlorophenol | 95-57-8 | 2 µg/L | 66.0 | 60 | 130 |
| | | EP075(SIM): 2-Nitrophenol | 88-75-5 | 2 µg/L | 61.5 | 60 | 130 |
| | | EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 2 µg/L | 83.0 | 70 | 130 |
| | | EP075(SIM): Pentachlorophenol | 87-86-5 | 2 µg/L | 29.1 | 20 | 130 |
| | | EP075(SIM): Phenol | 108-95-2 | 2 µg/L | 29.4 | 20 | 130 |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 196365) | | | | | | | |
| ES1529387-002 | Anonymous | EP075(SIM): Acenaphthene | 83-32-9 | 2 µg/L | 78.1 | 70 | 130 |
| | | EP075(SIM): Pyrene | 129-00-0 | 2 µg/L | 89.7 | 70 | 130 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 196366) | | | | | | | |
| ES1529387-002 | Anonymous | EP071: C10 - C14 Fraction | ---- | 2000 µg/L | 98.0 | 74 | 150 |
| | | EP071: C15 - C28 Fraction | ---- | 2500 µg/L | 104 | 77 | 153 |
| | | EP071: C29 - C36 Fraction | ---- | 2000 µg/L | 95.7 | 67 | 153 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 197980) | | | | | | | |
| EB1526728-002 | Anonymous | EP080: C6 - C9 Fraction | ---- | 325 µg/L | 85.3 | 70 | 130 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 196366) | | | | | | | |
| ES1529387-002 | Anonymous | EP071: >C10 - C16 Fraction | >C10_C16 | 2500 µg/L | 94.4 | 74 | 150 |
| | | EP071: >C16 - C34 Fraction | ---- | 3500 µg/L | 97.1 | 77 | 153 |
| | | EP071: >C34 - C40 Fraction | ---- | 1500 µg/L | 99.7 | 67 | 153 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 197980) | | | | | | | |
| EB1526728-002 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 77.9 | 70 | 130 |
| EP080: BTEXN (QCLot: 197980) | | | | | | | |
| EB1526728-002 | Anonymous | EP080: Benzene | 71-43-2 | 25 µg/L | 79.8 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 85.8 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 87.0 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 71.4 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 88.7 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 78.2 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 201869) | | | | | | | |
| ES1529385-001 | WKSW01 | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 75.3 | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 127 | 50 | 130 |



QA/QC Compliance Assessment for DQO Reporting

Work Order : **ES1529385**

Page : 1 of 11

Amendment : **1**

Client : **PARSONS BRINCKERHOFF AUST P/L**

Laboratory : Environmental Division Sydney

Contact : SEAN DAYKIN

Telephone : +61 2 8784 8503

Project : 2268523B

Date Samples Received : 27-Aug-2015

Site : ----

Issue Date : 14-Oct-2015

Sampler : ----

No. of samples received : 3

Order number : ----

No. of samples analysed : 3

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- Analysis Holding Time Outliers exist - please see following pages for full details.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|-------------------------------------|----------------------|------------------|----------|------------|----------------|--------|---|
| Matrix Spike (MS) Recoveries | | | | | | | |
| ED009: Anions | ES1529279--013 | Anonymous | Chloride | 16887-00-6 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Outliers : Analysis Holding Time Compliance

Matrix: **WATER**

| Method | Container / Client Sample ID(s) | Extraction / Preparation | | | Analysis | | |
|---|---------------------------------|--------------------------|--------------------|--------------|---------------|------------------|--------------|
| | | Date extracted | Due for extraction | Days overdue | Date analysed | Due for analysis | Days overdue |
| EA005P: pH by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural | | | | | | | |
| WKS01, WKS03 | WKS02, | ---- | ---- | ---- | 28-Aug-2015 | 26-Aug-2015 | 2 |
| EK010/011: Chlorine | | | | | | | |
| Clear Plastic Bottle - Natural | | | | | | | |
| WKS01, WKS03 | WKS02, | ---- | ---- | ---- | 29-Aug-2015 | 26-Aug-2015 | 2 |
| EP262: Ethanolamines | | | | | | | |
| Amber Glass Bottle - Unpreserved | | | | | | | |
| WKS01, WKS03 | WKS02, | ---- | ---- | ---- | 03-Sep-2015 | 02-Sep-2015 | 0 |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Suspended Solids (High Level) | 1 | 20 | 5.00 | 9.52 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for **VOC in soils** vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| Container / Client Sample ID(s) | | | | | | | |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA005P: pH by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA005-P) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 26-Aug-2015 | * |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| EA015: Total Dissolved Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 02-Sep-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 02-Sep-2015 | ✓ |
| ED009: Anions | | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 09-Sep-2015 | ✓ |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| ED093F: Dissolved Major Cations | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 23-Sep-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 22-Feb-2016 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 22-Feb-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 02-Sep-2015 | 23-Sep-2015 | ✓ |
| EG052G: Silica by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| EK010/011: Chlorine | | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 29-Aug-2015 | 26-Aug-2015 | * |
| EK040P: Fluoride by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 23-Sep-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 28-Aug-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 23-Sep-2015 | ✓ |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | 31-Aug-2015 | 23-Sep-2015 | ✓ | 31-Aug-2015 | 23-Sep-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | 31-Aug-2015 | 23-Sep-2015 | ✓ | 31-Aug-2015 | 23-Sep-2015 | ✓ |



Matrix: **WATER** Evaluation: ✖ = Holding time breach ; ✔ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 28-Aug-2015 | ✔ |
| EP005: Total Organic Carbon (TOC) | | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✔ |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 02-Sep-2015 | 23-Sep-2015 | ✔ |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 09-Sep-2015 | ✔ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | 31-Aug-2015 | 02-Sep-2015 | ✔ | 01-Sep-2015 | 10-Oct-2015 | ✔ |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | 31-Aug-2015 | 09-Sep-2015 | ✔ | 31-Aug-2015 | 09-Sep-2015 | ✔ |
| EP075(SIM)T: PAH Surrogates | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | 31-Aug-2015 | 02-Sep-2015 | ✔ | 01-Sep-2015 | 10-Oct-2015 | ✔ |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | 31-Aug-2015 | 09-Sep-2015 | ✔ | 31-Aug-2015 | 09-Sep-2015 | ✔ |
| EP262: Ethanolamines | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) WKSW01, WKSW03 | WKSW02, | 26-Aug-2015 | ---- | ---- | ---- | 03-Sep-2015 | 02-Sep-2015 | ✖ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 3 | 33.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 10 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH by PC Titrator | EA005-P | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 9.52 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 16 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 3 | 33.33 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 4.76 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 3 | 33.33 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH by PC Titrator | EA005-P | WATER | In house: Referenced to APHA 4500 H+ B. This procedure determines pH of water samples by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1529387 | Page | : 1 of 19 |
| Amendment | : 2 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 27-Aug-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 28-Aug-2015 |
| Sampler | : DAVID WATSON, SEAN DAYKIN | Issue Date | : 29-Sep-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |
| Raymond Commodore | Instrument Chemist | Sydney Inorganics |



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005P: pH by PC Titrator (QC Lot: 197028) | | | | | | | | | |
| ES1529385-001 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 7.38 | 7.50 | 1.61 | 0% - 20% |
| ES1529535-007 | Anonymous | EA005-P: pH Value | ---- | 0.01 | pH Unit | 8.22 | 8.19 | 0.366 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 197027) | | | | | | | | | |
| ES1529385-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 489 | 493 | 0.768 | 0% - 20% |
| ES1529535-007 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 749 | 750 | 0.00 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 198216) | | | | | | | | | |
| ES1529236-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 556 | 542 | 2.37 | 0% - 20% |
| ES1529328-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 7680 | 8040 | 4.64 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 198217) | | | | | | | | | |
| ES1529236-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 61 | 58 | 4.61 | 0% - 50% |
| ED009: Anions (QC Lot: 195954) | | | | | | | | | |
| ES1529279-013 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 98.1 | 97.9 | 0.284 | 0% - 20% |
| ES1529387-004 | WK13 | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 675 | 675 | 0.00 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 197025) | | | | | | | | | |
| ES1529349-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 14 | 17 | 15.7 | 0% - 50% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 14 | 17 | 15.7 | 0% - 50% |
| ES1529385-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 52 | 53 | 0.00 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 52 | 53 | 0.00 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 197004) | | | | | | | | | |
| ES1529535-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 18 | 17 | 0.00 | 0% - 50% |
| ES1529385-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 25 | 25 | 0.00 | 0% - 20% |
| ED045G: Chloride by Discrete Analyser (QC Lot: 197002) | | | | | | | | | |
| ES1529349-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 12 | 13 | 0.00 | 0% - 50% |
| ES1529385-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 66 | 67 | 1.55 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 197679) | | | | | | | | | |
| ES1529258-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 1040 | 1060 | 1.84 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 1090 | 1140 | 4.17 | 0% - 20% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 14 | 14 | 0.00 | 0% - 50% |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 6370 | 6480 | 1.67 | 0% - 20% |
| ES1529386-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 15 | 15 | 0.00 | 0% - 50% |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 197679) - continued | | | | | | | | | |
| ES1529386-001 | Anonymous | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 9 | 9 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 4 | 4 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 41 | 41 | 0.00 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 197676) | | | | | | | | | |
| ES1529258-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0010 | <0.0010 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.138 | 0.148 | 6.92 | 0% - 50% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 1.36 | 1.37 | 0.836 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.046 | 0.038 | 19.1 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.010 | <0.010 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.166 | 0.176 | 5.48 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 1.30 | 1.35 | 4.16 | 0% - 50% |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.10 | <0.10 | 0.00 | No Limit |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 29.0 | 31.0 | 6.77 | 0% - 20% | | |
| ES1529386-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.049 | 0.051 | 2.85 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.040 | 0.040 | 0.00 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.01 | 0.00 | No Limit |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit | | |

Page : 5 of 19
 Work Order : ES1529387 Amendment 2
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 197676) - continued | | | | | | | | | |
| ES1529386-001 | Anonymous | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 0.24 | 0.24 | 0.00 | No Limit |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.2 | 0.2 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 197677) | | | | | | | | | |
| ES1529258-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 29.1 | 31.2 | 6.99 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | 0.016 | 0.011 | 32.6 | No Limit |
| ES1529386-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.192 | 0.206 | 7.13 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 197678) | | | | | | | | | |
| ES1529258-002 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1529387-001 | AST2 | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 197005) | | | | | | | | | |
| ES1529522-001 | Anonymous | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 8.46 | 8.33 | 1.46 | 0% - 20% |
| ES1529385-001 | Anonymous | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 6.11 | 6.00 | 1.76 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 197340) | | | | | | | | | |
| ES1528883-001 | Anonymous | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <200 | <0.2 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 197026) | | | | | | | | | |
| ES1529385-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.1 | <0.1 | 0.00 | No Limit |
| ES1529535-007 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.6 | 0.7 | 0.00 | No Limit |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 198629) | | | | | | | | | |
| ES1529385-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.01 | 0.02 | 0.00 | No Limit |
| ES1529389-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.04 | 0.03 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 197006) | | | | | | | | | |
| ES1529393-002 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1529385-001 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 198628) | | | | | | | | | |
| ES1529385-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.01 | 0.01 | 0.00 | No Limit |
| ES1529389-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.11 | 0.11 | 0.00 | 0% - 50% |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 198619) | | | | | | | | | |
| ES1529385-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 0.4 | 0.3 | 0.00 | No Limit |
| ES1529389-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 1.4 | 1.5 | 7.58 | 0% - 50% |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 198618) | | | | | | | | | |
| ES1529385-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.02 | 0.02 | 0.00 | No Limit |
| ES1529389-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.15 | 0.16 | 0.00 | 0% - 50% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 197003) | | | | | | | | | |
| ES1529393-002 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1529385-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 195980) | | | | | | | | | |
| ES1529387-001 | AST2 | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 536 | 572 | 6.68 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| ES1529445-002 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 1210 | 1190 | 1.40 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074B: Oxygenated Compounds (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074B: Oxygenated Compounds (QC Lot: 197979) - continued | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | | |
|---|------------------|--|------------|-----------------------------------|----------|-----------------|------------------|---------|---------------------|------|----------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | | |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 197979) - continued | | | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| ES1529387-002 | WK11 | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| | | EP074F: Halogenated Aromatic Compounds (QC Lot: 197979) | | | | | | | | | |
| | | EB1526728-001 | Anonymous | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|-------------------------------------|------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 197979) - continued | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| EP074G: Trihalomethanes (QC Lot: 197979) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP075(SIM)A: Phenolic Compounds (QC Lot: 196365) | | | | | | | | | |
| ES1529387-001 | AST2 | EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | <2.0 | 0.00 | No Limit |
| | | EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | 0.00 | No Limit |
| | | ES1529387-005 | QA12 | EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | | | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | | | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|--|------------------|-------------------------------------|------------|-----------------------------------|----------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EP075(SIM)A: Phenolic Compounds (QC Lot: 196365) - continued | | | | | | | | | | |
| ES1529387-005 | QA12 | EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | 28.1 | 28.2 | 0.00 | 0% - 50% | |
| | | EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | 0.00 | No Limit | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QC Lot: 196365) | | | | | | | | | | |
| ES1529387-001 | AST2 | EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | 0.00 | No Limit | |
| | | EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | | | | 205-82-3 | | | | | |
| | | EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Indeno(1,2,3-cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | | | |
| ES1529387-005 | QA12 | EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | 0.00 | No Limit | |
| | | EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | | | | 205-82-3 | | | | | |
| | | EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |
| | | EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit | |

Page : 11 of 19
 Work Order : ES1529387 Amendment 2
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523B



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QC Lot: 196365) - continued | | | | | | | | | |
| ES1529387-005 | QA12 | EP075(SIM): Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| | | EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 196366) | | | | | | | | | |
| ES1529387-001 | AST2 | EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1529387-005 | QA12 | EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 197980) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | 160 | 180 | 13.1 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 196366) | | | | | | | | | |
| ES1529387-001 | AST2 | EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| ES1529387-005 | QA12 | EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| | | EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 197980) | | | | | | | | | |
| EB1526728-001 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1529387-002 | WK11 | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | 150 | 170 | 13.0 | No Limit |
| EP262: Ethanolamines (QC Lot: 201869) | | | | | | | | | |
| ES1529385-001 | Anonymous | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|--------|-------|-----------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 197027) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 105 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 198216) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 96.8 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 89.1 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 198217) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 97.7 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 96.3 | 84 | 110 | |
| ED009: Anions (QCLot: 195954) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 103 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 197025) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 86.3 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 197004) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 98.4 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 197002) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 110 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 90.7 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 197679) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 105 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 107 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 106 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 103 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197676) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 91.9 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 91.6 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 97.9 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 97.2 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.8 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 99.8 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 97.6 | 85 | 115 | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 99.8 | 85 | 115 | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 100 | 85 | 115 | |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 103 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|--------|------|--------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197676) - continued | | | | | | | | | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 94.2 | 85 | 115 | |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 96.3 | 85 | 115 | |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 100 | 85 | 115 | |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.5 | 85 | 115 | |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 98.3 | 85 | 115 | |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 95.2 | 85 | 115 | |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.6 | 85 | 115 | |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 101 | 85 | 115 | |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 94.1 | 85 | 115 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197677) | | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.4 | 80 | 112 | |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS (QCLot: 197678) | | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 93.7 | 78 | 114 | |
| EG052G: Silica by Discrete Analyser (QCLot: 197005) | | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 103 | 94 | 114 | |
| EK010/011: Chlorine (QCLot: 197340) | | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator (QCLot: 197026) | | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 99.6 | 75 | 119 | |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 198629) | | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 98.9 | 90 | 114 | |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 197006) | | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 93.8 | 82 | 114 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 198628) | | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 98.8 | 91 | 113 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 198619) | | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 84.3 | 69 | 101 | |
| | | | | <0.1 | 1 mg/L | 95.2 | 70 | 118 | |
| | | | | <0.1 | 5 mg/L | 106 | 74 | 118 | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 198618) | | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 87.0 | 71 | 101 | |
| | | | | <0.01 | 0.442 mg/L | 87.8 | 72 | 108 | |
| | | | | <0.01 | 1 mg/L | 104 | 78 | 118 | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 197003) | | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 101 | 85 | 117 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP020: Oil and Grease (O&G) (QCLot: 200813) | | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 91.3 | 80 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 195980) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 86.7 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 83.6 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 89.9 | 87 | 111 | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 93.5 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 99.4 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 87.4 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 85.9 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 197979) | | | | | | | | | |
| EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 91.3 | 71 | 121 | |
| EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 91.5 | 70 | 122 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 75 | 121 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 86.0 | 62 | 126 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 88.4 | 67 | 123 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 89.5 | 67 | 123 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 69 | 123 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 95.1 | 74 | 118 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 90.1 | 70 | 122 | |
| EP074B: Oxygenated Compounds (QCLot: 197979) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 93.0 | 74 | 130 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 109 | 65 | 137 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 111 | 61 | 139 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 93.2 | 61 | 134 | |
| EP074C: Sulfonated Compounds (QCLot: 197979) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 82.2 | 73 | 127 | |
| EP074D: Fumigants (QCLot: 197979) | | | | | | | | | |
| EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 88.2 | 69 | 117 | |
| EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 93.3 | 76 | 120 | |
| EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 88.8 | 61 | 119 | |
| EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 80.4 | 62 | 120 | |
| EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 97.8 | 61 | 119 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 197979) | | | | | | | | | |
| EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 86.6 | 66 | 114 | |
| EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 91.4 | 61 | 119 | |
| EP074: 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 104 | 70 | 124 | |
| EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 100 | 75 | 123 | |
| EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 89.6 | 75 | 119 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 197979) - continued | | | | | | | | | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 87.1 | 69 | 123 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 88.0 | 73 | 119 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 101 | 74 | 128 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 93.3 | 66 | 136 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 96.0 | 78 | 122 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 104 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 93.5 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 90.6 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 83.2 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 73.5 | 67 | 130 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 92.9 | 77 | 117 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 86.0 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 97.4 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 72.8 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 81.6 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | 79.9 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 96.7 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 86.8 | 72 | 124 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 89.2 | 71 | 119 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 89.5 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 91.6 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 89.3 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 89.5 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 197979) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 87.8 | 67 | 125 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 81.3 | 60 | 126 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 91.1 | 77 | 117 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 74 | 120 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 89.9 | 72 | 120 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 91.2 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 91.6 | 71 | 121 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 92.8 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 93.2 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 197979) | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 86.2 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 99.6 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 91.3 | 76 | 118 | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 96.5 | 65 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|----------------------|-----|------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 196365) | | | | | | | | | |
| EP075(SIM): 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 67.2 | 50 | 108 | |
| EP075(SIM): 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 61.6 | 59 | 118 | |
| EP075(SIM): 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 62.1 | 59 | 122 | |
| EP075(SIM): 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 68.5 | 60 | 112 | |
| EP075(SIM): 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 72.4 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | 66.6 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 70.0 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 71.3 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 77.2 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 63.7 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 15.2 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 38.0 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 196365) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 68.2 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 66.5 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 69.4 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 72.9 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 71.9 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | 5 µg/L | 80.4 | 62 | 119 | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 67.4 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 80.4 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 72.6 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 68.1 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | 69.7 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 69.6 | 64 | 115 | |
| EP075(SIM): Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 63.7 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 72.7 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 75.0 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 81.4 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 196366) | | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 100 | 59 | 129 | |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 101 | 71 | 131 | |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 104 | 62 | 120 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 197980) | | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 78.8 | 75 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 196366) | | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 99.0 | 59 | 131 | |



Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|------------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 196366) - continued | | | | | | | | | |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 102 | 74 | 138 | |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 98.0 | 67 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 197980) | | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 78.7 | 75 | 127 | |
| EP262: Ethanolamines (QCLot: 201869) | | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 106 | 50 | 130 | |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 97.4 | 50 | 130 | |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|------------------------|---------------------|------|
| | | | | Spike Concentration | SpikeRecovery(%) MS | Recovery Limits (%) | |
| | | | | | | Low | High |
| ED009: Anions (QCLot: 195954) | | | | | | | |
| ES1529279-013 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | # Not Determined | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 197004) | | | | | | | |
| ES1529385-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | 83.1 | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 197002) | | | | | | | |
| ES1529385-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 250 mg/L | 114 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 197676) | | | | | | | |
| ES1529258-002 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 101 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 72.6 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 94.1 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 97.2 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 94.2 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 95.2 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 93.8 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 90.0 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 96.2 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 91.9 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 95.8 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 75.9 | 70 | 130 |
| EG035F: Dissolved Mercury by FIMS (QCLot: 197678) | | | | | | | |
| ES1529258-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 82.0 | 70 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|---------------------|---------------------|------|
| | | | | Spike Concentration | SpikeRecovery(%) MS | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | | | Low | High |
| EG052G: Silica by Discrete Analyser (QCLot: 197005) | | | | | | | |
| ES1529385-001 | Anonymous | EG052G: Reactive Silica | ---- | 5 mg/L | 90.3 | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 197026) | | | | | | | |
| ES1529385-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 105 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 198629) | | | | | | | |
| ES1529385-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 88.3 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 197006) | | | | | | | |
| ES1529385-001 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 99.6 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 198628) | | | | | | | |
| ES1529385-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 100 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 198619) | | | | | | | |
| ES1529385-002 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 94.6 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 198618) | | | | | | | |
| ES1529385-002 | Anonymous | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 92.0 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 197003) | | | | | | | |
| ES1529385-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 86.9 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 195980) | | | | | | | |
| ES1529445-001 | Anonymous | EP033: Butane | 106-97-8 | 102.18 µg/L | 81.4 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 80.6 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 87.6 | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 87.5 | 70 | 130 |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | # Not Determined | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 84.3 | 70 | 130 |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 82.4 | 70 | 130 |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 197979) | | | | | | | |
| EB1526728-001 | Anonymous | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 75.2 | 70 | 130 |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 82.1 | 70 | 130 |
| EP074F: Halogenated Aromatic Compounds (QCLot: 197979) | | | | | | | |
| EB1526728-001 | Anonymous | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 82.7 | 70 | 130 |
| EP075(SIM)A: Phenolic Compounds (QCLot: 196365) | | | | | | | |
| ES1529387-002 | WK11 | EP075(SIM): 2-Chlorophenol | 95-57-8 | 2 µg/L | 66.0 | 60 | 130 |
| | | EP075(SIM): 2-Nitrophenol | 88-75-5 | 2 µg/L | 61.5 | 60 | 130 |
| | | EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 2 µg/L | 83.0 | 70 | 130 |
| | | EP075(SIM): Pentachlorophenol | 87-86-5 | 2 µg/L | 29.1 | 20 | 130 |
| | | EP075(SIM): Phenol | 108-95-2 | 2 µg/L | 29.4 | 20 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|--|------------------|----------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 196365) | | | | | | | |
| ES1529387-002 | WK11 | EP075(SIM): Acenaphthene | 83-32-9 | 2 µg/L | 78.1 | 70 | 130 |
| | | EP075(SIM): Pyrene | 129-00-0 | 2 µg/L | 89.7 | 70 | 130 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 196366) | | | | | | | |
| ES1529387-002 | WK11 | EP071: C10 - C14 Fraction | ---- | 2000 µg/L | 98.0 | 74 | 150 |
| | | EP071: C15 - C28 Fraction | ---- | 2500 µg/L | 104 | 77 | 153 |
| | | EP071: C29 - C36 Fraction | ---- | 2000 µg/L | 95.7 | 67 | 153 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 197980) | | | | | | | |
| EB1526728-002 | Anonymous | EP080: C6 - C9 Fraction | ---- | 325 µg/L | 85.3 | 70 | 130 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 196366) | | | | | | | |
| ES1529387-002 | WK11 | EP071: >C10 - C16 Fraction | >C10_C16 | 2500 µg/L | 94.4 | 74 | 150 |
| | | EP071: >C16 - C34 Fraction | ---- | 3500 µg/L | 97.1 | 77 | 153 |
| | | EP071: >C34 - C40 Fraction | ---- | 1500 µg/L | 99.7 | 67 | 153 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 197980) | | | | | | | |
| EB1526728-002 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 77.9 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 201869) | | | | | | | |
| ES1529385-001 | Anonymous | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 75.3 | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 127 | 50 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1529387 | Page | : 1 of 12 |
| Amendment | : 2 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 27-Aug-2015 |
| Site | : ---- | Issue Date | : 29-Sep-2015 |
| Sampler | : DAVID WATSON, SEAN DAYKIN | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- Analysis Holding Time Outliers exist - please see following pages for full details.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|-------------------------------------|----------------------|------------------|----------|------------|----------------|--------|---|
| Matrix Spike (MS) Recoveries | | | | | | | |
| ED009: Anions | ES1529279--013 | Anonymous | Chloride | 16887-00-6 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| EP033: C1 - C4 Hydrocarbon Gases | ES1529445--001 | Anonymous | Methane | 74-82-8 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Outliers : Analysis Holding Time Compliance

Matrix: **WATER**

| Method | Container / Client Sample ID(s) | Extraction / Preparation | | | Analysis | | |
|---|---------------------------------|--------------------------|--------------------|--------------|---------------|------------------|--------------|
| | | Date extracted | Due for extraction | Days overdue | Date analysed | Due for analysis | Days overdue |
| EA005P: pH by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural | | | | | | | |
| AST2, WK12, QA12 | WK11, WK13, | ---- | ---- | ---- | 28-Aug-2015 | 26-Aug-2015 | 2 |
| EK010/011: Chlorine | | | | | | | |
| Clear Plastic Bottle - Natural | | | | | | | |
| AST2, WK12, QA12 | WK11, WK13, | ---- | ---- | ---- | 29-Aug-2015 | 26-Aug-2015 | 2 |
| EP262: Ethanolamines | | | | | | | |
| Amber Glass Bottle - Unpreserved | | | | | | | |
| AST2, WK12, QA12 | WK11, WK13, | ---- | ---- | ---- | 03-Sep-2015 | 02-Sep-2015 | 0 |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Suspended Solids (High Level) | 1 | 20 | 5.00 | 9.52 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA005P: pH by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA005-P) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 26-Aug-2015 | * |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| EA015: Total Dissolved Solids | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 02-Sep-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 02-Sep-2015 | ✓ |
| ED009: Anions | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 09-Sep-2015 | ✓ |



Matrix: **WATER** Evaluation: ✘ = Holding time breach ; ✔ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✔ |
| ED045G: Chloride by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✔ |
| ED093F: Dissolved Major Cations | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 23-Sep-2015 | ✔ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 22-Feb-2016 | ✔ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 22-Feb-2016 | ✔ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 02-Sep-2015 | 23-Sep-2015 | ✔ |
| EG052G: Silica by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✔ |
| EK010/011: Chlorine | | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 29-Aug-2015 | 26-Aug-2015 | ✘ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EK040P: Fluoride by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 23-Sep-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 28-Aug-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 31-Aug-2015 | 23-Sep-2015 | ✓ |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | 31-Aug-2015 | 23-Sep-2015 | ✓ | 31-Aug-2015 | 23-Sep-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | 31-Aug-2015 | 23-Sep-2015 | ✓ | 31-Aug-2015 | 23-Sep-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 28-Aug-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|--|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 02-Sep-2015 | 23-Sep-2015 | ✓ | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 09-Sep-2015 | ✓ | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | 31-Aug-2015 | 02-Sep-2015 | ✓ | 01-Sep-2015 | 10-Oct-2015 | ✓ | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | 31-Aug-2015 | 09-Sep-2015 | ✓ | 31-Aug-2015 | 09-Sep-2015 | ✓ | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | 31-Aug-2015 | 02-Sep-2015 | ✓ | 01-Sep-2015 | 10-Oct-2015 | ✓ | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | 31-Aug-2015 | 09-Sep-2015 | ✓ | 31-Aug-2015 | 09-Sep-2015 | ✓ | |
| EP262: Ethanolamines | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) AST2, WK12, QA12 WK11, WK13, | 26-Aug-2015 | ---- | ---- | ---- | 03-Sep-2015 | 02-Sep-2015 | * | |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 10 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH by PC Titrator | EA005-P | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 9.52 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER**

Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Ethanolamines by LCMSMS | EP262 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 4.76 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH by PC Titrator | EA005-P | WATER | In house: Referenced to APHA 4500 H+ B. This procedure determines pH of water samples by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1529589 | Page | : 1 of 4 |
| Amendment | : 2 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 28-Aug-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 28-Aug-2015 |
| Sampler | : SEAN DAYKIN | Issue Date | : 02-Sep-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | | |
|---|------------------|---|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) | |
| EA010P: Conductivity by PC Titrator (QC Lot: 197064) | | | | | | | | | | |
| ES1529589-001 | AST2 | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8490 | 8560 | 0.845 | 0% - 20% | |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 201046) | | | | | | | | | | |
| ES1529589-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% | |
| EP080: BTEXN (QC Lot: 196769) | | | | | | | | | | |
| ES1529589-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | 1 | 1 | 0.00 | No Limit | |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | | 106-42-3 | | | | | | | |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit | |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 197064) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 106 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 201046) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 100 | 72 | 126 |
| EP080: BTEXN (QCLot: 196769) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 92.1 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 96.6 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 95.7 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 91.2 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 95.9 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 93.9 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 196769) | | | | | | | |
| ES1529589-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 79.0 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 90.8 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 89.3 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 92.5 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 89.9 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 86.8 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1529589 | Page | : 1 of 4 |
| Amendment | : 2 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 28-Aug-2015 |
| Site | : ---- | Issue Date | : 02-Sep-2015 |
| Sampler | : SEAN DAYKIN | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|----------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 26-Aug-2015 | ---- | ---- | ---- | 28-Aug-2015 | 23-Sep-2015 | ✓ | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, QA12 | WK11, WK13, | 26-Aug-2015 | 28-Aug-2015 | 09-Sep-2015 | ✓ | 28-Aug-2015 | 09-Sep-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 1 | 100.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1530616 | Page | : 1 of 4 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523A | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 09-Sep-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 09-Sep-2015 |
| Sampler | : ---- | Issue Date | : 29-Sep-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |

Page : 2 of 4
Work Order : ES1530616 Amendment 1
Client : PARSONS BRINCKERHOFF AUST P/L
Project : 2268523A



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key : Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
 CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 RPD = Relative Percentage Difference
 # = Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|---|----------------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA010P: Conductivity by PC Titrator (QC Lot: 208845) | | | | | | | | | |
| EN1512978-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 4090 | 4090 | 0.00 | 0% - 20% |
| EW1511643-007 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | <1 | 0.00 | No Limit |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 208991) | | | | | | | | | |
| ES1530616-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% |
| EP080: BTEXN (QC Lot: 208827) | | | | | | | | | |
| ES1530616-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1530686-003 | Anonymous | EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 208845) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 102 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 208991) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 107 | 72 | 126 |
| EP080: BTEXN (QCLot: 208827) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 87.3 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 92.4 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 91.8 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 94.5 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 93.5 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 208827) | | | | | | | |
| ES1530616-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 71.6 | 70 | 130 |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 87.3 | 70 | 130 |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 87.6 | 70 | 130 |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 94.2 | 70 | 130 |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 89.9 | 70 | 130 |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 79.6 | 70 | 130 |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1530616 | Page | : 1 of 4 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523A | Date Samples Received | : 09-Sep-2015 |
| Site | : ---- | Issue Date | : 29-Sep-2015 |
| Sampler | : ---- | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- **NO** Matrix Spike outliers occur.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 07-Oct-2015 | ✓ |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 WK11, WK13, | 09-Sep-2015 | 09-Sep-2015 | 23-Sep-2015 | ✓ | 09-Sep-2015 | 23-Sep-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|--|
| Work Order | : ES1530625 | Page | : 1 of 14 |
| Amendment | : 4 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523A | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 09-Sep-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 09-Sep-2015 |
| Sampler | : ---- | Issue Date | : 15-Oct-2015 |
| Site | : ---- | No. of samples received | : 10 |
| Quote number | : ---- | No. of samples analysed | : 10 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Alex Rossi | Organic Chemist | Sydney Organics |
| Andrew Epps | Senior Inorganic Chemist | Brisbane Organics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Matt Frost | Senior Organic Chemist | Brisbane Organics |
| Merrin Avery | Supervisor - Inorganic | Newcastle - Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005: pH (QC Lot: 209440) | | | | | | | | | |
| EN1512978-001 | Anonymous | EA005: pH Value | ---- | 0.01 | pH Unit | 7.88 | 7.89 | 0.127 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 208845) | | | | | | | | | |
| EN1512978-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 4090 | 4090 | 0.00 | 0% - 20% |
| EW1511643-007 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | <1 | 0.00 | No Limit |
| EA015: Total Dissolved Solids (QC Lot: 209646) | | | | | | | | | |
| ES1530625-001 | AST2 | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5320 | 5110 | 4.06 | 0% - 20% |
| ES1530630-006 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 10300 | 10900 | 5.33 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 209647) | | | | | | | | | |
| ES1530625-001 | AST2 | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 58 | 56 | 3.52 | 0% - 50% |
| ES1530630-006 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | <5 | 0.00 | No Limit |
| ED009: Anions (QC Lot: 208907) | | | | | | | | | |
| EP1513642-008 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | <0.100 | 0.00 | No Limit |
| ES1530612-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 142 | 134 | 5.62 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 208847) | | | | | | | | | |
| ES1530604-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 556 | 560 | 0.869 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 3 | 5 | 62.6 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 558 | 566 | 1.30 | 0% - 20% |
| EW1511643-007 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 208836) | | | | | | | | | |
| ES1530604-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 158 | 159 | 0.00 | 0% - 20% |
| EW1511631-014 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 24 | 24 | 0.00 | 0% - 20% |
| ED045G: Chloride by Discrete Analyser (QC Lot: 208837) | | | | | | | | | |
| ES1530604-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 229 | 230 | 0.665 | 0% - 20% |
| EW1511631-014 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 43 | 43 | 0.00 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 210898) | | | | | | | | | |
| ES1530625-005 | WK14 | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 40 | 36 | 10.6 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 15 | 14 | 9.01 | 0% - 50% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 23 | 20 | 12.7 | 0% - 20% |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 3990 | 3480 | 13.7 | 0% - 20% |
| ES1530486-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 27 | 29 | 5.09 | 0% - 20% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 210898) - continued | | | | | | | | | |
| ES1530486-001 | Anonymous | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 37 | 41 | 10.7 | 0% - 20% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 3 | 3 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 44 | 50 | 12.3 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 210901) | | | | | | | | | |
| ES1530625-005 | WK14 | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 8.04 | 7.63 | 5.34 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| ES1530486-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.434 | 0.458 | 5.26 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 210902) | | | | | | | | | |
| ES1530609-007 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | 0.007 | 0.007 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.030 | 0.028 | 6.77 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.002 | 0.003 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | 0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 1.1 | 1.2 | 0.00 | 0% - 50% |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 210900) | | | | | | | | | |
| ES1530486-003 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1530581-025 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 208839) | | | | | | | | | |
| ES1530625-001 | AST2 | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 18.0 | 19.6 | 8.44 | 0% - 20% |
| EW1511631-014 | Anonymous | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 2.78 | 2.67 | 4.11 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 208833) | | | | | | | | | |
| ES1530625-001 | AST2 | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 208846) | | | | | | | | | |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK040P: Fluoride by PC Titrator (QC Lot: 208846) - continued | | | | | | | | | |
| ES1530580-002 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.4 | 0.4 | 0.00 | No Limit |
| EW1511643-007 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 209389) | | | | | | | | | |
| EW1511631-003 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 0.01 | 0.00 | No Limit |
| ES1530625-001 | AST2 | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 208840) | | | | | | | | | |
| ES1530625-001 | AST2 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EW1511631-014 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | 0.01 | 0.01 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 209390) | | | | | | | | | |
| ES1530694-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.04 | 0.04 | 0.00 | No Limit |
| ES1530625-001 | AST2 | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.05 | 0.07 | 23.7 | No Limit |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 209376) | | | | | | | | | |
| ES1530625-001 | AST2 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 8.2 | 7.8 | 4.16 | 0% - 20% |
| EW1511631-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 0.7 | 0.7 | 0.00 | No Limit |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 209375) | | | | | | | | | |
| ES1530625-001 | AST2 | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 2.12 | 2.03 | 4.26 | 0% - 20% |
| EW1511631-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.04 | 0.04 | 0.00 | No Limit |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 208838) | | | | | | | | | |
| ES1530625-001 | AST2 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.04 | 0.03 | 0.00 | No Limit |
| EW1511631-014 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EP005: Total Organic Carbon (TOC) (QC Lot: 212045) | | | | | | | | | |
| ES1530361-001 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| ES1530625-001 | AST2 | EP005: Total Organic Carbon | ---- | 1 | mg/L | 66 | 50 | 27.8 | 0% - 50% |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 209191) | | | | | | | | | |
| EM1514199-001 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 124 | 125 | 0.00 | 0% - 50% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| ES1530693-001 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | 8400 | 7230 | 14.9 | 0% - 20% |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |

Page : 6 of 14
 Work Order : ES1530625 Amendment 4
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523A



Sub-Matrix: **WATER**

| | | | | <i>Laboratory Duplicate (DUP) Report</i> | | | | | |
|--|-------------------------|-------------------------|-------------------|--|-------------|------------------------|-------------------------|----------------|----------------------------|
| <i>Laboratory sample ID</i> | <i>Client sample ID</i> | <i>Method: Compound</i> | <i>CAS Number</i> | <i>LOR</i> | <i>Unit</i> | <i>Original Result</i> | <i>Duplicate Result</i> | <i>RPD (%)</i> | <i>Recovery Limits (%)</i> |
| EP262: Ethanolamines (QC Lot: 208936) | | | | | | | | | |
| ES1530625-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | 15 | 12 | 17.8 | 0% - 50% |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | 7 | 6 | 16.2 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|--------|-------|-----------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 208845) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 102 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 209646) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 102 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 104 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 209647) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 105 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 92.6 | 84 | 110 | |
| ED009: Anions (QCLot: 208907) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 99.8 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 208847) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 90.6 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 208836) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 102 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 208837) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 107 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 97.0 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 210898) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 99.3 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 107 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 106 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 108 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 210901) | | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.8 | 80 | 112 | |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 210902) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 92.3 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 93.3 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.6 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 95.5 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.0 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 104 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 94.5 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|--------|------|-----------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 210902) - continued | | | | | | | | | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.9 | 85 | 115 | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 95.6 | 85 | 115 | |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 96.0 | 85 | 115 | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 91.5 | 85 | 115 | |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.8 | 85 | 115 | |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 96.9 | 85 | 115 | |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.3 | 85 | 115 | |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.8 | 85 | 115 | |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 103 | 85 | 115 | |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.9 | 85 | 115 | |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 96.4 | 85 | 115 | |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 88.2 | 85 | 115 | |
| EG035F: Dissolved Mercury by FIMS (QCLot: 210900) | | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 88.0 | 78 | 114 | |
| EG052G: Silica by Discrete Analyser (QCLot: 208839) | | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 106 | 94 | 114 | |
| EK010/011: Chlorine (QCLot: 208833) | | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator (QCLot: 208846) | | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 98.2 | 75 | 119 | |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 209389) | | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 99.4 | 90 | 114 | |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 208840) | | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 103 | 82 | 114 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 209390) | | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 97.8 | 91 | 113 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 209376) | | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 93.3 | 69 | 101 | |
| | | | | <0.1 | 1 mg/L | 86.2 | 70 | 118 | |
| | | | | <0.1 | 5 mg/L | 102 | 74 | 118 | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 209375) | | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 91.1 | 71 | 101 | |
| | | | | <0.01 | 0.442 mg/L | 85.8 | 72 | 108 | |
| | | | | <0.01 | 1 mg/L | 96.8 | 78 | 118 | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 208838) | | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 104 | 85 | 117 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP005: Total Organic Carbon (TOC) (QCLot: 212045) | | | | | | | | | |
| EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | 10 mg/L | 89.7 | 79 | 113 | |
| | | | | <1 | 100 mg/L | 93.1 | 79 | 113 | |
| EP020: Oil and Grease (O&G) (QCLot: 212197) | | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 95.7 | 80 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 209191) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 103 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 101 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 96.1 | 87 | 111 | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 98.5 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 112 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 109 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 105 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 220839) | | | | | | | | | |
| EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 91.2 | 84 | 118 | |
| EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 88.6 | 83 | 119 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 84.4 | 84 | 118 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 83.1 | 80 | 122 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 90.0 | 80 | 120 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 85.4 | 81 | 121 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 87.6 | 82 | 122 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 76 | 119 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 90.8 | 81 | 121 | |
| EP074B: Oxygenated Compounds (QCLot: 220839) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 109 | 67 | 127 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 104 | 65 | 131 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 110 | 64 | 126 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 95.7 | 65 | 131 | |
| EP074C: Sulfonated Compounds (QCLot: 220839) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 72.1 | 72 | 128 | |
| EP074D: Fumigants (QCLot: 220839) | | | | | | | | | |
| EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 94.0 | 78 | 122 | |
| EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 96.5 | 83 | 117 | |
| EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 71.4 | 71 | 133 | |
| EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 20 µg/L | 86.9 | 75 | 123 | |
| EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 20 µg/L | 88.6 | 69 | 127 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 220839) | | | | | | | | | |
| EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 87.3 | 78 | 120 | |
| EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 83.6 | 79 | 121 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 220839) - continued | | | | | | | | | |
| EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 104 | 77 | 124 | |
| EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 96.0 | 81 | 122 | |
| EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 90.1 | 76 | 123 | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 81.2 | 75 | 127 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 84.6 | 83 | 117 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 108 | 71 | 129 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 102 | 64 | 134 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 102 | 82 | 120 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 95.6 | 82 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 83.8 | 58 | 135 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 80.4 | 77 | 125 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 79.5 | 69 | 129 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 63.0 | 57 | 135 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 93.9 | 83 | 119 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 80.8 | 58 | 135 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 99.6 | 78 | 122 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 60.6 | 42 | 140 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 82.2 | 67 | 137 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | 90.9 | 52 | 135 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 96.1 | 67 | 127 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 87.4 | 83 | 119 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 85.9 | 77 | 123 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 107 | 56 | 135 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 87.3 | 84 | 118 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 78.2 | 70 | 132 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 79.0 | 48 | 145 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 220839) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 98.0 | 78 | 123 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 87.1 | 79 | 121 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 95.7 | 85 | 115 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 91.6 | 85 | 117 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 92.0 | 85 | 117 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 94.9 | 84 | 118 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 94.5 | 85 | 119 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 96.7 | 83 | 117 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 87.6 | 84 | 115 | |
| EP074G: Trihalomethanes (QCLot: 220839) | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 94.3 | 79 | 121 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 74 | 124 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074G: Trihalomethanes (QCLot: 220839) - continued | | | | | | | | | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 94.4 | 81 | 118 | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 87.4 | 77 | 123 | |
| EP074H: Naphthalene (QCLot: 220839) | | | | | | | | | |
| EP074: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 102 | 75 | 116 | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 209215) | | | | | | | | | |
| EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 80.2 | 50 | 108 | |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 61.4 | 59 | 118 | |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 69.2 | 59 | 122 | |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 73.9 | 60 | 112 | |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 72.3 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | 70.6 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 69.2 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 66.8 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 71.2 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 68.9 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 43.9 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 55.0 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 209215) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 76.6 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 73.0 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 79.3 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 76.6 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 77.8 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | 5 µg/L | 79.7 | 62 | 119 | |
| | 205-82-3 | | | | | | | | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 77.4 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 78.0 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 79.9 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 77.5 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | 79.8 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 74.6 | 64 | 115 | |
| EP075(SIM): Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 77.2 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 72.2 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 78.2 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 80.6 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 209216) | | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 91.9 | 59 | 129 | |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 99.3 | 71 | 131 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|------|---------------------------------|---------------------------------------|--------------------|---------------------|------|
| | | | | | Spike Concentration | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | | | LCS | Low | High |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 209216) - continued | | | | | | | | |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 99.4 | 62 | 120 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 244162) | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 160 µg/L | 97.4 | 76 | 122 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 209216) | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 91.8 | 59 | 131 |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 100 | 74 | 138 |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 101 | 67 | 127 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 244162) | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 185 µg/L | 97.2 | 75 | 123 |
| EP080: C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | <20 | ---- | ---- | ---- | ---- |
| | X | | | | | | | |
| EP080: BTEXN (QCLot: 244162) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 104 | 77 | 119 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 94.1 | 78 | 119 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 20 µg/L | 95.9 | 77 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 106 | 75 | 120 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 96.5 | 76 | 121 |
| EP080: Sum of BTEX | ---- | 1 | µg/L | <1 | ---- | ---- | ---- | ---- |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 98.6 | 78 | 122 |
| EP080: Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- |
| EP262: Ethanolamines (QCLot: 208936) | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 88.7 | 50 | 130 |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 99.9 | 50 | 130 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: WATER

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|--------------------|---------------------|-----|
| | | | | Spike Concentration | Spike Recovery (%) | Recovery Limits (%) | |
| | | | | MS | Low | High | |
| ED009: Anions (QCLot: 208907) | | | | | | | |
| EP1513642-008 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | 107 | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 208836) | | | | | | | |
| ES1530625-001 | AST2 | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | 97.1 | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 208837) | | | | | | | |

Page : 13 of 14
 Work Order : ES1530625 Amendment 4
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523A



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| ED045G: Chloride by Discrete Analyser (QCLot: 208837) - continued | | | | | | | |
| ES1530625-001 | AST2 | ED045G: Chloride | 16887-00-6 | 250 mg/L | 84.5 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 210902) | | | | | | | |
| ES1530609-008 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 88.6 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 73.4 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 79.1 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 79.9 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 71.2 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 73.5 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 77.4 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 70.5 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | # 66.8 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 70.6 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 75.6 | 70 | 130 |
| EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 80.3 | 70 | 130 | | |
| EG035F: Dissolved Mercury by FIMS (QCLot: 210900) | | | | | | | |
| ES1530486-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 84.4 | 70 | 130 |
| EG052G: Silica by Discrete Analyser (QCLot: 208839) | | | | | | | |
| ES1530625-001 | AST2 | EG052G: Reactive Silica | ---- | 5 mg/L | 120 | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 208846) | | | | | | | |
| ES1530580-002 | Anonymous | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 98.8 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 209389) | | | | | | | |
| ES1530625-001 | AST2 | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 91.3 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 208840) | | | | | | | |
| ES1530625-001 | AST2 | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 99.0 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 209390) | | | | | | | |
| ES1530625-001 | AST2 | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 88.5 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 209376) | | | | | | | |
| ES1530625-002 | WK11 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 114 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 209375) | | | | | | | |
| ES1530625-002 | WK11 | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 94.1 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 208838) | | | | | | | |
| ES1530625-001 | AST2 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 99.7 | 70 | 130 |
| EP005: Total Organic Carbon (TOC) (QCLot: 212045) | | | | | | | |
| ES1530609-001 | Anonymous | EP005: Total Organic Carbon | ---- | 100 mg/L | 96.3 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 209191) | | | | | | | |

Page : 14 of 14
 Work Order : ES1530625 Amendment 4
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523A



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|-----------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 209191) - continued | | | | | | | |
| ES1530609-001 | Anonymous | EP033: Butane | 106-97-8 | 102.18 µg/L | 86.6 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 81.4 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 93.6 | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 93.4 | 70 | 130 |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | 102 | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 92.2 | 70 | 130 |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 85.3 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 208936) | | | | | | | |
| ES1530625-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 116 | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 71.4 | 50 | 130 |

QA/QC Compliance Assessment for DQO Reporting

Work Order : **ES1530625**

Page : 1 of 12

Amendment : **4**

Client : **PARSONS BRINCKERHOFF AUST P/L**

Laboratory : Environmental Division Sydney

Contact : SEAN DAYKIN

Telephone : +61 2 8784 8503

Project : 2268523A

Date Samples Received : 09-Sep-2015

Site : ----

Issue Date : 15-Oct-2015

Sampler : ----

No. of samples received : 10

Order number : ----

No. of samples analysed : 10

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- **NO** Laboratory Control outliers occur.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|-------------------------------------|----------------------|------------------|-----------|------------|--------|---------|---|
| Matrix Spike (MS) Recoveries | | | | | | | |
| EG020F: Dissolved Metals by ICP-MS | ES1530609--008 | Anonymous | Manganese | 7439-96-5 | 66.8 % | 70-130% | Recovery less than lower data quality objective |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 10 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 13 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 10 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 13 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA005: pH | | | | | | | | |
| Clear Plastic Bottle - Natural (EA005) | | | | | | | | |
| AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 09-Sep-2015 | ✓ |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) | | | | | | | | |
| WK11, WK13, | WK12, WK14 | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 07-Oct-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA015: Total Dissolved Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) AST2, WK12, WK14 | WK11, WK13 | 09-Sep-2015 | ---- | ---- | ---- | 10-Sep-2015 | 16-Sep-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) AST2, WK12, WK14 | WK11, WK13 | 09-Sep-2015 | ---- | ---- | ---- | 10-Sep-2015 | 16-Sep-2015 | ✓ |
| ED009: Anions | | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) AST2, WK12, WK14 | WK11, WK13 | 09-Sep-2015 | ---- | ---- | ---- | 10-Sep-2015 | 07-Oct-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) AST2, WK12, WK14 | WK11, WK13 | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 23-Sep-2015 | ✓ |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) AST2, WK12, WK14 | WK11, WK13 | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 07-Oct-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) AST2, WK12, WK14 | WK11, WK13 | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 07-Oct-2015 | ✓ |
| ED093F: Dissolved Major Cations | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) AST2, WK12, WK14 | WK11, WK13 | 09-Sep-2015 | ---- | ---- | ---- | 11-Sep-2015 | 07-Oct-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) AST2, WK12, WK14 | WK11, WK13 | 09-Sep-2015 | ---- | ---- | ---- | 11-Sep-2015 | 07-Mar-2016 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 11-Sep-2015 | 07-Mar-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 14-Sep-2015 | 07-Oct-2015 | ✓ |
| EG052G: Silica by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 07-Oct-2015 | ✓ |
| EK010/011: Chlorine | | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 09-Sep-2015 | ✓ |
| EK040P: Fluoride by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 07-Oct-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 10-Sep-2015 | 07-Oct-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 11-Sep-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 10-Sep-2015 | 07-Oct-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | 10-Sep-2015 | 07-Oct-2015 | ✓ | 10-Sep-2015 | 07-Oct-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | 10-Sep-2015 | 07-Oct-2015 | ✓ | 10-Sep-2015 | 07-Oct-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 09-Sep-2015 | 11-Sep-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 12-Sep-2015 | 07-Oct-2015 | ✓ |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 14-Sep-2015 | 07-Oct-2015 | ✓ |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP033) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 10-Sep-2015 | 23-Sep-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | 14-Sep-2015 | 16-Sep-2015 | ✓ | 14-Sep-2015 | 24-Oct-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | 14-Sep-2015 | 23-Sep-2015 | ✓ | 14-Sep-2015 | 23-Sep-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | 22-Sep-2015 | 23-Sep-2015 | ✓ | 22-Sep-2015 | 23-Sep-2015 | ✓ |
| EP075(SIM)T: PAH Surrogates | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | 14-Sep-2015 | 16-Sep-2015 | ✓ | 14-Sep-2015 | 24-Oct-2015 | ✓ |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | 14-Sep-2015 | 23-Sep-2015 | ✓ | 14-Sep-2015 | 23-Sep-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | 21-Sep-2015 | 23-Sep-2015 | ✓ | 21-Sep-2015 | 23-Sep-2015 | ✓ |
| EP262: Ethanolamines | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) AST2, WK12, WK14 | WK11, WK13, | 09-Sep-2015 | ---- | ---- | ---- | 10-Sep-2015 | 16-Sep-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 9 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 2 | 5 | 40.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 5 | 20.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 10 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH | EA005 | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 2 | 11 | 18.18 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 7 | 28.57 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 2 | 17 | 11.76 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | EP071 | 0 | 13 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 0 | 5 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 0 | 5 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|--------|----------|----------|------------|--|
| | | QC | Reular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 2 | 17 | 11.76 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 13 | 7.69 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 5 | 20.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 10 | 10.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 11 | 9.09 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 4.76 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 13 | 7.69 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 9 | 11.11 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 5 | 20.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 10 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 11 | 9.09 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 17 | 5.88 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 13 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH | EA005 | WATER | In house: Referenced to APHA 4500 H+ B. pH of water samples is determined by ISE either manually or by automated pH meter. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|--|
| Work Order | : ES1531965 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 23-Sep-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 23-Sep-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 24-Sep-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |

Page : 2 of 4
Work Order : ES1531965
Client : PARSONS BRINCKERHOFF AUST P/L
Project : 2268523B



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|---|----------------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA010P: Conductivity by PC Titrator (QC Lot: 223161) | | | | | | | | | |
| EW1511842-003 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 63 | 62 | 0.00 | 0% - 20% |
| ES1531962-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 925 | 921 | 0.439 | 0% - 20% |
| EK084: Un-ionized Hydrogen Sulfide (QC Lot: 224008) | | | | | | | | | |
| ES1531965-001 | AST2 | EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | 0% - 20% |
| EP080: BTEXN (QC Lot: 223097) | | | | | | | | | |
| ES1531965-001 | AST2 | EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|--|----------------------|-----|-------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EA010P: Conductivity by PC Titrator (QCLot: 223161) | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 102 | 95 | 113 |
| EK084: Un-ionized Hydrogen Sulfide (QCLot: 224008) | | | | | | | | |
| EK084: Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | 0.05 mg/L | 98.4 | 72 | 126 |
| EP080: BTEXN (QCLot: 223097) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 94.0 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 89.3 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 88.2 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 84.8 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 89.0 | 65 | 129 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: **WATER**

| | | | | Matrix Spike (MS) Report | | | | |
|-------------------------------------|------------------|----------------------------|----------------------|--------------------------|--------------------------|---------------------------------|-----|--|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | | |
| EP080: BTEXN (QCLot: 223097) | | | | | | | | |
| ES1531965-001 | AST2 | EP080: Benzene | 71-43-2 | 25 µg/L | 80.2 | 70 | 130 | |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 100 | 70 | 130 | |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 25 µg/L | 102 | 70 | 130 | |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 96.0 | 70 | 130 | |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 93.8 | 70 | 130 | |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 98.0 | 70 | 130 | |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1531965 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 23-Sep-2015 |
| Site | : ---- | Issue Date | : 24-Sep-2015 |
| Sampler | : CAROLINA SARDELLA | No. of samples received | : 5 |
| Order number | : ---- | No. of samples analysed | : 5 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO Method Blank value outliers occur.**
- **NO Duplicate outliers occur.**
- **NO Laboratory Control outliers occur.**
- **NO Matrix Spike outliers occur.**
- **For all regular sample matrices, NO surrogate recovery outliers occur.**

Outliers : Analysis Holding Time Compliance

- **NO Analysis Holding Time Outliers exist.**

Outliers : Frequency of Quality Control Samples

- **Quality Control Sample Frequency Outliers exist - please see following pages for full details.**



Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type Method | Count | | Rate (%) | | Quality Control Specification |
|---|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | |
| Un-ionized Hydrogen Sulfide | 0 | 5 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|----------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) AST2 | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 21-Oct-2015 | ✓ | |
| EP080: BTEXN | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | 23-Sep-2015 | 07-Oct-2015 | ✓ | 23-Sep-2015 | 07-Oct-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|---|---------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 2 | 13 | 15.38 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 10 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 10.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 13 | 7.69 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Conductivity by PC Titrator | EA010-P | 1 | 13 | 7.69 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Un-ionized Hydrogen Sulfide | EK084 | 0 | 5 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| TRH Volatiles/BTEX | EP080 | 1 | 10 | 10.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|-----------------------------|---------|--------|--|
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Un-ionized Hydrogen Sulfide | EK084 | WATER | In house: Referenced to APHA 4500-S2- H. Sulfide in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|--------------|--|-------------------------|---|
| Work Order | : ES1532002 | Page | : 1 of 18 |
| Amendment | : 2 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523A | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 23-Sep-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 23-Sep-2015 |
| Sampler | : ---- | Issue Date | : 09-Oct-2015 |
| Site | : ---- | No. of samples received | : 5 |
| Quote number | : ---- | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Alison Graham | Supervisor - Inorganic | Newcastle - Inorganics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005: pH (QC Lot: 224833) | | | | | | | | | |
| ES1532026-001 | Anonymous | EA005: pH Value | ---- | 0.01 | pH Unit | 7.37 | 7.34 | 0.408 | 0% - 20% |
| ES1532008-003 | Anonymous | EA005: pH Value | ---- | 0.01 | pH Unit | 7.30 | 7.33 | 0.410 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 225797) | | | | | | | | | |
| ES1531980-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 2140 | 2150 | 0.478 | 0% - 20% |
| ES1531935-004 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 185 | 182 | 1.65 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 225427) | | | | | | | | | |
| ES1531955-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 134 | 147 | 9.27 | 0% - 50% |
| ES1531956-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 1430 | 1380 | 3.69 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 225428) | | | | | | | | | |
| ES1531955-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | <5 | 0.00 | No Limit |
| ES1531956-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 12 | 15 | 18.2 | No Limit |
| ED009: Anions (QC Lot: 223259) | | | | | | | | | |
| EP1514101-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 9.00 | 8.75 | 2.78 | No Limit |
| ES1531880-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 22.4 | 22.3 | 0.345 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 225798) | | | | | | | | | |
| ES1532002-001 | AST2 | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 2850 | 2880 | 0.873 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 1250 | 1200 | 4.08 | 0% - 20% |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 4100 | 4080 | 0.612 | 0% - 20% |
| ES1531935-004 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 64 | 63 | 0.00 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 64 | 63 | 0.00 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 223166) | | | | | | | | | |
| ES1531935-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 268 | 260 | 2.82 | 0% - 20% |
| ES1532008-002 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 6 | 6 | 0.00 | No Limit |
| ED045G: Chloride by Discrete Analyser (QC Lot: 223167) | | | | | | | | | |
| ES1531962-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 76 | 76 | 0.00 | 0% - 20% |
| ES1531935-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 182 | 182 | 0.00 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 226314) | | | | | | | | | |
| ES1531907-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 8 | 8 | 0.00 | No Limit |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 6 | 6 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 2 | 2 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 15 | 15 | 0.00 | 0% - 50% |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 226314) - continued | | | | | | | | | |
| ES1531875-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 2 | 2 | 0.00 | No Limit |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 3 | 3 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 339 | 336 | 0.965 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 226315) | | | | | | | | | |
| ES1532002-005 | QA13 | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 6.95 | 6.85 | 1.45 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| ES1531875-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.030 | 0.029 | 0.00 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 226317) | | | | | | | | | |
| ES1531907-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.067 | 0.067 | 0.00 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.558 | 0.552 | 1.00 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.001 | 0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 12.0 | 12.1 | 1.12 | 0% - 20% |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| ES1531875-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | 0.003 | 0.002 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.018 | 0.018 | 0.00 | 0% - 50% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 226317) - continued | | | | | | | | | |
| ES1531875-001 | Anonymous | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.004 | 0.004 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | 0.06 | 0.06 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 0.21 | 0.21 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.2 | 0.2 | 0.00 | No Limit |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 226316) | | | | | | | | | |
| ES1531877-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1532002-005 | QA13 | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 223170) | | | | | | | | | |
| ES1532008-002 | Anonymous | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 3.66 | 3.66 | 0.00 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 223119) | | | | | | | | | |
| ES1532002-001 | AST2 | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 225796) | | | | | | | | | |
| ES1531352-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.5 | 0.5 | 0.00 | No Limit |
| ES1531935-004 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 223310) | | | | | | | | | |
| ES1532002-005 | QA13 | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 4.85 | 4.87 | 0.414 | 0% - 20% |
| ES1531880-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.02 | 0.02 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 223168) | | | | | | | | | |
| ES1531935-001 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1532008-002 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 223309) | | | | | | | | | |
| ES1532002-002 | WK11 | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.01 | 0.02 | 0.00 | No Limit |
| ES1531880-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.05 | 0.02 | 59.4 | No Limit |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 223293) | | | | | | | | | |
| ES1531570-008 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 2.0 | 2.0 | 0.00 | 0% - 20% |
| ES1531921-004 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 24.8 | 24.7 | 0.00 | 0% - 20% |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 223296) | | | | | | | | | |
| EW1511842-003 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| ES1532002-005 | QA13 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 5.8 | 5.8 | 0.00 | 0% - 20% |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 223294) | | | | | | | | | |
| ES1531570-008 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 0.06 | 0.06 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|----------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 223294) - continued | | | | | | | | | |
| ES1531921-004 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 68.7 | 71.6 | 4.18 | 0% - 20% |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 223295) | | | | | | | | | |
| EW1511842-003 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1532002-005 | QA13 | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 1.39 | 1.40 | 1.12 | 0% - 20% |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 223165) | | | | | | | | | |
| ES1531935-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1532008-002 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 225763) | | | | | | | | | |
| EM1514747-001 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| ES1531999-004 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | WK13 | EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 226812) - continued | | | | | | | | | |
| ES1532002-003 | WK13 | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074B: Oxygenated Compounds (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1532002-003 | WK13 | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | WK13 | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | WK13 | EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 226812) - continued | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| ES1532002-003 | WK13 | EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 226812) - continued | | | | | | | | | |
| ES1532002-003 | WK13 | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | WK13 | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074G: Trihalomethanes (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | WK13 | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 226811) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1532002-003 | WK13 | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | 180 | 180 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 226811) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1532002-003 | WK13 | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | 180 | 180 | 0.00 | No Limit |
| EP262: Ethanolamines (QC Lot: 223283) | | | | | | | | | |
| ES1532002-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | 36 | 33 | 8.97 | 0% - 20% |

Page : 10 of 18
 Work Order : ES1532002 Amendment 2
 Client : PARSONS BRINCKERHOFF AUST P/L
 Project : 2268523A



Sub-Matrix: **WATER**

Laboratory Duplicate (DUP) Report

| <i>Laboratory sample ID</i> | <i>Client sample ID</i> | <i>Method: Compound</i> | <i>CAS Number</i> | <i>LOR</i> | <i>Unit</i> | <i>Original Result</i> | <i>Duplicate Result</i> | <i>RPD (%)</i> | <i>Recovery Limits (%)</i> |
|--|-------------------------|-------------------------|-------------------|------------|-------------|------------------------|-------------------------|----------------|----------------------------|
| EP262: Ethanolamines (QC Lot: 223283) - continued | | | | | | | | | |
| ES1532002-001 | AST2 | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | 17 | 16 | 0.00 | 0% - 50% |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|--------|-------|-----------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 225797) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 100 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 225427) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 94.3 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 116 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 225428) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 117 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 99.8 | 84 | 110 | |
| ED009: Anions (QCLot: 223259) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 102 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 225798) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 91.9 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 223166) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 107 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 223167) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 112 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 104 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 226314) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 94.6 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 102 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 98.0 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 95.8 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226315) | | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 88.9 | 80 | 112 | |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226317) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 94.7 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 90.6 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.7 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.4 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 99.3 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 85.6 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 93.6 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|--------|------|--------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226317) - continued | | | | | | | | | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.1 | 85 | 115 | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.4 | 85 | 115 | |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.6 | 85 | 115 | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 102 | 85 | 115 | |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 95.4 | 85 | 115 | |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.4 | 85 | 115 | |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.6 | 85 | 115 | |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 89.3 | 85 | 115 | |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 90.0 | 85 | 115 | |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 87.1 | 85 | 115 | |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 94.6 | 85 | 115 | |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 90.8 | 85 | 115 | |
| EG035F: Dissolved Mercury by FIMS (QCLot: 226316) | | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 91.0 | 78 | 114 | |
| EG052G: Silica by Discrete Analyser (QCLot: 223170) | | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 105 | 94 | 114 | |
| EK010/011: Chlorine (QCLot: 223119) | | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator (QCLot: 225796) | | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 81.2 | 75 | 119 | |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 223310) | | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 96.3 | 90 | 114 | |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 223168) | | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 95.0 | 82 | 114 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 223309) | | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 94.9 | 91 | 113 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 223293) | | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 87.4 | 69 | 101 | |
| | | | | <0.1 | 1 mg/L | 99.9 | 70 | 118 | |
| | | | | <0.1 | 5 mg/L | 101 | 74 | 118 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 223296) | | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 88.0 | 69 | 101 | |
| | | | | <0.1 | 1 mg/L | 95.5 | 70 | 118 | |
| | | | | <0.1 | 5 mg/L | 100 | 74 | 118 | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 223294) | | | | | | | | | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|------|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 223294) - continued | | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 92.6 | 71 | 101 | |
| | | | | <0.01 | 0.442 mg/L | 97.5 | 72 | 108 | |
| | | | | <0.01 | 1 mg/L | 106 | 78 | 118 | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 223295) | | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 94.2 | 71 | 101 | |
| | | | | <0.01 | 0.442 mg/L | 93.7 | 72 | 108 | |
| | | | | <0.01 | 1 mg/L | 103 | 78 | 118 | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 223165) | | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 102 | 85 | 117 | |
| EP020: Oil and Grease (O&G) (QCLot: 227406) | | | | | | | | | |
| EP020: Oil & Grease | ---- | 5 | mg/L | <5 | 5000 mg/L | 86.6 | 80 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 225763) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 101 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 100 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 98.8 | 87 | 111 | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 98.4 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 103 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 97.1 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 97.6 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 226812) | | | | | | | | | |
| EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 91.7 | 71 | 121 | |
| EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 89.6 | 70 | 122 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 93.8 | 75 | 121 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 90.4 | 62 | 126 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 79.9 | 67 | 123 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 89.4 | 67 | 123 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 88.1 | 69 | 123 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 91.4 | 74 | 118 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 70 | 122 | |
| EP074B: Oxygenated Compounds (QCLot: 226812) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 87.8 | 74 | 130 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 98.6 | 65 | 137 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 100 | 61 | 139 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 103 | 61 | 134 | |
| EP074C: Sulfonated Compounds (QCLot: 226812) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 85.2 | 73 | 127 | |
| EP074D: Fumigants (QCLot: 226812) | | | | | | | | | |
| EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 95.0 | 69 | 117 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074D: Fumigants (QCLot: 226812) - continued | | | | | | | | | |
| EP074: 1.2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 94.6 | 76 | 120 | |
| EP074: 2.2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 89.4 | 61 | 119 | |
| EP074: cis-1.3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 83.4 | 62 | 120 | |
| EP074: trans-1.3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 85.4 | 61 | 119 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 226812) | | | | | | | | | |
| EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 88.0 | 66 | 114 | |
| EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 81.8 | 61 | 119 | |
| EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 99.4 | 70 | 124 | |
| EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 97.5 | 75 | 123 | |
| EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 90.1 | 75 | 119 | |
| EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 96.8 | 69 | 123 | |
| EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 92.0 | 73 | 119 | |
| EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 93.4 | 74 | 128 | |
| EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 101 | 66 | 136 | |
| EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 93.6 | 78 | 122 | |
| EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 99.1 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 76.9 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 78.6 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 82.5 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 87.6 | 67 | 130 | |
| EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 89.1 | 77 | 117 | |
| EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 89.8 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 91.0 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 71.9 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 85.2 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | # 59.3 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 86.8 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 88.5 | 72 | 124 | |
| EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 85.3 | 71 | 119 | |
| EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 81.9 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 94.1 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 75.8 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 109 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 226812) | | | | | | | | | |
| EP074: 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 87.9 | 67 | 125 | |
| EP074: 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 87.7 | 60 | 126 | |
| EP074: 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 93.7 | 77 | 117 | |
| EP074: 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 74 | 120 | |
| EP074: 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 95.1 | 72 | 120 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|----------------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 226812) - continued | | | | | | | | | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 80.8 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 88.6 | 71 | 121 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 96.9 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 93.9 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 226812) | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 83.4 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 102 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 81.4 | 76 | 118 | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 95.5 | 65 | 115 | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 223698) | | | | | | | | | |
| EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 65.5 | 50 | 108 | |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 64.8 | 59 | 118 | |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 77.9 | 59 | 122 | |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 72.3 | 60 | 112 | |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 80.3 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | # 63.3 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 66.0 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 67.4 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 59.6 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 72.6 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 60.2 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 44.8 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 223698) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 68.5 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 69.1 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 80.2 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 81.0 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 87.4 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | 5 µg/L | 82.2 | 62 | 119 | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 87.0 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 93.5 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 82.8 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 89.4 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | 91.2 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 73.3 | 64 | 115 | |
| EP075(SIM): Indeno(1,2,3-cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 86.4 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 76.0 | 59 | 119 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 223698) - continued | | | | | | | | | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 79.3 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 92.1 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 223699) | | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 102 | 59 | 129 | |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 97.9 | 71 | 131 | |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 93.0 | 62 | 120 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 226811) | | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 94.5 | 75 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 223699) | | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 88.4 | 59 | 131 | |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 93.4 | 74 | 138 | |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 99.2 | 67 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 226811) | | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 95.7 | 75 | 127 | |
| EP262: Ethanolamines (QCLot: 223283) | | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 125 | 50 | 130 | |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 89.7 | 50 | 130 | |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

Sub-Matrix: WATER

| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|-----------------------|---------------------|------|
| | | | | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) | |
| | | | | | | Low | High |
| ED009: Anions (QCLot: 223259) | | | | | | | |
| EP1514101-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | 114 | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 223166) | | | | | | | |
| ES1531935-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | # Not Determined | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 223167) | | | | | | | |
| ES1531935-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 250 mg/L | 110 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226317) | | | | | | | |
| ES1531877-002 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 82.7 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 80.4 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 78.7 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 76.6 | 70 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|-------------------|---------------------|------|
| | | | | Spike | Spike Recovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226317) - continued | | | | | | | |
| ES1531877-002 | Anonymous | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 72.7 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 77.0 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 74.6 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 74.5 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 83.3 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 77.1 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 74.4 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 87.4 | 70 | 130 |
| EG035F: Dissolved Mercury by FIMS (QCLot: 226316) | | | | | | | |
| ES1531875-002 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 81.0 | 70 | 130 |
| EG052G: Silica by Discrete Analyser (QCLot: 223170) | | | | | | | |
| ES1532008-002 | Anonymous | EG052G: Reactive Silica | ---- | 5 mg/L | 99.0 | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 225796) | | | | | | | |
| ES1531352-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 104 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 223310) | | | | | | | |
| ES1531880-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 87.0 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 223168) | | | | | | | |
| ES1531935-001 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 97.7 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 223309) | | | | | | | |
| ES1531880-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 93.2 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 223293) | | | | | | | |
| ES1531570-009 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 98.4 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 223296) | | | | | | | |
| ES1532008-001 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 98.8 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 223294) | | | | | | | |
| ES1531570-009 | Anonymous | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 102 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 223295) | | | | | | | |
| ES1532008-001 | Anonymous | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 105 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 223165) | | | | | | | |
| ES1531935-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 97.2 | 70 | 130 |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 225763) | | | | | | | |
| EM1514747-002 | Anonymous | EP033: Butane | 106-97-8 | 102.18 µg/L | 80.5 | 70 | 130 |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 78.2 | 70 | 130 |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 77.9 | 70 | 130 |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 76.9 | 70 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|--|------------------|---------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 225763) - continued | | | | | | | |
| EM1514747-002 | Anonymous | EP033: Methane | 74-82-8 | 28.48 µg/L | 84.4 | 70 | 130 |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 79.7 | 70 | 130 |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 76.7 | 70 | 130 |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 226812) | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 81.7 | 70 | 130 |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 94.5 | 70 | 130 |
| EP074F: Halogenated Aromatic Compounds (QCLot: 226812) | | | | | | | |
| ES1531576-006 | Anonymous | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 101 | 70 | 130 |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 226811) | | | | | | | |
| ES1531576-005 | Anonymous | EP080: C6 - C9 Fraction | ---- | 325 µg/L | 113 | 70 | 130 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 226811) | | | | | | | |
| ES1531576-005 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 113 | 70 | 130 |
| EP262: Ethanolamines (QCLot: 223283) | | | | | | | |
| ES1532002-001 | AST2 | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 121 | 50 | 130 |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 84.5 | 50 | 130 |

QA/QC Compliance Assessment for DQO Reporting

Work Order : **ES1532002**

Page : 1 of 12

Amendment : **2**

Client : **PARSONS BRINCKERHOFF AUST P/L**

Laboratory : Environmental Division Sydney

Contact : SEAN DAYKIN

Telephone : +61 2 8784 8503

Project : 2268523A

Date Samples Received : 23-Sep-2015

Site : ----

Issue Date : 09-Oct-2015

Sampler : ----

No. of samples received : 5

Order number : ----

No. of samples analysed : 5

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- Laboratory Control outliers exist - please see following pages for full details.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- **NO** Analysis Holding Time Outliers exist.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|--|----------------------|------------------|--------------------------------|------------|----------------|---------|---|
| Laboratory Control Spike (LCS) Recoveries | | | | | | | |
| EP074E: Halogenated Aliphatic Compounds | QC-226812-002 | ---- | Iodomethane | 74-88-4 | 59.3 % | 70-128% | Recovery less than lower control limit |
| EP075(SIM)A: Phenolic Compounds | QC-223698-002 | ---- | 2-Chlorophenol | 95-57-8 | 63.3 % | 64-110% | Recovery less than lower control limit |
| Matrix Spike (MS) Recoveries | | | | | | | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | ES1531935--001 | Anonymous | Sulfate as SO4 - Turbidimetric | 14808-79-8 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 18 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 20 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 18 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 20 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |

Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA005: pH | | | | | | | | |
| Clear Plastic Bottle - Natural (EA005) | | | | | | | | |
| AST2, WK13, QA13 | 23-Sep-2015 | WK11, WK14, | ---- | ---- | ---- | 23-Sep-2015 | 23-Sep-2015 | ✓ |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) | | | | | | | | |
| WK11, WK14, | 23-Sep-2015 | WK13, QA13 | ---- | ---- | ---- | 25-Sep-2015 | 21-Oct-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EA015: Total Dissolved Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 30-Sep-2015 | ✓ |
| EA025: Suspended Solids | | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 30-Sep-2015 | ✓ |
| ED009: Anions | | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 21-Oct-2015 | ✓ |
| ED037P: Alkalinity by PC Titrator | | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 07-Oct-2015 | ✓ |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 21-Oct-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 21-Oct-2015 | ✓ |
| ED093F: Dissolved Major Cations | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Oct-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Mar-2016 | ✓ |



Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) AST2, WK13, QA13 WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Mar-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) AST2, WK13, QA13 WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Oct-2015 | ✓ |
| EG052G: Silica by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) AST2, WK13, QA13 WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 21-Oct-2015 | ✓ |
| EK010/011: Chlorine | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) AST2, WK13, QA13 WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 23-Sep-2015 | ✓ |
| EK040P: Fluoride by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) AST2, WK13, QA13 WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 21-Oct-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) AST2, WK13, QA13 WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 21-Oct-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) AST2, WK13, QA13 WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 25-Sep-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) AST2, WK13, QA13 WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 21-Oct-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | 24-Sep-2015 | 21-Oct-2015 | ✓ | 24-Sep-2015 | 21-Oct-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | 24-Sep-2015 | 21-Oct-2015 | ✓ | 24-Sep-2015 | 21-Oct-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 25-Sep-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | | |
| Amber TOC Vial - Sulfuric Acid (EP005) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Oct-2015 | ✓ |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| Amber Jar - Sulfuric Acid or Sodium Bisulfate (EP020) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 29-Sep-2015 | 21-Oct-2015 | ✓ |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 07-Oct-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | 28-Sep-2015 | 30-Sep-2015 | ✓ | 29-Sep-2015 | 07-Nov-2015 | ✓ |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | 29-Sep-2015 | 07-Oct-2015 | ✓ | 29-Sep-2015 | 07-Oct-2015 | ✓ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | | |
|--|-------------|--------------------------|--------------------|-------------|---------------|------------------|-------------|---|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) | | | | | | | | |
| AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | 28-Sep-2015 | 30-Sep-2015 | ✓ | 29-Sep-2015 | 07-Nov-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) | | | | | | | | |
| AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | 29-Sep-2015 | 07-Oct-2015 | ✓ | 29-Sep-2015 | 07-Oct-2015 | ✓ |
| EP262: Ethanolamines | | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) | | | | | | | | |
| AST2, WK13, QA13 | WK11, WK14, | 23-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 30-Sep-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 2 | 16 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 18 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH | EA005 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 7 | 28.57 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 20 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 15 | 6.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 16 | 6.25 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|--------|----------|----------|------------|--|
| | | QC | Reular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Ethanolamines by LCMSMS | EP262 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 20 | 15.00 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 19 | 15.79 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Oil and Grease | EP020 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 4.76 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: ✖ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 15 | 6.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 8 | 12.50 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 15 | 6.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 18 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 8 | 12.50 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 20 | 0.00 | 5.00 | ✖ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH | EA005 | WATER | In house: Referenced to APHA 4500 H+ B. pH of water samples is determined by ISE either manually or by automated pH meter. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| Oil and Grease | EP020 | WATER | In house: Referenced to APHA 5520 B. Oil & grease is a gravimetric procedure to determine the amount of oil & grease residue in an aqueous sample. The sample is serially extracted three times n-hexane. The resultant extracts are combined, dehydrated and concentrated prior to gravimetric determination. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

QUALITY CONTROL REPORT

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1532008 | Page | : 1 of 20 |
| Amendment | : 3 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 23-Sep-2015 |
| C-O-C number | : ---- | Date Analysis Commenced | : 23-Sep-2015 |
| Sampler | : ANDREW FARINA, SEAN DAYKIN | Issue Date | : 28-Oct-2015 |
| Site | : ---- | No. of samples received | : 3 |
| Quote number | : ---- | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Quality Control Report contains the following information:

- Laboratory Duplicate (DUP) Report; Relative Percentage Difference (RPD) and Acceptance Limits
- Method Blank (MB) and Laboratory Control Spike (LCS) Report; Recovery and Acceptance Limits
- Matrix Spike (MS) Report; Recovery and Acceptance Limits



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis. Where the LOR of a reported result differs from standard LOR, this may be due to high

Key :
Anonymous = Refers to samples which are not specifically part of this work order but formed part of the QC process lot
CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
RPD = Relative Percentage Difference
= Indicates failed QC



NATA Accredited
Laboratory 825

Accredited for
compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Alison Graham | Supervisor - Inorganic | Newcastle - Inorganics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



Laboratory Duplicate (DUP) Report

The quality control term Laboratory Duplicate refers to a randomly selected intralaboratory split. Laboratory duplicates provide information regarding method precision and sample heterogeneity. The permitted ranges for the Relative Percent Deviation (RPD) of Laboratory Duplicates are specified in ALS Method QWI-EN/38 and are dependent on the magnitude of results in comparison to the level of reporting: Result < 10 times LOR: No Limit; Result between 10 and 20 times LOR:- 0% - 50%; Result > 20 times LOR:0% - 20%.

Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|--|-------------|-----------------------------------|---------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EA005: pH (QC Lot: 224833) | | | | | | | | | |
| ES1532026-001 | Anonymous | EA005: pH Value | ---- | 0.01 | pH Unit | 7.37 | 7.34 | 0.408 | 0% - 20% |
| ES1532008-003 | WКСW03 | EA005: pH Value | ---- | 0.01 | pH Unit | 7.30 | 7.33 | 0.410 | 0% - 20% |
| EA010P: Conductivity by PC Titrator (QC Lot: 225797) | | | | | | | | | |
| ES1531980-001 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 2140 | 2150 | 0.478 | 0% - 20% |
| ES1531935-004 | Anonymous | EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 185 | 182 | 1.65 | 0% - 20% |
| EA015: Total Dissolved Solids (QC Lot: 225427) | | | | | | | | | |
| ES1531955-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 134 | 147 | 9.27 | 0% - 50% |
| ES1531956-001 | Anonymous | EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | 1430 | 1380 | 3.69 | 0% - 20% |
| EA025: Suspended Solids (QC Lot: 225428) | | | | | | | | | |
| ES1531955-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | <5 | 0.00 | No Limit |
| ES1531956-001 | Anonymous | EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | 12 | 15 | 18.2 | No Limit |
| ED009: Anions (QC Lot: 223259) | | | | | | | | | |
| EP1514101-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 9.00 | 8.75 | 2.78 | No Limit |
| ES1531880-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 22.4 | 22.3 | 0.345 | 0% - 20% |
| ED009: Anions (QC Lot: 223260) | | | | | | | | | |
| ES1532008-003 | WКСW03 | ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | 145 | 146 | 0.678 | 0% - 20% |
| ED037P: Alkalinity by PC Titrator (QC Lot: 225798) | | | | | | | | | |
| ES1532002-001 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 2850 | 2880 | 0.873 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 1250 | 1200 | 4.08 | 0% - 20% |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 4100 | 4080 | 0.612 | 0% - 20% |
| ES1531935-004 | Anonymous | ED037-P: Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 64 | 63 | 0.00 | 0% - 20% |
| | | ED037-P: Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED037-P: Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 64 | 63 | 0.00 | 0% - 20% |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QC Lot: 223166) | | | | | | | | | |
| ES1531935-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 268 | 260 | 2.82 | 0% - 20% |
| ES1532008-002 | WКСW02 | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 6 | 6 | 0.00 | No Limit |
| ED045G: Chloride by Discrete Analyser (QC Lot: 223167) | | | | | | | | | |
| ES1531962-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 76 | 76 | 0.00 | 0% - 20% |
| ES1531935-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 182 | 182 | 0.00 | 0% - 20% |
| ED045G: Chloride by Discrete Analyser (QC Lot: 223171) | | | | | | | | | |
| ES1532008-002 | WКСW02 | ED045G: Chloride | 16887-00-6 | 1 | mg/L | 144 | 146 | 1.04 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 226314) | | | | | | | | | |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|----------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| ED093F: Dissolved Major Cations (QC Lot: 226314) - continued | | | | | | | | | |
| ES1531907-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 8 | 8 | 0.00 | No Limit |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 6 | 6 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 2 | 2 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 15 | 15 | 0.00 | 0% - 50% |
| ES1531875-001 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 2 | 2 | 0.00 | No Limit |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 3 | 3 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 339 | 336 | 0.965 | 0% - 20% |
| ED093F: Dissolved Major Cations (QC Lot: 226319) | | | | | | | | | |
| ES1532008-002 | WKSU02 | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 33 | 33 | 0.00 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 18 | 19 | 0.00 | 0% - 50% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 4 | 4 | 0.00 | No Limit |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 69 | 69 | 0.00 | 0% - 20% |
| EW1511841-003 | Anonymous | ED093F: Calcium | 7440-70-2 | 1 | mg/L | 34 | 35 | 0.00 | 0% - 20% |
| | | ED093F: Magnesium | 7439-95-4 | 1 | mg/L | 16 | 16 | 0.00 | 0% - 50% |
| | | ED093F: Potassium | 7440-09-7 | 1 | mg/L | 25 | 25 | 0.00 | 0% - 20% |
| | | ED093F: Sodium | 7440-23-5 | 1 | mg/L | 519 | 526 | 1.33 | 0% - 20% |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 226315) | | | | | | | | | |
| ES1532002-005 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 6.95 | 6.85 | 1.45 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| ES1531875-001 | Anonymous | EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | 0.030 | 0.029 | 0.00 | 0% - 20% |
| | | EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 226317) | | | | | | | | | |
| ES1531907-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.067 | 0.067 | 0.00 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.558 | 0.552 | 1.00 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.001 | 0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|----------------------|------------|-----------------------------------|-------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 226317) - continued | | | | | | | | | |
| ES1531907-001 | Anonymous | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 12.0 | 12.1 | 1.12 | 0% - 20% |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| ES1531875-001 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | 0.003 | 0.002 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.018 | 0.018 | 0.00 | 0% - 50% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.004 | 0.004 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | 0.06 | 0.06 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 0.21 | 0.21 | 0.00 | No Limit |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | <0.05 | 0.00 | No Limit | | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.2 | 0.2 | 0.00 | No Limit | | |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 226318) | | | | | | | | | |
| ES1532008-002 | WKSW02 | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 0.055 | 0.055 | 0.00 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.305 | 0.315 | 3.16 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | 0.00 | No Limit |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit | | |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|----------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EG020F: Dissolved Metals by ICP-MS (QC Lot: 226318) - continued | | | | | | | | | |
| ES1532008-002 | WKSW02 | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 0.05 | <0.05 | 0.00 | No Limit |
| | | EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 0.10 | 0.10 | 0.00 | No Limit |
| | | EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.2 | 0.2 | 0.00 | No Limit |
| EW1511841-003 | Anonymous | EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | 0.0001 | 0.0001 | 0.00 | No Limit |
| | | EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | 0.011 | 0.010 | 0.00 | 0% - 50% |
| | | EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | 0.058 | 0.058 | 0.00 | 0% - 20% |
| | | EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | 5.31 | 5.31 | 0.00 | 0% - 20% |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | 0.011 | 0.012 | 0.00 | 0% - 50% |
| | | EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | 0.005 | 0.005 | 0.00 | No Limit |
| | | EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | 0.008 | 0.008 | 0.00 | No Limit |
| | | EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | 0.070 | 0.073 | 3.48 | 0% - 20% |
| | | EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.022 | 0.021 | 0.00 | 0% - 20% |
| | | EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | 0.064 | 0.065 | 1.89 | 0% - 20% |
| | | EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | 0.00 | No Limit |
| | | EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | 0.085 | 0.085 | 0.00 | 0% - 50% |
| | | EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | 0.02 | 0.03 | 0.00 | No Limit |
| | | EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | 0.06 | 0.06 | 0.00 | No Limit | | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | 0.14 | 0.14 | 0.00 | No Limit | | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | 0.1 | 0.1 | 0.00 | No Limit | | |
| EG035F: Dissolved Mercury by FIMS (QC Lot: 226316) | | | | | | | | | |
| ES1531877-001 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| ES1532002-005 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | 0.00 | No Limit |
| EG052G: Silica by Discrete Analyser (QC Lot: 223170) | | | | | | | | | |
| ES1532008-002 | WKSW02 | EG052G: Reactive Silica | ---- | 0.05 | mg/L | 3.66 | 3.66 | 0.00 | 0% - 20% |
| EK010/011: Chlorine (QC Lot: 223119) | | | | | | | | | |
| ES1532002-001 | Anonymous | EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| | | EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | 0.00 | No Limit |
| EK040P: Fluoride by PC Titrator (QC Lot: 225796) | | | | | | | | | |
| ES1531352-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | 0.5 | 0.5 | 0.00 | No Limit |
| ES1531935-004 | Anonymous | EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| EK055G: Ammonia as N by Discrete Analyser (QC Lot: 223310) | | | | | | | | | |
| ES1532002-005 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 4.85 | 4.87 | 0.414 | 0% - 20% |
| ES1531880-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.02 | 0.02 | 0.00 | No Limit |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 223168) | | | | | | | | | |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|--------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EK057G: Nitrite as N by Discrete Analyser (QC Lot: 223168) - continued | | | | | | | | | |
| ES1531935-001 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1532008-002 | WKSU02 | EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QC Lot: 223309) | | | | | | | | | |
| ES1532002-002 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.01 | 0.02 | 0.00 | No Limit |
| ES1531880-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.05 | 0.02 | 59.4 | No Limit |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QC Lot: 223296) | | | | | | | | | |
| EW1511842-003 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.00 | No Limit |
| ES1532002-005 | Anonymous | EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 5.8 | 5.8 | 0.00 | 0% - 20% |
| EK067G: Total Phosphorus as P by Discrete Analyser (QC Lot: 223295) | | | | | | | | | |
| EW1511842-003 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1532002-005 | Anonymous | EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | 1.39 | 1.40 | 1.12 | 0% - 20% |
| EK071G: Reactive Phosphorus as P by discrete analyser (QC Lot: 223165) | | | | | | | | | |
| ES1531935-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| ES1532008-002 | WKSU02 | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.00 | No Limit |
| EP005: Total Organic Carbon (TOC) (QC Lot: 226830) | | | | | | | | | |
| ES1531900-001 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | 2 | 2 | 0.00 | No Limit |
| ES1531955-009 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | 10 | 10 | 0.00 | 0% - 50% |
| EP005: Total Organic Carbon (TOC) (QC Lot: 226831) | | | | | | | | | |
| ES1532008-003 | WKSU03 | EP005: Total Organic Carbon | ---- | 1 | mg/L | 7 | 7 | 0.00 | No Limit |
| EW1511841-001 | Anonymous | EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | <1 | 0.00 | No Limit |
| EP033: C1 - C4 Hydrocarbon Gases (QC Lot: 225763) | | | | | | | | | |
| EM1514747-001 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| ES1531999-004 | Anonymous | EP033: Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Methane | 74-82-8 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| | | EP033: Propene | 115-07-1 | 10 | µg/L | <10 | <10 | 0.00 | No Limit |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|--|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074A: Monocyclic Aromatic Hydrocarbons (QC Lot: 226812) - continued | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | Anonymous | EP074: 1.2.4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3.5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit | | |
| EP074B: Oxygenated Compounds (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| ES1532002-003 | Anonymous | EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074C: Sulfonated Compounds (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | Anonymous | EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074D: Fumigants (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1.2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2.2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | Anonymous | EP074: 1.2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2.2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 226812) | | | | | | | | | |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 226812) - continued | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1.4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| ES1532002-003 | Anonymous | EP074: 1.1.1.2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1.2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1.3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



| Sub-Matrix: WATER | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|------------------------------------|------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074E: Halogenated Aliphatic Compounds (QC Lot: 226812) - continued | | | | | | | | | |
| ES1532002-003 | Anonymous | EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| | | EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | 0.00 | No Limit |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | 0.00 | No Limit | | |
| EP074F: Halogenated Aromatic Compounds (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | Anonymous | EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP074G: Trihalomethanes (QC Lot: 226812) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |



Sub-Matrix: **WATER**

| | | | | Laboratory Duplicate (DUP) Report | | | | | |
|---|------------------|-----------------------------|----------------------|-----------------------------------|------|-----------------|------------------|---------|---------------------|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | LOR | Unit | Original Result | Duplicate Result | RPD (%) | Recovery Limits (%) |
| EP074G: Trihalomethanes (QC Lot: 226812) - continued | | | | | | | | | |
| ES1532002-003 | Anonymous | EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| | | EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP080/071: Total Petroleum Hydrocarbons (QC Lot: 226811) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1532002-003 | Anonymous | EP080: C6 - C9 Fraction | ---- | 20 | µg/L | 180 | 180 | 0.00 | No Limit |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QC Lot: 226811) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 0.00 | No Limit |
| ES1532002-003 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | 180 | 180 | 0.00 | No Limit |
| EP080: BTEXN (QC Lot: 226811) | | | | | | | | | |
| ES1531576-006 | Anonymous | EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | 0.00 | No Limit |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| ES1532002-003 | Anonymous | EP080: Benzene | 71-43-2 | 1 | µg/L | 52 | 52 | 0.00 | 0% - 20% |
| | | EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 10 | 9 | 0.00 | No Limit |
| | | EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 0.00 | No Limit |
| | | EP080: Toluene | 108-88-3 | 2 | µg/L | 50 | 50 | 0.00 | 0% - 20% |
| | | EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | 0.00 | No Limit |
| EP262: Ethanolamines (QC Lot: 223283) | | | | | | | | | |
| ES1532002-001 | Anonymous | EP262: Diethanolamine | 111-42-2 | 1 | µg/L | 36 | 33 | 8.97 | 0% - 20% |
| | | EP262: Ethanolamine | 141-43-5 | 1 | µg/L | 17 | 16 | 0.00 | 0% - 50% |



Method Blank (MB) and Laboratory Control Spike (LCS) Report

The quality control term Method / Laboratory Blank refers to an analyte free matrix to which all reagents are added in the same volumes or proportions as used in standard sample preparation. The purpose of this QC parameter is to monitor potential laboratory contamination. The quality control term Laboratory Control Sample (LCS) refers to a certified reference material, or a known interference free matrix spiked with target analytes. The purpose of this QC parameter is to monitor method precision and accuracy independent of sample matrix. Dynamic Recovery Limits are based on statistical evaluation of processed LCS.

Sub-Matrix: **WATER**

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-------|-------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EA010P: Conductivity by PC Titrator (QCLot: 225797) | | | | | | | | | |
| EA010-P: Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | <1 | 2000 µS/cm | 100 | 95 | 113 | |
| EA015: Total Dissolved Solids (QCLot: 225427) | | | | | | | | | |
| EA015H: Total Dissolved Solids @180°C | ---- | 10 | mg/L | <10 | 2000 mg/L | 94.3 | 87 | 109 | |
| | | | | <10 | 293 mg/L | 116 | 66 | 126 | |
| EA025: Suspended Solids (QCLot: 225428) | | | | | | | | | |
| EA025H: Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 150 mg/L | 117 | 83 | 129 | |
| | | | | <5 | 1000 mg/L | 99.8 | 84 | 110 | |
| ED009: Anions (QCLot: 223259) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 102 | 89 | 107 | |
| ED009: Anions (QCLot: 223260) | | | | | | | | | |
| ED009-X: Chloride | 16887-00-6 | 0.1 | mg/L | <0.100 | 2 mg/L | 102 | 89 | 107 | |
| ED037P: Alkalinity by PC Titrator (QCLot: 225798) | | | | | | | | | |
| ED037-P: Total Alkalinity as CaCO3 | ---- | ---- | mg/L | ---- | 200 mg/L | 91.9 | 81 | 111 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 223166) | | | | | | | | | |
| ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | 25 mg/L | 107 | 86 | 122 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 223167) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 112 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 104 | 77 | 119 | |
| ED045G: Chloride by Discrete Analyser (QCLot: 223171) | | | | | | | | | |
| ED045G: Chloride | 16887-00-6 | 1 | mg/L | <1 | 10 mg/L | 107 | 75 | 123 | |
| | | | | <1 | 1000 mg/L | 101 | 77 | 119 | |
| ED093F: Dissolved Major Cations (QCLot: 226314) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 94.6 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 102 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 98.0 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 95.8 | 82 | 118 | |
| ED093F: Dissolved Major Cations (QCLot: 226319) | | | | | | | | | |
| ED093F: Calcium | 7440-70-2 | 1 | mg/L | <1 | 50 mg/L | 96.8 | 90 | 114 | |
| ED093F: Magnesium | 7439-95-4 | 1 | mg/L | <1 | 50 mg/L | 105 | 90 | 110 | |
| ED093F: Potassium | 7440-09-7 | 1 | mg/L | <1 | 50 mg/L | 101 | 87 | 117 | |
| ED093F: Sodium | 7440-23-5 | 1 | mg/L | <1 | 50 mg/L | 97.5 | 82 | 118 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226315) | | | | | | | | | |
| EG020B-F: Strontium | 7440-24-6 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 88.9 | 80 | 112 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|--------|------|--------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226315) - continued | | | | | | | | | |
| EG020B-F: Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | ---- | ---- | ---- | ---- | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226317) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 94.7 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 90.6 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.7 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.4 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 99.3 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 85.6 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 93.6 | 85 | 115 | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.1 | 85 | 115 | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 90.4 | 85 | 115 | |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 92.6 | 85 | 115 | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 102 | 85 | 115 | |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 95.4 | 85 | 115 | |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.4 | 85 | 115 | |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.6 | 85 | 115 | |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 89.3 | 85 | 115 | |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 90.0 | 85 | 115 | |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 87.1 | 85 | 115 | |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 94.6 | 85 | 115 | |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 90.8 | 85 | 115 | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226318) | | | | | | | | | |
| EG020A-F: Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 98.7 | 85 | 115 | |
| EG020A-F: Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.01 mg/L | 89.2 | 85 | 115 | |
| EG020A-F: Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 98.1 | 85 | 115 | |
| EG020A-F: Barium | 7440-39-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.9 | 85 | 115 | |
| EG020A-F: Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 97.8 | 85 | 115 | |
| EG020A-F: Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.1 mg/L | 113 | 85 | 115 | |
| EG020A-F: Bromine | 7726-95-6 | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | |
| EG020A-F: Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | 0.1 mg/L | 92.8 | 85 | 115 | |
| EG020A-F: Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.4 | 85 | 115 | |
| EG020A-F: Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 97.3 | 85 | 115 | |
| EG020A-F: Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 93.9 | 85 | 115 | |
| EG020A-F: Iron | 7439-89-6 | 0.05 | mg/L | <0.05 | 0.5 mg/L | 102 | 85 | 115 | |
| EG020A-F: Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 97.8 | 85 | 115 | |
| EG020A-F: Manganese | 7439-96-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.6 | 85 | 115 | |
| EG020A-F: Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 94.2 | 85 | 115 | |
| EG020A-F: Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 98.3 | 85 | 115 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|--------|------|--------------------------|---------------------------------------|--------------------|------|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226318) - continued | | | | | | | | | |
| EG020A-F: Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 96.5 | 85 | 115 | |
| EG020A-F: Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | 0.1 mg/L | 91.8 | 85 | 115 | |
| EG020A-F: Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | 0.1 mg/L | 94.7 | 85 | 115 | |
| EG020A-F: Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.1 mg/L | 95.0 | 85 | 115 | |
| EG035F: Dissolved Mercury by FIMS (QCLot: 226316) | | | | | | | | | |
| EG035F: Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | 0.01 mg/L | 91.0 | 78 | 114 | |
| EG052G: Silica by Discrete Analyser (QCLot: 223170) | | | | | | | | | |
| EG052G: Reactive Silica | ---- | 0.05 | mg/L | <0.05 | 5 mg/L | 105 | 94 | 114 | |
| EK010/011: Chlorine (QCLot: 223119) | | | | | | | | | |
| EK010: Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK010: Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator (QCLot: 225796) | | | | | | | | | |
| EK040P: Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 5 mg/L | 81.2 | 75 | 119 | |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 223310) | | | | | | | | | |
| EK055G: Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 1 mg/L | 96.3 | 90 | 114 | |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 223168) | | | | | | | | | |
| EK057G: Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 95.0 | 82 | 114 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 223309) | | | | | | | | | |
| EK059G: Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.5 mg/L | 94.9 | 91 | 113 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 223296) | | | | | | | | | |
| EK061G: Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | <0.1 | 10 mg/L | 88.0 | 69 | 101 | |
| | | | | <0.1 | 1 mg/L | 95.5 | 70 | 118 | |
| | | | | <0.1 | 5 mg/L | 100 | 74 | 118 | |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 223295) | | | | | | | | | |
| EK067G: Total Phosphorus as P | ---- | 0.01 | mg/L | <0.01 | 4.42 mg/L | 94.2 | 71 | 101 | |
| | | | | <0.01 | 0.442 mg/L | 93.7 | 72 | 108 | |
| | | | | <0.01 | 1 mg/L | 103 | 78 | 118 | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 223165) | | | | | | | | | |
| EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.5 mg/L | 102 | 85 | 117 | |
| EP005: Total Organic Carbon (TOC) (QCLot: 226830) | | | | | | | | | |
| EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | 10 mg/L | 85.8 | 76 | 120 | |
| EP005: Total Organic Carbon (TOC) (QCLot: 226831) | | | | | | | | | |
| EP005: Total Organic Carbon | ---- | 1 | mg/L | <1 | 10 mg/L | 83.9 | 76 | 120 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 225763) | | | | | | | | | |
| EP033: Butane | 106-97-8 | 10 | µg/L | <10 | 102.18 µg/L | 101 | 85 | 115 | |
| EP033: Butene | 25167-67-3 | 10 | µg/L | <10 | 99.61 µg/L | 100 | 83 | 115 | |
| EP033: Ethane | 74-84-0 | 10 | µg/L | <10 | 54.43 µg/L | 98.8 | 87 | 111 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report Result | Laboratory Control Spike (LCS) Report | | | | |
|---|------------|-----|------|---------------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 225763) - continued | | | | | | | | | |
| EP033: Ethene | 74-85-1 | 10 | µg/L | <10 | 50.29 µg/L | 98.4 | 87 | 111 | |
| EP033: Methane | 74-82-8 | 10 | µg/L | <10 | 28.48 µg/L | 103 | 86 | 114 | |
| EP033: Propane | 74-98-6 | 10 | µg/L | <10 | 78.28 µg/L | 97.1 | 84 | 112 | |
| EP033: Propene | 115-07-1 | 10 | µg/L | <10 | 73.97 µg/L | 97.6 | 85 | 113 | |
| EP074A: Monocyclic Aromatic Hydrocarbons (QCLot: 226812) | | | | | | | | | |
| EP074: 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | 10 µg/L | 91.7 | 71 | 121 | |
| EP074: 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | 10 µg/L | 89.6 | 70 | 122 | |
| EP074: Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | 10 µg/L | 93.8 | 75 | 121 | |
| EP074: n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | 10 µg/L | 90.4 | 62 | 126 | |
| EP074: n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | 10 µg/L | 79.9 | 67 | 123 | |
| EP074: p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | 10 µg/L | 89.4 | 67 | 123 | |
| EP074: sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | 10 µg/L | 88.1 | 69 | 123 | |
| EP074: Styrene | 100-42-5 | 5 | µg/L | <5 | 10 µg/L | 91.4 | 74 | 118 | |
| EP074: tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | 10 µg/L | 91.8 | 70 | 122 | |
| EP074B: Oxygenated Compounds (QCLot: 226812) | | | | | | | | | |
| EP074: 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | 100 µg/L | 87.8 | 74 | 130 | |
| EP074: 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | 100 µg/L | 98.6 | 65 | 137 | |
| EP074: 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | 100 µg/L | 100 | 61 | 139 | |
| EP074: Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | 100 µg/L | 103 | 61 | 134 | |
| EP074C: Sulfonated Compounds (QCLot: 226812) | | | | | | | | | |
| EP074: Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | 10 µg/L | 85.2 | 73 | 127 | |
| EP074D: Fumigants (QCLot: 226812) | | | | | | | | | |
| EP074: 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | 10 µg/L | 95.0 | 69 | 117 | |
| EP074: 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | 10 µg/L | 94.6 | 76 | 120 | |
| EP074: 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | 10 µg/L | 89.4 | 61 | 119 | |
| EP074: cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | 10 µg/L | 83.4 | 62 | 120 | |
| EP074: trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | 10 µg/L | 85.4 | 61 | 119 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 226812) | | | | | | | | | |
| EP074: 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | 10 µg/L | 88.0 | 66 | 114 | |
| EP074: 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | 10 µg/L | 81.8 | 61 | 119 | |
| EP074: 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | 10 µg/L | 99.4 | 70 | 124 | |
| EP074: 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | 10 µg/L | 97.5 | 75 | 123 | |
| EP074: 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | 10 µg/L | 90.1 | 75 | 119 | |
| EP074: 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | 10 µg/L | 96.8 | 69 | 123 | |
| EP074: 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | 10 µg/L | 92.0 | 73 | 119 | |
| EP074: 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | 10 µg/L | 93.4 | 74 | 128 | |
| EP074: 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | 10 µg/L | 101 | 66 | 136 | |
| EP074: 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | 10 µg/L | 93.6 | 78 | 122 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | Concentration | LCS | Low | High | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 226812) - continued | | | | | | | | | |
| EP074: 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | 10 µg/L | 99.1 | 79 | 121 | |
| EP074: Bromomethane | 74-83-9 | 50 | µg/L | <50 | 100 µg/L | 76.9 | 56 | 140 | |
| EP074: Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | 10 µg/L | 78.6 | 63 | 121 | |
| EP074: Chloroethane | 75-00-3 | 50 | µg/L | <50 | 100 µg/L | 82.5 | 63 | 135 | |
| EP074: Chloromethane | 74-87-3 | 50 | µg/L | <50 | 100 µg/L | 87.6 | 67 | 130 | |
| EP074: cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | 10 µg/L | 89.1 | 77 | 117 | |
| EP074: cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | 10 µg/L | 89.8 | 71 | 128 | |
| EP074: Dibromomethane | 74-95-3 | 5 | µg/L | <5 | 10 µg/L | 91.0 | 74 | 118 | |
| EP074: Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | 100 µg/L | 71.9 | 61 | 138 | |
| EP074: Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | 10 µg/L | 85.2 | 58 | 132 | |
| EP074: Iodomethane | 74-88-4 | 5 | µg/L | <5 | 10 µg/L | # 59.3 | 70 | 128 | |
| EP074: Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | 10 µg/L | 86.8 | 72 | 126 | |
| EP074: Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | 10 µg/L | 88.5 | 72 | 124 | |
| EP074: trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | 10 µg/L | 85.3 | 71 | 119 | |
| EP074: trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | 10 µg/L | 81.9 | 60 | 120 | |
| EP074: Trichloroethene | 79-01-6 | 5 | µg/L | <5 | 10 µg/L | 94.1 | 74 | 120 | |
| EP074: Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | 100 µg/L | 75.8 | 65 | 131 | |
| EP074: Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | 100 µg/L | 109 | 69 | 129 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 226812) | | | | | | | | | |
| EP074: 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | 10 µg/L | 87.9 | 67 | 125 | |
| EP074: 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | 10 µg/L | 87.7 | 60 | 126 | |
| EP074: 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | 10 µg/L | 93.7 | 77 | 117 | |
| EP074: 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | 10 µg/L | 92.4 | 74 | 120 | |
| EP074: 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | 10 µg/L | 95.1 | 72 | 120 | |
| EP074: 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | 10 µg/L | 80.8 | 71 | 121 | |
| EP074: 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | 10 µg/L | 88.6 | 71 | 121 | |
| EP074: Bromobenzene | 108-86-1 | 5 | µg/L | <5 | 10 µg/L | 96.9 | 76 | 116 | |
| EP074: Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | 10 µg/L | 93.9 | 80 | 118 | |
| EP074G: Trihalomethanes (QCLot: 226812) | | | | | | | | | |
| EP074: Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | 10 µg/L | 83.4 | 64 | 118 | |
| EP074: Bromoform | 75-25-2 | 5 | µg/L | <5 | 10 µg/L | 102 | 74 | 126 | |
| EP074: Chloroform | 67-66-3 | 5 | µg/L | <5 | 10 µg/L | 81.4 | 76 | 118 | |
| EP074: Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | 10 µg/L | 95.5 | 65 | 115 | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 223698) | | | | | | | | | |
| EP075(SIM): 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | 5 µg/L | 65.5 | 50 | 108 | |
| EP075(SIM): 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | 5 µg/L | 64.8 | 59 | 118 | |
| EP075(SIM): 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | 5 µg/L | 77.9 | 59 | 122 | |
| EP075(SIM): 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | 5 µg/L | 72.3 | 60 | 112 | |



Sub-Matrix: WATER

| Method: Compound | CAS Number | LOR | Unit | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | | |
|--|------------|-----|------|-----------------------------|---------------------------------------|--------------------|-----|---------------------|--|
| | | | | Result | Spike Concentration | Spike Recovery (%) | | Recovery Limits (%) | |
| | | | | | | LCS | Low | High | |
| EP075(SIM)A: Phenolic Compounds (QCLot: 223698) - continued | | | | | | | | | |
| EP075(SIM): 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | 5 µg/L | 80.3 | 64 | 118 | |
| EP075(SIM): 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | 5 µg/L | # 63.3 | 64 | 110 | |
| EP075(SIM): 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | 5 µg/L | 66.0 | 56 | 112 | |
| EP075(SIM): 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | 5 µg/L | 67.4 | 63 | 117 | |
| EP075(SIM): 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | 10 µg/L | 59.6 | 43 | 114 | |
| EP075(SIM): 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | 5 µg/L | 72.6 | 63 | 119 | |
| EP075(SIM): Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | 10 µg/L | 60.2 | 10 | 95 | |
| EP075(SIM): Phenol | 108-95-2 | 1 | µg/L | <1.0 | 5 µg/L | 44.8 | 25 | 62 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons (QCLot: 223698) | | | | | | | | | |
| EP075(SIM): Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | 5 µg/L | 68.5 | 62 | 113 | |
| EP075(SIM): Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | 5 µg/L | 69.1 | 64 | 114 | |
| EP075(SIM): Anthracene | 120-12-7 | 1 | µg/L | <1.0 | 5 µg/L | 80.2 | 64 | 116 | |
| EP075(SIM): Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | 5 µg/L | 81.0 | 64 | 117 | |
| EP075(SIM): Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | 5 µg/L | 87.4 | 63 | 117 | |
| EP075(SIM): Benzo(b+j)fluoranthene | 205-99-2 | 1 | µg/L | <1.0 | 5 µg/L | 82.2 | 62 | 119 | |
| | 205-82-3 | | | | | | | | |
| EP075(SIM): Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | 5 µg/L | 87.0 | 59 | 118 | |
| EP075(SIM): Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | 5 µg/L | 93.5 | 62 | 117 | |
| EP075(SIM): Chrysene | 218-01-9 | 1 | µg/L | <1.0 | 5 µg/L | 82.8 | 63 | 116 | |
| EP075(SIM): Dibenz(a,h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | 5 µg/L | 89.4 | 61 | 117 | |
| EP075(SIM): Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | 5 µg/L | 91.2 | 64 | 118 | |
| EP075(SIM): Fluorene | 86-73-7 | 1 | µg/L | <1.0 | 5 µg/L | 73.3 | 64 | 115 | |
| EP075(SIM): Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | 5 µg/L | 86.4 | 60 | 118 | |
| EP075(SIM): Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | 5 µg/L | 76.0 | 59 | 119 | |
| EP075(SIM): Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | 5 µg/L | 79.3 | 63 | 116 | |
| EP075(SIM): Pyrene | 129-00-0 | 1 | µg/L | <1.0 | 5 µg/L | 92.1 | 63 | 118 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 223699) | | | | | | | | | |
| EP071: C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 102 | 59 | 129 | |
| EP071: C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 3000 µg/L | 97.9 | 71 | 131 | |
| EP071: C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 2000 µg/L | 93.0 | 62 | 120 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 226811) | | | | | | | | | |
| EP080: C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 260 µg/L | 94.5 | 75 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 223699) | | | | | | | | | |
| EP071: >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | 2500 µg/L | 88.4 | 59 | 131 | |
| EP071: >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 3500 µg/L | 93.4 | 74 | 138 | |
| EP071: >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 1500 µg/L | 99.2 | 67 | 127 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 226811) | | | | | | | | | |
| EP080: C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 310 µg/L | 95.7 | 75 | 127 | |



| Sub-Matrix: WATER | | | | Method Blank (MB) Report | Laboratory Control Spike (LCS) Report | | | |
|---|----------------------|-----|------|--------------------------|---------------------------------------|---------------------------|---------------------------------|-----|
| Method: Compound | CAS Number | LOR | Unit | Result | Spike Concentration | Spike Recovery (%) LCS | Recovery Limits (%) Low High | |
| EP080: BTEXN (QCLot: 226811) | | | | | | | | |
| EP080: Benzene | 71-43-2 | 1 | µg/L | <1 | 10 µg/L | 83.2 | 70 | 124 |
| EP080: Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 10 µg/L | 91.9 | 70 | 120 |
| EP080: meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 10 µg/L | 95.7 | 69 | 121 |
| EP080: Naphthalene | 91-20-3 | 5 | µg/L | <5 | 10 µg/L | 95.4 | 70 | 124 |
| EP080: ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 µg/L | 94.5 | 72 | 122 |
| EP080: Toluene | 108-88-3 | 2 | µg/L | <2 | 10 µg/L | 85.8 | 65 | 129 |
| EP262: Ethanolamines (QCLot: 223283) | | | | | | | | |
| EP262: Diethanolamine | 111-42-2 | 1 | µg/L | <1 | 10 µg/L | 125 | 50 | 130 |
| EP262: Ethanolamine | 141-43-5 | 1 | µg/L | <1 | 10 µg/L | 89.7 | 50 | 130 |

Matrix Spike (MS) Report

The quality control term Matrix Spike (MS) refers to an intralaboratory split sample spiked with a representative set of target analytes. The purpose of this QC parameter is to monitor potential matrix effects on analyte recoveries. Static Recovery Limits as per laboratory Data Quality Objectives (DQOs). Ideal recovery ranges stated may be waived in the event of sample matrix interference.

| Sub-Matrix: WATER | | | | Matrix Spike (MS) Report | | | |
|--|------------------|--|------------|--------------------------|--------------------------|---------------------------------|-----|
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Spike Concentration | Spike Recovery (%) MS | Recovery Limits (%) Low High | |
| ED009: Anions (QCLot: 223259) | | | | | | | |
| EP1514101-001 | Anonymous | ED009-X: Chloride | 16887-00-6 | 4 mg/L | 114 | 70 | 130 |
| ED009: Anions (QCLot: 223260) | | | | | | | |
| ES1532008-003 | WKSW03 | ED009-X: Chloride | 16887-00-6 | 4 mg/L | # Not Determined | 70 | 130 |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA (QCLot: 223166) | | | | | | | |
| ES1531935-001 | Anonymous | ED041G: Sulfate as SO4 - Turbidimetric | 14808-79-8 | 10 mg/L | # Not Determined | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 223167) | | | | | | | |
| ES1531935-001 | Anonymous | ED045G: Chloride | 16887-00-6 | 250 mg/L | 110 | 70 | 130 |
| ED045G: Chloride by Discrete Analyser (QCLot: 223171) | | | | | | | |
| ES1532008-002 | WKSW02 | ED045G: Chloride | 16887-00-6 | 250 mg/L | 112 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226317) | | | | | | | |
| ES1531877-002 | Anonymous | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 82.7 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 80.4 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 78.7 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 76.6 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 72.7 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 77.0 | 70 | 130 |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | |
|---|------------------|--------------------------------------|------------|--------------------------|------------------|---------------------|------|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226317) - continued | | | | | | | |
| ES1531877-002 | Anonymous | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 74.6 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 74.5 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 83.3 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 77.1 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 74.4 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 87.4 | 70 | 130 |
| EG020F: Dissolved Metals by ICP-MS (QCLot: 226318) | | | | | | | |
| ES1532008-003 | WKSW03 | EG020A-F: Arsenic | 7440-38-2 | 0.2 mg/L | 114 | 70 | 130 |
| | | EG020A-F: Barium | 7440-39-3 | 0.2 mg/L | 112 | 70 | 130 |
| | | EG020A-F: Beryllium | 7440-41-7 | 0.2 mg/L | 116 | 70 | 130 |
| | | EG020A-F: Cadmium | 7440-43-9 | 0.05 mg/L | 114 | 70 | 130 |
| | | EG020A-F: Chromium | 7440-47-3 | 0.2 mg/L | 112 | 70 | 130 |
| | | EG020A-F: Cobalt | 7440-48-4 | 0.2 mg/L | 115 | 70 | 130 |
| | | EG020A-F: Copper | 7440-50-8 | 0.2 mg/L | 111 | 70 | 130 |
| | | EG020A-F: Lead | 7439-92-1 | 0.2 mg/L | 111 | 70 | 130 |
| | | EG020A-F: Manganese | 7439-96-5 | 0.2 mg/L | 103 | 70 | 130 |
| | | EG020A-F: Nickel | 7440-02-0 | 0.2 mg/L | 110 | 70 | 130 |
| | | EG020A-F: Vanadium | 7440-62-2 | 0.2 mg/L | 116 | 70 | 130 |
| | | EG020A-F: Zinc | 7440-66-6 | 0.2 mg/L | 108 | 70 | 130 |
| EG035F: Dissolved Mercury by FIMS (QCLot: 226316) | | | | | | | |
| ES1531875-002 | Anonymous | EG035F: Mercury | 7439-97-6 | 0.01 mg/L | 81.0 | 70 | 130 |
| EG052G: Silica by Discrete Analyser (QCLot: 223170) | | | | | | | |
| ES1532008-002 | WKSW02 | EG052G: Reactive Silica | ---- | 5 mg/L | 99.0 | 70 | 130 |
| EK040P: Fluoride by PC Titrator (QCLot: 225796) | | | | | | | |
| ES1531352-001 | Anonymous | EK040P: Fluoride | 16984-48-8 | 5 mg/L | 104 | 70 | 130 |
| EK055G: Ammonia as N by Discrete Analyser (QCLot: 223310) | | | | | | | |
| ES1531880-001 | Anonymous | EK055G: Ammonia as N | 7664-41-7 | 1 mg/L | 87.0 | 70 | 130 |
| EK057G: Nitrite as N by Discrete Analyser (QCLot: 223168) | | | | | | | |
| ES1531935-001 | Anonymous | EK057G: Nitrite as N | 14797-65-0 | 0.5 mg/L | 97.7 | 70 | 130 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser (QCLot: 223309) | | | | | | | |
| ES1531880-001 | Anonymous | EK059G: Nitrite + Nitrate as N | ---- | 0.5 mg/L | 93.2 | 70 | 130 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser (QCLot: 223296) | | | | | | | |
| ES1532008-001 | WKSW01 | EK061G: Total Kjeldahl Nitrogen as N | ---- | 5 mg/L | 98.8 | 70 | 130 |
| EK067G: Total Phosphorus as P by Discrete Analyser (QCLot: 223295) | | | | | | | |
| ES1532008-001 | WKSW01 | EK067G: Total Phosphorus as P | ---- | 1 mg/L | 105 | 70 | 130 |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 223165) | | | | | | | |



Sub-Matrix: WATER

| | | | | Matrix Spike (MS) Report | | | | |
|--|------------------|----------------------------------|------------|--------------------------|------------------|---------------------|------|--|
| | | | | Spike | SpikeRecovery(%) | Recovery Limits (%) | | |
| Laboratory sample ID | Client sample ID | Method: Compound | CAS Number | Concentration | MS | Low | High | |
| EK071G: Reactive Phosphorus as P by discrete analyser (QCLot: 223165) - continued | | | | | | | | |
| ES1531935-001 | Anonymous | EK071G: Reactive Phosphorus as P | 14265-44-2 | 0.5 mg/L | 97.2 | 70 | 130 | |
| EP005: Total Organic Carbon (TOC) (QCLot: 226830) | | | | | | | | |
| ES1531940-001 | Anonymous | EP005: Total Organic Carbon | ---- | 100 mg/L | 94.6 | 70 | 130 | |
| EP005: Total Organic Carbon (TOC) (QCLot: 226831) | | | | | | | | |
| ES1532088-018 | Anonymous | EP005: Total Organic Carbon | ---- | 100 mg/L | 122 | 70 | 130 | |
| EP033: C1 - C4 Hydrocarbon Gases (QCLot: 225763) | | | | | | | | |
| EM1514747-002 | Anonymous | EP033: Butane | 106-97-8 | 102.18 µg/L | 80.5 | 70 | 130 | |
| | | EP033: Butene | 25167-67-3 | 99.61 µg/L | 78.2 | 70 | 130 | |
| | | EP033: Ethane | 74-84-0 | 54.43 µg/L | 77.9 | 70 | 130 | |
| | | EP033: Ethene | 74-85-1 | 50.29 µg/L | 76.9 | 70 | 130 | |
| | | EP033: Methane | 74-82-8 | 28.48 µg/L | 84.4 | 70 | 130 | |
| | | EP033: Propane | 74-98-6 | 78.28 µg/L | 79.7 | 70 | 130 | |
| | | EP033: Propene | 115-07-1 | 73.97 µg/L | 76.7 | 70 | 130 | |
| EP074E: Halogenated Aliphatic Compounds (QCLot: 226812) | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: 1,1-Dichloroethene | 75-35-4 | 25 µg/L | 81.7 | 70 | 130 | |
| | | EP074: Trichloroethene | 79-01-6 | 25 µg/L | 94.5 | 70 | 130 | |
| EP074F: Halogenated Aromatic Compounds (QCLot: 226812) | | | | | | | | |
| ES1531576-006 | Anonymous | EP074: Chlorobenzene | 108-90-7 | 25 µg/L | 101 | 70 | 130 | |
| EP080/071: Total Petroleum Hydrocarbons (QCLot: 226811) | | | | | | | | |
| ES1531576-005 | Anonymous | EP080: C6 - C9 Fraction | ---- | 325 µg/L | 113 | 70 | 130 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions (QCLot: 226811) | | | | | | | | |
| ES1531576-005 | Anonymous | EP080: C6 - C10 Fraction | C6_C10 | 375 µg/L | 113 | 70 | 130 | |
| EP080: BTEXN (QCLot: 226811) | | | | | | | | |
| ES1531576-005 | Anonymous | EP080: Benzene | 71-43-2 | 25 µg/L | 80.9 | 70 | 130 | |
| | | EP080: Ethylbenzene | 100-41-4 | 25 µg/L | 92.4 | 70 | 130 | |
| | | EP080: meta- & para-Xylene | 108-38-3 | 25 µg/L | 98.7 | 70 | 130 | |
| | | | 106-42-3 | | | | | |
| | | EP080: Naphthalene | 91-20-3 | 25 µg/L | 98.5 | 70 | 130 | |
| | | EP080: ortho-Xylene | 95-47-6 | 25 µg/L | 95.4 | 70 | 130 | |
| | | EP080: Toluene | 108-88-3 | 25 µg/L | 94.9 | 70 | 130 | |
| EP262: Ethanolamines (QCLot: 223283) | | | | | | | | |
| ES1532002-001 | Anonymous | EP262: Diethanolamine | 111-42-2 | 10 µg/L | 121 | 50 | 130 | |
| | | EP262: Ethanolamine | 141-43-5 | 10 µg/L | 84.5 | 50 | 130 | |

QA/QC Compliance Assessment for DQO Reporting

| | | | |
|--------------|---------------------------------|-------------------------|---------------------------------|
| Work Order | : ES1532008 | Page | : 1 of 12 |
| Amendment | : 3 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Telephone | : +61 2 8784 8503 |
| Project | : 2268523B | Date Samples Received | : 23-Sep-2015 |
| Site | : ---- | Issue Date | : 28-Oct-2015 |
| Sampler | : ANDREW FARINA, SEAN DAYKIN | No. of samples received | : 3 |
| Order number | : ---- | No. of samples analysed | : 3 |

This report is automatically generated by the ALS LIMS through interpretation of the ALS Quality Control Report and several Quality Assurance parameters measured by ALS. This automated reporting highlights any non-conformances, facilitates faster and more accurate data validation and is designed to assist internal expert and external Auditor review. Many components of this report contribute to the overall DQO assessment and reporting for guideline compliance.

Brief method summaries and references are also provided to assist in traceability.

Summary of Outliers

Outliers : Quality Control Samples

This report highlights outliers flagged in the Quality Control (QC) Report.

- **NO** Method Blank value outliers occur.
- **NO** Duplicate outliers occur.
- Laboratory Control outliers exist - please see following pages for full details.
- Matrix Spike outliers exist - please see following pages for full details.
- For all regular sample matrices, **NO** surrogate recovery outliers occur.

Outliers : Analysis Holding Time Compliance

- Analysis Holding Time Outliers exist - please see following pages for full details.

Outliers : Frequency of Quality Control Samples

- Quality Control Sample Frequency Outliers exist - please see following pages for full details.



Outliers : Quality Control Samples

Duplicates, Method Blanks, Laboratory Control Samples and Matrix Spikes

Matrix: **WATER**

| Compound Group Name | Laboratory Sample ID | Client Sample ID | Analyte | CAS Number | Data | Limits | Comment |
|--|----------------------|------------------|--------------------------------|------------|----------------|---------|---|
| Laboratory Control Spike (LCS) Recoveries | | | | | | | |
| EP074E: Halogenated Aliphatic Compounds | QC-226812-002 | ---- | Iodomethane | 74-88-4 | 59.3 % | 70-128% | Recovery less than lower control limit |
| EP075(SIM)A: Phenolic Compounds | QC-223698-002 | ---- | 2-Chlorophenol | 95-57-8 | 63.3 % | 64-110% | Recovery less than lower control limit |
| Matrix Spike (MS) Recoveries | | | | | | | |
| ED009: Anions | ES1532008--003 | WKSW03 | Chloride | 16887-00-6 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | ES1531935--001 | Anonymous | Sulfate as SO4 - Turbidimetric | 14808-79-8 | Not Determined | ---- | MS recovery not determined, background level greater than or equal to 4x spike level. |

Outliers : Analysis Holding Time Compliance

Matrix: **WATER**

| Method | Container / Client Sample ID(s) | Extraction / Preparation | | | Analysis | | |
|--------------------------------|---------------------------------|--------------------------|--------------------|--------------|---------------|------------------|--------------|
| | | Date extracted | Due for extraction | Days overdue | Date analysed | Due for analysis | Days overdue |
| EA005: pH | | | | | | | |
| Clear Plastic Bottle - Natural | WKSW02, WKSW03 | ---- | ---- | ---- | 23-Sep-2015 | 22-Sep-2015 | 1 |
| EK010/011: Chlorine | | | | | | | |
| Clear Plastic Bottle - Natural | WKSW02, WKSW03 | ---- | ---- | ---- | 23-Sep-2015 | 22-Sep-2015 | 1 |

Outliers : Frequency of Quality Control Samples

Matrix: **WATER**

| Quality Control Sample Type | Count | | Rate (%) | | Quality Control Specification |
|------------------------------------|-------|---------|----------|----------|--|
| | QC | Regular | Actual | Expected | |
| Laboratory Duplicates (DUP) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 18 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 20 | 0.00 | 10.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | |
| PAH/Phenols (GC/MS - SIM) | 0 | 18 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | 0 | 20 | 0.00 | 5.00 | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Analysis Holding Time Compliance

This report summarizes extraction / preparation and analysis times and compares each with ALS recommended holding times (referencing USEPA SW 846, APHA, AS and NEPM) based on the sample container provided. Dates reported represent first date of extraction or analysis and preclude subsequent dilutions and reruns. A listing of breaches (if any) is provided herein.

Holding time for leachate methods (e.g. TCLP) vary according to the analytes reported. Assessment compares the leach date with the shortest analyte holding time for the equivalent soil method. These are: organics 14 days, mercury 28 days & other metals 180 days. A recorded breach does not guarantee a breach for all non-volatile parameters.

Holding times for VOC in soils vary according to analytes of interest. Vinyl Chloride and Styrene holding time is 7 days; others 14 days. A recorded breach does not guarantee a breach for all VOC analytes and should be verified in case the reported breach is a false positive or Vinyl Chloride and Styrene are not key analytes of interest/concern.

Matrix: **WATER**

Evaluation: ✖ = Holding time breach ; ✔ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|--|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EA005: pH | | | | | | | |
| Clear Plastic Bottle - Natural (EA005) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 22-Sep-2015 | ✖ |
| Clear Plastic Bottle - Natural (EA005) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 23-Sep-2015 | ✔ |
| EA010P: Conductivity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EA010-P) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 20-Oct-2015 | ✔ |
| Clear Plastic Bottle - Natural (EA010-P) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 21-Oct-2015 | ✔ |
| EA015: Total Dissolved Solids | | | | | | | |
| Clear Plastic Bottle - Natural (EA015H) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 29-Sep-2015 | ✔ |
| Clear Plastic Bottle - Natural (EA015H) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 30-Sep-2015 | ✔ |
| EA025: Suspended Solids | | | | | | | |
| Clear Plastic Bottle - Natural (EA025H) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 29-Sep-2015 | ✔ |
| Clear Plastic Bottle - Natural (EA025H) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 30-Sep-2015 | ✔ |
| ED009: Anions | | | | | | | |
| Clear Plastic Bottle - Natural (ED009-X) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 20-Oct-2015 | ✔ |
| Clear Plastic Bottle - Natural (ED009-X) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 21-Oct-2015 | ✔ |
| ED037P: Alkalinity by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (ED037-P) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 06-Oct-2015 | ✔ |
| Clear Plastic Bottle - Natural (ED037-P) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 07-Oct-2015 | ✔ |



Matrix: **WATER** Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | |
| Clear Plastic Bottle - Natural (ED041G) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Natural (ED041G) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 21-Oct-2015 | ✓ |
| ED045G: Chloride by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (ED045G) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Natural (ED045G) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 21-Oct-2015 | ✓ |
| ED093F: Dissolved Major Cations | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Nitric Acid; Filtered (ED093F) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Oct-2015 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 20-Mar-2016 | ✓ |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020A-F) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Mar-2016 | ✓ |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 20-Mar-2016 | ✓ |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG020B-F) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Mar-2016 | ✓ |
| EG035F: Dissolved Mercury by FIMS | | | | | | | |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Nitric Acid; Filtered (EG035F) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Oct-2015 | ✓ |
| EG052G: Silica by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EG052G) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Natural (EG052G) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 21-Oct-2015 | ✓ |
| EK010/011: Chlorine | | | | | | | |
| Clear Plastic Bottle - Natural (EK010) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 22-Sep-2015 | * |
| Clear Plastic Bottle - Natural (EK010) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 23-Sep-2015 | ✓ |



Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EK040P: Fluoride by PC Titrator | | | | | | | |
| Clear Plastic Bottle - Natural (EK040P) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Natural (EK040P) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 21-Oct-2015 | ✓ |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Sulfuric Acid (EK055G) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 21-Oct-2015 | ✓ |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EK057G) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 24-Sep-2015 | ✓ |
| Clear Plastic Bottle - Natural (EK057G) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 25-Sep-2015 | ✓ |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Sulfuric Acid (EK059G) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 21-Oct-2015 | ✓ |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) WКСW02, WКСW03 | 22-Sep-2015 | 24-Sep-2015 | 20-Oct-2015 | ✓ | 24-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Sulfuric Acid (EK061G) WКСW01 | 23-Sep-2015 | 24-Sep-2015 | 21-Oct-2015 | ✓ | 24-Sep-2015 | 21-Oct-2015 | ✓ |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) WКСW02, WКСW03 | 22-Sep-2015 | 24-Sep-2015 | 20-Oct-2015 | ✓ | 24-Sep-2015 | 20-Oct-2015 | ✓ |
| Clear Plastic Bottle - Sulfuric Acid (EK067G) WКСW01 | 23-Sep-2015 | 24-Sep-2015 | 21-Oct-2015 | ✓ | 24-Sep-2015 | 21-Oct-2015 | ✓ |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | |
| Clear Plastic Bottle - Natural (EK071G) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 24-Sep-2015 | ✓ |
| Clear Plastic Bottle - Natural (EK071G) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 23-Sep-2015 | 25-Sep-2015 | ✓ |
| EP005: Total Organic Carbon (TOC) | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP005) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 20-Oct-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP005) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 28-Sep-2015 | 21-Oct-2015 | ✓ |



Matrix: **WATER**

Evaluation: * = Holding time breach ; ✓ = Within holding time.

| Method Container / Client Sample ID(s) | Sample Date | Extraction / Preparation | | | Analysis | | |
|---|-------------|--------------------------|--------------------|------------|---------------|------------------|------------|
| | | Date extracted | Due for extraction | Evaluation | Date analysed | Due for analysis | Evaluation |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP033) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 06-Oct-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP033) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 25-Sep-2015 | 07-Oct-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP071) WКСW02, WКСW03 | 22-Sep-2015 | 28-Sep-2015 | 29-Sep-2015 | ✓ | 29-Sep-2015 | 07-Nov-2015 | ✓ |
| Amber Glass Bottle - Unpreserved (EP071) WКСW01 | 23-Sep-2015 | 28-Sep-2015 | 30-Sep-2015 | ✓ | 29-Sep-2015 | 07-Nov-2015 | ✓ |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP074) WКСW02, WКСW03 | 22-Sep-2015 | 29-Sep-2015 | 06-Oct-2015 | ✓ | 29-Sep-2015 | 06-Oct-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP074) WКСW01 | 23-Sep-2015 | 29-Sep-2015 | 07-Oct-2015 | ✓ | 29-Sep-2015 | 07-Oct-2015 | ✓ |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) WКСW02, WКСW03 | 22-Sep-2015 | 28-Sep-2015 | 29-Sep-2015 | ✓ | 29-Sep-2015 | 07-Nov-2015 | ✓ |
| Amber Glass Bottle - Unpreserved (EP075(SIM)) WКСW01 | 23-Sep-2015 | 28-Sep-2015 | 30-Sep-2015 | ✓ | 29-Sep-2015 | 07-Nov-2015 | ✓ |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | |
| Amber VOC Vial - Sulfuric Acid (EP080) WКСW02, WКСW03 | 22-Sep-2015 | 29-Sep-2015 | 06-Oct-2015 | ✓ | 29-Sep-2015 | 06-Oct-2015 | ✓ |
| Amber VOC Vial - Sulfuric Acid (EP080) WКСW01 | 23-Sep-2015 | 29-Sep-2015 | 07-Oct-2015 | ✓ | 29-Sep-2015 | 07-Oct-2015 | ✓ |
| EP262: Ethanolamines | | | | | | | |
| Amber Glass Bottle - Unpreserved (EP262) WКСW02, WКСW03 | 22-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 29-Sep-2015 | ✓ |
| Amber Glass Bottle - Unpreserved (EP262) WКСW01 | 23-Sep-2015 | ---- | ---- | ---- | 24-Sep-2015 | 30-Sep-2015 | ✓ |



Quality Control Parameter Frequency Compliance

The following report summarises the frequency of laboratory QC samples analysed within the analytical lot(s) in which the submitted sample(s) was(were) processed. Actual rate should be greater than or equal to the expected rate. A listing of breaches is provided in the Summary of Outliers.

Matrix: **WATER** Evaluation: ✘ = Quality Control frequency not within specification ; ✔ = Quality Control frequency within specification.

| Quality Control Sample Type | | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| Analytical Methods | Method | QC | Reaular | Actual | Expected | Evaluation | |
| Laboratory Duplicates (DUP) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 2 | 18 | 11.11 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 2 | 16 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 18 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| pH | EA005 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 8 | 12.50 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 2 | 7 | 28.57 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 2 | 9 | 22.22 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 2 | 15 | 13.33 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 2 | 14 | 14.29 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatle Fraction | EP071 | 0 | 20 | 0.00 | 10.00 | ✘ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 2 | 19 | 10.53 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Laboratory Control Samples (LCS) | | | | | | | |
| Alkalinity by PC Titrator | ED037-P | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ammonia as N by Discrete analyser | EK055G | 1 | 18 | 5.56 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 2 | 20 | 10.00 | 10.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 14 | 7.14 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 15 | 6.67 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✔ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Laboratory Control Samples (LCS) - Continued | | | | | | | |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 2 | 20 | 10.00 | 9.52 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 2 | 20 | 10.00 | 10.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 3 | 9 | 33.33 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 3 | 14 | 21.43 | 15.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Method Blanks (MB) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chlorine | EK010 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Conductivity by PC Titrator | EA010-P | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | 1 | 16 | 6.25 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Major Cations - Dissolved | ED093F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Suspended Solids (High Level) | EA025H | 1 | 20 | 5.00 | 4.76 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Dissolved Solids (High Level) | EA015H | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Matrix: **WATER** Evaluation: * = Quality Control frequency not within specification ; ✓ = Quality Control frequency within specification.

| Quality Control Sample Type | Method | Count | | Rate (%) | | | Quality Control Specification |
|--|------------|-------|---------|----------|----------|------------|--|
| | | QC | Regular | Actual | Expected | Evaluation | |
| Analytical Methods | | | | | | | |
| Method Blanks (MB) - Continued | | | | | | | |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Matrix Spikes (MS) | | | | | | | |
| Ammonia as N by Discrete analyser | EK055G | 1 | 18 | 5.56 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| C1 - C4 Gases | EP033 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Chloride by Discrete Analyser | ED045G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Mercury by FIMS | EG035F | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Ethanolamines by LCMSMS | EP262 | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Fluoride by PC Titrator | EK040P | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite and Nitrate as N (NOx) by Discrete Analyser | EK059G | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Nitrite as N by Discrete Analyser | EK057G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | 0 | 18 | 0.00 | 5.00 | ✗ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Silica (Reactive) by Discrete Analyser | EG052G | 1 | 8 | 12.50 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Standard Anions -by IC (Extended Method) | ED009-X | 1 | 7 | 14.29 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | 1 | 9 | 11.11 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Organic Carbon | EP005 | 1 | 15 | 6.67 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Total Phosphorus as P By Discrete Analyser | EK067G | 1 | 14 | 7.14 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH - Semivolatile Fraction | EP071 | 0 | 20 | 0.00 | 5.00 | ✗ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| TRH Volatiles/BTEX | EP080 | 1 | 20 | 5.00 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Volatile Organic Compounds | EP074 | 1 | 19 | 5.26 | 5.00 | ✓ | NEPM 2013 Schedule B(3) and ALS QCS3 requirement |



Brief Method Summaries

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the US EPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request. The following report provides brief descriptions of the analytical procedures employed for results reported in the Certificate of Analysis. Sources from which ALS methods have been developed are provided within the Method Descriptions.

| Analytical Methods | Method | Matrix | Method Descriptions |
|--|----------|--------|---|
| pH | EA005 | WATER | In house: Referenced to APHA 4500 H+ B. pH of water samples is determined by ISE either manually or by automated pH meter. This method is compliant with NEPM (2013) Schedule B(3) |
| Conductivity by PC Titrator | EA010-P | WATER | In house: Referenced to APHA 2510 B. This procedure determines conductivity by automated ISE. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Dissolved Solids (High Level) | EA015H | WATER | In house: Referenced to APHA 2540C. A gravimetric procedure that determines the amount of 'filterable' residue in an aqueous sample. A well-mixed sample is filtered through a glass fibre filter (1.2um). The filtrate is evaporated to dryness and dried to constant weight at 180+/-5C. This method is compliant with NEPM (2013) Schedule B(3) |
| Suspended Solids (High Level) | EA025H | WATER | In house: Referenced to APHA 2540D. A gravimetric procedure employed to determine the amount of 'non-filterable' residue in a aqueous sample. The prescribed GFC (1.2um) filter is rinsed with deionised water, oven dried and weighed prior to analysis. A well-mixed sample is filtered through a glass fibre filter (1.2um). The residue on the filter paper is dried at 104+/-2C. This method is compliant with NEPM (2013) Schedule B(3) |
| Standard Anions -by IC (Extended Method) | ED009-X | WATER | In house: Referenced to APHA 4110. This method is compliant with NEPM (2013) Schedule B(3) |
| Alkalinity by PC Titrator | ED037-P | WATER | In house: Referenced to APHA 2320 B This procedure determines alkalinity by automated measurement (e.g. PC Titrate) using pH 4.5 for indicating the total alkalinity end-point. This method is compliant with NEPM (2013) Schedule B(3) |
| Sulfate (Turbidimetric) as SO4 2- by Discrete Analyser | ED041G | WATER | In house: Referenced to APHA 4500-SO4. Dissolved sulfate is determined in a 0.45um filtered sample. Sulfate ions are converted to a barium sulfate suspension in an acetic acid medium with barium chloride. Light absorbance of the BaSO4 suspension is measured by a photometer and the SO4-2 concentration is determined by comparison of the reading with a standard curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Chloride by Discrete Analyser | ED045G | WATER | In house: Referenced to APHA 4500 Cl - G. The thiocyanate ion is liberated from mercuric thiocyanate through sequestration of mercury by the chloride ion to form non-ionised mercuric chloride. In the presence of ferric ions the liberated thiocyanate forms highly-coloured ferric thiocyanate which is measured at 480 nm APHA 21st edition seal method 2 017-1-L april 2003 |
| Major Cations - Dissolved | ED093F | WATER | In house: Referenced to APHA 3120 and 3125; USEPA SW 846 - 6010 and 6020; Cations are determined by either ICP-AES or ICP-MS techniques. This method is compliant with NEPM (2013) Schedule B(3) Sodium Adsorption Ratio is calculated from Ca, Mg and Na which determined by ALS in house method QWI-EN/ED093F. This method is compliant with NEPM (2013) Schedule B(3) Hardness parameters are calculated based on APHA 2340 B. This method is compliant with NEPM (2013) Schedule B(3) |
| Dissolved Metals by ICP-MS - Suite A | EG020A-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |



| Analytical Methods | Method | Matrix | Method Descriptions |
|--|------------------------|--------|--|
| Dissolved Metals by ICP-MS - Suite B | EG020B-F | WATER | In house: Referenced to APHA 3125; USEPA SW846 - 6020, ALS QWI-EN/EG020. Samples are 0.45 um filtered prior to analysis. The ICPMS technique utilizes a highly efficient argon plasma to ionize selected elements. Ions are then passed into a high vacuum mass spectrometer, which separates the analytes based on their distinct mass to charge ratios prior to their measurement by a discrete dynode ion detector. |
| Dissolved Mercury by FIMS | EG035F | WATER | In house: Referenced to AS 3550, APHA 3112 Hg - B (Flow-injection (SnCl ₂)(Cold Vapour generation) AAS) Samples are 0.45 um filtered prior to analysis. FIM-AAS is an automated flameless atomic absorption technique. A bromate/bromide reagent is used to oxidise any organic mercury compounds in the filtered sample. The ionic mercury is reduced online to atomic mercury vapour by SnCl ₂ which is then purged into a heated quartz cell. Quantification is by comparing absorbance against a calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| Silica (Reactive) by Discrete Analyser | EG052G | WATER | In house: Referenced to APHA 4500-SiO ₂ D: Under Acidic conditions reactive silicon combines with ammonium molybdate to form a yellow molybdosilicic acid complex. This is reduced by 1-amino-2-naphthol-4-sulfonic acid to a silicomolybdenum blue complex which is measured by discrete analyser at 670 nm. This method is compliant with NEPM (2013) Schedule B(3) |
| Chlorine | EK010 | WATER | In-house (DPD colourimetry) |
| Fluoride by PC Titrator | EK040P | WATER | In house: Referenced to APHA 4500 F--C CDTA is added to the sample to provide a uniform ionic strength background, adjust pH, and break up complexes. Fluoride concentration is determined by either manual or automatic ISE measurement. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonia as N by Discrete analyser | EK055G | WATER | In house: Referenced to APHA 4500-NH ₃ G Ammonia is determined by direct colorimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ammonium as N | EK055G-NH ₄ | WATER | Ammonium in the sample is reported as the ionised / unionised fractions by the use of a nomograph and the initial pH and Temperature. Ammonia is determined by direct colorimetry by Discrete Analyser according to APHA 4500-NH ₃ G. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite as N by Discrete Analyser | EK057G | WATER | In house: Referenced to APHA 4500-NO ₂ - B. Nitrite is determined by direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrate as N by Discrete Analyser | EK058G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Nitrate is reduced to nitrite by way of a chemical reduction followed by quantification by Discrete Analyser. Nitrite is determined separately by direct colourimetry and result for Nitrate calculated as the difference between the two results. This method is compliant with NEPM (2013) Schedule B(3) |
| Nitrite and Nitrate as N (NO _x) by Discrete Analyser | EK059G | WATER | In house: Referenced to APHA 4500-NO ₃ - F. Combined oxidised Nitrogen (NO ₂ +NO ₃) is determined by Chemical Reduction and direct colourimetry by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Kjeldahl Nitrogen as N By Discrete Analyser | EK061G | WATER | In house: Referenced to APHA 4500-Norg D (In house). An aliquot of sample is digested using a high temperature Kjeldahl digestion to convert nitrogenous compounds to ammonia. Ammonia is determined colorimetrically by discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Nitrogen as N (TKN + Nox) By Discrete Analyser | EK062G | WATER | In house: Referenced to APHA 4500-Norg / 4500-NO ₃ -. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Phosphorus as P By Discrete Analyser | EK067G | WATER | In house: Referenced to APHA 4500-P H, Jirka et al (1976), Zhang et al (2006). This procedure involves sulphuric acid digestion of a sample aliquot to break phosphorus down to orthophosphate. The orthophosphate reacts with ammonium molybdate and antimony potassium tartrate to form a complex which is then reduced and its concentration measured at 880nm using discrete analyser. This method is compliant with NEPM (2013) Schedule B(3) |



| Analytical Methods | Method | Matrix | Method Descriptions |
|---|-------------|--------|--|
| Reactive Phosphorus as P-By Discrete Analyser | EK071G | WATER | In house: Referenced to APHA 4500-P F Ammonium molybdate and potassium antimonyl tartrate reacts in acid medium with orthophosphate to form a heteropoly acid -phosphomolybdic acid - which is reduced to intensely coloured molybdenum blue by ascorbic acid. Quantification is by Discrete Analyser. This method is compliant with NEPM (2013) Schedule B(3) |
| Ionic Balance by PCT DA and Turbi SO4 DA | EN055 - PG | WATER | In house: Referenced to APHA 1030F. This method is compliant with NEPM (2013) Schedule B(3) |
| Total Organic Carbon | EP005 | WATER | In house: Referenced to APHA 5310 B, The automated TOC analyzer determines Total and Inorganic Carbon by IR cell. TOC is calculated as the difference. This method is compliant with NEPM (2013) Schedule B(3) |
| C1 - C4 Gases | EP033 | WATER | Technical Guidance for the Natural Attenuation Indicators: Methane, Ethane, and Ethene, US EPA - Region 1, EPA New England, July 2001. Automated static headspace, dual column GC/FID. A 12 mL sample is pipetted into a 20 mL headspace vial containing 3g of sodium chloride and sealed. Each sample is equilibrated with shaking at 40 degrees C for 10 minutes prior to analysis by GC/FID using a pair of PLOT columns of different polarity. |
| TRH - Semivolatile Fraction | EP071 | WATER | USEPA SW 846 - 8015A The sample extract is analysed by Capillary GC/FID and quantification is by comparison against an established 5 point calibration curve of n-Alkane standards. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Volatile Organic Compounds | EP074 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| PAH/Phenols (GC/MS - SIM) | EP075(SIM) | WATER | USEPA SW 846 - 8270D Sample extracts are analysed by Capillary GC/MS in SIM Mode and quantification is by comparison against an established 5 point calibration curve. This method is compliant with NEPM (2013) Schedule B(3) |
| TRH Volatiles/BTEX | EP080 | WATER | USEPA SW 846 - 8260B Water samples are directly purged prior to analysis by Capillary GC/MS and quantification is by comparison against an established 5 point calibration curve. Alternatively, a sample is equilibrated in a headspace vial and a portion of the headspace determined by GCMS analysis. This method is compliant with the QC requirements of NEPM (2013) Schedule B(3) |
| Ethanolamines by LCMSMS | EP262 | WATER | In-house LC-MSMS: Benzoyl derivatives of target compounds are analysed by LC/MSMS in ESI Positive Mode. |
| Preparation Methods | Method | Matrix | Method Descriptions |
| TKN/TP Digestion | EK061/EK067 | WATER | APHA 4500 Norg - D; APHA 4500 P - H. This method is compliant with NEPM (2013) Schedule B(3) |

CERTIFICATE OF ANALYSIS

130805

Client:

Parsons Brinckerhoff Aust. Pty Ltd
GPO Box 5394
Sydney
NSW 2001

Attention: Sean Daykin, Carolina Sardello

Sample log in details:

| | |
|---|---------------------|
| Your Reference: | 2268523A |
| No. of samples: | 6 waters |
| Date samples received / completed instructions received | 08/07/15 / 08/07/15 |

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data. Samples were analysed as received from the client. Results relate specifically to the samples as received. Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Please refer to the last page of this report for any comments relating to the results.

Report Details:

| | |
|--|---------------------|
| Date results requested by: / Issue Date: | 15/07/15 / 14/07/15 |
| Date of Preliminary Report: | Not Issued |

NATA accreditation number 2901. This document shall not be reproduced except in full.

Accredited for compliance with ISO/IEC 17025. **Tests not covered by NATA are denoted with *.**

Results Approved By:



Jacinta Hurst
Laboratory Manager

| | | | | | | |
|--------------------------|-------|------------|------------|------------|------------|------------|
| Miscellaneous Inorganics | | | | | | |
| Our Reference: | UNITS | 130805-1 | 130805-2 | 130805-3 | 130805-4 | 130805-5 |
| Your Reference | ----- | AST2 | WK11 | WK12 | WK13 | WK14 |
| Date Sampled | ----- | 08/07/2015 | 08/07/2015 | 08/07/2015 | 08/07/2015 | 08/07/2015 |
| Type of sample | | Water | Water | Water | Water | Water |
| Date prepared | - | 10/07/2015 | 10/07/2015 | 10/07/2015 | 10/07/2015 | 10/07/2015 |
| Date analysed | - | 10/07/2015 | 10/07/2015 | 10/07/2015 | 10/07/2015 | 10/07/2015 |
| THPS in Water by uHPLC* | µg/L | <50 | <50 | <50 | <50 | <50 |
| Sulphate, SO4 | mg/L | 1 | 4 | <1 | 2 | <1 |

| | | |
|--------------------------|-------|------------|
| Miscellaneous Inorganics | | |
| Our Reference: | UNITS | 130805-6 |
| Your Reference | ----- | QA4 |
| Date Sampled | ----- | 08/07/2015 |
| Type of sample | | Water |
| Date prepared | - | 10/07/2015 |
| Date analysed | - | 10/07/2015 |
| THPS in Water by uHPLC* | µg/L | <50 |
| Sulphate, SO4 | mg/L | <1 |

| | | | | | | |
|-------------------------------------|-------|------------|------------|------------|------------|------------|
| Metals in Waters - Acid extractable | | | | | | |
| Our Reference: | UNITS | 130805-1 | 130805-2 | 130805-3 | 130805-4 | 130805-5 |
| Your Reference | ----- | AST2 | WK11 | WK12 | WK13 | WK14 |
| Date Sampled | ----- | 08/07/2015 | 08/07/2015 | 08/07/2015 | 08/07/2015 | 08/07/2015 |
| Type of sample | | Water | Water | Water | Water | Water |
| Date prepared | - | 10/07/2015 | 10/07/2015 | 10/07/2015 | 10/07/2015 | 10/07/2015 |
| Date analysed | - | 10/07/2015 | 10/07/2015 | 10/07/2015 | 10/07/2015 | 10/07/2015 |
| Phosphorus - Total | mg/L | 2.9 | 3.6 | 1.8 | 3.6 | 2.4 |

| | | |
|-------------------------------------|-------|------------|
| Metals in Waters - Acid extractable | | |
| Our Reference: | UNITS | 130805-6 |
| Your Reference | ----- | QA4 |
| Date Sampled | ----- | 08/07/2015 |
| Type of sample | | Water |
| Date prepared | - | 10/07/2015 |
| Date analysed | - | 10/07/2015 |
| Phosphorus - Total | mg/L | 2.4 |

| Method ID | Methodology Summary |
|--------------------|---|
| AT-021 | Determination of Bis[Tetrakis(Hydroxymethyl)Phosphonium Sulfate (THPS) in waters by conversion to formaldehyde, derivatisation and analysis using ultra high performance liquid chromatography-diode array detection. |
| Inorg-081 | Anions - a range of Anions are determined by Ion Chromatography, in accordance with APHA latest edition, 4110-B. |
| Metals-020 ICP-AES | Determination of various metals by ICP-AES. |

Client Reference: 2268523A

| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
|-------------------------------------|-------|----------|--------------------|-----------------------------------|---------------|---------------------------|------------------|------------------|
| Miscellaneous Inorganics | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 10/07/2015 | 130805-1 | 10/07/2015 10/07/2015 | 130805-3 | 10/07/2015 |
| Date analysed | - | | | 10/07/2015 | 130805-1 | 10/07/2015 10/07/2015 | 130805-3 | 10/07/2015 |
| THPS in Water by uHPLC* | µg/L | 50 | AT-021 | <50 | 130805-1 | <50 <50 | 130805-3 | 90% |
| Sulphate, SO4 | mg/L | 1 | Inorg-081 | <1 | 130805-1 | 1 1 RPD: 0 | [NR] | [NR] |
| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
| Metals in Waters - Acid extractable | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 10/07/2015 | [NT] | [NT] | LCS-W2 | 10/07/2015 |
| Date analysed | - | | | 10/07/2015 | [NT] | [NT] | LCS-W2 | 10/07/2015 |
| Phosphorus - Total | mg/L | 0.05 | Metals-020 ICP-AES | <0.05 | [NT] | [NT] | LCS-W2 | 104% |
| QUALITYCONTROL | UNITS | Dup. Sm# | | Duplicate Base + Duplicate + %RPD | | Spike Sm# | Spike % Recovery | |
| Miscellaneous Inorganics | | | | | | | | |
| Date prepared | - | [NT] | | [NT] | | LCS-1 | 10/07/2015 | |
| Date analysed | - | [NT] | | [NT] | | LCS-1 | 10/07/2015 | |
| THPS in Water by uHPLC* | µg/L | [NT] | | [NT] | | LCS-1 | 88% | |
| Sulphate, SO4 | mg/L | [NT] | | [NT] | | LCS-1 | 101% | |
| QUALITYCONTROL | UNITS | Dup. Sm# | | Duplicate Base + Duplicate + %RPD | | | | |
| Metals in Waters - Acid extractable | | | | | | | | |
| Date prepared | - | 130805-3 | | 10/07/2015 10/07/2015 | | | | |
| Date analysed | - | 130805-3 | | 10/07/2015 10/07/2015 | | | | |
| Phosphorus - Total | mg/L | 130805-3 | | 1.8 1.8 RPD: 0 | | | | |

Report Comments:

Asbestos ID was analysed by Approved Identifier: Not applicable for this job
Asbestos ID was authorised by Approved Signatory: Not applicable for this job

INS: Insufficient sample for this test
NA: Test not required
<: Less than

PQL: Practical Quantitation Limit
RPD: Relative Percent Difference
>: Greater than

NT: Not tested
NA: Test not required
LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

CERTIFICATE OF ANALYSIS

131168

Client:

Parsons Brinckerhoff Aust. Pty Ltd
GPO Box 5394
Sydney
NSW 2001

Attention: Sean Daykin

Sample log in details:

Your Reference: **2268523B**
No. of samples: 5 WaterS
Date samples received / completed instructions received 15/07/15 / 15/07/15

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data.
Samples were analysed as received from the client. Results relate specifically to the samples as received.
Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Please refer to the last page of this report for any comments relating to the results.

Report Details:

Date results requested by: / Issue Date: 22/07/15 / 22/07/15
Date of Preliminary Report: Not Issued

NATA accreditation number 2901. This document shall not be reproduced except in full.

Accredited for compliance with ISO/IEC 17025. **Tests not covered by NATA are denoted with *.**

Results Approved By:



Jacinta Hurst
Laboratory Manager

| | | | | | | |
|--------------------------|-------|------------|------------|------------|------------|------------|
| Miscellaneous Inorganics | | | | | | |
| Our Reference: | UNITS | 131168-1 | 131168-2 | 131168-3 | 131168-4 | 131168-5 |
| Your Reference | ----- | AST2 7.15 | WK11 9.30 | WK13 8.35 | WK14 9.0 | QA7 |
| Date Sampled | ----- | 15/07/2015 | 15/07/2015 | 15/07/2015 | 15/07/2015 | 15/07/2015 |
| Time Sampled | | 07:15 | 09:30 | 08:35 | 09:00 | 09:00 |
| Type of sample | | Water | Water | Water | Water | Water |
| Date prepared | - | 16/07/2015 | 16/07/2015 | 16/07/2015 | 16/07/2015 | 16/07/2015 |
| Date analysed | - | 16/07/2015 | 16/07/2015 | 16/07/2015 | 16/07/2015 | 16/07/2015 |
| THPS in Water by uHPLC* | µg/L | <50 | 58 | <50 | <50 | 52 |
| Sulphate, SO4 | mg/L | <1 | 2 | 2 | <1 | 2 |

| | | | | | | |
|-------------------------------------|-------|------------|------------|------------|------------|------------|
| Metals in Waters - Acid extractable | | | | | | |
| Our Reference: | UNITS | 131168-1 | 131168-2 | 131168-3 | 131168-4 | 131168-5 |
| Your Reference | ----- | AST2 7.15 | WK11 9.30 | WK13 8.35 | WK14 9.0 | QA7 |
| Date Sampled | ----- | 15/07/2015 | 15/07/2015 | 15/07/2015 | 15/07/2015 | 15/07/2015 |
| Time Sampled | | 07:15 | 09:30 | 08:35 | 09:00 | 09:00 |
| Type of sample | | Water | Water | Water | Water | Water |
| Date prepared | - | 17/07/2015 | 17/07/2015 | 17/07/2015 | 17/07/2015 | 17/07/2015 |
| Date analysed | - | 17/07/2015 | 17/07/2015 | 17/07/2015 | 17/07/2015 | 17/07/2015 |
| Phosphorus - Total | mg/L | 2.8 | 3.4 | 2.9 | 2.2 | 3.0 |

| Method ID | Methodology Summary |
|--------------------|---|
| AT-021 | Determination of Bis[Tetrakis(Hydroxymethyl)Phosphonium Sulfate (THPS) in waters by conversion to formaldehyde, derivatisation and analysis using ultra high performance liquid chromatography-diode array detection. |
| Inorg-081 | Anions - a range of Anions are determined by Ion Chromatography, in accordance with APHA latest edition, 4110-B. |
| Metals-020 ICP-AES | Determination of various metals by ICP-AES. |

Client Reference: 2268523B

| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
|-------------------------------------|-------|----------|--------------------|-----------------------------------|---------------|---------------------------|------------------|------------------|
| Miscellaneous Inorganics | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 16/07/2015 | 131168-1 | 16/07/2015 16/07/2015 | 131168-2 | 16/07/2015 |
| Date analysed | - | | | 16/07/2015 | 131168-1 | 16/07/2015 16/07/2015 | 131168-2 | 16/07/2015 |
| THPS in Water by uHPLC* | µg/L | 50 | AT-021 | <50 | 131168-1 | <50 <50 | 131168-2 | 91% |
| Sulphate, SO4 | mg/L | 1 | Inorg-081 | <1 | 131168-1 | <1 [N/T] | [NR] | [NR] |
| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
| Metals in Waters - Acid extractable | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 17/07/2015 | [NT] | [NT] | LCS-W2 | 17/07/2015 |
| Date analysed | - | | | 17/07/2015 | [NT] | [NT] | LCS-W2 | 17/07/2015 |
| Phosphorus - Total | mg/L | 0.05 | Metals-020 ICP-AES | <0.05 | [NT] | [NT] | LCS-W2 | 100% |
| QUALITYCONTROL | UNITS | Dup. Sm# | | Duplicate Base + Duplicate + %RPD | | Spike Sm# | Spike % Recovery | |
| Miscellaneous Inorganics | | | | | | | | |
| Date prepared | - | | [NT] | | [NT] | LCS-1 | 16/07/2015 | |
| Date analysed | - | | [NT] | | [NT] | LCS-1 | 16/07/2015 | |
| THPS in Water by uHPLC* | µg/L | | [NT] | | [NT] | LCS-1 | 99% | |
| Sulphate, SO4 | mg/L | | [NT] | | [NT] | LCS-1 | 101% | |

Report Comments:

Asbestos ID was analysed by Approved Identifier: Not applicable for this job
Asbestos ID was authorised by Approved Signatory: Not applicable for this job

INS: Insufficient sample for this test
NA: Test not required
<: Less than

PQL: Practical Quantitation Limit
RPD: Relative Percent Difference
>: Greater than

NT: Not tested
NA: Test not required
LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

CERTIFICATE OF ANALYSIS

131627

Client:

Parsons Brinckerhoff Aust. Pty Ltd
GPO Box 5394
Sydney
NSW 2001

Attention: Sean Daykin

Sample log in details:

| | |
|---|---------------------|
| Your Reference: | 2268523B |
| No. of samples: | 2 Waters |
| Date samples received / completed instructions received | 23/07/15 / 23/07/15 |

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data. Samples were analysed as received from the client. Results relate specifically to the samples as received. Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Please refer to the last page of this report for any comments relating to the results.

Report Details:

| | |
|--|---------------------|
| Date results requested by: / Issue Date: | 30/07/15 / 28/07/15 |
| Date of Preliminary Report: | Not Issued |

NATA accreditation number 2901. This document shall not be reproduced except in full.

Accredited for compliance with ISO/IEC 17025. **Tests not covered by NATA are denoted with *.**

Results Approved By:



Jacinta Hurst
Laboratory Manager

| | | | |
|--------------------------|-------|------------|------------|
| Miscellaneous Inorganics | | | |
| Our Reference: | UNITS | 131627-1 | 131627-2 |
| Your Reference | ----- | AST2 7.10 | WK14 8.05 |
| Date Sampled | ----- | 22/07/2015 | 22/07/2015 |
| Time Sampled | | 07:10 | 08:05 |
| Type of sample | | Water | Water |
| Date prepared | - | 23/07/2015 | 23/07/2015 |
| Date analysed | - | 23/07/2015 | 23/07/2015 |
| THPS in Water by uHPLC* | µg/L | <50 | <50 |
| Sulphate, SO4 | mg/L | 1 | <1 |

| | | | |
|-------------------------------------|-------|------------|------------|
| Metals in Waters - Acid extractable | | | |
| Our Reference: | UNITS | 131627-1 | 131627-2 |
| Your Reference | ----- | AST2 7.10 | WK14 8.05 |
| Date Sampled | ----- | 22/07/2015 | 22/07/2015 |
| Time Sampled | | 07:10 | 08:05 |
| Type of sample | | Water | Water |
| Date prepared | - | 24/07/2015 | 24/07/2015 |
| Date analysed | - | 24/07/2015 | 24/07/2015 |
| Phosphorus - Total | mg/L | 2.8 | 2.0 |

| Method ID | Methodology Summary |
|--------------------|---|
| AT-021 | Determination of Bis[Tetrakis(Hydroxymethyl)Phosphonium Sulfate (THPS) in waters by conversion to formaldehyde, derivatisation and analysis using ultra high performance liquid chromatography-diode array detection. |
| Inorg-081 | Anions - a range of Anions are determined by Ion Chromatography, in accordance with APHA latest edition, 4110-B. |
| Metals-020 ICP-AES | Determination of various metals by ICP-AES. |

Client Reference: 2268523B

| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
|-------------------------------------|-------|----------|--------------------|-----------------------------------|---------------|---------------------------|------------------|------------------|
| Miscellaneous Inorganics | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 23/07/2015 | 131627-1 | 23/07/2015 23/07/2015 | LCS-1 | 23/07/2015 |
| Date analysed | - | | | 23/07/2015 | 131627-1 | 23/07/2015 23/07/2015 | LCS-1 | 23/07/2015 |
| THPS in Water by uHPLC* | µg/L | 50 | AT-021 | <50 | 131627-1 | <50 <50 | LCS-1 | 96% |
| Sulphate, SO4 | mg/L | 1 | Inorg-081 | <1 | 131627-1 | 1 [N/T] | LCS-1 | 97% |
| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
| Metals in Waters - Acid extractable | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 24/07/2015 | [NT] | [NT] | LCS-W1 | 24/07/2015 |
| Date analysed | - | | | 24/07/2015 | [NT] | [NT] | LCS-W1 | 24/07/2015 |
| Phosphorus - Total | mg/L | 0.05 | Metals-020 ICP-AES | <0.05 | [NT] | [NT] | LCS-W1 | 104% |
| QUALITYCONTROL | UNITS | Dup. Sm# | | Duplicate Base + Duplicate + %RPD | | Spike Sm# | Spike % Recovery | |
| Miscellaneous Inorganics | | | | | | | | |
| Date prepared | - | | [NT] | | [NT] | 131627-2 | | 23/07/2015 |
| Date analysed | - | | [NT] | | [NT] | 131627-2 | | 23/07/2015 |
| THPS in Water by uHPLC* | µg/L | | [NT] | | [NT] | 131627-2 | | 88% |
| Sulphate, SO4 | mg/L | | [NT] | | [NT] | [NR] | | [NR] |

Report Comments:

Asbestos ID was analysed by Approved Identifier: Not applicable for this job
Asbestos ID was authorised by Approved Signatory: Not applicable for this job

INS: Insufficient sample for this test
NA: Test not required
<: Less than

PQL: Practical Quantitation Limit
RPD: Relative Percent Difference
>: Greater than

NT: Not tested
NA: Test not required
LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

CERTIFICATE OF ANALYSIS

131883

Client:

Parsons Brinckerhoff Aust. Pty Ltd
GPO Box 5394
Sydney
NSW 2001

Attention: Sean Daykin

Sample log in details:

| | |
|---|---------------------|
| Your Reference: | 2268523B |
| No. of samples: | 3 Waters |
| Date samples received / completed instructions received | 29/07/15 / 29/07/15 |

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data. Samples were analysed as received from the client. Results relate specifically to the samples as received. Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Please refer to the last page of this report for any comments relating to the results.

Report Details:

Date results requested by: / Issue Date: 5/08/15 / 31/07/15
Date of Preliminary Report: Not Issued

NATA accreditation number 2901. This document shall not be reproduced except in full.

Accredited for compliance with ISO/IEC 17025. **Tests not covered by NATA are denoted with *.**

Results Approved By:



Jacinta Hurst
Laboratory Manager

| | | | | |
|--------------------------|-------|------------|------------|------------|
| Miscellaneous Inorganics | | | | |
| Our Reference: | UNITS | 131883-1 | 131883-2 | 131883-3 |
| Your Reference | ----- | AST2 | WK13 | WK12 |
| Date Sampled | ----- | 29/07/2015 | 29/07/2015 | 29/07/2015 |
| Time Sampled | | 07:15 | 07:45 | 08:30 |
| Type of sample | | Water | Water | Water |
| Date prepared | - | 30/07/2015 | 30/07/2015 | 30/07/2015 |
| Date analysed | - | 30/07/2015 | 30/07/2015 | 30/07/2015 |
| THPS in Water by uHPLC* | µg/L | <50 | <50 | <50 |
| Sulphate, SO4 | mg/L | 1 | 2 | <1 |

| | | | | |
|-------------------------------------|-------|------------|------------|------------|
| Metals in Waters - Acid extractable | | | | |
| Our Reference: | UNITS | 131883-1 | 131883-2 | 131883-3 |
| Your Reference | ----- | AST2 | WK13 | WK12 |
| Date Sampled | ----- | 29/07/2015 | 29/07/2015 | 29/07/2015 |
| Time Sampled | | 07:15 | 07:45 | 08:30 |
| Type of sample | | Water | Water | Water |
| Date prepared | - | 30/07/2015 | 30/07/2015 | 30/07/2015 |
| Date analysed | - | 30/07/2015 | 30/07/2015 | 30/07/2015 |
| Phosphorus - Total | mg/L | 3.1 | 3.1 | 1.8 |

| Method ID | Methodology Summary |
|--------------------|---|
| AT-021 | Determination of Bis[Tetrakis(Hydroxymethyl)Phosphonium Sulfate (THPS) in waters by conversion to formaldehyde, derivatisation and analysis using ultra high performance liquid chromatography-diode array detection. |
| Inorg-081 | Anions - a range of Anions are determined by Ion Chromatography, in accordance with APHA latest edition, 4110-B. |
| Metals-020 ICP-AES | Determination of various metals by ICP-AES. |

Client Reference: 2268523B

| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
|-------------------------------------|-------|----------|--------------------|-----------------------------------|---------------|---------------------------|------------------|------------------|
| Miscellaneous Inorganics | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 30/07/2015 | 131883-1 | 30/07/2015 30/07/2015 | LCS-W1 | 30/07/2015 |
| Date analysed | - | | | 30/07/2015 | 131883-1 | 30/07/2015 30/07/2015 | LCS-W1 | 30/07/2015 |
| THPS in Water by uHPLC* | µg/L | 50 | AT-021 | <50 | 131883-1 | <50 <50 | LCS-W1 | 98% |
| Sulphate, SO4 | mg/L | 1 | Inorg-081 | <1 | 131883-1 | 1 [N/T] | LCS-W1 | 101% |
| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
| Metals in Waters - Acid extractable | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 30/07/2015 | [NT] | [NT] | LCS-W1 | 30/07/2015 |
| Date analysed | - | | | 30/07/2015 | [NT] | [NT] | LCS-W1 | 30/07/2015 |
| Phosphorus - Total | mg/L | 0.05 | Metals-020 ICP-AES | <0.05 | [NT] | [NT] | LCS-W1 | 114% |
| QUALITYCONTROL | UNITS | Dup. Sm# | | Duplicate Base + Duplicate + %RPD | | Spike Sm# | Spike % Recovery | |
| Miscellaneous Inorganics | | | | | | | | |
| Date prepared | - | | [NT] | | [NT] | 131883-2 | | 30/07/2015 |
| Date analysed | - | | [NT] | | [NT] | 131883-2 | | 30/07/2015 |
| THPS in Water by uHPLC* | µg/L | | [NT] | | [NT] | 131883-2 | | 83% |
| Sulphate, SO4 | mg/L | | [NT] | | [NT] | [NR] | | [NR] |

Report Comments:

Asbestos ID was analysed by Approved Identifier: Not applicable for this job
Asbestos ID was authorised by Approved Signatory: Not applicable for this job

INS: Insufficient sample for this test
NA: Test not required
<: Less than

PQL: Practical Quantitation Limit
RPD: Relative Percent Difference
>: Greater than

NT: Not tested
NA: Test not required
LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

CERTIFICATE OF ANALYSIS

132658

Client:

Parsons Brinckerhoff Aust. Pty Ltd
GPO Box 5394
Sydney
NSW 2001

Attention: Sean Daykin

Sample log in details:

Your Reference: **2268523B**
No. of samples: 3 waters
Date samples received / completed instructions received 13/08/15 / 13/08/15

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data.
Samples were analysed as received from the client. Results relate specifically to the samples as received.
Results are reported on a dry weight basis for solids and on an as received basis for other matrices.
Please refer to the last page of this report for any comments relating to the results.

Report Details:

Date results requested by: / Issue Date: 20/08/15 / 19/08/15
Date of Preliminary Report: Not Issued
NATA accreditation number 2901. This document shall not be reproduced except in full.
Accredited for compliance with ISO/IEC 17025. **Tests not covered by NATA are denoted with *.**

Results Approved By:



Jacinta Hurst
Laboratory Manager

| | | | | |
|--------------------------|-------|------------|------------|------------|
| Miscellaneous Inorganics | | | | |
| Our Reference: | UNITS | 132658-1 | 132658-2 | 132658-3 |
| Your Reference | ----- | AST2 | WK12 | WK13 |
| Date Sampled | ----- | 12/08/2015 | 12/08/2015 | 12/08/2015 |
| Type of sample | | Water | Water | Water |
| Date prepared | - | 13/08/2015 | 13/08/2015 | 13/08/2015 |
| Date analysed | - | 13/08/2015 | 13/08/2015 | 13/08/2015 |
| THPS in Water by uHPLC* | µg/L | <50 | <50 | <50 |
| Sulphate, SO4 | mg/L | <1 | <1 | 1 |

| | | | | |
|-------------------------------------|-------|------------|------------|------------|
| Metals in Waters - Acid extractable | | | | |
| Our Reference: | UNITS | 132658-1 | 132658-2 | 132658-3 |
| Your Reference | ----- | AST2 | WK12 | WK13 |
| Date Sampled | ----- | 12/08/2015 | 12/08/2015 | 12/08/2015 |
| Type of sample | | Water | Water | Water |
| Date prepared | - | 17/08/2015 | 17/08/2015 | 17/08/2015 |
| Date analysed | - | 17/08/2015 | 17/08/2015 | 17/08/2015 |
| Phosphorus - Total | mg/L | 3.1 | 1.7 | 2.8 |

| Method ID | Methodology Summary |
|--------------------|---|
| AT-021 | Determination of Bis[Tetrakis(Hydroxymethyl)Phosphonium Sulfate (THPS) in waters by conversion to formaldehyde, derivatisation and analysis using ultra high performance liquid chromatography-diode array detection. |
| Inorg-081 | Anions - a range of Anions are determined by Ion Chromatography, in accordance with APHA latest edition, 4110-B. |
| Metals-020 ICP-AES | Determination of various metals by ICP-AES. |

Client Reference: 2268523B

| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
|-------------------------------------|-------|----------|--------------------|-----------------------------------|---------------|---------------------------|------------------|------------------|
| Miscellaneous Inorganics | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 13/08/2015 | 132658-1 | 13/08/2015 13/08/2015 | 132658-3 | 13/08/2015 |
| Date analysed | - | | | 13/08/2015 | 132658-1 | 13/08/2015 13/08/2015 | 132658-3 | 13/08/2015 |
| THPS in Water by uHPLC* | µg/L | 50 | AT-021 | <50 | 132658-1 | <50 <50 | 132658-3 | 99% |
| Sulphate, SO4 | mg/L | 1 | Inorg-081 | <1 | 132658-1 | <1 <1 | [NR] | [NR] |
| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
| Metals in Waters - Acid extractable | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 17/08/2015 | [NT] | [NT] | LCS-W1 | 17/08/2015 |
| Date analysed | - | | | 17/08/2015 | [NT] | [NT] | LCS-W1 | 17/08/2015 |
| Phosphorus - Total | mg/L | 0.05 | Metals-020 ICP-AES | <0.05 | [NT] | [NT] | LCS-W1 | 106% |
| QUALITYCONTROL | UNITS | Dup. Sm# | | Duplicate Base + Duplicate + %RPD | | Spike Sm# | Spike % Recovery | |
| Miscellaneous Inorganics | | | | | | | | |
| Date prepared | - | | [NT] | | [NT] | LCS-1 | 13/08/2015 | |
| Date analysed | - | | [NT] | | [NT] | LCS-1 | 13/08/2015 | |
| THPS in Water by uHPLC* | µg/L | | [NT] | | [NT] | LCS-1 | 104% | |
| Sulphate, SO4 | mg/L | | [NT] | | [NT] | LCS-1 | 100% | |

Report Comments:

Asbestos ID was analysed by Approved Identifier: Not applicable for this job
Asbestos ID was authorised by Approved Signatory: Not applicable for this job

INS: Insufficient sample for this test
NA: Test not required
<: Less than

PQL: Practical Quantitation Limit
RPD: Relative Percent Difference
>: Greater than

NT: Not tested
NA: Test not required
LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

CERTIFICATE OF ANALYSIS

133320

Client:

Parsons Brinckerhoff Aust. Pty Ltd
GPO Box 5394
Sydney
NSW 2001

Attention: Sean Daykin

Sample log in details:

Your Reference: **2268523B**
No. of samples: 3 Waters
Date samples received / completed instructions received 27/08/2015 / 27/08/2015

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data.
Samples were analysed as received from the client. Results relate specifically to the samples as received.
Results are reported on a dry weight basis for solids and on an as received basis for other matrices.
Please refer to the last page of this report for any comments relating to the results.

Report Details:

Date results requested by: / Issue Date: 3/09/15 / 1/09/15
Date of Preliminary Report: Not Issued
NATA accreditation number 2901. This document shall not be reproduced except in full.
Accredited for compliance with ISO/IEC 17025. **Tests not covered by NATA are denoted with *.**

Results Approved By:



Jacinta Hurst
Laboratory Manager

| | | | | |
|--------------------------|-------|------------|------------|------------|
| Miscellaneous Inorganics | | | | |
| Our Reference: | UNITS | 133320-1 | 133320-2 | 133320-3 |
| Your Reference | ----- | WKS01 | WKS02 | WKS03 |
| Date Sampled | ----- | 26/08/2015 | 26/08/2015 | 26/08/2015 |
| Type of sample | | Water | Water | Water |
| Date prepared | - | 27/08/2015 | 27/08/2015 | 27/08/2015 |
| Date analysed | - | 27/08/2015 | 27/08/2015 | 27/08/2015 |
| THPS in Water by uHPLC* | µg/L | <50 | <50 | <50 |
| Sulphate, SO4 | mg/L | 21 | 10 | 25 |

| | | | | |
|-------------------------------------|-------|------------|------------|------------|
| Metals in Waters - Acid extractable | | | | |
| Our Reference: | UNITS | 133320-1 | 133320-2 | 133320-3 |
| Your Reference | ----- | WKS01 | WKS02 | WKS03 |
| Date Sampled | ----- | 26/08/2015 | 26/08/2015 | 26/08/2015 |
| Type of sample | | Water | Water | Water |
| Date prepared | - | 31/08/2015 | 31/08/2015 | 31/08/2015 |
| Date analysed | - | 31/08/2015 | 31/08/2015 | 31/08/2015 |
| Phosphorus - Total | mg/L | <0.05 | 0.1 | <0.05 |

| Method ID | Methodology Summary |
|--------------------|---|
| AT-021 | Determination of Bis[Tetrakis(Hydroxymethyl)Phosphonium Sulfate (THPS) in waters by conversion to formaldehyde, derivatisation and analysis using ultra high performance liquid chromatography-diode array detection. |
| Inorg-081 | Anions - a range of Anions are determined by Ion Chromatography, in accordance with APHA latest edition, 4110-B. |
| Metals-020 ICP-AES | Determination of various metals by ICP-AES. |

Client Reference: 2268523B

| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
|-------------------------------------|-------|----------|--------------------|-----------------------------------|---------------|---------------------------|------------------|------------------|
| Miscellaneous Inorganics | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 27/08/2015 | 133320-1 | 27/08/2015 27/08/2015 | LCS-1 | 27/08/2015 |
| Date analysed | - | | | 27/08/2015 | 133320-1 | 27/08/2015 27/08/2015 | LCS-1 | 27/08/2015 |
| THPS in Water by uHPLC* | µg/L | 50 | AT-021 | <50 | 133320-1 | <50 <50 | LCS-1 | 105% |
| Sulphate, SO4 | mg/L | 1 | Inorg-081 | <1 | 133320-1 | 21 [N/T] | LCS-1 | 104% |
| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
| Metals in Waters - Acid extractable | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 31/08/2015 | [NT] | [NT] | LCS-W1 | 31/08/2015 |
| Date analysed | - | | | 31/08/2015 | [NT] | [NT] | LCS-W1 | 31/08/2015 |
| Phosphorus - Total | mg/L | 0.05 | Metals-020 ICP-AES | <0.05 | [NT] | [NT] | LCS-W1 | 98% |
| QUALITYCONTROL | UNITS | Dup. Sm# | | Duplicate Base + Duplicate + %RPD | | Spike Sm# | Spike % Recovery | |
| Miscellaneous Inorganics | | | | | | | | |
| Date prepared | - | | [NT] | | [NT] | 133320-2 | | 27/08/2015 |
| Date analysed | - | | [NT] | | [NT] | 133320-2 | | 27/08/2015 |
| THPS in Water by uHPLC* | µg/L | | [NT] | | [NT] | 133320-2 | | 121% |
| Sulphate, SO4 | mg/L | | [NT] | | [NT] | [NR] | | [NR] |

Report Comments:

Asbestos ID was analysed by Approved Identifier: Not applicable for this job
Asbestos ID was authorised by Approved Signatory: Not applicable for this job

INS: Insufficient sample for this test

PQL: Practical Quantitation Limit

NT: Not tested

NA: Test not required

RPD: Relative Percent Difference

NA: Test not required

<: Less than

>: Greater than

LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

CERTIFICATE OF ANALYSIS

134039

Client:

Parsons Brinckerhoff Aust. Pty Ltd

GPO Box 5394

Sydney

NSW 2001

Attention: Sean Daykin

Sample log in details:

Your Reference:

2268523A

No. of samples:

5 Waters

Date samples received / completed instructions received

09/09/15

/ 09/09/15

Analysis Details:

Please refer to the following pages for results, methodology summary and quality control data.

Samples were analysed as received from the client. Results relate specifically to the samples as received.

Results are reported on a dry weight basis for solids and on an as received basis for other matrices.

Please refer to the last page of this report for any comments relating to the results.

Report Details:

Date results requested by: / Issue Date:

16/09/15

/

17/09/15

Date of Preliminary Report:

Not Issued

NATA accreditation number 2901. This document shall not be reproduced except in full.

Accredited for compliance with ISO/IEC 17025.

Tests not covered by NATA are denoted with *.

Results Approved By:



Jacinta Hurst
Laboratory Manager

| | | | | | | |
|--------------------------|-------|------------|------------|------------|------------|------------|
| Miscellaneous Inorganics | | | | | | |
| Our Reference: | UNITS | 134039-1 | 134039-2 | 134039-3 | 134039-4 | 134039-5 |
| Your Reference | ----- | AST2 | WK13 | WK14 | WK12 | WK11 |
| Date Sampled | ----- | 09/09/2015 | 09/09/2015 | 09/09/2015 | 09/09/2015 | 09/09/2015 |
| Type of sample | | Water | Water | Water | Water | Water |
| Date prepared | - | 10/09/2015 | 10/09/2015 | 10/09/2015 | 10/09/2015 | 10/09/2015 |
| Date analysed | - | 11/09/2015 | 11/09/2015 | 11/09/2015 | 11/09/2015 | 11/09/2015 |
| THPS in Water by uHPLC* | µg/L | 51 | 150 | 86 | 93 | 120 |
| Sulphate, SO4 | mg/L | <1 | <1 | 8 | <1 | 1 |

| | | | | | | |
|-------------------------------------|-------|------------|------------|------------|------------|------------|
| Metals in Waters - Acid extractable | | | | | | |
| Our Reference: | UNITS | 134039-1 | 134039-2 | 134039-3 | 134039-4 | 134039-5 |
| Your Reference | ----- | AST2 | WK13 | WK14 | WK12 | WK11 |
| Date Sampled | ----- | 09/09/2015 | 09/09/2015 | 09/09/2015 | 09/09/2015 | 09/09/2015 |
| Type of sample | | Water | Water | Water | Water | Water |
| Date prepared | - | 10/09/2015 | 10/09/2015 | 10/09/2015 | 10/09/2015 | 10/09/2015 |
| Date analysed | - | 10/09/2015 | 10/09/2015 | 10/09/2015 | 10/09/2015 | 10/09/2015 |
| Phosphorus - Total | mg/L | 2.4 | 2.2 | 1.8 | 1.5 | 3.1 |

| Method ID | Methodology Summary |
|--------------------|---|
| AT-021 | Determination of Bis[Tetrakis(Hydroxymethyl)Phosphonium Sulfate (THPS) in waters by conversion to formaldehyde, derivatisation and analysis using ultra high performance liquid chromatography-diode array detection. |
| Inorg-081 | Anions - a range of Anions are determined by Ion Chromatography, in accordance with APHA latest edition, 4110-B. |
| Metals-020 ICP-AES | Determination of various metals by ICP-AES. |

Client Reference: 2268523A

| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
|-------------------------------------|-------|----------|--------------------|-----------------------------------|---------------|---------------------------|------------------|------------------|
| Miscellaneous Inorganics | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 10/09/2015 | 134039-1 | 10/09/2015 11/09/2015 | LCS-W1 | 10/09/2015 |
| Date analysed | - | | | 10/09/2015 | 134039-1 | 11/09/2015 11/09/2015 | LCS-W1 | 10/09/2015 |
| THPS in Water by uHPLC* | µg/L | 50 | AT-021 | <50 | 134039-1 | 51 58 RPD: 13 | LCS-W1 | 106% |
| Sulphate, SO4 | mg/L | 1 | Inorg-081 | <1 | 134039-1 | <1 [N/T] | LCS-W1 | 99% |
| QUALITYCONTROL | UNITS | PQL | METHOD | Blank | Duplicate Sm# | Duplicate results | Spike Sm# | Spike % Recovery |
| Metals in Waters - Acid extractable | | | | | | Base II Duplicate II %RPD | | |
| Date prepared | - | | | 10/09/2015 | [NT] | [NT] | LCS-W2 | 10/09/2015 |
| Date analysed | - | | | 10/09/2015 | [NT] | [NT] | LCS-W2 | 10/09/2015 |
| Phosphorus - Total | mg/L | 0.05 | Metals-020 ICP-AES | <0.05 | [NT] | [NT] | LCS-W2 | 100% |
| QUALITYCONTROL | UNITS | Dup. Sm# | | Duplicate Base + Duplicate + %RPD | | Spike Sm# | Spike % Recovery | |
| Miscellaneous Inorganics | | | | | | | | |
| Date prepared | - | | [NT] | | [NT] | 134039-2 | | 11/9/2015 |
| Date analysed | - | | [NT] | | [NT] | 134039-2 | | 11/9/2015 |
| THPS in Water by uHPLC* | µg/L | | [NT] | | [NT] | 134039-2 | | 88% |
| Sulphate, SO4 | mg/L | | [NT] | | [NT] | [NR] | | [NR] |

Report Comments:

Asbestos ID was analysed by Approved Identifier: Not applicable for this job
Asbestos ID was authorised by Approved Signatory: Not applicable for this job

INS: Insufficient sample for this test
NA: Test not required
<: Less than

PQL: Practical Quantitation Limit
RPD: Relative Percent Difference
>: Greater than

NT: Not tested
NA: Test not required
LCS: Laboratory Control Sample

Quality Control Definitions

Blank: This is the component of the analytical signal which is not derived from the sample but from reagents, glassware etc, can be determined by processing solvents and reagents in exactly the same manner as for samples.

Duplicate: This is the complete duplicate analysis of a sample from the process batch. If possible, the sample selected should be one where the analyte concentration is easily measurable.

Matrix Spike: A portion of the sample is spiked with a known concentration of target analyte. The purpose of the matrix spike is to monitor the performance of the analytical method used and to determine whether matrix interferences exist.

LCS (Laboratory Control Sample): This comprises either a standard reference material or a control matrix (such as a blank sand or water) fortified with analytes representative of the analyte class. It is simply a check sample.

Surrogate Spike: Surrogates are known additions to each sample, blank, matrix spike and LCS in a batch, of compounds which are similar to the analyte of interest, however are not expected to be found in real samples.

Laboratory Acceptance Criteria

Duplicate sample and matrix spike recoveries may not be reported on smaller jobs, however, were analysed at a frequency to meet or exceed NEPM requirements. All samples are tested in batches of 20. The duplicate sample RPD and matrix spike recoveries for the batch were within the laboratory acceptance criteria.

Filters, swabs, wipes, tubes and badges will not have duplicate data as the whole sample is generally extracted during sample extraction.

Spikes for Physical and Aggregate Tests are not applicable.

For VOCs in water samples, three vials are required for duplicate or spike analysis.

Duplicates: <5xPQL - any RPD is acceptable; >5xPQL - 0-50% RPD is acceptable.

Matrix Spikes, LCS and Surrogate recoveries: Generally 70-130% for inorganics/metals; 60-140% for organics (+/-50% surrogates) and 10-140% for labile SVOCs (including labile surrogates), ultra trace organics and speciated phenols is acceptable.

In circumstances where no duplicate and/or sample spike has been reported at 1 in 10 and/or 1 in 20 samples respectively, the sample volume submitted was insufficient in order to satisfy laboratory QA/QC protocols.

When samples are received where certain analytes are outside of recommended technical holding times (THTs), the analysis has proceeded. Where analytes are on the verge of breaching THTs, every effort will be made to analyse within the THT or as soon as practicable.

Appendix D

Summary results of water quality



Table D.1 Waukivory surface water quality results

| Analyte ^a | Units | LOR | WKS01 | WKS01 | WKS02 | WKS02 | WKS03 | WKS03 |
|--------------------------------|--|----------|------------|------------|------------|------------|------------|------------|
| | | | 26/08/2015 | 23/09/2015 | 26/08/2015 | 22/09/2015 | 26/08/2015 | 22/09/2015 |
| Sample date | | | | | | | | |
| Field parameters | Temperature | °C | 15.49 | 13.34 | 16.94 | 17.36 | 15.12 | 19.06 |
| | Electrical conductivity | uS/cm | 479 | 696 | 536 | 682 | 498 | 693 |
| | pH | pH units | 7.22 | 8.68 | 7.06 | 7.96 | 6.99 | 8.69 |
| | TDS | mg/L | 312 | 452 | 348 | 443 | 324 | 450 |
| | DO % | % | 109.3 | 59.1 | 80.6 | 44.2 | 160 | 57.3 |
| | DO mg/L | mg/L | 10.7 | 6.16 | 7.56 | 4.24 | 15.57 | 5.29 |
| | Redox | mV | -93.6 | 13.8 | -92.3 | 125.3 | -88.7 | 107.1 |
| | Chlorine Free | mg/L | 0.04 | 0.03 | 0.07 | 0.1 | 0.04 | 0.05 |
| | Chlorine Total | mg/L | 0.13 | 0.08 | 0.15 | 0.04 | 0.07 | 0.11 |
| Key analytes | Ethanolamine | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Diethanolamine | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | THPS ^b | µg/L | 50 | <50 | <50 | - | <50 | - |
| | Boron | mg/L | 0.05 | <0.05 | <0.05 | <0.05 | <0.05 | <0.05 |
| | Chloride (Method analysis ED009) | mg/L | 0.1 | 98.2 | 152 | 109 | 145 | 108 |
| | Chloride (Method analysis ED045) | mg/L | 1 | 66 | 150 | 74 | 144 | 143 |
| | Chlorine - Free | mg/L | 0.2 | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 |
| | Chlorine - Total Residual | mg/L | 0.2 | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 |
| | Nitrogen (Total) | mg/L | 0.1 | 0.4 | 0.5 | 1.2 | 0.3 | 0.4 |
| | Sulfate as SO ₄ | mg/L | 1 | 25 | 37 | 13 | 6 | 28 |
| | Sulphate as SO ₄ ^b | mg/L | 1 | 21 | - | 10 | - | 25 |
| | Total Phosphorus | mg/L | 0.01 | 0.02 | 0.02 | 0.11 | 0.03 | 0.03 |
| | Total Phosphorus ^b | mg/L | 0.05 | <0.05 | - | 0.1 | - | <0.05 |
| Lab physical parameters | Electrical conductivity | µS/cm | 1 | 489 | 671 | 557 | 647 | 522 |
| | pH (Lab) ^c | pH units | 0.01 | 7.38 | 7.46 | 7.37 | 7.29 | 7.3 |
| | TDS | mg/L | 10 | 266 | 413 | 287 | 375 | 246 |
| | TSS | mg/L | 5 | <5 | <5 | 9 | <5 | 10 |
| Major/minor ions | Bicarbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | 52 | 72 | 75 | 103 | 51 |
| | Carbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Alkalinity (Hydroxide) as CaCO ₃ | mg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Alkalinity (total) as CaCO ₃ | mg/L | 1 | 52 | 72 | 75 | 103 | 51 |
| | Calcium | mg/L | 1 | 15 | 21 | 23 | 33 | 17 |
| | Magnesium | mg/L | 1 | 11 | 18 | 12 | 18 | 12 |
| | Potassium | mg/L | 1 | 3 | 4 | 6 | 4 | 3 |
| | Sodium | mg/L | 1 | 55 | 85 | 57 | 69 | 59 |
| | Fluoride | mg/L | 0.1 | 0.1 | <0.1 | 0.2 | 0.2 | 0.1 |
| | Reactive Silica | mg/L | 0.05 | 6.11 | 3.08 | 3.28 | 3.66 | 4.13 |
| | Bromine | mg/L | 0.1 | 0.3 | 0.3 | 0.3 | 0.2 | 0.3 |
| | Ionic Balance | % | 0.01 | 9.29 | 0.88 | 10.6 | 0.1 | 10.4 |
| Nutrients | Ammonia as N | mg/L | 0.01 | 0.01 | 0.03 | 0.06 | 0.01 | 0.1 |
| | Ammonium as N | mg/L | 0.01 | <0.01 | 0.03 | 0.06 | <0.01 | 0.1 |
| | Nitrate (as N) | mg/L | 0.01 | 0.01 | 0.03 | 0.06 | <0.01 | 0.15 |
| | Nitrite (as N) | mg/L | 0.01 | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 |
| | Nitrite + Nitrate as N | mg/L | 0.01 | 0.01 | 0.03 | 0.06 | <0.01 | 0.15 |
| | Kjeldahl Nitrogen Total | mg/L | 0.1 | 0.4 | 0.5 | 1.1 | 0.3 | 0.4 |
| | Reactive Phosphorus as P | mg/L | 0.01 | <0.01 | <0.01 | 0.02 | <0.01 | <0.01 |
| | Total Organic Carbon | mg/L | 1 | 5 | 8 | 11 | 4 | 6 |
| Dissolved gas | Methane | mg/L | 0.01 | 0.011 | 0.03 | 0.046 | 0.247 | 0.177 |
| Dissolved metals | Aluminium | mg/L | 0.01 | <0.01 | <0.01 | 0.01 | <0.01 | <0.01 |
| | Antimony | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Arsenic | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Barium | mg/L | 0.001 | 0.054 | 0.066 | 0.048 | 0.055 | 0.06 |
| | Beryllium | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Cadmium | mg/L | 0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 |
| | Chromium | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Cobalt | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Copper | mg/L | 0.001 | <0.001 | <0.001 | 0.002 | <0.001 | 0.002 |
| | Iron | mg/L | 0.05 | 0.1 | 0.11 | 0.33 | 0.1 | 0.18 |
| | Lead | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Vanadium | mg/L | 0.01 | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 |
| | Zinc | mg/L | 0.005 | <0.005 | <0.005 | 0.006 | <0.005 | 0.006 |
| | Manganese | mg/L | 0.001 | 0.045 | 0.371 | 0.093 | 0.305 | 0.094 |
| | Mercury | mg/L | 0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 |
| | Molybdenum | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Nickel | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Selenium | mg/L | 0.01 | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 |
| | Strontium | mg/L | 0.001 | 0.217 | 0.375 | 0.259 | 0.386 | 0.223 |
| | Tin | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| | Uranium | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 |
| Oil and Grease | Oil and Grease | mg/L | 5 | <5 | - | 5 | - | <5 |
| Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | 2,4,6-Trichlorophenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | 2,4-dichlorophenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | 2,4-dimethylphenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | 2,6-dichlorophenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | 2-chlorophenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | 2-methylphenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | 2-nitrophenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | 3-&4-methylphenol | µg/L | 2 | <2 | <2 | <2 | <2 | <2 |
| | 4-chloro-3-methylphenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Pentachlorophenol | µg/L | 2 | <2 | <2 | <2 | <2 | <2 |
| | Phenol | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| PAH | Acenaphthene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Acenaphthylene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Anthracene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Benz(a)anthracene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Benzo(a) pyrene | µg/L | 0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| | Benzo(b&j)fluoranthene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Benzo(g,h,i)perylene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Benzo(k)fluoranthene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Benzo(a)pyrene TEQ (zero) | µg/L | 0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| | Chrysene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Dibenz(a,h)anthracene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Fluoranthene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Fluorene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Indeno(1,2,3-c,d)pyrene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Naphthalene (Method analysis EP075(SIMB)) | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Phenanthrene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Pyrene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Polycyclic aromatic hydrocarbons EPA448 | µg/L | 0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| TRH | TPH C6-C10 | µg/L | 20 | <20 | <20 | <20 | <20 | <20 |
| | C6 - C10 Fraction minus BTEX (F1) | µg/L | 20 | <20 | <20 | <20 | <20 | <20 |
| | C10 - C16 Fraction | µg/L | 100 | <100 | <100 | <100 | <100 | <100 |
| | C16 - C34 Fraction | µg/L | 100 | <100 | <100 | <100 | <100 | <100 |
| | C34 - C40 Fraction | µg/L | 100 | <100 | <100 | <100 | <100 | <100 |
| | C10 - C40 Fraction (Sum) | µg/L | 100 | <100 | <100 | <100 | <100 | <100 |
| | TRH >C10-C16 less Naphthalene (F2) | µg/L | 100 | <100 | <100 | <100 | <100 | <100 |
| TPH | C6 - C9 Fraction | µg/L | 20 | <20 | <20 | <20 | <20 | <20 |
| | C10 - C14 Fraction | µg/L | 50 | <50 | <50 | <50 | <50 | <50 |
| | C15 - C28 Fraction | µg/L | 100 | <100 | <100 | <100 | <100 | <100 |
| | C29-C36 Fraction | µg/L | 50 | <50 | <50 | <50 | <50 | <50 |
| | +C10 - C36 (Sum of total) | µg/L | 50 | <50 | <50 | <50 | <50 | <50 |
| BTEX | Benzene | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Toluene | µg/L | 2 | <2 | <2 | <2 | <2 | <2 |
| | Ethylbenzene | µg/L | 2 | <2 | <2 | <2 | <2 | <2 |
| | Xylene (m & p) | µg/L | 2 | <2 | <2 | <2 | <2 | <2 |
| | Xylene (o) | µg/L | 2 | <2 | <2 | <2 | <2 | <2 |
| | Xylene Total | µg/L | 2 | <2 | <2 | <2 | <2 | <2 |
| | Sum of BTEX | µg/L | 1 | <1 | <1 | <1 | <1 | <1 |
| | Naphthalene (Method analysis EP080) | µg/L | 5 | <5 | <5 | <5 | <5 | <5 |

Notes:

- not analysed

a - All data is from ALS results unless otherwise stated.

b - Analysed by Envirolab.

c - Laboratory readings of pH (lab) is outside of the holding time, therefore field measurements of pH should be relied upon for accuracy.



Table D.2 AST2 and Pilot wells.

| Sample date | Analyte ^a | Units | LOR | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | | |
|--|--|--|--------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|------------|-------|
| | | | | 1/07/2015 | 2/07/2015 | 3/07/2015 | 4/07/2015 | 6/07/2015 | 7/07/2015 | 8/07/2015 | 9/07/2015 | 10/07/2015 | 11/07/2015 | 13/07/2015 | 14/07/2015 | 15/07/2015 | |
| Field parameters | Temperature | °C | | 12.74 | 11.04 | 10.29 | 7.76 | 15.77 | 7.22 | 9.14 | 8.54 | 9.03 | 8.98 | 15.35 | 8.05 | 6.83 | |
| | Electrical conductivity | uS/cm | | 6873 | 7154 | 7150 | 7140 | 7265 | 7116 | 7339 | 5143 | 7557 | 8890 | 7613 | 7411 | 7504 | |
| | pH | pH units | | 9.14 | 9.12 | 9.08 | 9.08 | 8.99 | 8.99 | 8.99 | 9.06 | 8.97 | 9.04 | 9 | 9.01 | 8.99 | |
| | TDS | mg/L | | 4467 | 4650 | 4647 | 4641 | 4739 | 4625 | 4625 | 3343 | 4912 | 5240 | 4949 | 4814 | 4878 | |
| | DO % | % | | 29.9 | 19.7 | 134.9 | 21.7 | 64.4 | 31.2 | 31.2 | 121.3 | 16.5 | 22.8 | 32.9 | 96.3 | 27.6 | |
| | DO mg/L | mg/L | | 3.09 | 2.12 | 14.76 | 2.53 | 6.21 | 3.66 | 3.66 | 13.95 | 1.86 | 2.57 | 3.21 | 11.3 | 3.24 | |
| | Redox | mV | | -128.9 | -115.9 | -115 | -105.2 | -171 | -107.1 | -107.1 | -115.8 | -114.7 | -118.1 | -120.6 | -120.4 | -120 | |
| | Chlorine Free | mg/L | | 0.09 | 0.04 | 0 | 0 | 0.04 | 0.09 | 0.09 | 0.09 | 0 | 0 | 0.02 | 0 | 0.02 | |
| | Chlorine Total | mg/L | | 0.11 | 0.12 | 0 | 0 | 0.05 | 0.09 | 0.09 | 0.03 | 0 | 0.02 | 0.13 | 0 | 0.03 | |
| | Key analytes | Ethanolamine | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | 18 |
| Diethanolamine | | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | 2 | |
| THPS ^b | | µg/L | 50 | - | - | - | - | - | - | <50 | - | - | - | - | - | <50 | |
| Boron | | mg/L | 0.05 | - | - | - | - | - | - | 5.66 | - | - | - | - | - | 0.24 | |
| Chloride (Method analysis ED009) | | mg/L | 0.1 | - | - | - | - | - | - | 619 | - | - | - | - | - | 611 | |
| Chloride (Method analysis ED045) | | mg/L | 1 | - | - | - | - | - | - | 621 | - | - | - | - | - | 483 | |
| Chlorine - Free | | mg/L | 0.2 | - | - | - | - | - | - | <0.2 | - | - | - | - | - | <0.2 | |
| Chlorine - Total Residual | | mg/L | 0.2 | - | - | - | - | - | - | <0.2 | - | - | - | - | - | <0.2 | |
| Nitrogen (Total) | | mg/L | 0.1 | - | - | - | - | - | - | 7.9 | - | - | - | - | - | 8.5 | |
| Sulfate as SO ₄ | | mg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <10 | |
| Sulphate as SO ₄ ^b | | mg/L | 1 | - | - | - | - | - | - | 1 | - | - | - | - | - | <1 | |
| Total Phosphorus | | mg/L | 0.01 | - | - | - | - | - | - | 2.38 | - | - | - | - | - | 2.62 | |
| Total Phosphorus ^b | | mg/L | 0.05 | - | - | - | - | - | - | 2.9 | - | - | - | - | - | 2.8 | |
| Lab physical parameters | | Electrical conductivity | µS/cm | 1 | 7050 | 7020 | 7120 | 7000 | 7430 | 7490 | 7140 | 7350 | 7430 | 7660 | 7600 | 7720 | 7490 |
| | pH (Lab) ^c | pH units | 0.01 | - | - | - | - | - | - | 9.19 | - | - | - | - | - | 9.16 | |
| | TDS | mg/L | 10 | - | - | - | - | - | - | 5000 | - | - | - | - | - | 5200 | |
| | TSS | mg/L | 5 | - | - | - | - | - | - | 68 | - | - | - | - | - | 52 | |
| | Major/minor ions | Bicarbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | - | - | - | - | - | - | 2970 | - | - | - | - | - | 3110 |
| Carbonate Alkalinity-mg CaCO ₃ /L | | mg/L | 1 | - | - | - | - | - | - | 712 | - | - | - | - | - | 617 | |
| Alkalinity (Hydroxide) as CaCO ₃ | | mg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| Alkalinity (total) as CaCO ₃ | | mg/L | 1 | - | - | - | - | - | - | 3680 | - | - | - | - | - | 3730 | |
| Calcium | | mg/L | 1 | - | - | - | - | - | - | 10 | - | - | - | - | - | 21 | |
| Magnesium | | mg/L | 1 | - | - | - | - | - | - | 3 | - | - | - | - | - | 3 | |
| Potassium | | mg/L | 1 | - | - | - | - | - | - | 21 | - | - | - | - | - | 12 | |
| Sodium | | mg/L | 1 | - | - | - | - | - | - | 1820 | - | - | - | - | - | 1560 | |
| Fluoride | | mg/L | 0.1 | - | - | - | - | - | - | 1.1 | - | - | - | - | - | 1.2 | |
| Reactive Silica | | mg/L | 0.05 | - | - | - | - | - | - | 21.1 | - | - | - | - | - | 21.6 | |
| Bromine | | mg/L | 0.1 | - | - | - | - | - | - | 0.8 | - | - | - | - | - | 0.5 | |
| Ionic Balance | | % | 0.01 | - | - | - | - | - | - | 6.24 | - | - | - | - | - | - | |
| Nutrients | | Ammonia as N | mg/L | 0.01 | - | - | - | - | - | - | <0.1 | - | - | - | - | - | <0.01 |
| | | Ammonium as N | mg/L | 0.01 | - | - | - | - | - | - | <0.1 | - | - | - | - | - | <0.01 |
| | Nitrate (as N) | mg/L | 0.01 | - | - | - | - | - | - | 0.04 | - | - | - | - | - | 0.04 | |
| | Nitrite (as N) | mg/L | 0.01 | - | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.01 | |
| | Nitrite + Nitrate as N | mg/L | 0.01 | - | - | - | - | - | - | 0.04 | - | - | - | - | - | 0.04 | |
| | Kjeldahl Nitrogen Total | mg/L | 0.1 | - | - | - | - | - | - | 7.9 | - | - | - | - | - | 8.5 | |
| | Reactive Phosphorus as P | mg/L | 0.01 | - | - | - | - | - | - | 0.05 | - | - | - | - | - | 0.03 | |
| | Total Organic Carbon | mg/L | 1 | - | - | - | - | - | - | 232 | - | - | - | - | - | - | |
| | Nonpurgeable Organic Carbon ^d | mg/L | 1 | - | - | - | - | - | - | - | - | - | - | - | - | 206 | |
| | Dissolved gas | Methane | mg/L | 0.01 | - | - | - | - | - | - | 2.66 | - | - | - | - | - | 1.98 |
| Dissolved metals | Aluminium | mg/L | 0.01 | - | - | - | - | - | - | <0.01 | - | - | - | - | - | 0.01 | |
| | Antimony | mg/L | 0.001 | - | - | - | - | - | - | <0.001 | - | - | - | - | - | <0.001 | |
| | Arsenic | mg/L | 0.001 | - | - | - | - | - | - | 0.004 | - | - | - | - | - | 0.003 | |
| | Barium | mg/L | 0.001 | - | - | - | - | - | - | 4.72 | - | - | - | - | - | 4.14 | |
| | Beryllium | mg/L | 0.001 | - | - | - | - | - | - | <0.001 | - | - | - | - | - | <0.001 | |
| | Cadmium | mg/L | 0.0001 | - | - | - | - | - | - | <0.0001 | - | - | - | - | - | <0.0001 | |
| | Chromium | mg/L | 0.001 | - | - | - | - | - | - | 0.002 | - | - | - | - | - | 0.002 | |
| | Cobalt | mg/L | 0.001 | - | - | - | - | - | - | <0.001 | - | - | - | - | - | <0.001 | |
| | Copper | mg/L | 0.001 | - | - | - | - | - | - | <0.001 | - | - | - | - | - | <0.001 | |
| | Iron | mg/L | 0.05 | - | - | - | - | - | - | 0.4 | - | - | - | - | - | 0.28 | |
| | Lead | mg/L | 0.001 | - | - | - | - | - | - | <0.001 | - | - | - | - | - | <0.001 | |
| | Vanadium | mg/L | 0.01 | - | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.01 | |
| | Zinc | mg/L | 0.005 | - | - | - | - | - | - | <0.005 | - | - | - | - | - | <0.005 | |
| | Manganese | mg/L | 0.001 | - | - | - | - | - | - | 0.015 | - | - | - | - | - | 0.015 | |
| | Mercury | mg/L | 0.0001 | - | - | - | - | - | - | <0.0001 | - | - | - | - | - | <0.0001 | |
| | Molybdenum | mg/L | 0.001 | - | - | - | - | - | - | 0.004 | - | - | - | - | - | 0.003 | |
| | Nickel | mg/L | 0.001 | - | - | - | - | - | - | 0.002 | - | - | - | - | - | 0.001 | |
| | Selenium | mg/L | 0.01 | - | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.01 | |
| | Strontium | mg/L | 0.001 | - | - | - | - | - | - | 3.15 | - | - | - | - | - | 2.72 | |
| | Tin | mg/L | 0.001 | - | - | - | - | - | - | <0.001 | - | - | - | - | - | <0.001 | |
| | Uranium | mg/L | 0.001 | - | - | - | - | - | - | <0.001 | - | - | - | - | - | <0.001 | |
| | Oil and Grease | Oil and Grease | mg/L | 5 | - | - | - | - | - | - | 10 | - | - | - | - | - | <5 |
| Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2,4,6-Trichlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2,4-dichlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2,4-dimethylphenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2,6-dichlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2-chlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2-methylphenol | µg/L | 1 | - | - | - | - | - | - | 1.2 | - | - | - | - | - | 1.2 | |
| | 2-nitrophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 3-&4-methylphenol | µg/L | 2 | - | - | - | - | - | - | 45.9 | - | - | - | - | - | 29.7 | |
| | 4-chloro-3-methylphenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Pentachlorophenol | µg/L | 2 | - | - | - | - | - | - | <2 | - | - | - | - | - | <2 | |
| Phenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | 1.1 | | |
| PAH | Acenaphthene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Acenaphthylene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Anthracene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benz(a)anthracene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benzo(a) pyrene | µg/L | 0.5 | - | - | - | - | - | - | <0.5 | - | - | - | - | - | <0.5 | |
| | Benzo(b&j)fluoranthene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benzo(g,h,i)perylene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benzo(k)fluoranthene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benzo(a)pyrene TEQ (zero) | µg/L | 0.5 | - | - | - | - | - | - | <0.5 | - | - | - | - | - | <0.5 | |
| | Chrysene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Dibenz(a,h)anthracene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Fluoranthene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Fluorene | µg/L | 1 | - | - | - | - | | | | | | | | | | |

Table D.2 AST2 and Pilot wells cont.

| Sample date | Analyte ^a | Units | LOR | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | AST2 | |
|---|---|-----------------------------------|--------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------|
| | | | | 16/07/2015 | 17/07/2015 | 18/07/2015 | 20/07/2015 | 21/07/2015 | 22/07/2015 | 23/07/2015 | 24/07/2015 | 25/07/2015 | 27/07/2015 | 28/07/2015 | 29/07/2015 | |
| Field parameters | Temperature | °C | | 7.89 | 5.28 | 8.37 | 13.67 | 8.96 | 9.57 | 10.03 | 12.08 | 13.33 | 16.55 | 5.74 | 7.71 | |
| | Electrical conductivity | uS/cm | | 7654 | 7525 | 7657 | 7809 | 7794 | 7786 | 7723 | 7745 | 7836 | 8265 | 7766 | 7788 | |
| | pH | pH units | | 8.99 | 8.99 | 9.04 | 9.03 | 9.01 | 9.06 | 9 | 8.98 | 9.06 | 9.04 | 9.04 | 9.04 | |
| | TDS | mg/L | | 4981 | 4891 | 4978 | 5076 | 5067 | 5061 | 5020 | 5034 | 5093 | 5372 | 5053 | 5062 | |
| | DO % | % | | 24.3 | 23.8 | 24.8 | 54.4 | 32.4 | 53.5 | 26.8 | 25.1 | 39.9 | 26.7 | 27.1 | 14.6 | |
| | DO mg/L | mg/L | | 2.82 | 2.94 | 2.84 | 5.47 | 3.63 | 5.72 | 2.93 | 2.62 | 4.02 | 2.52 | 3.31 | 1.69 | |
| | Redox | mV | | -118.7 | 165.9 | 133.7 | 183.9 | 157 | 261.8 | 148.7 | 117.8 | -53.9 | 43.1 | 177.5 | 195.8 | |
| | Chlorine Free | mg/L | | 0.05 | 0.13 | 0 | 0.09 | 0.03 | 0.04 | 0.08 | 0.06 | 0.25 | 0.06 | 0.03 | 0 | |
| | Chlorine Total | mg/L | | 0.06 | 0.22 | 0 | 0.13 | 0.11 | 0.03 | 0.11 | 0 | 0.19 | 0.15 | 0.08 | 0.06 | |
| | Key analytes | Ethanolamine | µg/L | 1 | - | - | - | - | - | 29 | - | - | - | - | - | 20 |
| Diethanolamine | | µg/L | 1 | - | - | - | - | - | 26 | - | - | - | - | - | <1 | |
| THPS ^b | | µg/L | 50 | - | - | - | - | - | <50 | - | - | - | - | - | <50 | |
| Boron | | mg/L | 0.05 | - | - | - | - | - | 8.52 | - | - | - | - | - | 6.93 | |
| Chloride (Method analysis ED009) | | mg/L | 0.1 | - | - | - | - | - | 668 | - | - | - | - | - | 658 | |
| Chloride (Method analysis ED045) | | mg/L | 1 | - | - | - | - | - | 508 | - | - | - | - | - | 487 | |
| Chlorine - Free | | mg/L | 0.2 | - | - | - | - | - | <0.2 | - | - | - | - | - | <0.2 | |
| Chlorine - Total Residual | | mg/L | 0.2 | - | - | - | - | - | <0.2 | - | - | - | - | - | <0.2 | |
| Nitrogen (Total) | | mg/L | 0.1 | - | - | - | - | - | 5.4 | - | - | - | - | - | 9.5 | |
| Sulfate as SO4 | | mg/L | 1 | - | - | - | - | - | <10 | - | - | - | - | - | <1 | |
| Sulphate as SO4 ^b | | mg/L | 1 | - | - | - | - | - | 1 | - | - | - | - | - | 1 | |
| Total Phosphorus | | mg/L | 0.01 | - | - | - | - | - | 1.63 | - | - | - | - | - | 2.69 | |
| Lab physical parameters | | Electrical conductivity | µS/cm | 1 | 7780 | 7430 | 7910 | 7650 | 7770 | 7950 | 8000 | 7720 | 8460 | 7220 | 7880 | 7150 |
| | pH (Lab) ^c | pH units | 0.01 | - | - | - | - | - | 8.97 | - | - | - | - | - | 9.18 | |
| | TDS | mg/L | 10 | - | - | - | - | - | 5240 | - | - | - | - | - | 5330 | |
| | TSS | mg/L | 5 | - | - | - | - | - | 48 | - | - | - | - | - | 42 | |
| | Major/minor ions | Bicarbonate Alkalinity-mg CaCO3/L | mg/L | 1 | - | - | - | - | - | 3320 | - | - | - | - | - | 3180 |
| Carbonate Alkalinity-mg CaCO3/L | | mg/L | 1 | - | - | - | - | - | 600 | - | - | - | - | - | 750 | |
| Alkalinity (Hydroxide) as CaCO3 | | mg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| Alkalinity (total) as CaCO3 | | mg/L | 1 | - | - | - | - | - | 3920 | - | - | - | - | - | 3920 | |
| Calcium | | mg/L | 1 | - | - | - | - | - | 24 | - | - | - | - | - | 17 | |
| Magnesium | | mg/L | 1 | - | - | - | - | - | <10 | - | - | - | - | - | 4 | |
| Potassium | | mg/L | 1 | - | - | - | - | - | 15 | - | - | - | - | - | 15 | |
| Sodium | | mg/L | 1 | - | - | - | - | - | 2110 | - | - | - | - | - | 2140 | |
| Fluoride | | mg/L | 0.1 | - | - | - | - | - | 1.2 | - | - | - | - | - | 1.2 | |
| Reactive Silica | | mg/L | 0.05 | - | - | - | - | - | 22.7 | - | - | - | - | - | 24.6 | |
| Bromine | | mg/L | 0.1 | - | - | - | - | - | 3.3 | - | - | - | - | - | 1.4 | |
| Ionic Balance | | % | 0.01 | - | - | - | - | - | 0.32 | - | - | - | - | - | 1.32 | |
| Nutrients | | Ammonia as N | mg/L | 0.01 | - | - | - | - | - | 0.03 | - | - | - | - | - | 0.01 |
| | | Ammonium as N | mg/L | 0.01 | - | - | - | - | - | 0.02 | - | - | - | - | - | <0.01 |
| | Nitrate (as N) | mg/L | 0.01 | - | - | - | - | - | 0.02 | - | - | - | - | - | <0.01 | |
| | Nitrite (as N) | mg/L | 0.01 | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.01 | |
| | Nitrite + Nitrate as N | mg/L | 0.01 | - | - | - | - | - | 0.02 | - | - | - | - | - | <0.01 | |
| | Kjeldahl Nitrogen Total | mg/L | 0.1 | - | - | - | - | - | 5.4 | - | - | - | - | - | 9.5 | |
| | Reactive Phosphorus as P | mg/L | 0.01 | - | - | - | - | - | 0.02 | - | - | - | - | - | 0.06 | |
| | Total Organic Carbon | mg/L | 1 | - | - | - | - | - | 291 | - | - | - | - | - | 188 | |
| | Nonpurgeable Organic Carbon ^d | mg/L | 1 | - | - | - | - | - | - | - | - | - | - | - | - | |
| | Dissolved gas | Methane | mg/L | 0.01 | - | - | - | - | - | 0.786 | - | - | - | - | - | 0.494 |
| Dissolved metals | Aluminium | mg/L | 0.01 | - | - | - | - | - | <0.1 | - | - | - | - | - | <0.01 | |
| | Antimony | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.001 | |
| | Arsenic | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | 0.006 | |
| | Barium | mg/L | 0.001 | - | - | - | - | - | 5.11 | - | - | - | - | - | 5.91 | |
| | Beryllium | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.001 | |
| | Cadmium | mg/L | 0.0001 | - | - | - | - | - | <0.001 | - | - | - | - | - | <0.0001 | |
| | Chromium | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | 0.003 | |
| | Cobalt | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.001 | |
| | Copper | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.001 | |
| | Iron | mg/L | 0.05 | - | - | - | - | - | 0.55 | - | - | - | - | - | 0.3 | |
| | Lead | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.001 | |
| | Vanadium | mg/L | 0.01 | - | - | - | - | - | <0.1 | - | - | - | - | - | <0.01 | |
| | Zinc | mg/L | 0.005 | - | - | - | - | - | <0.05 | - | - | - | - | - | <0.005 | |
| | Manganese | mg/L | 0.001 | - | - | - | - | - | 0.021 | - | - | - | - | - | 0.009 | |
| | Mercury | mg/L | 0.0001 | - | - | - | - | - | <0.0001 | - | - | - | - | - | <0.0001 | |
| | Molybdenum | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | 0.009 | |
| | Nickel | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | 0.002 | |
| | Selenium | mg/L | 0.01 | - | - | - | - | - | <0.1 | - | - | - | - | - | <0.01 | |
| | Strontium | mg/L | 0.001 | - | - | - | - | - | 3.33 | - | - | - | - | - | 3.74 | |
| | Tin | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.001 | |
| | Uranium | mg/L | 0.001 | - | - | - | - | - | <0.01 | - | - | - | - | - | <0.001 | |
| | Oil and Grease | Oil and Grease | mg/L | 5 | - | - | - | - | - | 14 | - | - | - | - | - | <5 |
| Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2,4,6-Trichlorophenol | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2,4-dichlorophenol | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2,4-dimethylphenol | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2,6-dichlorophenol | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2-chlorophenol | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 2-methylphenol | µg/L | 1 | - | - | - | - | - | 1.3 | - | - | - | - | - | <1 | |
| | 2-nitrophenol | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | 3-&4-methylphenol | µg/L | 2 | - | - | - | - | - | 30.9 | - | - | - | - | - | 24.2 | |
| | 4-chloro-3-methylphenol | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Pentachlorophenol | µg/L | 2 | - | - | - | - | - | <2 | - | - | - | - | - | <2 | |
| | Phenol | µg/L | 1 | - | - | - | - | - | 1.6 | - | - | - | - | - | 1.4 | |
| PAH | Acenaphthene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Acenaphthylene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Anthracene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benz(a)anthracene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benzo(a) pyrene | µg/L | 0.5 | - | - | - | - | - | <0.5 | - | - | - | - | - | <0.5 | |
| | Benzo(b&j)fluoranthene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benzo(g,h,i)perylene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benzo(k)fluoranthene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Benzo(a)pyrene TEQ (zero) | µg/L | 0.5 | - | - | - | - | - | <0.5 | - | - | - | - | - | <0.5 | |
| | Chrysene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Dibenz(a,h)anthracene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Fluoranthene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Fluorene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Indeno(1,2,3-c,d)pyrene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Naphthalene (Method analysis EP075(SIM)B) | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| | Phenanthrene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | |
| Pyrene | µg/L | 1 | - | - | - | - | - | <1 | - | - | - | - | - | <1 | | |
| Polycyclic aromatic hydrocarbons EPA448 | µg/L | 0.5 | - | - | - | - | - | <0.5 | - | - | - | - | - | <0.5 | | |
| TRH | TPH C6-C10 | µg/L | 20 | - | - | - | - | - | 40 | - | - | - | - | | | |

Table D.2 AST2 and Pilot wells cont.

| Sample date | Analyte ^a | Units | LOR | WK11 | WK11 | WK11 | WK11 | WK11 | WK11 | WK11 | WK11 | WK11 | WK11 | WK11 | WK11 | |
|--|--|--|--------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-----------|------------|--------|
| | | | | 10/07/2015 | 11/07/2015 | 13/07/2015 | 14/07/2015 | 15/07/2015 | 16/07/2015 | 17/07/2015 | 20/07/2015 | 27/07/2015 | 26/08/2015 | 9/09/2015 | 23/09/2015 | |
| Field parameters | Temperature | °C | | 14.3 | 14.93 | 19.35 | 15.67 | 15.28 | 13.34 | 12.54 | 21.24 | 19.16 | 22.68 | 22 | 12.56 | |
| | Electrical conductivity | uS/cm | | 11,528 | 12,476 | 11,317 | 11,183 | 11,018 | 11,235 | 10,870 | 11,014 | 11,275 | 11,074 | 10,955 | 10,541 | |
| | pH | pH units | | 7.05 | 7.2 | 7.33 | 7.32 | 7.27 | 7.44 | 7.51 | 7.51 | 7.65 | 7.58 | 7.45 | 8.01 | |
| | TDS | mg/L | | 7493 | 8110 | 7363 | 7267 | 7163 | 7302 | 7066 | 7160 | 7328 | 7201 | 7124 | 6882 | |
| | DO % | % | | 26.8 | 28.1 | 65.5 | 34.6 | 45.7 | 29.8 | 16.9 | 26.6 | 26.2 | 34.1 | 8.9 | 41 | |
| | DO mg/L | mg/L | | 2.62 | 2.71 | 5.77 | 3.31 | 4.44 | 2.99 | 1.73 | 2.22 | 2.32 | 2.82 | 0.75 | 4.18 | |
| | Redox | mV | | -124.8 | -127.6 | -101.8 | -102.7 | -107.4 | -101.3 | -112.4 | -154.7 | -146.2 | -117.2 | -131.1 | -91 | |
| | Chlorine Free | mg/L | | 0 | 0 | 0 | 0 | 0.03 | 0.02 | 0.1 | 0 | 0 | 0.04 | 0.14 | 0.08 | |
| | Chlorine Total | mg/L | | 0 | 0 | 0.05 | 0 | 0 | 0.02 | 0.02 | 0 | 0.04 | 0.17 | 0.11 | 0.06 | |
| Key analytes | Ethanolamine | µg/L | 1 | - | - | - | - | 34 | - | - | - | - | 103 | 9 | 44 | |
| | Diethanolamine | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | 6 | 3 | 18 | |
| | THPS ^b | µg/L | 50 | - | - | - | - | 58 | - | - | - | - | - | 120 | - | |
| | Boron | mg/L | 0.05 | - | - | - | - | 3.35 | - | - | - | - | 8.08 | 5.31 | 2.16 | |
| | Chloride (Method analysis ED009) | mg/L | 0.1 | - | - | - | - | 754 | - | - | - | - | 798 | 770 | 813 | |
| | Chloride (Method analysis ED045) | mg/L | 1 | - | - | - | - | 587 | - | - | - | - | 552 | 801 | 801 | |
| | Chlorine - Free | mg/L | 0.2 | - | - | - | - | <0.2 | - | - | - | - | <0.2 | <0.2 | <0.2 | |
| | Chlorine - Total Residual | mg/L | 0.2 | - | - | - | - | <0.2 | - | - | - | - | <0.2 | <0.2 | <0.2 | |
| | Nitrogen (Total) | mg/L | 0.1 | - | - | - | - | 8.6 | - | - | - | - | 7.1 | 6.8 | 7.5 | |
| | Sulfate as SO ₄ | mg/L | 1 | - | - | - | - | <10 | - | - | - | - | <1 | <10 | <1 | |
| | Sulphate as SO ₄ ^b | mg/L | 1 | - | - | - | - | 2 | - | - | - | - | - | 1 | - | |
| | Total Phosphorus | mg/L | 0.01 | - | - | - | - | 3.15 | - | - | - | - | 2.46 | 2.66 | 2.83 | |
| | Total Phosphorus ^b | mg/L | 0.05 | - | - | - | - | 3.4 | - | - | - | - | - | 3.1 | - | |
| | Lab physical parameters | Electrical conductivity | µS/cm | 1 | - | - | - | - | 11,600 | - | - | - | - | 11,900 | 10,800 | 10,700 |
| pH (Lab) ^c | | pH units | 0.01 | - | - | - | - | 7.75 | - | - | - | - | 8.51 | 7.88 | 7.95 | |
| TDS | | mg/L | 10 | - | - | - | - | 6490 | - | - | - | - | 7170 | 7630 | 6820 | |
| TSS | | mg/L | 5 | - | - | - | - | 33 | - | - | - | - | 50 | 10 | 73 | |
| Major/minor ions | | Bicarbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | - | - | - | - | 6180 | - | - | - | - | 6100 | 6150 | 5780 |
| | Carbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | - | - | - | - | <1 | - | - | - | - | 200 | <1 | <1 | |
| | Alkalinity (Hydroxide) as CaCO ₃ | mg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| | Alkalinity (total) as CaCO ₃ | mg/L | 1 | - | - | - | - | 6180 | - | - | - | - | 6300 | 6150 | 5780 | |
| | Calcium | mg/L | 1 | - | - | - | - | 27 | - | - | - | - | 41 | 36 | 18 | |
| | Magnesium | mg/L | 1 | - | - | - | - | 3 | - | - | - | - | <10 | 4 | 2 | |
| | Potassium | mg/L | 1 | - | - | - | - | 9 | - | - | - | - | 17 | 19 | 13 | |
| | Sodium | mg/L | 1 | - | - | - | - | 1700 | - | - | - | - | 3330 | 3750 | 2480 | |
| | Fluoride | mg/L | 0.1 | - | - | - | - | 1.3 | - | - | - | - | 1.7 | 1.7 | 1.9 | |
| | Reactive Silica | mg/L | 0.05 | - | - | - | - | 35.2 | - | - | - | - | 35.8 | 31.9 | 6.48 | |
| | Bromine | mg/L | 0.1 | - | - | - | - | 0.6 | - | - | - | - | 1.8 | 1.8 | 1.2 | |
| | Ionic Balance | % | 0.01 | - | - | - | - | - | - | - | - | - | 1.97 | 6.45 | 11.7 | |
| | Nutrients | Ammonia as N | mg/L | 0.01 | - | - | - | - | 5.9 | - | - | - | - | 5.74 | 4.61 | 4.67 |
| | | Ammonium as N | mg/L | 0.01 | - | - | - | - | 5.87 | - | - | - | - | 5.64 | 4.55 | 4.56 |
| Nitrate (as N) | | mg/L | 0.01 | - | - | - | - | <0.05 | - | - | - | - | 0.2 | 0.01 | 0.01 | |
| Nitrite (as N) | | mg/L | 0.01 | - | - | - | - | <0.05 | - | - | - | - | <0.01 | <0.01 | <0.01 | |
| Nitrite + Nitrate as N | | mg/L | 0.01 | - | - | - | - | <0.05 | - | - | - | - | 0.2 | 0.01 | 0.01 | |
| Kjeldahl Nitrogen Total | | mg/L | 0.1 | - | - | - | - | 8.6 | - | - | - | - | 6.9 | 6.8 | 7.5 | |
| Reactive Phosphorus as P | | mg/L | 0.01 | - | - | - | - | 0.09 | - | - | - | - | 0.11 | 0.15 | 0.41 | |
| Total Organic Carbon | | mg/L | 1 | - | - | - | - | - | - | - | - | - | - | 20 | - | |
| Nonpurgeable Organic Carbon ^d | | mg/L | 1 | - | - | - | - | 477 | - | - | - | - | - | 123 | - | 36 |
| Dissolved gas | | Methane | mg/L | 0.01 | - | - | - | - | 19.3 | - | - | - | - | 4.14 | 3.57 | 30.6 |
| Dissolved metals | Aluminium | mg/L | 0.01 | - | - | - | - | <0.01 | - | - | - | - | <0.1 | 0.01 | <0.01 | |
| | Antimony | mg/L | 0.001 | - | - | - | - | 0.001 | - | - | - | - | <0.01 | <0.001 | <0.001 | |
| | Arsenic | mg/L | 0.001 | - | - | - | - | 0.004 | - | - | - | - | <0.01 | 0.005 | 0.003 | |
| | Barium | mg/L | 0.001 | - | - | - | - | 5.56 | - | - | - | - | 8.54 | 8.82 | 5.93 | |
| | Beryllium | mg/L | 0.001 | - | - | - | - | <0.001 | - | - | - | - | <0.01 | <0.001 | <0.001 | |
| | Cadmium | mg/L | 0.0001 | - | - | - | - | <0.0001 | - | - | - | - | <0.001 | <0.0001 | <0.0001 | |
| | Chromium | mg/L | 0.001 | - | - | - | - | <0.001 | - | - | - | - | 0.015 | 0.026 | 0.015 | |
| | Cobalt | mg/L | 0.001 | - | - | - | - | <0.001 | - | - | - | - | <0.01 | <0.001 | <0.001 | |
| | Copper | mg/L | 0.001 | - | - | - | - | 0.005 | - | - | - | - | 0.017 | 0.005 | 0.002 | |
| | Iron | mg/L | 0.05 | - | - | - | - | <0.05 | - | - | - | - | 0.25 | 0.48 | 1.1 | |
| | Lead | mg/L | 0.001 | - | - | - | - | <0.001 | - | - | - | - | <0.01 | <0.001 | <0.001 | |
| | Vanadium | mg/L | 0.01 | - | - | - | - | <0.01 | - | - | - | - | <0.1 | <0.01 | <0.01 | |
| | Zinc | mg/L | 0.005 | - | - | - | - | <0.005 | - | - | - | - | <0.05 | 0.007 | <0.005 | |
| | Manganese | mg/L | 0.001 | - | - | - | - | 0.008 | - | - | - | - | 0.047 | 0.028 | 0.021 | |
| | Mercury | mg/L | 0.0001 | - | - | - | - | <0.0001 | - | - | - | - | <0.0001 | <0.0001 | <0.0001 | |
| | Molybdenum | mg/L | 0.001 | - | - | - | - | 0.003 | - | - | - | - | <0.01 | 0.01 | 0.009 | |
| | Nickel | mg/L | 0.001 | - | - | - | - | <0.001 | - | - | - | - | <0.01 | 0.004 | 0.003 | |
| | Selenium | mg/L | 0.01 | - | - | - | - | <0.01 | - | - | - | - | <0.1 | <0.01 | <0.01 | |
| | Strontium | mg/L | 0.001 | - | - | - | - | 3.64 | - | - | - | - | 5.11 | 5.29 | 3.54 | |
| | Tin | mg/L | 0.001 | - | - | - | - | <0.001 | - | - | - | - | <0.01 | <0.001 | <0.001 | |
| Uranium | mg/L | 0.001 | - | - | - | - | <0.001 | - | - | - | - | <0.01 | <0.001 | <0.001 | | |
| Oil and Grease | Oil and Grease | mg/L | 5 | - | - | - | - | 11 | - | - | - | - | <5 | <5 | <5 | |
| Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| | 2,4,6-Trichlorophenol | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| | 2,4-dichlorophenol | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| | 2,4-dimethylphenol | µg/L | 1 | - | - | - | - | 1.5 | - | - | - | - | <1 | <1 | <1 | |
| | 2,6-dichlorophenol | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| | 2-chlorophenol | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| | 2-methylphenol | µg/L | 1 | - | - | - | - | 5.2 | - | - | - | - | 1.6 | <1 | <1 | |
| | 2-nitrophenol | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| | 3-&4-methylphenol | µg/L | 2 | - | - | - | - | 47.7 | - | - | - | - | <2 | <2 | 37.1 | |
| | 4-chloro-3-methylphenol | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| | Pentachlorophenol | µg/L | 2 | - | - | - | - | <2 | - | - | - | - | <2 | <2 | <2 | |
| | Phenol | µg/L | 1 | - | - | - | - | 8.8 | - | - | - | - | 1.8 | 2 | 1.8 | |
| | PAH | Acenaphthene | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 |
| Acenaphthylene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Anthracene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Benzo(a)anthracene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Benzo(a)pyrene | | µg/L | 0.5 | - | - | - | - | <0.5 | - | - | - | - | <0.5 | <0.5 | <0.5 | |
| Benzo(b&j)fluoranthene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Benzo(g,h,i)perylene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Benzo(k)fluoranthene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Benzo(a)pyrene TEQ (zero) | | µg/L | 0.5 | - | - | - | - | <0.5 | - | - | - | - | <0.5 | <0.5 | <0.5 | |
| Chrysene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Dibenz(a,h)anthracene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Fluoranthene | | µg/L | 1 | - | - | - | - | <1 | - | - | - | - | <1 | <1 | <1 | |
| Fluorene | | µg/L | 1 | - | - | | | | | | | | | | | |

Table D.2 AST2 and Pilot wells cont.

| Sample date | Analyte ^a | Units | LOR | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | |
|--|---|-------------------------|--------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|
| | | | | 1/07/2015 | 2/07/2015 | 3/07/2015 | 4/07/2015 | 6/07/2015 | 7/07/2015 | 8/07/2015 | 9/07/2015 | 10/07/2015 | 11/07/2015 | 13/07/2015 | 16/07/2015 |
| Field parameters | Temperature | °C | | 17.28 | 14.69 | 14.18 | 12.13 | 22.76 | 10.64 | 11.57 | 10.59 | 12.22 | 12.49 | 20.56 | 11.91 |
| | Electrical conductivity | uS/cm | | 7572 | 7328 | 7869 | 7553 | 4502 | 7436 | 7407 | 9057 | 7787 | 8463 | 7845 | 7850 |
| | pH | pH units | | 7.06 | 7.1 | 7.09 | 7.12 | 7.14 | 7.16 | 7.19 | 7.27 | 7.16 | 7.35 | 7.69 | 7.29 |
| | TDS | mg/L | | 4920 | 4750 | 5118 | 4910 | 2922 | 4835 | 4815 | 5884 | 5065 | 5502 | 5102 | 5102 |
| | DO % | % | | 30 | 34.8 | 28.1 | 29.6 | 97.1 | 44.5 | 39.5 | 35.7 | 30.5 | 27.4 | 23.8 | 32.8 |
| | DO mg/L | mg/L | | 2.83 | 3.44 | 2.81 | 3.1 | 8.27 | 4.81 | 4.2 | 3.9 | 3.19 | 2.82 | 2.07 | 3.43 |
| | Redox | mV | | -150.2 | -137 | -137.6 | -128 | -146.8 | -152.6 | -136 | -130.6 | -152.3 | -144.4 | -148.5 | -115.8 |
| | Chlorine Free | mg/L | | 0.08 | 0.02 | 0.01 | 0 | 0.08 | 0.02 | 0.09 | 0 | 0 | 0.06 | 0 | 0.11 |
| | Chlorine Total | mg/L | | 0.11 | 0 | 0.06 | 0 | 0.01 | 0 | 0.04 | 0 | 0 | 0.1 | 0 | 0 |
| Key analytes | Ethanolamine | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - |
| | Diethanolamine | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - |
| | THPS ^b | µg/L | 50 | - | - | - | - | - | - | <50 | - | - | - | - | - |
| | Boron | mg/L | 0.05 | - | - | - | - | - | - | 5.03 | - | - | - | - | - |
| | Chloride (Method analysis ED009) | mg/L | 0.1 | - | - | - | - | - | - | 702 | - | - | - | - | - |
| | Chloride (Method analysis ED045) | mg/L | 1 | - | - | - | - | - | - | 703 | - | - | - | - | - |
| | Chlorine - Free | mg/L | 0.2 | - | - | - | - | - | - | <0.2 | - | - | - | - | - |
| | Chlorine - Total Residual | mg/L | 0.2 | - | - | - | - | - | - | <0.2 | - | - | - | - | - |
| | Nitrogen (Total) | mg/L | 0.1 | - | - | - | - | - | - | 3.3 | - | - | - | - | - |
| | Sulfate as SO4 | mg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - |
| | Sulphate as SO4 ^b | mg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | - |
| | Total Phosphorus | mg/L | 0.01 | - | - | - | - | - | - | 1.54 | - | - | - | - | - |
| | Total Phosphorus ^b | mg/L | 0.05 | - | - | - | - | - | - | 1.8 | - | - | - | - | - |
| | Lab physical parameters | Electrical conductivity | µS/cm | 1 | 7590 | 7690 | - | - | - | - | 7660 | - | - | - | - |
| pH (Lab) ^c | | pH units | 0.01 | - | - | - | - | - | - | 7.41 | - | - | - | - | - |
| TDS | | mg/L | 10 | - | - | - | - | - | - | 4210 | - | - | - | - | - |
| TSS | | mg/L | 5 | - | - | - | - | - | - | 15 | - | - | - | - | - |
| Major/minor ions | Bicarbonate Alkalinity-mg CaCO3/L | mg/L | 1 | - | - | - | - | - | - | 3400 | - | - | - | - | - |
| | Carbonate Alkalinity-mg CaCO3/L | mg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Alkalinity (Hydroxide) as CaCO3 | mg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Alkalinity (total) as CaCO3 | mg/L | 1 | - | - | - | - | - | - | 3400 | - | - | - | - | |
| | Calcium | mg/L | 1 | - | - | - | - | - | - | 24 | - | - | - | - | |
| | Magnesium | mg/L | 1 | - | - | - | - | - | - | 4 | - | - | - | - | |
| | Potassium | mg/L | 1 | - | - | - | - | - | - | 14 | - | - | - | - | |
| | Sodium | mg/L | 1 | - | - | - | - | - | - | 1840 | - | - | - | - | |
| | Fluoride | mg/L | 0.1 | - | - | - | - | - | - | 1 | - | - | - | - | |
| | Reactive Silica | mg/L | 0.05 | - | - | - | - | - | - | 26.2 | - | - | - | - | |
| | Bromine | mg/L | 0.1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Ionic Balance | % | 0.01 | - | - | - | - | - | - | 3.5 | - | - | - | - | |
| | Nutrients | Ammonia as N | mg/L | 0.01 | - | - | - | - | - | - | 2.48 | - | - | - | - |
| | | Ammonium as N | mg/L | 0.01 | - | - | - | - | - | - | 2.47 | - | - | - | - |
| Nitrate (as N) | | mg/L | 0.01 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| Nitrite (as N) | | mg/L | 0.01 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| Nitrite + Nitrate as N | | mg/L | 0.01 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| Kjeldahl Nitrogen Total | | mg/L | 0.1 | - | - | - | - | - | - | 3.3 | - | - | - | - | |
| Reactive Phosphorus as P | | mg/L | 0.01 | - | - | - | - | - | - | 0.05 | - | - | - | - | |
| Total Organic Carbon | | mg/L | 1 | - | - | - | - | - | - | - | - | - | - | - | |
| Nonpurgeable Organic Carbon ^d | | mg/L | 1 | - | - | - | - | - | - | 2 | - | - | - | - | |
| Dissolved gas | | Methane | mg/L | 0.01 | - | - | - | - | - | - | 11 | - | - | - | - |
| | | | | | | | | | | | | | | | |
| Dissolved metals | Aluminium | mg/L | 0.01 | - | - | - | - | - | - | <0.1 | - | - | - | - | |
| | Antimony | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| | Arsenic | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| | Barium | mg/L | 0.001 | - | - | - | - | - | - | 5.58 | - | - | - | - | |
| | Beryllium | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| | Cadmium | mg/L | 0.0001 | - | - | - | - | - | - | <0.001 | - | - | - | - | |
| | Chromium | mg/L | 0.001 | - | - | - | - | - | - | 0.032 | - | - | - | - | |
| | Cobalt | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| | Copper | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| | Iron | mg/L | 0.05 | - | - | - | - | - | - | 5.72 | - | - | - | - | |
| | Lead | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| | Vanadium | mg/L | 0.01 | - | - | - | - | - | - | <0.1 | - | - | - | - | |
| | Zinc | mg/L | 0.005 | - | - | - | - | - | - | <0.05 | - | - | - | - | |
| | Manganese | mg/L | 0.001 | - | - | - | - | - | - | 0.064 | - | - | - | - | |
| | Mercury | mg/L | 0.0001 | - | - | - | - | - | - | <0.0001 | - | - | - | - | |
| | Molybdenum | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| | Nickel | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| | Selenium | mg/L | 0.01 | - | - | - | - | - | - | <0.1 | - | - | - | - | |
| | Strontium | mg/L | 0.001 | - | - | - | - | - | - | 4.17 | - | - | - | - | |
| | Tin | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | |
| Uranium | mg/L | 0.001 | - | - | - | - | - | - | <0.01 | - | - | - | - | | |
| Oil and Grease | Oil and Grease | mg/L | 5 | - | - | - | - | - | - | 9 | - | - | - | - | |
| Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | 2,4,6-Trichlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | 2,4-dichlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | 2,4-dimethylphenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | 2,6-dichlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | 2-chlorophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | 2-methylphenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | 2-nitrophenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | 3- & 4-methylphenol | µg/L | 2 | - | - | - | - | - | - | 5.8 | - | - | - | - | |
| | 4-chloro-3-methylphenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Pentachlorophenol | µg/L | 2 | - | - | - | - | - | - | <2 | - | - | - | - | |
| | Phenol | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| PAH | Acenaphthene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Acenaphthylene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Anthracene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Benz(a)anthracene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Benzo(a)pyrene | µg/L | 0.5 | - | - | - | - | - | - | <0.5 | - | - | - | - | |
| | Benzo(b&f)fluoranthene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Benzo(g,h,i)perylene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Benzo(k)fluoranthene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Benzo(a)pyrene TEQ (zero) | µg/L | 0.5 | - | - | - | - | - | - | <0.5 | - | - | - | - | |
| | Chrysene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Dibenz(a,h)anthracene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Fluoranthene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Fluorene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Indeno(1,2,3-c,d)pyrene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| | Naphthalene (Method analysis EP075(SIM)B) | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | |
| Phenanthrene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | | |
| Pyrene | µg/L | 1 | - | - | - | - | - | - | <1 | - | - | - | - | | |
| Polycyclic aromatic hydrocarbons EPA448 | µg/L | 0.5 | - | - | - | - | - | - | <0.5 | - | - | - | - | | |
| TRH | TPH C6-C10 | µg/L | 20 | - | - | - | - | - | - | <20 | - | - | - | - | |
| | C6 - C10 Fraction minus BTEX (F1) | µg/L | 20 | - | - | - | - | - | - | <20 | - | - | - | - | |
| | C10 - C16 Fraction | µg/L | 100 | - | - | - | - | - | - | <100 | - | - | - | - | |
| | C16 - C34 Fraction | µg/L | 100 | - | - | - | - | - | - | <100 | - | - | - | - | |
| | C34 - C40 Fraction | µg/L | 100 | - | - | - | - | - | - | <100 | - | - | - | - | |
| | C10 - C40 Fraction (Sum) | µg/L | 100 | - | - | - | - | - | - | <100 | - | - | - | - | |
| | TRH >C10-C16 less Naphthalene (F2) | µg/L | 100 | - | - | - | - | - | - | <100 | - | - | | | |

Table D.2 AST2 and Pilot wells cont.

| Sample date | Analyte ^a | Units | LOR | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | WK12 | | |
|--|-----------------------------------|-------------------------|----------------|------------|------------|------------|------------|------------|------------|------------|------------|-----------|-----------|-----------|-----------|---|---|
| | | | | 17/07/2015 | 20/07/2015 | 21/07/2015 | 23/07/2015 | 25/07/2015 | 29/07/2015 | 12/08/2015 | 26/08/2015 | 9/09/2015 | 1/07/2015 | 2/07/2015 | 3/07/2015 | | |
| Field parameters | Temperature | °C | | 10.27 | 19.03 | 13.04 | 14.46 | 15.97 | 11.18 | 12.83 | 22.36 | 21.1 | 20.65 | 17.91 | 18.33 | | |
| | Electrical conductivity | uS/cm | | 7566 | 7496 | 7520 | 7528 | 7682 | 7533 | 7267 | 7378 | 7410 | 7791 | 7927 | 8257 | | |
| | pH | pH units | | 7.44 | 7.47 | 7.38 | 7.33 | 7.34 | 7.34 | 7.41 | 7.3 | 7.48 | 7.72 | 7.76 | 7.76 | | |
| | TDS | mg/L | | 4918 | 4911 | 4891 | 4895 | 4994 | 4902 | 4723 | 4797 | 4823 | 5067 | 5154 | 5367 | | |
| | DO % | % | | 24.1 | 32.2 | 28.8 | 30.3 | 34.5 | 18.6 | 29.9 | 18.1 | 10.6 | 22 | 21.2 | 19.5 | | |
| | DO mg/L | mg/L | | 2.61 | 2.94 | 2.91 | 2.99 | 3.31 | 1.99 | 3.12 | 1.53 | 0.92 | 1.94 | 1.94 | 1.81 | | |
| | Redox | mV | | -130.4 | -142.7 | -130.1 | -116.4 | -119.1 | -113 | -152.4 | -130.8 | -153.1 | -176.8 | -150.2 | -147.4 | | |
| | Chlorine Free | mg/L | | 0.06 | 0.08 | 0.03 | 0.06 | 0 | 0.01 | 0.01 | 0.04 | 0.06 | 0.03 | 0.02 | 0 | | |
| | Chlorine Total | mg/L | | 0.08 | 0 | 0 | 0.04 | 0 | 0.07 | 0 | 0.05 | 0.05 | 0.09 | 0.1 | 0.03 | | |
| Key analytes | Ethanolamine | µg/L | 1 | - | - | - | - | - | 13 | 10 | 72 | 7 | - | - | - | | |
| | Diethanolamine | µg/L | 1 | - | - | - | - | - | <1 | <1 | 1 | <1 | - | - | - | | |
| | THPS ^b | µg/L | 50 | - | - | - | - | - | <50 | <50 | - | 93 | - | - | - | | |
| | Boron | mg/L | 0.05 | - | - | - | - | - | 3.18 | 3.56 | 4 | 3.28 | - | - | - | | |
| | Chloride (Method analysis ED009) | mg/L | 0.1 | - | - | - | - | - | 721 | 720 | 685 | 662 | - | - | - | | |
| | Chloride (Method analysis ED045) | mg/L | 1 | - | - | - | - | - | 499 | 601 | 489 | 700 | - | - | - | | |
| | Chlorine - Free | mg/L | 0.2 | - | - | - | - | - | <0.2 | <0.2 | <0.2 | <0.2 | - | - | - | | |
| | Chlorine - Total Residual | mg/L | 0.2 | - | - | - | - | - | <0.2 | <0.2 | <0.2 | <0.2 | - | - | - | | |
| | Nitrogen (Total) | mg/L | 0.1 | - | - | - | - | - | 3.6 | 3.3 | 2.8 | 3.3 | - | - | - | | |
| | Sulfate as SO4 | mg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <10 | - | - | - | | |
| | Sulphate as SO4 ^b | mg/L | 1 | - | - | - | - | - | <1 | <1 | - | <1 | - | - | - | | |
| | Total Phosphorus | mg/L | 0.01 | - | - | - | - | - | 1.55 | 1.28 | 1.17 | 0.38 | - | - | - | | |
| | Total Phosphorus ^b | mg/L | 0.05 | - | - | - | - | - | 1.8 | 1.7 | - | 1.5 | - | - | - | | |
| Lab physical parameters | Electrical conductivity | µS/cm | 1 | - | - | - | - | - | 7860 | 7810 | 8070 | 7390 | 7810 | 7850 | - | | |
| | pH (Lab) ^c | pH units | 0.01 | - | - | - | - | - | 7.85 | 7.98 | 8.57 | 7.83 | - | - | - | | |
| | TDS | mg/L | 10 | - | - | - | - | - | 4570 | 3710 | 4450 | 4820 | - | - | - | | |
| | TSS | mg/L | 5 | - | - | - | - | - | 13 | 16 | <5 | 120 | - | - | - | | |
| Major/minor ions | Bicarbonate Alkalinity-mg CaCO3/L | mg/L | 1 | - | - | - | - | - | 3720 | 3600 | 3550 | 3650 | - | - | - | | |
| | Carbonate Alkalinity-mg CaCO3/L | mg/L | 1 | - | - | - | - | - | <1 | <1 | 200 | <1 | - | - | - | | |
| | Alkalinity (Hydroxide) as CaCO3 | mg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | | |
| | Alkalinity (total) as CaCO3 | mg/L | 1 | - | - | - | - | - | 3720 | 3600 | 3750 | 3650 | - | - | - | | |
| | Calcium | mg/L | 1 | - | - | - | - | - | 22 | 28 | 23 | 32 | - | - | - | | |
| | Magnesium | mg/L | 1 | - | - | - | - | - | 4 | 5 | <10 | 5 | - | - | - | | |
| | Potassium | mg/L | 1 | - | - | - | - | - | 10 | 10 | 12 | 12 | - | - | - | | |
| | Sodium | mg/L | 1 | - | - | - | - | - | 1920 | 2060 | 2260 | 2530 | - | - | - | | |
| | Fluoride | mg/L | 0.1 | - | - | - | - | - | 1.1 | 1.5 | 1.3 | 1.3 | - | - | - | | |
| | Reactive Silica | mg/L | 0.05 | - | - | - | - | - | 29.7 | 27.3 | 25.1 | 23.2 | - | - | - | | |
| | Bromine | mg/L | 0.1 | - | - | - | - | - | 1 | 0.6 | <1 | 0.9 | - | - | - | | |
| | Ionic Balance | % | 0.01 | - | - | - | - | - | 1.91 | 1.48 | 5.8 | 9.54 | - | - | - | | |
| | Nutrients | Ammonia as N | mg/L | 0.01 | - | - | - | - | - | 2.7 | 2.46 | 2.76 | 2.54 | - | - | - | |
| Ammonium as N | | mg/L | 0.01 | - | - | - | - | - | 2.69 | 2.44 | 2.73 | 2.51 | - | - | - | | |
| Nitrate (as N) | | mg/L | 0.01 | - | - | - | - | - | 0.03 | <0.01 | <0.01 | 0.01 | - | - | - | | |
| Nitrite (as N) | | mg/L | 0.01 | - | - | - | - | - | <0.01 | <0.01 | <0.01 | <0.01 | - | - | - | | |
| Nitrite + Nitrate as N | | mg/L | 0.01 | - | - | - | - | - | 0.03 | <0.01 | <0.01 | 0.01 | - | - | - | | |
| Kjeldahl Nitrogen Total | | mg/L | 0.1 | - | - | - | - | - | 3.6 | 3.3 | 2.8 | 3.3 | - | - | - | | |
| Reactive Phosphorus as P | | mg/L | 0.01 | - | - | - | - | - | 0.06 | 0.01 | 0.03 | 0.1 | - | - | - | | |
| Total Organic Carbon | | mg/L | 1 | - | - | - | - | - | - | - | - | 17 | - | - | - | | |
| Nonpurgeable Organic Carbon ^d | | mg/L | 1 | - | - | - | - | - | 3 | 4 | <1 | - | - | - | - | | |
| Dissolved gas | Methane | mg/L | 0.01 | - | - | - | - | - | 12.9 | 8.9 | 2.8 | 5.87 | - | - | - | | |
| | | | | | | | | | | | | | | | | | |
| Dissolved metals | Aluminium | mg/L | 0.01 | - | - | - | - | - | <0.01 | 0.01 | <0.1 | 0.07 | - | - | - | | |
| | Antimony | mg/L | 0.001 | - | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | - | - | - | | |
| | Arsenic | mg/L | 0.001 | - | - | - | - | - | 0.004 | 0.004 | <0.01 | 0.005 | - | - | - | | |
| | Barium | mg/L | 0.001 | - | - | - | - | - | 2.74 | 3.98 | 2 | 5.15 | - | - | - | | |
| | Beryllium | mg/L | 0.001 | - | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | - | - | - | | |
| | Cadmium | mg/L | 0.0001 | - | - | - | - | - | <0.0001 | <0.0001 | <0.001 | <0.0001 | - | - | - | | |
| | Chromium | mg/L | 0.001 | - | - | - | - | - | 0.005 | 0.03 | <0.01 | 0.026 | - | - | - | | |
| | Cobalt | mg/L | 0.001 | - | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | - | - | - | | |
| | Copper | mg/L | 0.001 | - | - | - | - | - | <0.001 | <0.001 | <0.01 | 0.004 | - | - | - | | |
| | Iron | mg/L | 0.05 | - | - | - | - | - | 0.06 | 5.3 | <0.1 | 3.61 | - | - | - | | |
| | Lead | mg/L | 0.001 | - | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | - | - | - | | |
| | Vanadium | mg/L | 0.01 | - | - | - | - | - | <0.01 | <0.01 | <0.1 | <0.1 | - | - | - | | |
| | Zinc | mg/L | 0.005 | - | - | - | - | - | <0.005 | <0.005 | <0.05 | 0.009 | - | - | - | | |
| | Manganese | mg/L | 0.001 | - | - | - | - | - | 0.021 | 0.051 | 0.026 | 0.039 | - | - | - | | |
| | Mercury | mg/L | 0.0001 | - | - | - | - | - | <0.0001 | <0.0001 | <0.0001 | <0.0001 | - | - | - | | |
| | Molybdenum | mg/L | 0.001 | - | - | - | - | - | 0.004 | 0.002 | <0.01 | 0.005 | - | - | - | | |
| | Nickel | mg/L | 0.001 | - | - | - | - | - | 0.001 | <0.001 | <0.01 | 0.001 | - | - | - | | |
| | Selenium | mg/L | 0.01 | - | - | - | - | - | <0.01 | <0.01 | <0.1 | 0.01 | - | - | - | | |
| | Strontium | mg/L | 0.001 | - | - | - | - | - | 3.05 | 3.52 | 2.21 | 4.2 | - | - | - | | |
| Tin | mg/L | 0.001 | - | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | - | - | - | | | |
| Uranium | mg/L | 0.001 | - | - | - | - | - | <0.001 | <0.001 | <0.01 | 0.001 | - | - | - | | | |
| Oil and Grease | Oil and Grease | mg/L | 5 | - | - | - | - | - | <5 | <5 | 6 | 9 | - | - | - | | |
| | Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | 2,4,6-Trichlorophenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | 2,4-dichlorophenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | 2,4-dimethylphenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | 2,6-dichlorophenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | 2-chlorophenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | 2-methylphenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | 2-nitrophenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | 3-&4-methylphenol | µg/L | 2 | - | - | - | - | - | 13.5 | 10.8 | <2 | <2 | - | - | - | |
| | | 4-chloro-3-methylphenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | Pentachlorophenol | µg/L | 2 | - | - | - | - | - | <2 | <2 | <2 | <2 | - | - | - | |
| | | Phenol | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | |
| | | PAH | Acenaphthene | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - |
| | | | Acenaphthylene | µg/L | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - |
| Anthracene | µg/L | | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | | |
| Benz(a)anthracene | µg/L | | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | | |
| Benzo(a)pyrene | µg/L | | 0.5 | - | - | - | - | - | <0.5 | <0.5 | <0.5 | <0.5 | - | - | - | | |
| Benzo(b&j)fluoranthene | µg/L | | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | | |
| Benzo(g,h,i)perylene | µg/L | | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | | |
| Benzo(k)fluoranthene | µg/L | | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | | |
| Benzo(a)pyrene TEQ (zero) | µg/L | | 0.5 | - | - | - | - | - | <0.5 | <0.5 | <0.5 | <0.5 | - | - | - | | |
| Chrysene | µg/L | | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | | |
| Dibenz(a,h)anthracene | µg/L | | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | - | | |
| Fluoranthene | µg/L | | 1 | - | - | - | - | - | <1 | <1 | <1 | <1 | - | - | | | |

Table D.2 AST2 and Pilot wells cont.

| Sample date | Analyte ^a | Units | LOR | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | |
|---|--|-------------------------|--------------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|------------|------------|------------|---|
| | | | | 4/07/2015 | 6/07/2015 | 7/07/2015 | 8/07/2015 | 9/07/2015 | 10/07/2015 | 11/07/2015 | 13/07/2015 | 14/07/2015 | 15/07/2015 | 16/07/2015 | 17/07/2015 | |
| Field parameters | Temperature | °C | | 16.17 | 21.74 | 18.6 | 16.74 | 14.55 | 15.17 | 15.66 | 20 | 15.86 | 13.7 | 11.92 | 10.36 | |
| | Electrical conductivity | uS/cm | | 7882 | 8015 | 7764 | 8195 | 9386 | 8121 | 8717 | 7954 | 7719 | 7474 | 7801 | 7530 | |
| | pH | pH units | | 7.82 | 7.81 | 7.78 | 7.92 | 7.97 | 7.89 | 7.99 | 8.12 | 8.15 | 8.15 | 8.25 | 8.16 | |
| | TDS | mg/L | | 5122 | 5211 | 5050 | 5328 | 6101 | 5279 | 5666 | 5171 | 5018 | 4860 | 5071 | 4895 | |
| | DO % | % | | 28.3 | 18.1 | 31 | 31.8 | 24.5 | 14.8 | 17.8 | 15.3 | 10.1 | 37.1 | 26 | 22.6 | |
| | DO mg/L | mg/L | | 2.74 | 1.55 | 2.76 | 3.02 | 2.39 | 1.44 | 1.71 | 1.36 | 0.97 | 3.6 | 2.73 | 2.43 | |
| | Redox | mV | | -142 | -146.1 | -162.9 | -131.4 | -138.2 | -150.9 | -169.1 | -105.7 | -128 | -111.7 | -71.6 | -104.8 | |
| | Chlorine Free | mg/L | | 0.04 | 0.04 | 0.19 | 0.01 | 0.02 | 0.06 | 0.08 | 0.04 | 0 | 0 | 0.11 | 0 | |
| | Chlorine Total | mg/L | | 0.07 | 0 | 0 | 0.06 | 0.07 | 0 | 0 | 0.11 | 0 | 0 | 0 | 0.02 | |
| | Key analytes | Ethanolamine | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | 42 | - | - |
| Diethanolamine | | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| THPS ^b | | µg/L | 50 | - | - | - | <50 | - | - | - | - | - | <50 | - | - | |
| Boron | | mg/L | 0.05 | - | - | - | 4.29 | - | - | - | - | - | 2.35 | - | - | |
| Chloride (Method analysis ED009) | | mg/L | 0.1 | - | - | - | 721 | - | - | - | - | - | 666 | - | - | |
| Chloride (Method analysis ED045) | | mg/L | 1 | - | - | - | 723 | - | - | - | - | - | 532 | - | - | |
| Chlorine - Free | | mg/L | 0.2 | - | - | - | <0.2 | - | - | - | - | - | <0.2 | - | - | |
| Chlorine - Total Residual | | mg/L | 0.2 | - | - | - | <0.2 | - | - | - | - | - | <0.2 | - | - | |
| Nitrogen (Total) | | mg/L | 0.1 | - | - | - | 6.1 | - | - | - | - | - | 5.8 | - | - | |
| Sulfate as SO ₄ | | mg/L | 1 | - | - | - | 12 | - | - | - | - | - | <10 | - | - | |
| Sulphate as SO ₄ ^b | | mg/L | 1 | - | - | - | 2 | - | - | - | - | - | 2 | - | - | |
| Total Phosphorus | | mg/L | 0.01 | - | - | - | 2.95 | - | - | - | - | - | 2.6 | - | - | |
| Total Phosphorus ^b | | mg/L | 0.05 | - | - | - | 3.6 | - | - | - | - | - | 2.9 | - | - | |
| Lab physical parameters | | Electrical conductivity | µS/cm | 1 | - | - | - | 8220 | - | - | - | - | - | 8020 | - | - |
| | pH (Lab) ^c | pH units | 0.01 | - | - | - | 8.04 | - | - | - | - | - | 8.37 | - | - | |
| | TDS | mg/L | 10 | - | - | - | 5630 | - | - | - | - | - | 4300 | - | - | |
| | TSS | mg/L | 5 | - | - | - | <5 | - | - | - | - | - | <5 | - | - | |
| Major/minor ions | Bicarbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | - | - | - | 3400 | - | - | - | - | - | 3780 | - | - | |
| | Carbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | - | - | - | <1 | - | - | - | - | - | 47 | - | - | |
| | Alkalinity (Hydroxide) as CaCO ₃ | mg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| | Alkalinity (total) as CaCO ₃ | mg/L | 1 | - | - | - | 3400 | - | - | - | - | - | 3820 | - | - | |
| | Calcium | mg/L | 1 | - | - | - | 12 | - | - | - | - | - | 11 | - | - | |
| | Magnesium | mg/L | 1 | - | - | - | 2 | - | - | - | - | - | 2 | - | - | |
| | Potassium | mg/L | 1 | - | - | - | 18 | - | - | - | - | - | 10 | - | - | |
| | Sodium | mg/L | 1 | - | - | - | 2000 | - | - | - | - | - | 1790 | - | - | |
| | Fluoride | mg/L | 0.1 | - | - | - | 2.3 | - | - | - | - | - | 2.6 | - | - | |
| | Reactive Silica | mg/L | 0.05 | - | - | - | 25.7 | - | - | - | - | - | 24.1 | - | - | |
| | Bromine | mg/L | 0.1 | - | - | - | <1 | - | - | - | - | - | 1.4 | - | - | |
| | Ionic Balance | % | 0.01 | - | - | - | 0.26 | - | - | - | - | - | - | - | - | |
| | Nutrients | Ammonia as N | mg/L | 0.01 | - | - | - | 3.97 | - | - | - | - | - | 3.99 | - | - |
| | | Ammonium as N | mg/L | 0.01 | - | - | - | 3.87 | - | - | - | - | - | 3.65 | - | - |
| Nitrate (as N) | | mg/L | 0.01 | - | - | - | 0.01 | - | - | - | - | - | 0.04 | - | - | |
| Nitrite (as N) | | mg/L | 0.01 | - | - | - | <0.01 | - | - | - | - | - | <0.01 | - | - | |
| Nitrite + Nitrate as N | | mg/L | 0.01 | - | - | - | 0.01 | - | - | - | - | - | 0.04 | - | - | |
| Kjeldahl Nitrogen Total | | mg/L | 0.1 | - | - | - | 6.1 | - | - | - | - | - | 5.8 | - | - | |
| Reactive Phosphorus as P | | mg/L | 0.01 | - | - | - | 0.12 | - | - | - | - | - | 0.16 | - | - | |
| Total Organic Carbon | | mg/L | 1 | - | - | - | - | - | - | - | - | - | - | - | - | |
| Nonpurgeable Organic Carbon ^d | | mg/L | 1 | - | - | - | 4 | - | - | - | - | - | 152 | - | - | |
| Dissolved gas | Methane | mg/L | 0.01 | - | - | - | 14.5 | - | - | - | - | - | 32.9 | - | - | |
| Dissolved metals | Aluminium | mg/L | 0.01 | - | - | - | <0.1 | - | - | - | - | - | <0.01 | - | - | |
| | Antimony | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | 0.003 | - | - | |
| | Arsenic | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | 0.006 | - | - | |
| | Barium | mg/L | 0.001 | - | - | - | 6.33 | - | - | - | - | - | 2.48 | - | - | |
| | Beryllium | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | <0.001 | - | - | |
| | Cadmium | mg/L | 0.0001 | - | - | - | <0.001 | - | - | - | - | - | <0.0001 | - | - | |
| | Chromium | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | <0.001 | - | - | |
| | Cobalt | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | <0.001 | - | - | |
| | Copper | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | 0.003 | - | - | |
| | Iron | mg/L | 0.05 | - | - | - | 4.11 | - | - | - | - | - | <0.05 | - | - | |
| | Lead | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | <0.001 | - | - | |
| | Vanadium | mg/L | 0.01 | - | - | - | <0.1 | - | - | - | - | - | <0.01 | - | - | |
| | Zinc | mg/L | 0.005 | - | - | - | <0.05 | - | - | - | - | - | <0.005 | - | - | |
| | Manganese | mg/L | 0.001 | - | - | - | 0.039 | - | - | - | - | - | 0.002 | - | - | |
| | Mercury | mg/L | 0.0001 | - | - | - | <0.0001 | - | - | - | - | - | <0.0001 | - | - | |
| | Molybdenum | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | 0.006 | - | - | |
| | Nickel | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | <0.001 | - | - | |
| | Selenium | mg/L | 0.01 | - | - | - | <0.1 | - | - | - | - | - | <0.01 | - | - | |
| | Strontium | mg/L | 0.001 | - | - | - | 4.03 | - | - | - | - | - | 2.26 | - | - | |
| | Tin | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | <0.001 | - | - | |
| | Uranium | mg/L | 0.001 | - | - | - | <0.01 | - | - | - | - | - | <0.001 | - | - | |
| Oil and Grease | Oil and Grease | mg/L | 5 | - | - | - | 11 | - | - | - | - | - | <5 | - | - | |
| | Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - |
| | | 2,4,6-Trichlorophenol | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - |
| | | 2,4-dichlorophenol | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - |
| | | 2,4-dimethylphenol | µg/L | 1 | - | - | - | 2 | - | - | - | - | - | 1.6 | - | - |
| | | 2,6-dichlorophenol | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - |
| | | 2-chlorophenol | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - |
| | | 2-methylphenol | µg/L | 1 | - | - | - | 6.3 | - | - | - | - | - | 5.2 | - | - |
| | | 2-nitrophenol | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - |
| | | 3-4-methylphenol | µg/L | 2 | - | - | - | 65.1 | - | - | - | - | - | 50.6 | - | - |
| | | 4-chloro-3-methylphenol | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - |
| | | Pentachlorophenol | µg/L | 2 | - | - | - | <2 | - | - | - | - | - | <2 | - | - |
| | | Phenol | µg/L | 1 | - | - | - | 1.8 | - | - | - | - | - | <1 | - | - |
| | | PAH | Acenaphthene | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - |
| Acenaphthylene | | | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - |
| Anthracene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Benz(a)anthracene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Benzo(a) pyrene | µg/L | | 0.5 | - | - | - | <0.5 | - | - | - | - | - | <0.5 | - | - | |
| Benzo(b&j)fluoranthene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Benzo(g,h,i)perylene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Benzo(k)fluoranthene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Benzo(a)pyrene TEQ (zero) | µg/L | | 0.5 | - | - | - | <0.5 | - | - | - | - | - | <0.5 | - | - | |
| Chrysene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Dibenz(a,h)anthracene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Fluoranthene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Fluorene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Indeno(1,2,3-c,d)pyrene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Naphthalene (Method analysis EP075(SIM)B) | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Phenanthrene | µg/L | | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | |
| Pyrene | µg/L | 1 | - | - | - | <1 | - | - | - | - | - | <1 | - | - | | |
| Polycyclic aromatic hydrocarbons EPA448 | µg/L | 0.5 | - | - | - | <0.5 | - | - | - | - | - | <0.5 | - | - | | |
| TRH | TPH C6-C10</ | | | | | | | | | | | | | | | |

Table D.2 AST2 and Pilot wells cont.

| Sample date | Analyte ^a | Units | LOR | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK13 | WK14 | WK14 | WK14 |
|--|-----------------------------------|--------------|--------|------------|------------|------------|------------|------------|------------|------------|-----------|------------|-----------|-----------|-----------|
| | | | | 18/07/2015 | 23/07/2015 | 27/07/2015 | 28/07/2015 | 29/07/2015 | 12/08/2015 | 26/08/2015 | 9/09/2015 | 23/09/2015 | 1/07/2015 | 2/07/2015 | 3/07/2015 |
| Field parameters | Temperature | °C | | 15.15 | 17.29 | 19.8 | 13.6 | 13.4 | 12.9 | 23.64 | 17.8 | 13.27 | 16.94 | 14.4 | 13.44 |
| | Electrical conductivity | uS/cm | | 7622 | 7306 | 7746 | 7309 | 7356 | 6851 | 6953 | 7078 | 7173 | 12,256 | 11,108 | 10,993 |
| | pH | pH units | | 8.37 | 8.15 | 8.15 | 8.17 | 8.25 | 8.52 | 8.34 | 7.75 | 8.67 | 7.05 | 7.15 | 7.11 |
| | TDS | mg/L | | 4955 | 4754 | 5036 | 4750 | 4781 | 4453 | 4519 | 4596 | 4662 | 7967 | 7222 | 7149 |
| | DO % | % | | 15.3 | 31.9 | 14.5 | 18.9 | 17.7 | 19.5 | 19.1 | 11.9 | 19.5 | 31.7 | 111.1 | 26.8 |
| | DO mg/L | mg/L | | 1.49 | 2.95 | 1.29 | 1.91 | 1.81 | 2 | 1.54 | 1.11 | 2.96 | 2.93 | 10.94 | 2.68 |
| | Redox | mV | | -66.9 | -140.3 | -146.3 | -130 | 13.8 | -51.8 | -130.7 | -200.7 | 92.9 | -142.6 | -138 | -132.8 |
| | Chlorine Free | mg/L | | 0.06 | 0.04 | 0.05 | 0.11 | 0 | 0 | 0.03 | 0 | 0.03 | 0 | 0.04 | 0.02 |
| Chlorine Total | mg/L | | 0 | 0.01 | 0.03 | 0.04 | 0 | 0 | 0.01 | 0 | 0.07 | 0 | 0 | 0 | |
| Key analytes | Ethanolamine | µg/L | 1 | - | - | - | - | 13 | 11 | 36 | 8 | 38 | - | - | - |
| | Diethanolamine | µg/L | 1 | - | - | - | - | <1 | 3 | 4 | 3 | 4 | - | - | - |
| | THPS ^b | µg/L | 50 | - | - | - | - | <50 | <50 | - | 150 | - | - | - | - |
| | Boron | mg/L | 0.05 | - | - | - | - | 2.81 | 2.44 | 2.67 | 2.65 | 2.57 | - | - | - |
| | Chloride (Method analysis ED009) | mg/L | 0.1 | - | - | - | - | 696 | 668 | 675 | 659 | 674 | - | - | - |
| | Chloride (Method analysis ED045) | mg/L | 1 | - | - | - | - | 504 | 575 | 542 | 705 | 687 | - | - | - |
| | Chlorine - Free | mg/L | 0.2 | - | - | - | - | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | - | - | - |
| | Chlorine - Total Residual | mg/L | 0.2 | - | - | - | - | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | - | - | - |
| | Nitrogen (Total) | mg/L | 0.1 | - | - | - | - | 6.3 | 6.2 | 5.6 | 5.9 | 1 | - | - | - |
| | Sulfate as SO4 | mg/L | 1 | - | - | - | - | <1 | <1 | <1 | <10 | <1 | - | - | - |
| | Sulphate as SO4 ^b | mg/L | 1 | - | - | - | - | 2 | 1 | - | <1 | - | - | - | - |
| | Total Phosphorus | mg/L | 0.01 | - | - | - | - | 2.55 | 2.46 | 1.78 | 1.79 | 0.12 | - | - | - |
| | Total Phosphorus ^b | mg/L | 0.05 | - | - | - | - | 3.1 | 2.8 | - | 2.2 | - | - | - | - |
| Lab physical parameters | Electrical conductivity | µS/cm | 1 | - | - | - | - | 7670 | 7410 | 7670 | 7140 | 7190 | 12,200 | 11,200 | - |
| | pH (Lab) ^c | pH units | 0.01 | - | - | - | - | 8.47 | 8.61 | 8.94 | 8.65 | 8.42 | - | - | - |
| | TDS | mg/L | 10 | - | - | - | - | 4610 | 3920 | 4100 | 4430 | 4440 | - | - | - |
| | TSS | mg/L | 5 | - | - | - | - | 22 | 29 | 75 | 20 | 7 | - | - | - |
| Major/minor ions | Bicarbonate Alkalinity-mg CaCO3/L | mg/L | 1 | - | - | - | - | 3380 | 3000 | 3250 | 3700 | 3280 | - | - | - |
| | Carbonate Alkalinity-mg CaCO3/L | mg/L | 1 | - | - | - | - | 150 | 200 | 350 | 300 | 100 | - | - | - |
| | Alkalinity (Hydroxide) as CaCO3 | mg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Alkalinity (total) as CaCO3 | mg/L | 1 | - | - | - | - | 3520 | 3200 | 3600 | 4000 | 3380 | - | - | - |
| | Calcium | mg/L | 1 | - | - | - | - | 11 | 10 | <10 | 10 | 12 | - | - | - |
| | Magnesium | mg/L | 1 | - | - | - | - | 2 | 2 | <10 | 2 | 2 | - | - | - |
| | Potassium | mg/L | 1 | - | - | - | - | 11 | 11 | 12 | 13 | 13 | - | - | - |
| | Sodium | mg/L | 1 | - | - | - | - | 1880 | 1990 | 1960 | 2160 | 1860 | - | - | - |
| | Fluoride | mg/L | 0.1 | - | - | - | - | 2.2 | 3 | 2.5 | 2.4 | 2.6 | - | - | - |
| | Reactive Silica | mg/L | 0.05 | - | - | - | - | 29 | 25 | 24.6 | 23.5 | 26.9 | - | - | - |
| | Bromine | mg/L | 0.1 | - | - | - | - | 1.9 | 1.6 | 1.9 | 1.9 | 1.3 | - | - | - |
| | Ionic Balance | % | 0.01 | - | - | - | - | 1.12 | 4.32 | 1.02 | 2.55 | 2.97 | - | - | - |
| | Nutrients | Ammonia as N | mg/L | 0.01 | - | - | - | - | 4 | 4.28 | 4.46 | 4.38 | 0.02 | - | - |
| Ammonium as N | | mg/L | 0.01 | - | - | - | - | 3.84 | 3.97 | 4.01 | 4.3 | 0.02 | - | - | - |
| Nitrate (as N) | | mg/L | 0.01 | - | - | - | - | 0.01 | 0.02 | <0.01 | 0.01 | 0.03 | - | - | - |
| Nitrite (as N) | | mg/L | 0.01 | - | - | - | - | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 | - | - | - |
| Nitrite + Nitrate as N | | mg/L | 0.01 | - | - | - | - | 0.01 | 0.02 | <0.01 | 0.01 | 0.03 | - | - | - |
| Kjeldahl Nitrogen Total | | mg/L | 0.1 | - | - | - | - | 6.3 | 6.2 | 5.6 | 5.9 | 1 | - | - | - |
| Reactive Phosphorus as P | | mg/L | 0.01 | - | - | - | - | 0.6 | 0.16 | 0.12 | 0.14 | 0.14 | - | - | - |
| Total Organic Carbon | | mg/L | 1 | - | - | - | - | 81 | - | - | 2 | - | - | - | - |
| Nonpurgeable Organic Carbon ^d | | mg/L | 1 | - | - | - | - | - | 26 | 25 | - | 22 | - | - | - |
| Dissolved gas | | Methane | mg/L | 0.01 | - | - | - | - | 5.56 | 21.3 | 8.33 | 1.14 | 26.4 | - | - |
| Dissolved metals | Aluminium | mg/L | 0.01 | - | - | - | - | <0.01 | 0.01 | <0.1 | <0.01 | 0.02 | - | - | - |
| | Antimony | mg/L | 0.001 | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | <0.001 | - | - | - |
| | Arsenic | mg/L | 0.001 | - | - | - | - | 0.004 | 0.004 | <0.01 | 0.006 | 0.004 | - | - | - |
| | Barium | mg/L | 0.001 | - | - | - | - | 2.64 | 3.06 | 2.76 | 3.34 | 3.69 | - | - | - |
| | Beryllium | mg/L | 0.001 | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | <0.001 | - | - | - |
| | Cadmium | mg/L | 0.0001 | - | - | - | - | <0.0001 | <0.0001 | <0.001 | <0.0001 | <0.0001 | - | - | - |
| | Chromium | mg/L | 0.001 | - | - | - | - | 0.001 | 0.002 | <0.01 | 0.001 | 0.002 | - | - | - |
| | Cobalt | mg/L | 0.001 | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | <0.001 | - | - | - |
| | Copper | mg/L | 0.001 | - | - | - | - | 0.003 | 0.001 | <0.01 | <0.001 | <0.001 | - | - | - |
| | Iron | mg/L | 0.05 | - | - | - | - | 0.12 | 1.4 | 0.34 | 0.53 | 0.74 | - | - | - |
| | Lead | mg/L | 0.001 | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | <0.001 | - | - | - |
| | Vanadium | mg/L | 0.01 | - | - | - | - | <0.01 | <0.01 | <0.1 | <0.01 | <0.01 | - | - | - |
| | Zinc | mg/L | 0.005 | - | - | - | - | <0.005 | <0.005 | <0.05 | <0.005 | <0.005 | - | - | - |
| | Manganese | mg/L | 0.001 | - | - | - | - | 0.006 | 0.01 | <0.01 | 0.01 | 0.009 | - | - | - |
| | Mercury | mg/L | 0.0001 | - | - | - | - | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | - | - | - |
| | Molybdenum | mg/L | 0.001 | - | - | - | - | 0.009 | 0.008 | 0.011 | 0.017 | 0.004 | - | - | - |
| | Nickel | mg/L | 0.001 | - | - | - | - | 0.002 | 0.001 | <0.01 | 0.002 | 0.002 | - | - | - |
| | Selenium | mg/L | 0.01 | - | - | - | - | <0.01 | <0.01 | <0.1 | <0.01 | <0.01 | - | - | - |
| | Strontium | mg/L | 0.001 | - | - | - | - | 2.47 | 2.12 | 1.89 | 2.4 | 2.45 | - | - | - |
| | Tin | mg/L | 0.001 | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | <0.001 | - | - | - |
| Uranium | mg/L | 0.001 | - | - | - | - | <0.001 | <0.001 | <0.01 | <0.001 | <0.001 | - | - | - | |
| Oil and Grease | Oil and Grease | mg/L | 5 | - | - | - | - | <5 | <5 | <5 | <5 | <5 | - | - | - |
| Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | 2,4,6-Trichlorophenol | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | 2,4-dichlorophenol | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | 2,4-dimethylphenol | µg/L | 1 | - | - | - | - | 1.8 | 1.3 | <1 | <1 | <1 | - | - | - |
| | 2,6-dichlorophenol | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | 2-chlorophenol | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | 2-methylphenol | µg/L | 1 | - | - | - | - | 5.4 | 4.7 | <1 | 3.6 | <1 | - | - | - |
| | 2-nitrophenol | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | 3-&4-methylphenol | µg/L | 2 | - | - | - | - | 62.5 | 72.6 | 20.8 | <2 | 26.3 | - | - | - |
| | 4-chloro-3-methylphenol | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Pentachlorophenol | µg/L | 2 | - | - | - | - | <2 | <2 | <2 | <2 | <2 | - | - | - |
| | Phenol | µg/L | 1 | - | - | - | - | 1.1 | <1 | <1 | <1 | <1 | - | - | - |
| PAH | Acenaphthene | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Acenaphthylene | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Anthracene | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Benz(a)anthracene | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Benzo(a) pyrene | µg/L | 0.5 | - | - | - | - | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | - | - | - |
| | Benzo(b&f)fluoranthene | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Benzo(g,h,i)perylene | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Benzo(k)fluoranthene | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Benzo(a)pyrene TEQ (zero) | µg/L | 0.5 | - | - | - | - | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | - | - | - |
| | Chrysene | µg/L | 1 | - | - | - | - | <1 | <1 | <1 | <1 | <1 | - | - | - |
| | Dibenz(a,h)anthracene</ | | | | | | | | | | | | | | |

Table D.2 AST2 and Pilot wells cont.

| Sample date | Analyte ^a | Units | LOR | WK14 | WK14 | WK14 | WK14 | WK14 | WK14 | WK14 | WK14 | WK14 | WK14 | WK14 | WK14 |
|---|--|-----------------------------------|--------|-----------|-----------|-----------|-----------|-----------|------------|------------|------------|------------|------------|------------|------------|
| | | | | 4/07/2015 | 6/07/2015 | 7/07/2015 | 8/07/2015 | 9/07/2015 | 10/07/2015 | 15/07/2015 | 16/07/2015 | 18/07/2015 | 22/07/2015 | 24/07/2015 | 28/07/2015 |
| Field parameters | Temperature | °C | | 11.53 | 21.88 | 11.18 | 13.74 | 11.32 | 10.09 | 12.24 | 10.97 | 13.06 | 12.4 | 15.58 | 12.05 |
| | Electrical conductivity | uS/cm | | 10,160 | 10,321 | 9863 | 10,337 | 12,003 | 10,229 | 9975 | 10,961 | 11,290 | 11,015 | 11,060 | 11,071 |
| | pH | pH units | | 7.22 | 7.16 | 7.12 | 7.25 | 7.44 | 7.57 | 7.64 | 7.21 | 7.52 | 7.44 | 7.43 | 7.43 |
| | TDS | mg/L | | 6606 | 6709 | 6418 | 6718 | 7802 | 6652 | 6474 | 7124 | 7339 | 7159 | 7193 | 7196 |
| | DO % | % | | 25.9 | 34.7 | 30.5 | 27.5 | 122.2 | 16.4 | 26 | 42.1 | 19.1 | 19.3 | 37.4 | 21.4 |
| | DO mg/L | mg/L | | 2.71 | 2.96 | 3.22 | 2.74 | 13.03 | 1.78 | 2.68 | 4.45 | 1.92 | 1.99 | 3.54 | 2.21 |
| | Redox | mV | | -128.1 | -142 | 141.7 | -151.7 | -132.8 | -144 | -125.3 | -107.8 | -122.5 | -121.4 | -141 | -138.9 |
| | Chlorine Free | mg/L | | 0.09 | 0.04 | 0 | 0 | 0.04 | 0.06 | 0.09 | 0.01 | 0.08 | 0.04 | 0.1 | 0.04 |
| | Chlorine Total | mg/L | | 0.16 | 0 | 0 | 0 | 0 | 0.13 | 0.06 | 0.07 | 0.05 | 0.09 | 0 | 0.01 |
| Key analytes | Ethanolamine | µg/L | 1 | - | - | - | <1 | - | - | 50 | - | - | 26 | - | - |
| | Diethanolamine | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | 10 | - | - |
| | THPS ^b | µg/L | 50 | - | - | - | <50 | - | - | <50 | - | - | <50 | - | - |
| | Boron | mg/L | 0.05 | - | - | - | 4.69 | - | - | 2.87 | - | - | 4.18 | - | - |
| | Chloride (Method analysis ED009) | mg/L | 0.1 | - | - | - | 1240 | - | - | 1230 | - | - | 1850 | - | - |
| | Chloride (Method analysis ED045) | mg/L | 1 | - | - | - | 1170 | - | - | 886 | - | - | 1280 | - | - |
| | Chlorine - Free | mg/L | 0.2 | - | - | - | <0.2 | - | - | <0.2 | - | - | <0.2 | - | - |
| | Chlorine - Total Residual | mg/L | 0.2 | - | - | - | <0.2 | - | - | <0.2 | - | - | <0.2 | - | - |
| | Nitrogen (Total) | mg/L | 0.1 | - | - | - | 5.3 | - | - | 5.8 | - | - | 6.6 | - | - |
| | Sulfate as SO4 | mg/L | 1 | - | - | - | <1 | - | - | <10 | - | - | <10 | - | - |
| | Sulphate as SO4 ^b | mg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | Total Phosphorus | mg/L | 0.01 | - | - | - | 2 | - | - | 2.07 | - | - | 1.96 | - | - |
| | Total Phosphorus ^b | mg/L | 0.05 | - | - | - | 2.4 | - | - | 2.2 | - | - | 2 | - | - |
| Lab physical parameters | Electrical conductivity | µS/cm | 1 | - | - | - | 10,600 | - | - | 10,400 | - | - | 11,700 | - | - |
| | pH (Lab) ^c | pH units | 0.01 | - | - | - | 7.74 | - | - | 7.96 | - | - | 7.7 | - | - |
| | TDS | mg/L | 10 | - | - | - | 6840 | - | - | 6520 | - | - | 7190 | - | - |
| | TSS | mg/L | 5 | - | - | - | 7 | - | - | 11 | - | - | 10 | - | - |
| | Major/minor ions | Bicarbonate Alkalinity-mg CaCO3/L | mg/L | 1 | - | - | - | 4360 | - | - | 4540 | - | - | 4200 | - |
| Carbonate Alkalinity-mg CaCO3/L | | mg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Alkalinity (Hydroxide) as CaCO3 | | mg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Alkalinity (total) as CaCO3 | | mg/L | 1 | - | - | - | 4360 | - | - | 4540 | - | - | 4200 | - | - |
| Calcium | | mg/L | 1 | - | - | - | 39 | - | - | 21 | - | - | 46 | - | - |
| Magnesium | | mg/L | 1 | - | - | - | 9 | - | - | 7 | - | - | 10 | - | - |
| Potassium | | mg/L | 1 | - | - | - | 22 | - | - | 12 | - | - | 16 | - | - |
| Sodium | | mg/L | 1 | - | - | - | 2540 | - | - | 2090 | - | - | 2800 | - | - |
| Fluoride | | mg/L | 0.1 | - | - | - | 1 | - | - | 1.1 | - | - | 1 | - | - |
| Reactive Silica | | mg/L | 0.05 | - | - | - | 32.5 | - | - | 30.2 | - | - | 39.2 | - | - |
| Bromine | | mg/L | 0.1 | - | - | - | <1 | - | - | 0.6 | - | - | 4.2 | - | - |
| Ionic Balance | | % | 0.01 | - | - | - | 2.78 | - | - | - | - | - | 2.1 | - | - |
| Nutrients | | Ammonia as N | mg/L | 0.01 | - | - | - | 4.19 | - | - | 4.82 | - | - | 4.57 | - |
| | Ammonium as N | mg/L | 0.01 | - | - | - | 4.17 | - | - | 4.77 | - | - | 4.54 | - | - |
| | Nitrate (as N) | mg/L | 0.01 | - | - | - | <0.01 | - | - | 0.03 | - | - | <0.01 | - | - |
| | Nitrite (as N) | mg/L | 0.01 | - | - | - | 0.04 | - | - | 0.02 | - | - | <0.01 | - | - |
| | Nitrite + Nitrate as N | mg/L | 0.01 | - | - | - | 0.01 | - | - | 0.05 | - | - | <0.01 | - | - |
| | Kjeldahl Nitrogen Total | mg/L | 0.1 | - | - | - | 5.3 | - | - | 5.7 | - | - | 6.6 | - | - |
| | Reactive Phosphorus as P | mg/L | 0.01 | - | - | - | 0.99 | - | - | 0.17 | - | - | 0.06 | - | - |
| | Total Organic Carbon | mg/L | 1 | - | - | - | - | - | - | - | - | - | 8 | - | - |
| | Nonpurgeable Organic Carbon ^d | mg/L | 1 | - | - | - | 594 | - | - | 66 | - | - | - | - | - |
| Dissolved gas | Methane | mg/L | 0.01 | - | - | - | 26.5 | - | - | 14.3 | - | - | 22.8 | - | - |
| Dissolved metals | Aluminium | mg/L | 0.01 | - | - | - | <0.1 | - | - | <0.01 | - | - | <0.1 | - | - |
| | Antimony | mg/L | 0.001 | - | - | - | <0.01 | - | - | 0.002 | - | - | <0.01 | - | - |
| | Arsenic | mg/L | 0.001 | - | - | - | <0.01 | - | - | 0.008 | - | - | <0.01 | - | - |
| | Barium | mg/L | 0.001 | - | - | - | 2.11 | - | - | 3.59 | - | - | 6.53 | - | - |
| | Beryllium | mg/L | 0.001 | - | - | - | <0.01 | - | - | <0.001 | - | - | <0.01 | - | - |
| | Cadmium | mg/L | 0.0001 | - | - | - | <0.001 | - | - | <0.0001 | - | - | <0.001 | - | - |
| | Chromium | mg/L | 0.001 | - | - | - | <0.01 | - | - | <0.001 | - | - | 0.05 | - | - |
| | Cobalt | mg/L | 0.001 | - | - | - | <0.01 | - | - | <0.001 | - | - | <0.01 | - | - |
| | Copper | mg/L | 0.001 | - | - | - | <0.01 | - | - | 0.002 | - | - | <0.01 | - | - |
| | Iron | mg/L | 0.05 | - | - | - | <0.5 | - | - | <0.05 | - | - | 5.04 | - | - |
| | Lead | mg/L | 0.001 | - | - | - | <0.01 | - | - | <0.001 | - | - | <0.01 | - | - |
| | Vanadium | mg/L | 0.01 | - | - | - | <0.1 | - | - | <0.01 | - | - | <0.1 | - | - |
| | Zinc | mg/L | 0.005 | - | - | - | <0.05 | - | - | <0.005 | - | - | <0.05 | - | - |
| | Manganese | mg/L | 0.001 | - | - | - | 0.018 | - | - | 0.008 | - | - | 0.048 | - | - |
| | Mercury | mg/L | 0.0001 | - | - | - | <0.0001 | - | - | <0.0001 | - | - | <0.0001 | - | - |
| | Molybdenum | mg/L | 0.001 | - | - | - | <0.01 | - | - | 0.004 | - | - | <0.01 | - | - |
| | Nickel | mg/L | 0.001 | - | - | - | <0.01 | - | - | <0.001 | - | - | <0.01 | - | - |
| | Selenium | mg/L | 0.01 | - | - | - | <0.1 | - | - | <0.01 | - | - | <0.1 | - | - |
| | Strontium | mg/L | 0.001 | - | - | - | 2.11 | - | - | 3.41 | - | - | 4.96 | - | - |
| | Tin | mg/L | 0.001 | - | - | - | <0.01 | - | - | <0.001 | - | - | <0.01 | - | - |
| Uranium | mg/L | 0.001 | - | - | - | <0.01 | - | - | <0.001 | - | - | <0.01 | - | - | |
| Oil and Grease | Oil and Grease | mg/L | 5 | - | - | - | 7 | - | - | <5 | - | - | 10 | - | - |
| Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | 2,4,6-Trichlorophenol | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | 2,4-dichlorophenol | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | 2,4-dimethylphenol | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | 2,6-dichlorophenol | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | 2-chlorophenol | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | 2-methylphenol | µg/L | 1 | - | - | - | 1.4 | - | - | 1.4 | - | - | 1.6 | - | - |
| | 2-nitrophenol | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | 3-&4-methylphenol | µg/L | 2 | - | - | - | 40.9 | - | - | 214 | - | - | 66.5 | - | - |
| | 4-chloro-3-methylphenol | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| | Pentachlorophenol | µg/L | 2 | - | - | - | <2 | - | - | <2 | - | - | <2 | - | - |
| | Phenol | µg/L | 1 | - | - | - | 1.9 | - | - | 2.3 | - | - | 2.5 | - | - |
| | PAH | Acenaphthene | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - |
| Acenaphthylene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Anthracene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Benz(a)anthracene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Benzo(a)pyrene | | µg/L | 0.5 | - | - | - | <0.5 | - | - | <0.5 | - | - | <0.5 | - | - |
| Benzo(b&j)fluoranthene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Benzo(g,h,i)perylene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Benzo(k)fluoranthene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Benzo(a)pyrene TEQ (zero) | | µg/L | 0.5 | - | - | - | <0.5 | - | - | <0.5 | - | - | <0.5 | - | - |
| Chrysene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Dibenz(a,h)anthracene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Fluoranthene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Fluorene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Indeno(1,2,3-c,d)pyrene | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Naphthalene (Method analysis EP075(SIM)B) | | µg/L | 1 | - | - | - | <1 | - | - | <1 | - | - | <1 | - | - |
| Phenanthrene | | µ | | | | | | | | | | | | | |

Table D.2 AST2 and Pilot wells cont.

| Sample date | Analyte ^a | Units | LOR | WK14 | | |
|---|--|----------------------------|--------|-----------|------------|------|
| | | | | 9/09/2015 | 23/09/2015 | |
| Field parameters | Temperature | °C | | 18.9 | 12.77 | |
| | Electrical conductivity | uS/cm | | 11,846 | 12,270 | |
| | pH | pH units | | 7.86 | 7.03 | |
| | TDS | mg/L | | 7646 | 7973 | |
| | DO % | % | | 16.3 | 27.3 | |
| | DO mg/L | mg/L | | 1.44 | 2.76 | |
| | Redox | mV | | -89 | -80.8 | |
| | Chlorine Free | mg/L | | 0 | 0 | |
| Key analytes | Chlorine Total | mg/L | | 0 | 0.01 | |
| | Ethanolamine | µg/L | 1 | 6 | 23 | |
| | Diethanolamine | µg/L | 1 | 3 | 10 | |
| | THPS ^b | µg/L | 50 | 86 | - | |
| | Boron | mg/L | 0.05 | 3.06 | 3.03 | |
| | Chloride (Method analysis ED009) | mg/L | 0.1 | 2090 | 2130 | |
| | Chloride (Method analysis ED045) | mg/L | 1 | 2200 | 2130 | |
| | Chlorine - Free | mg/L | 0.2 | <0.2 | <0.2 | |
| | Chlorine - Total Residual | mg/L | 0.2 | <0.2 | <0.2 | |
| | Nitrogen (Total) | mg/L | 0.1 | 6.1 | 5.8 | |
| | Sulfate as SO ₄ | mg/L | 1 | <10 | <1 | |
| | Sulphate as SO ₄ ^b | mg/L | 1 | 8 | - | |
| | Total Phosphorus | mg/L | 0.01 | 1.52 | 1.43 | |
| Lab physical parameters | Total Phosphorus ^b | mg/L | 0.05 | 1.8 | - | |
| | Electrical conductivity | µS/cm | 1 | 12,100 | 12,300 | |
| | pH (Lab) ^c | pH units | 0.01 | 8.07 | 7.72 | |
| | TDS | mg/L | 10 | 7610 | 8060 | |
| | TSS | mg/L | 5 | <5 | 14 | |
| Major/minor ions | Bicarbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | 4300 | 4480 | |
| | Carbonate Alkalinity-mg CaCO ₃ /L | mg/L | 1 | <1 | <1 | |
| | Alkalinity (Hydroxide) as CaCO ₃ | mg/L | 1 | <1 | <1 | |
| | Alkalinity (total) as CaCO ₃ | mg/L | 1 | 4300 | 4480 | |
| | Calcium | mg/L | 1 | 40 | 34 | |
| | Magnesium | mg/L | 1 | 15 | 12 | |
| | Potassium | mg/L | 1 | 23 | 18 | |
| | Sodium | mg/L | 1 | 3990 | 3150 | |
| | Fluoride | mg/L | 0.1 | 1.1 | 0.9 | |
| | Reactive Silica | mg/L | 0.05 | 32.5 | 44.4 | |
| | Bromine | mg/L | 0.1 | 1.3 | 0.9 | |
| | Ionic Balance | % | 0.01 | 8.99 | 3.3 | |
| | Nutrients | Ammonia as N | mg/L | 0.01 | 5.08 | 4.94 |
| | | Ammonium as N | mg/L | 0.01 | 4.95 | 4.86 |
| Nitrate (as N) | | mg/L | 0.01 | 0.01 | <1 | |
| Nitrite (as N) | | mg/L | 0.01 | <0.01 | <1 | |
| Nitrite + Nitrate as N | | mg/L | 0.01 | 0.01 | <1 | |
| Kjeldahl Nitrogen Total | | mg/L | 0.1 | 6.1 | 5.8 | |
| Reactive Phosphorus as P | | mg/L | 0.01 | 0.16 | 0.07 | |
| Total Organic Carbon | | mg/L | 1 | <1 | - | |
| Nonpurgeable Organic Carbon ^d | | mg/L | 1 | - | 11 | |
| Dissolved gas | | Methane | mg/L | 0.01 | 2.6 | 23.8 |
| Dissolved metals | Aluminium | mg/L | 0.01 | <0.01 | <0.01 | |
| | Antimony | mg/L | 0.001 | <0.001 | <0.001 | |
| | Arsenic | mg/L | 0.001 | 0.007 | 0.004 | |
| | Barium | mg/L | 0.001 | 9.24 | 7.5 | |
| | Beryllium | mg/L | 0.001 | <0.001 | <0.001 | |
| | Cadmium | mg/L | 0.0001 | <0.0001 | <0.0001 | |
| | Chromium | mg/L | 0.001 | 0.01 | 0.006 | |
| | Cobalt | mg/L | 0.001 | <0.001 | <0.001 | |
| | Copper | mg/L | 0.001 | <0.001 | <0.001 | |
| | Iron | mg/L | 0.05 | 2.99 | 2.97 | |
| | Lead | mg/L | 0.001 | <0.001 | <0.001 | |
| | Vanadium | mg/L | 0.01 | <0.01 | <0.01 | |
| | Zinc | mg/L | 0.005 | 0.008 | <0.005 | |
| | Manganese | mg/L | 0.001 | 0.046 | 0.035 | |
| | Mercury | mg/L | 0.0001 | <0.0001 | <0.0001 | |
| | Molybdenum | mg/L | 0.001 | 0.011 | 0.008 | |
| | Nickel | mg/L | 0.001 | 0.002 | 0.002 | |
| | Selenium | mg/L | 0.01 | <0.01 | <0.01 | |
| | Strontium | mg/L | 0.001 | 8.04 | 6.68 | |
| | Tin | mg/L | 0.001 | <0.001 | <0.001 | |
| | Uranium | mg/L | 0.001 | <0.001 | <0.001 | |
| Oil and Grease | Oil and Grease | mg/L | 5 | <5 | <5 | |
| Phenolic compounds | 2,4,5-trichlorophenol | µg/L | 1 | <1 | <1 | |
| | 2,4,6-Trichlorophenol | µg/L | 1 | <1 | <1 | |
| | 2,4-dichlorophenol | µg/L | 1 | <1 | <1 | |
| | 2,4-dimethylphenol | µg/L | 1 | <1 | <1 | |
| | 2,6-dichlorophenol | µg/L | 1 | <1 | <1 | |
| | 2-chlorophenol | µg/L | 1 | <1 | <1 | |
| | 2-methylphenol | µg/L | 1 | <1 | <1 | |
| | 2-nitrophenol | µg/L | 1 | <1 | <1 | |
| | 3-&4-methylphenol | µg/L | 2 | <2 | 40.3 | |
| | 4-chloro-3-methylphenol | µg/L | 1 | <1 | <1 | |
| | Pentachlorophenol | µg/L | 2 | <2 | <2 | |
| | Phenol | µg/L | 1 | <1 | <1 | |
| | PAH | Acenaphthene | µg/L | 1 | <1 | <1 |
| | | Acenaphthylene | µg/L | 1 | <1 | <1 |
| Anthracene | | µg/L | 1 | <1 | <1 | |
| Benz(a)anthracene | | µg/L | 1 | <1 | <1 | |
| Benzo(a) pyrene | | µg/L | 0.5 | <0.5 | <0.5 | |
| Benzo(b&j)fluoranthene | | µg/L | 1 | <1 | <1 | |
| Benzo(g,h,i)perylene | | µg/L | 1 | <1 | <1 | |
| Benzo(k)fluoranthene | | µg/L | 1 | <1 | <1 | |
| Benzo(a)pyrene TEQ (zero) | | µg/L | 0.5 | <0.5 | <0.5 | |
| Chrysene | | µg/L | 1 | <1 | <1 | |
| Dibenz(a,h)anthracene | | µg/L | 1 | <1 | <1 | |
| Fluoranthene | | µg/L | 1 | <1 | <1 | |
| Fluorene | | µg/L | 1 | <1 | <1 | |
| Indeno(1,2,3-c,d)pyrene | | µg/L | 1 | <1 | <1 | |
| Naphthalene (Method analysis EP075(SIM)B) | | µg/L | 1 | <1 | <1 | |
| Phenanthrene | | µg/L | 1 | <1 | <1 | |
| Pyrene | | µg/L | 1 | <1 | <1 | |
| Polycyclic aromatic hydrocarbons EPA448 | | µg/L | 0.5 | <0.5 | <0.5 | |
| TRH | | TPH C6-C10 | µg/L | 20 | 70 | 130 |
| | C6 - C10 Fraction minus BTEX (F1) | µg/L | 20 | <20 | 50 | |
| | C10 - C16 Fraction | µg/L | 100 | <100 | <100 | |
| | C16 - C34 Fraction | µg/L | 100 | 400 | <100 | |
| | C34 - C40 Fraction | µg/L | 100 | 180 | <100 | |
| | C10 - C40 Fraction (Sum) | µg/L | 100 | 580 | <100 | |
| | TRH >C10-C16 less Naphthalene (F2) | µg/L | 100 | <100 | <100 | |
| | TPH | C6 - C9 Fraction | µg/L | 20 | 70 | 130 |
| C10 - C14 Fraction | | µg/L | 50 | 60 | <50 | |
| C15 - C28 Fraction | | µg/L | 100 | 240 | <100 | |
| C29-C36 Fraction | | µg/L | 50 | 260 | <50 | |
| +C10 - C36 (Sum of total) | | µg/L | 50 | 560 | <50 | |
| BTEX | | Benzene | µg/L | 1 | 23 | 31 |
| | Toluene | µg/L | 2 | 27 | 28 | |
| | Ethylbenzene | µg/L | 2 | <2 | <2 | |
| | Xylene (m & p) | µg/L | 2 | 6 | 6 | |
| | Xylene (o) | µg/L | 2 | <2 | <2 | |
| | Xylene Total | µg/L | 2 | 6 | 6 | |
| | Sum of BTEX | µg/L | 1 | 56 | 65 | |
| | Naphthalene (Method analysis EP080) | µg/L | 5 | <5 | <5 | |
| | Micro | Unionized Hydrogen Sulfide | µg/L | 100 | <100 | <100 |

Notes:

- not analysed

a - All data is from ALS results unless otherwise stated.

b - Analysed by Envirolab.

c - Laboratory readings of pH (lab) is outside of the holding time, therefore field measurements of pH should be relied upon for accuracy.

d - NPOC analysis was carried out instead of TOC due to high inorganic carbon content

Appendix E

Pilot well analyte time-series hydrographs



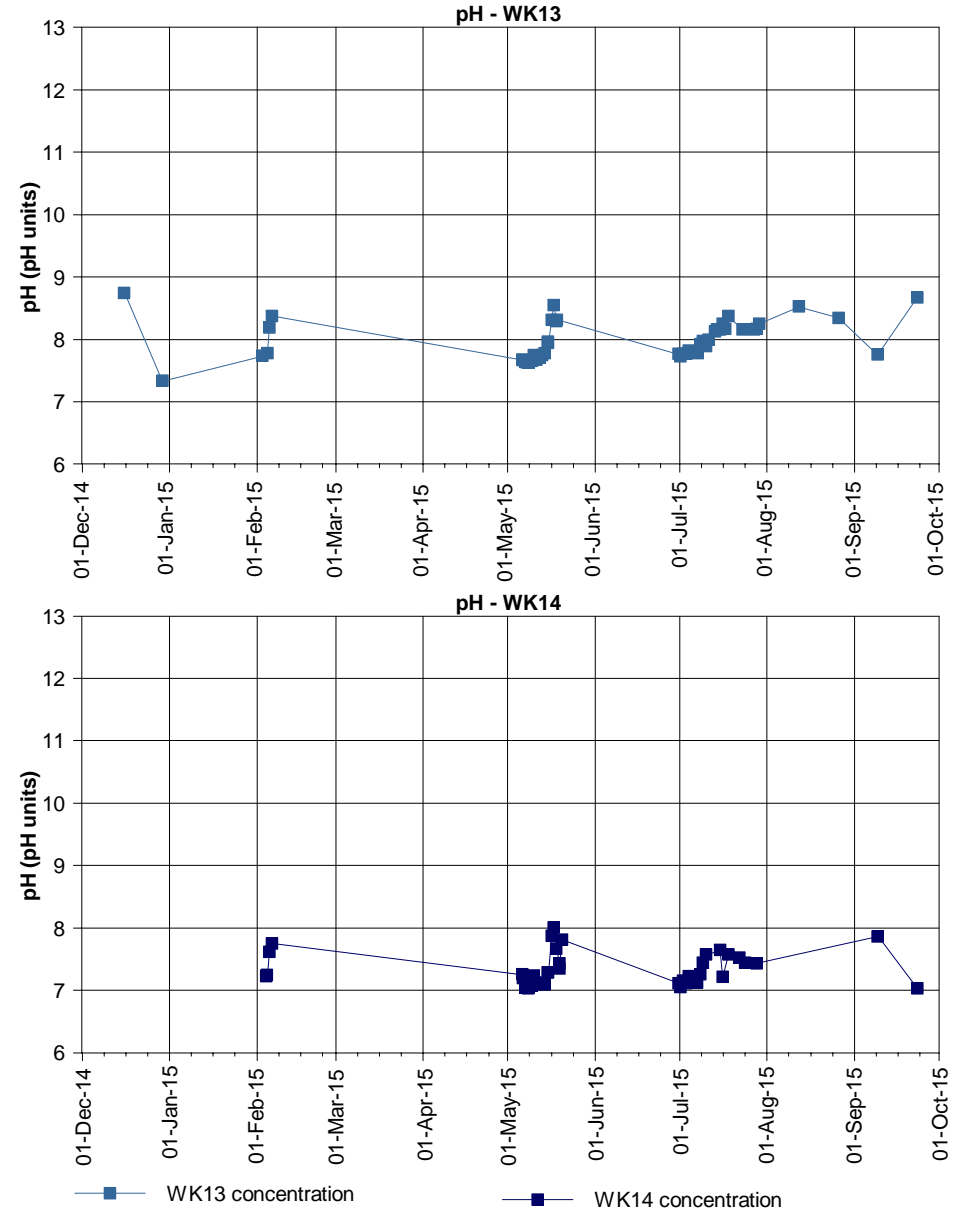
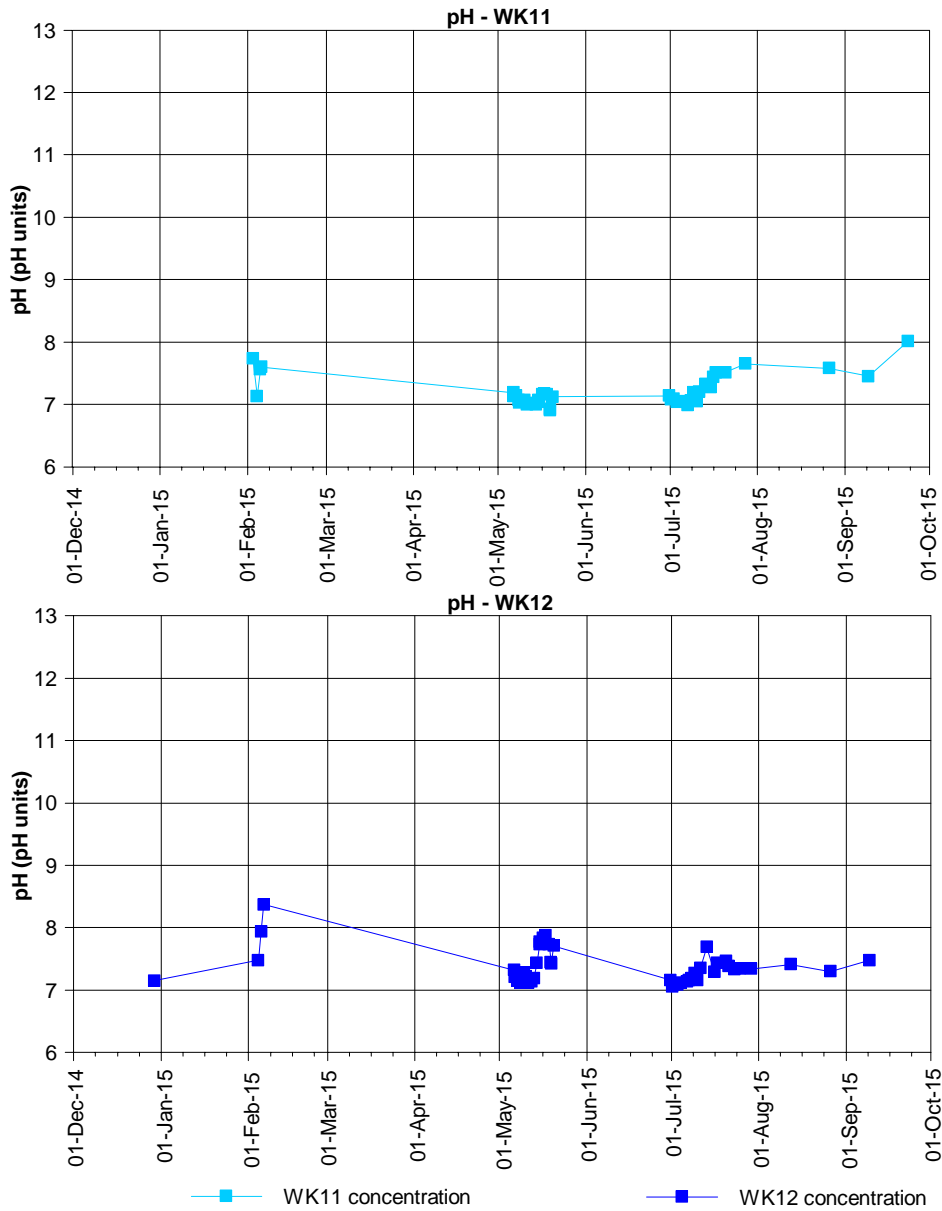


Figure E1.1: Field pH measurements at the Waukivory pilot wells

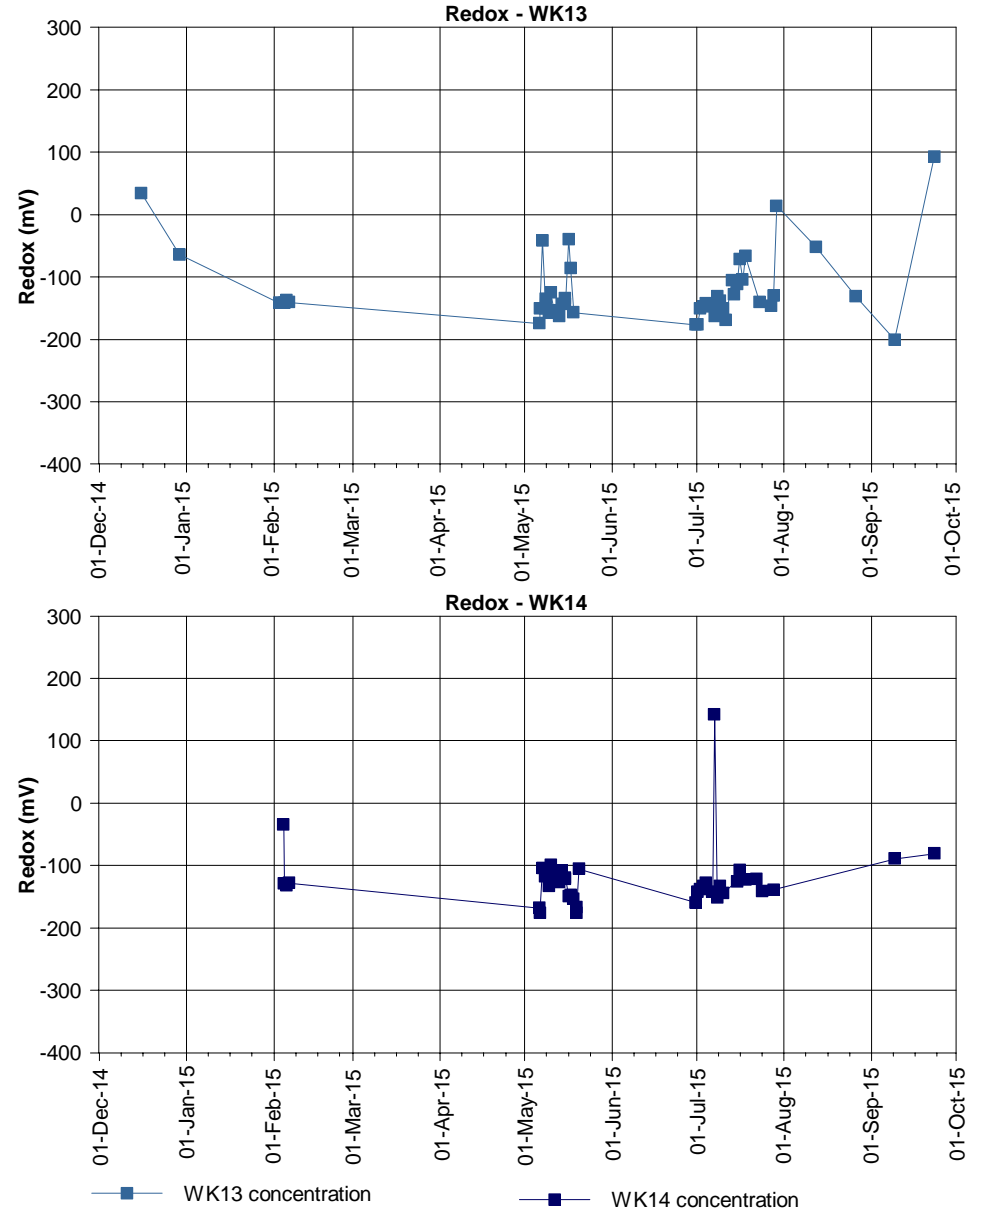
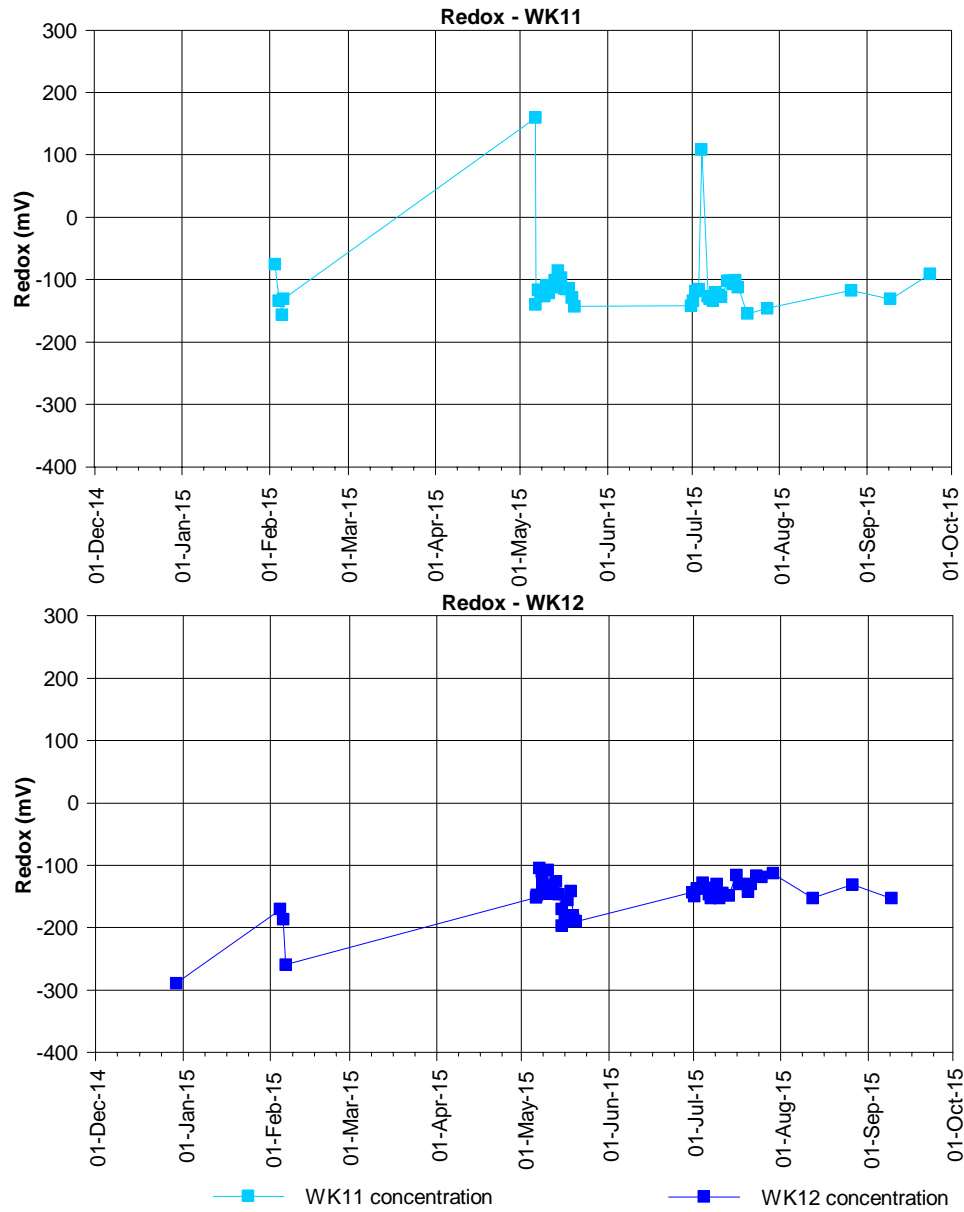


Figure E1.2: Field redox measurements at the Waukivory pilot wells






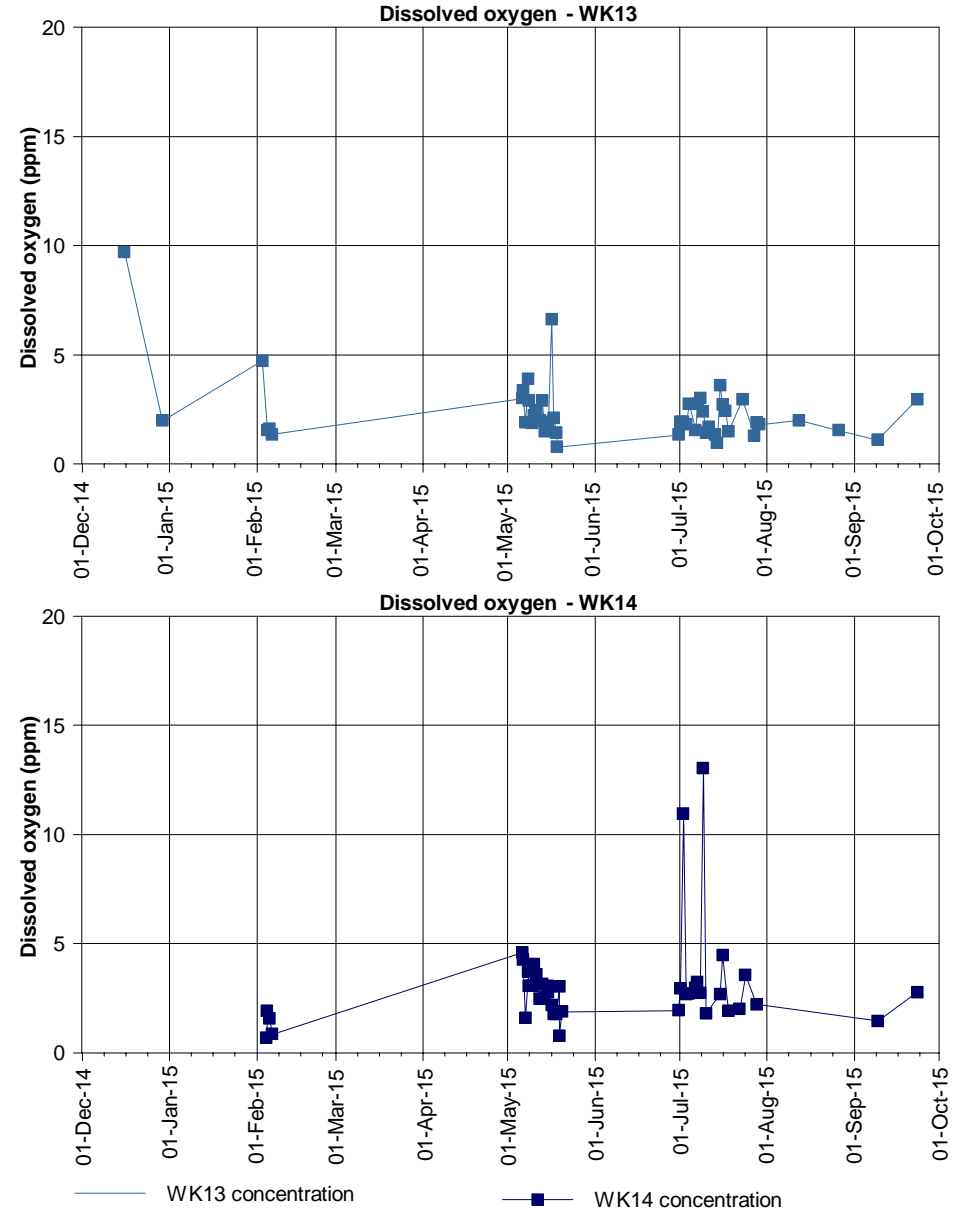


Figure E1.3: Field dissolved oxygen measurements at the Waukivory pilot wells

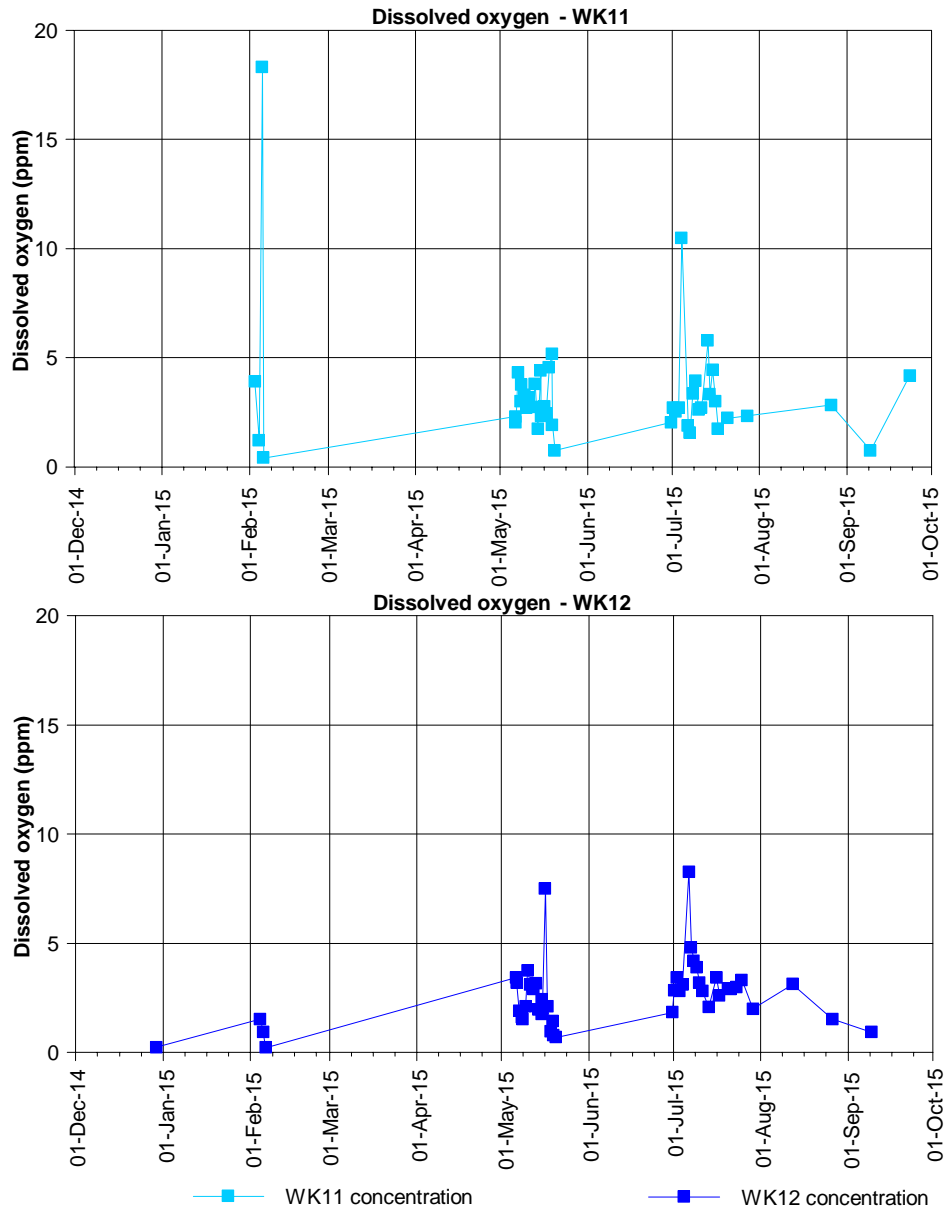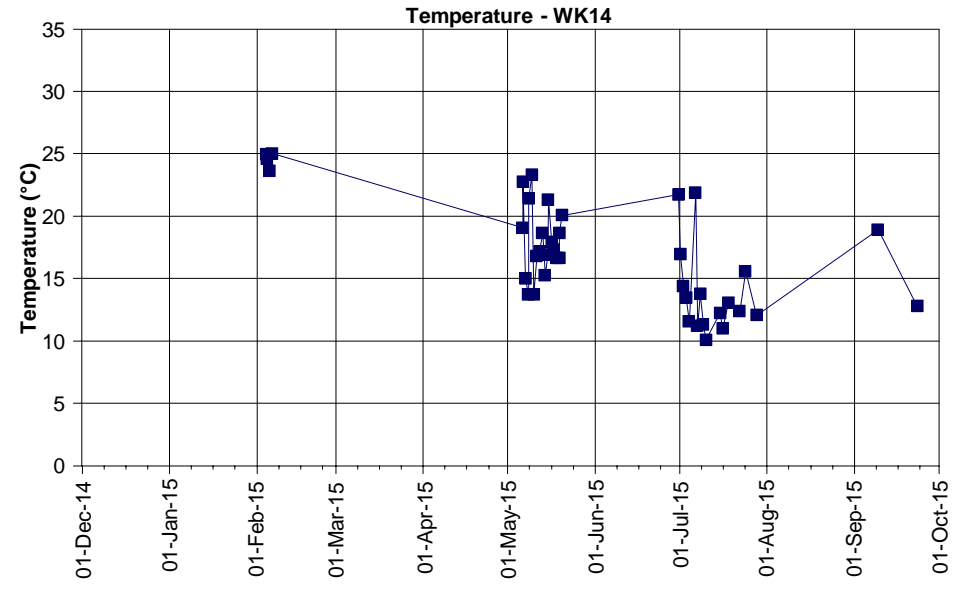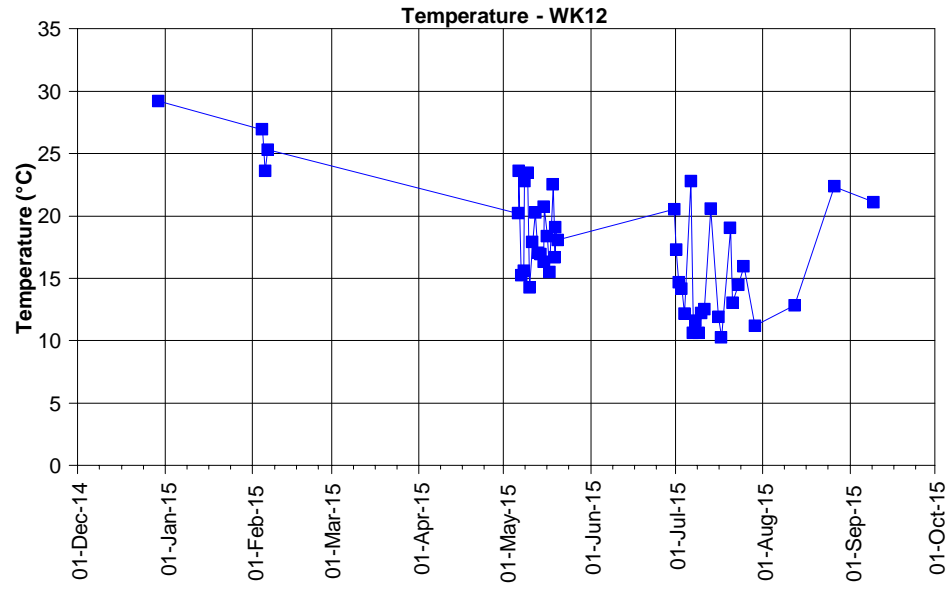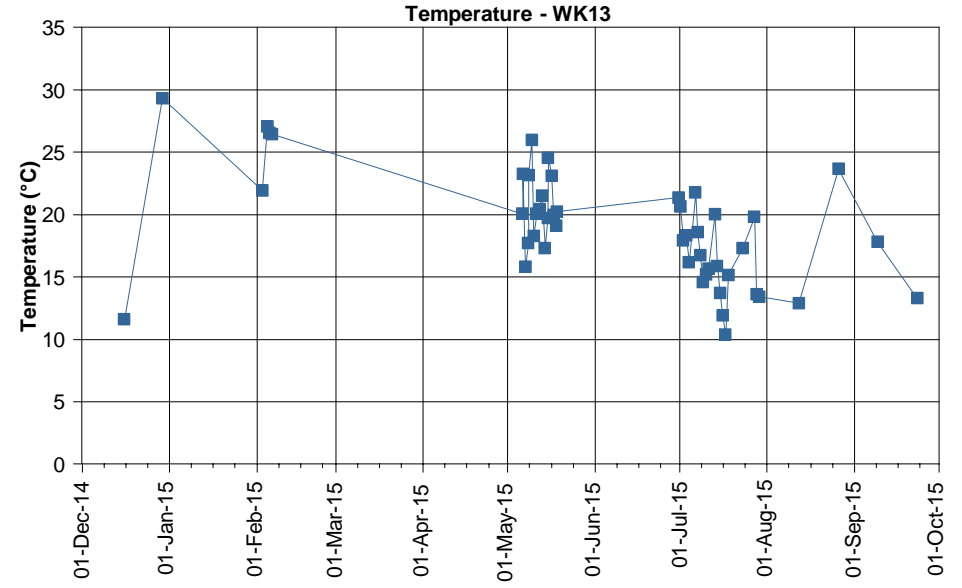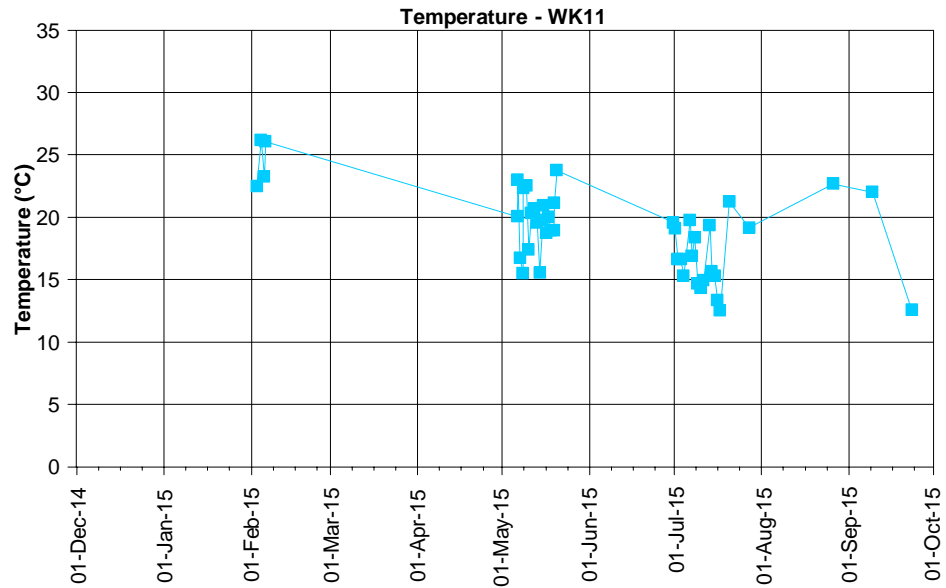





WK11 concentration

WK12 concentration

WK13 concentration

WK14 concentration





Figure E1.4: Field temperature measurements at the Waukivory pilot wells

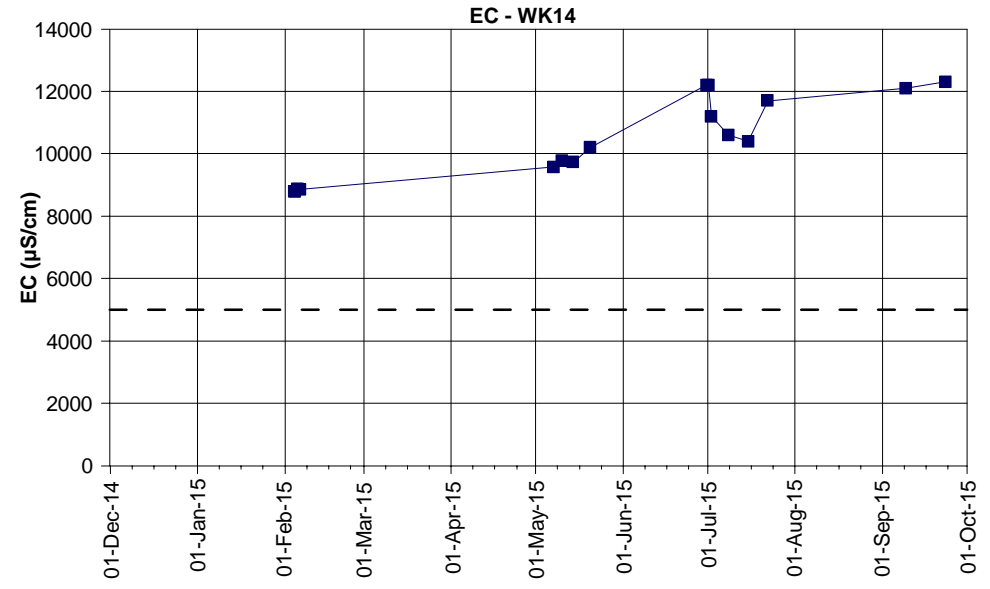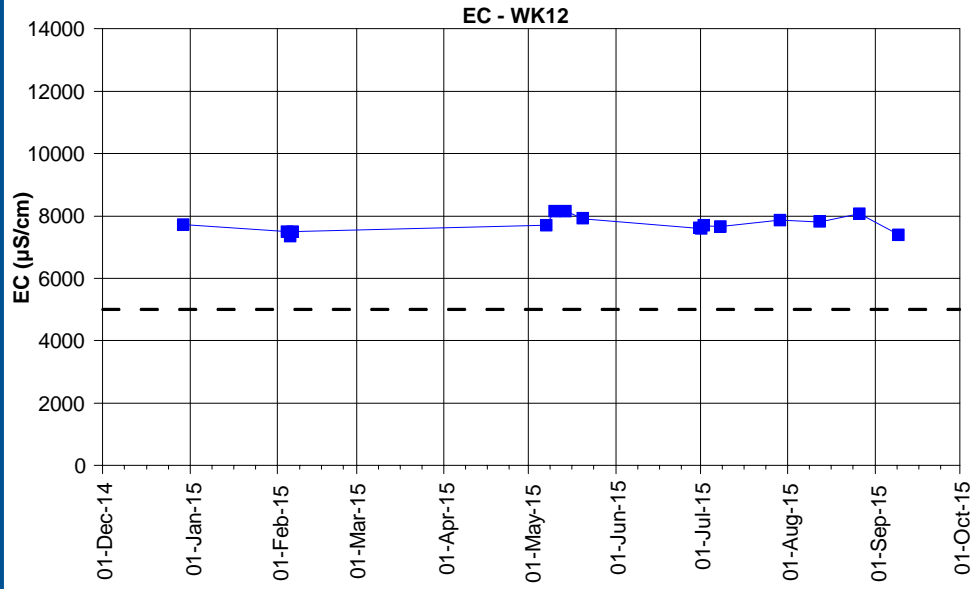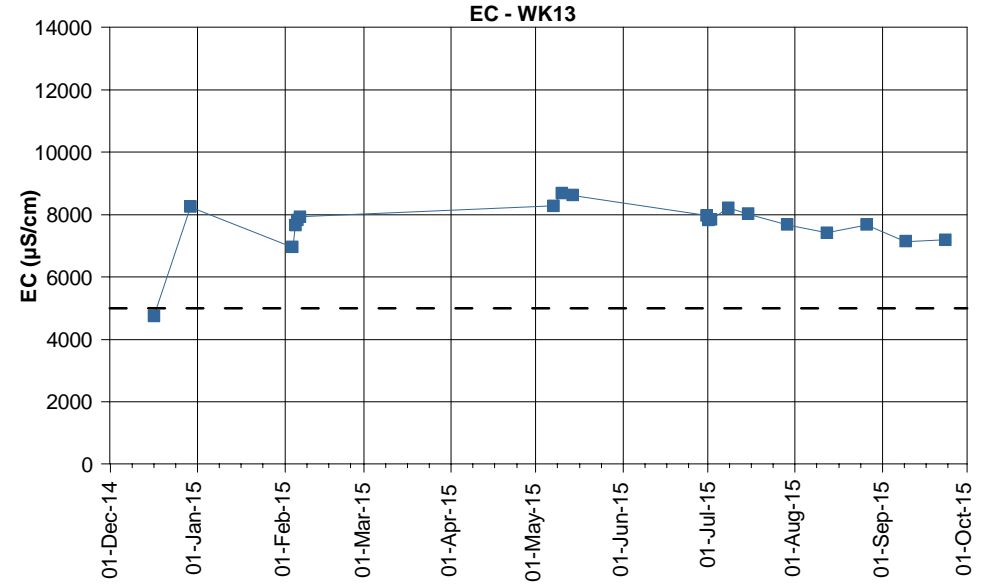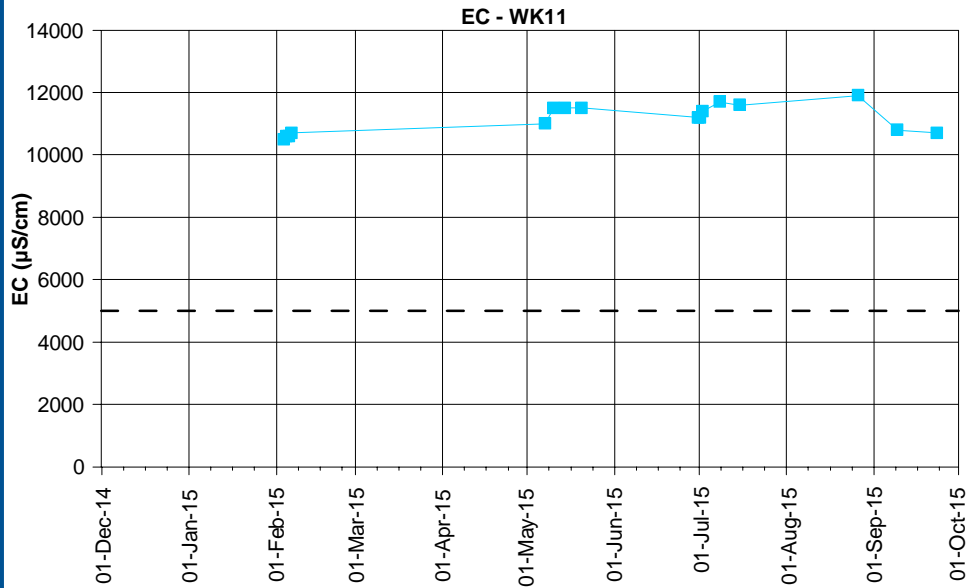

EC 5000 uS/cm
 WK11 concentration
 WK12 concentration

WK13 concentration
 WK14 concentration

Figure E1.5: Laboratory electrical conductivity (EC) measurements at the Waukivory pilot wells

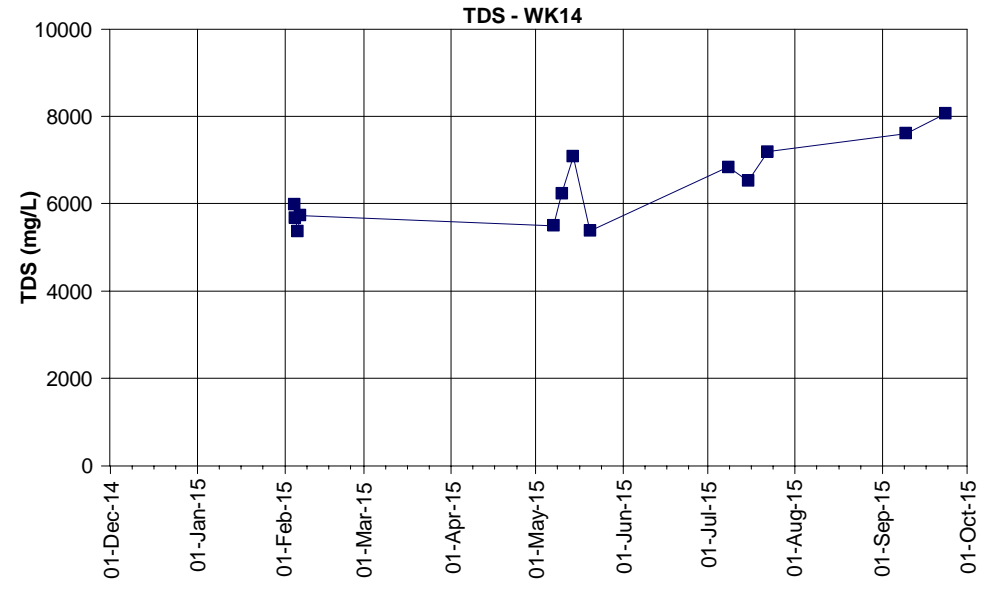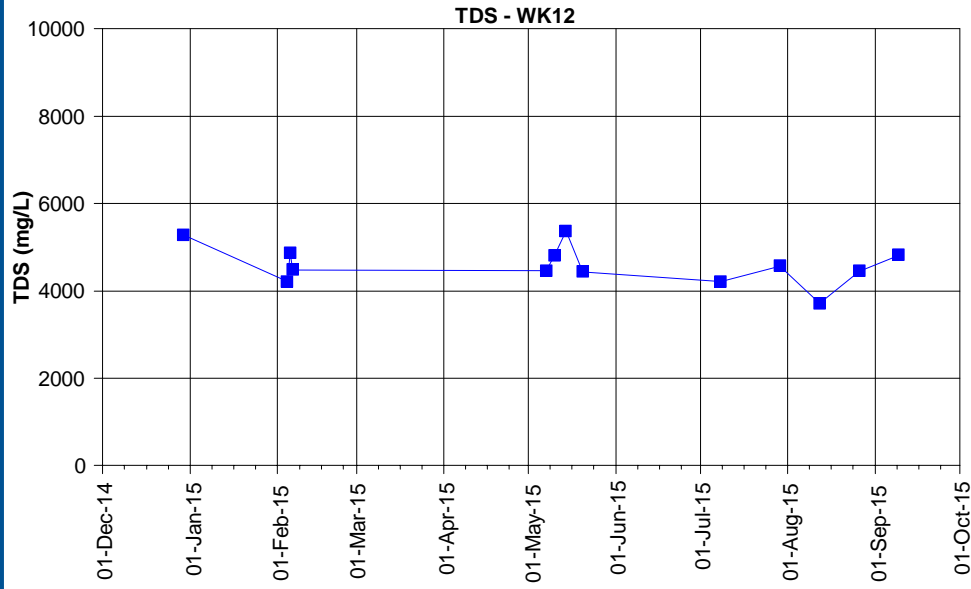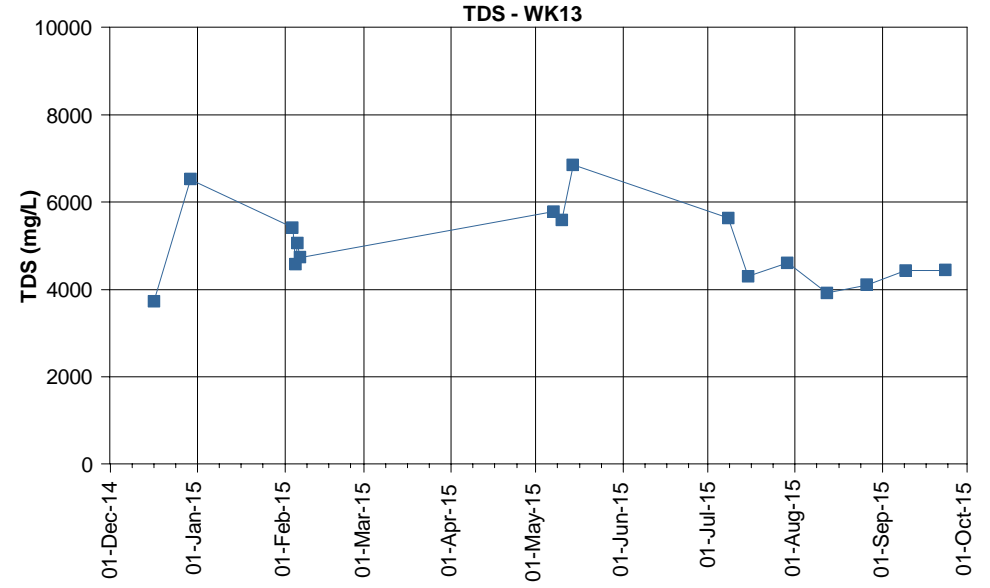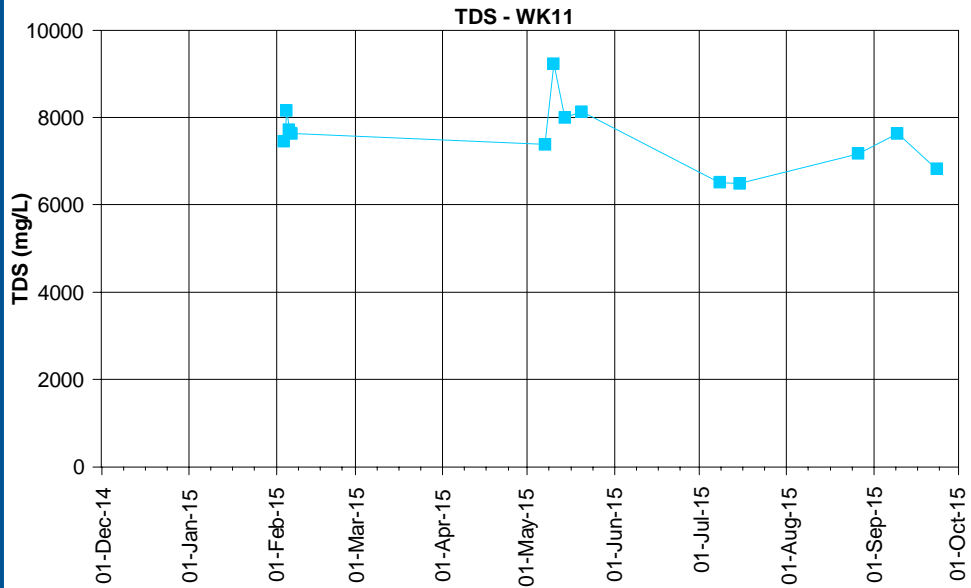

■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E1.6: Laboratory total dissolved solids (TDS) measurements at the Waukivory pilot wells

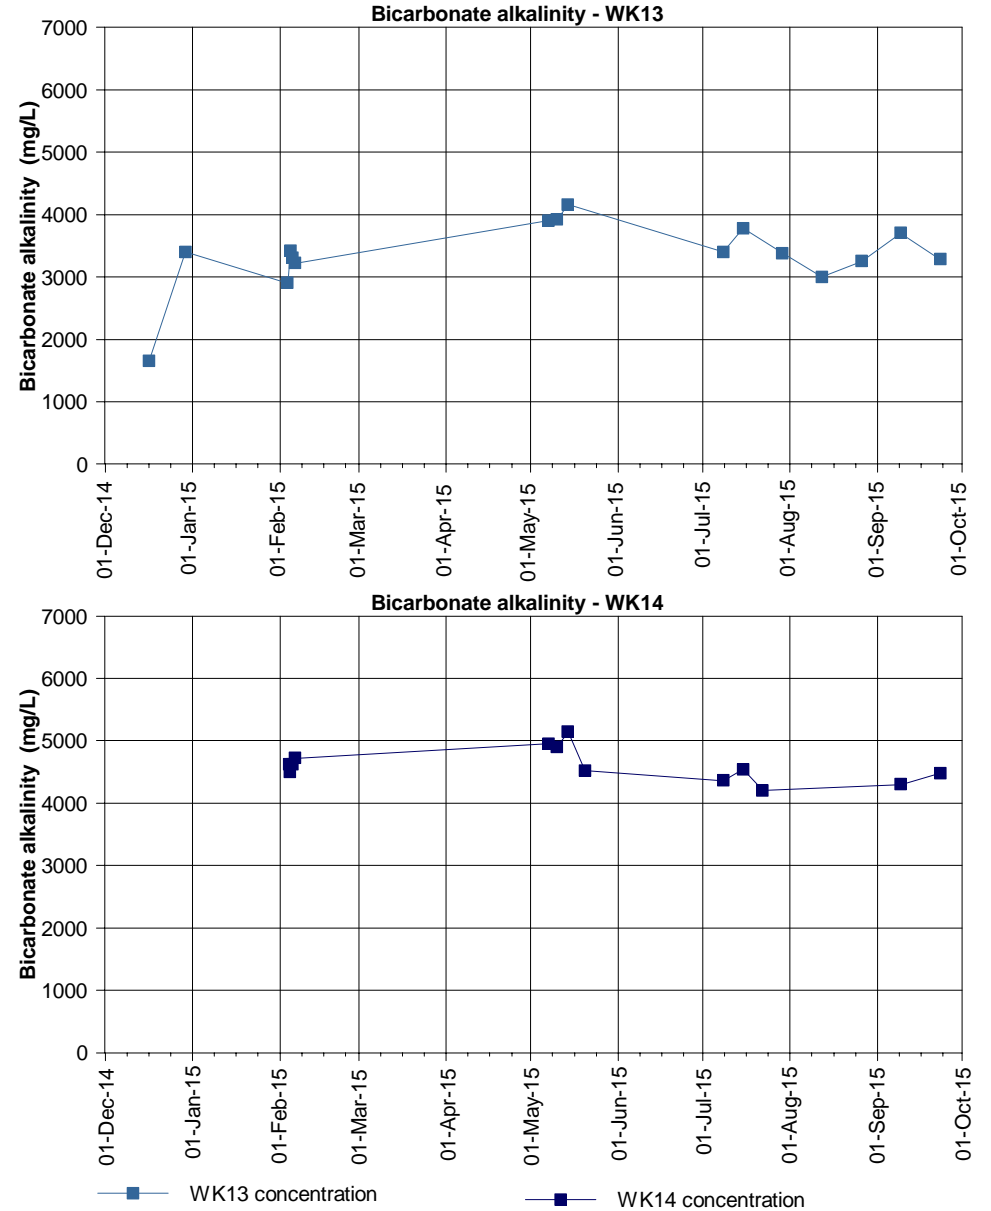
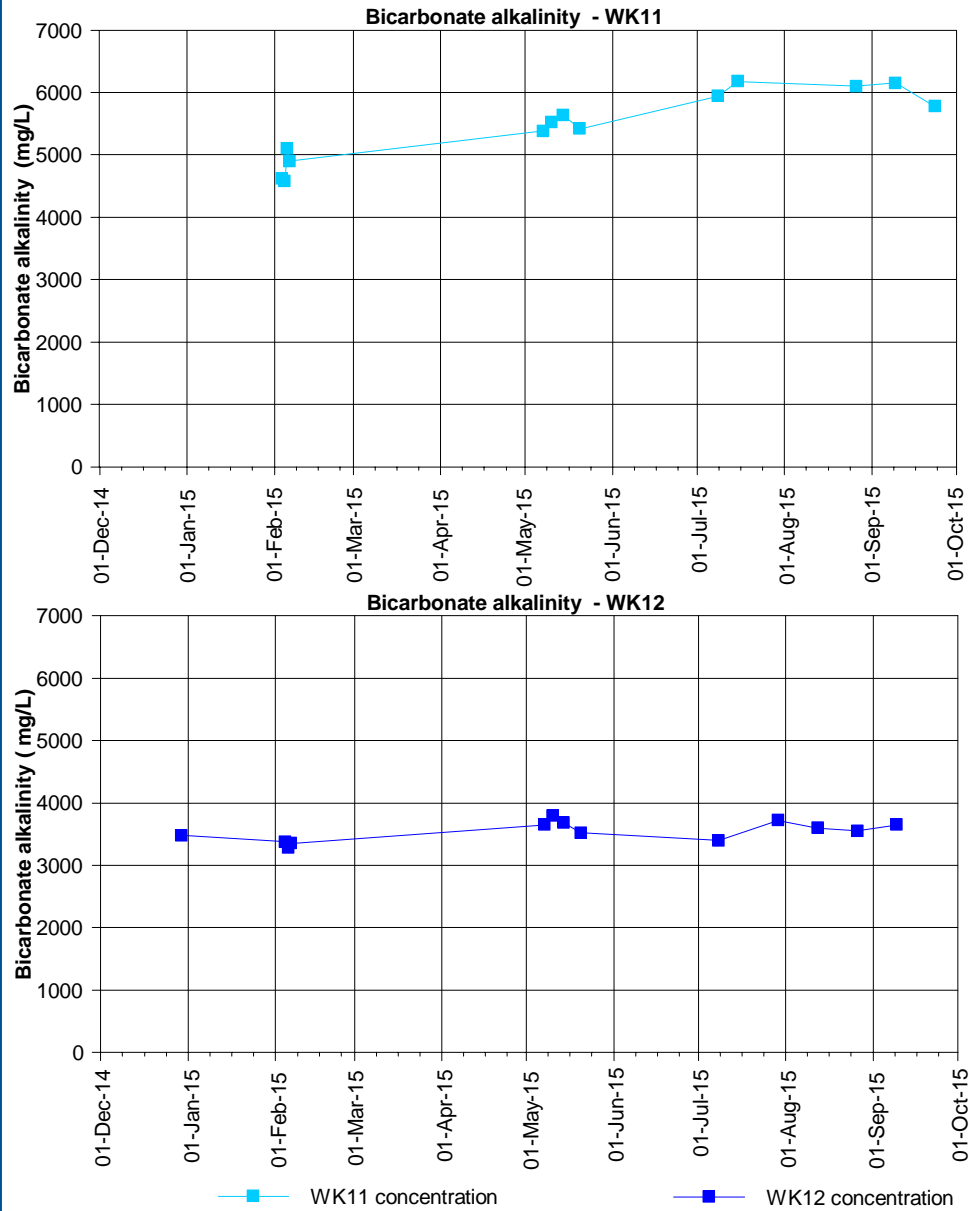


Figure E2.1: Bicarbonate alkalinity concentrations at the Waukivory pilot wells

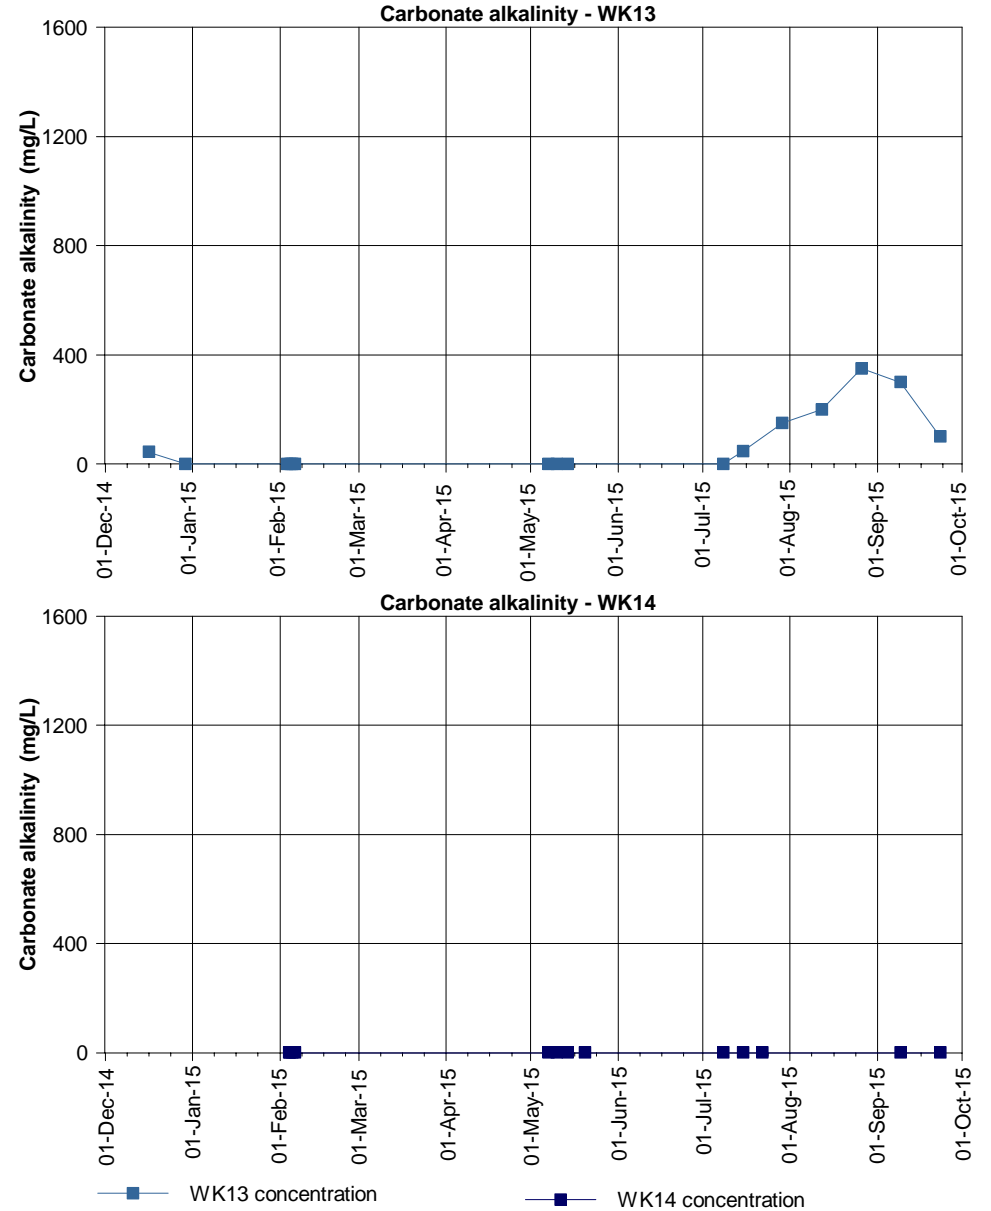
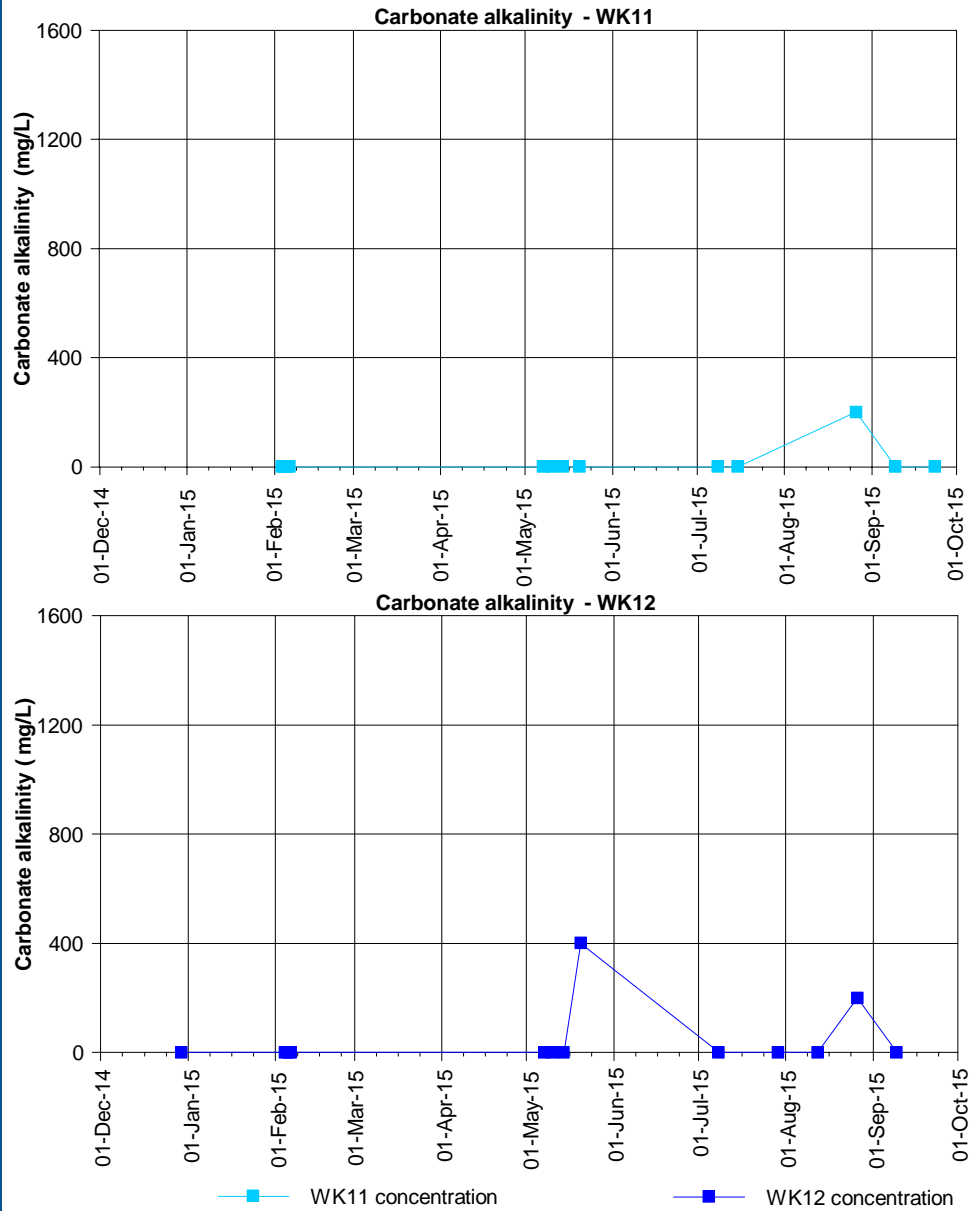


Figure E2.2: Carbonate alkalinity concentrations at the Waukivory pilot wells

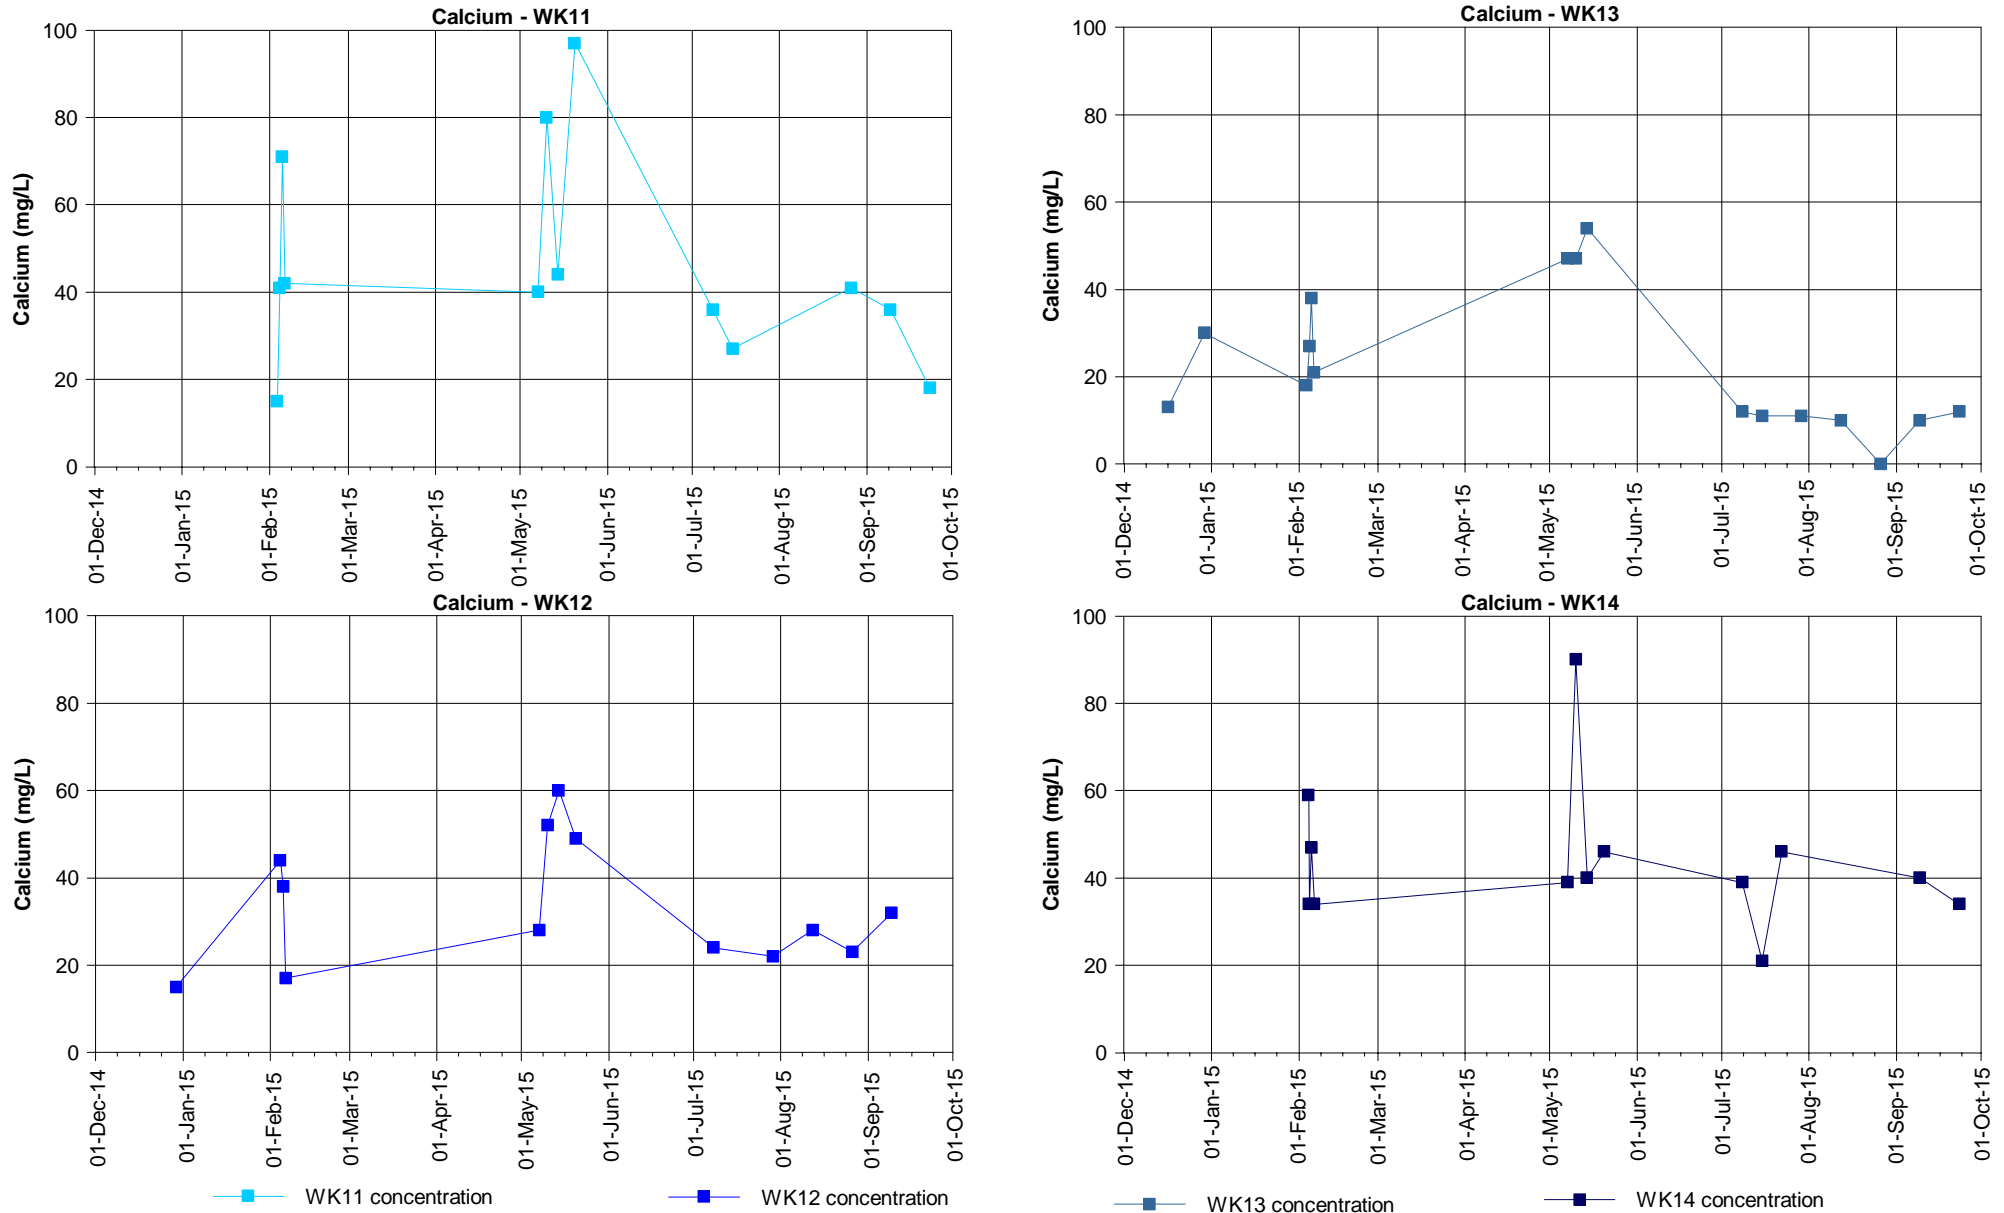


Figure E2.3: Calcium concentrations at the Waukivory pilot wells






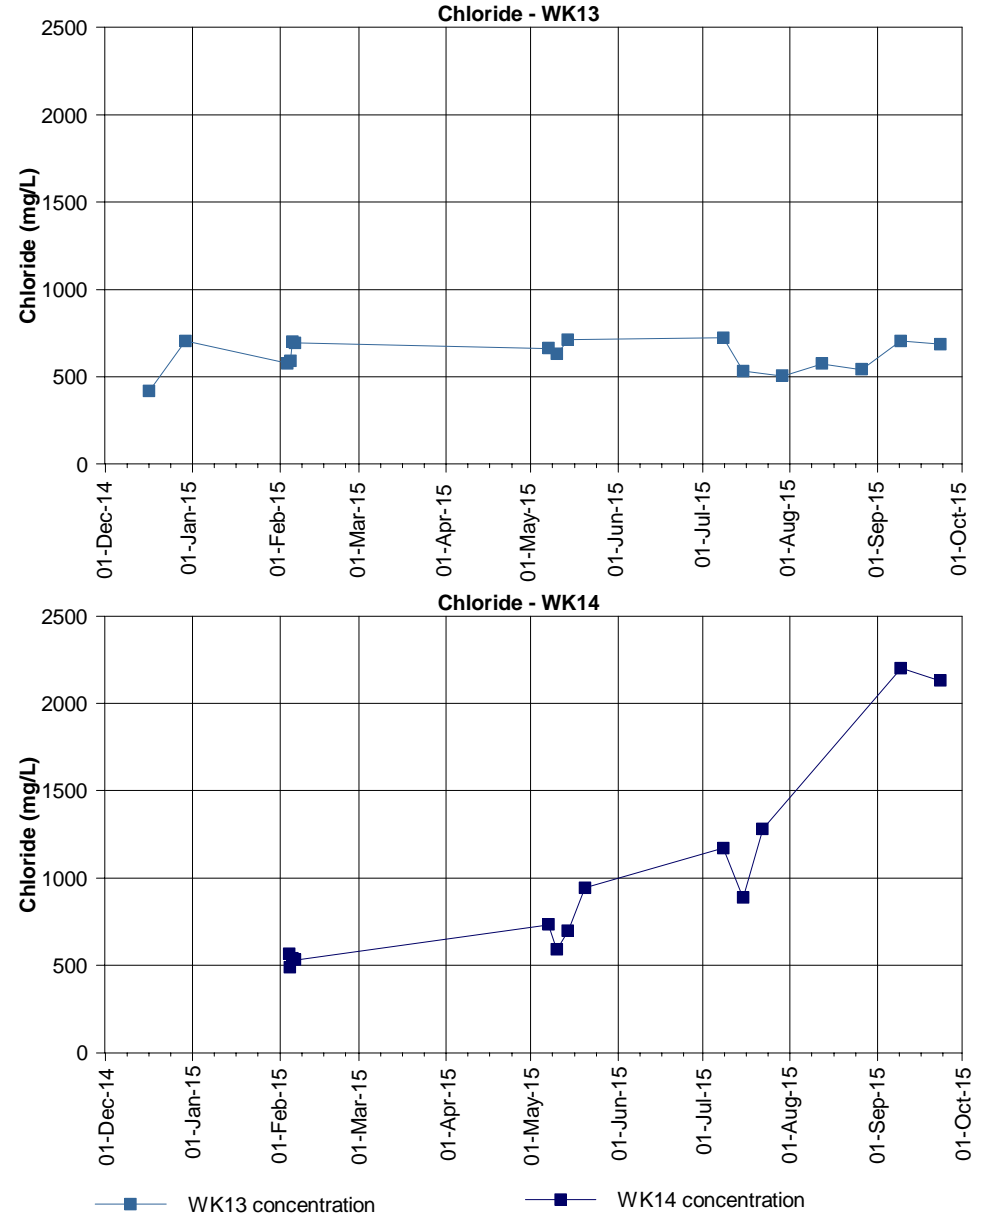


Figure E2.4: Chloride concentrations at the Waukivory pilot wells

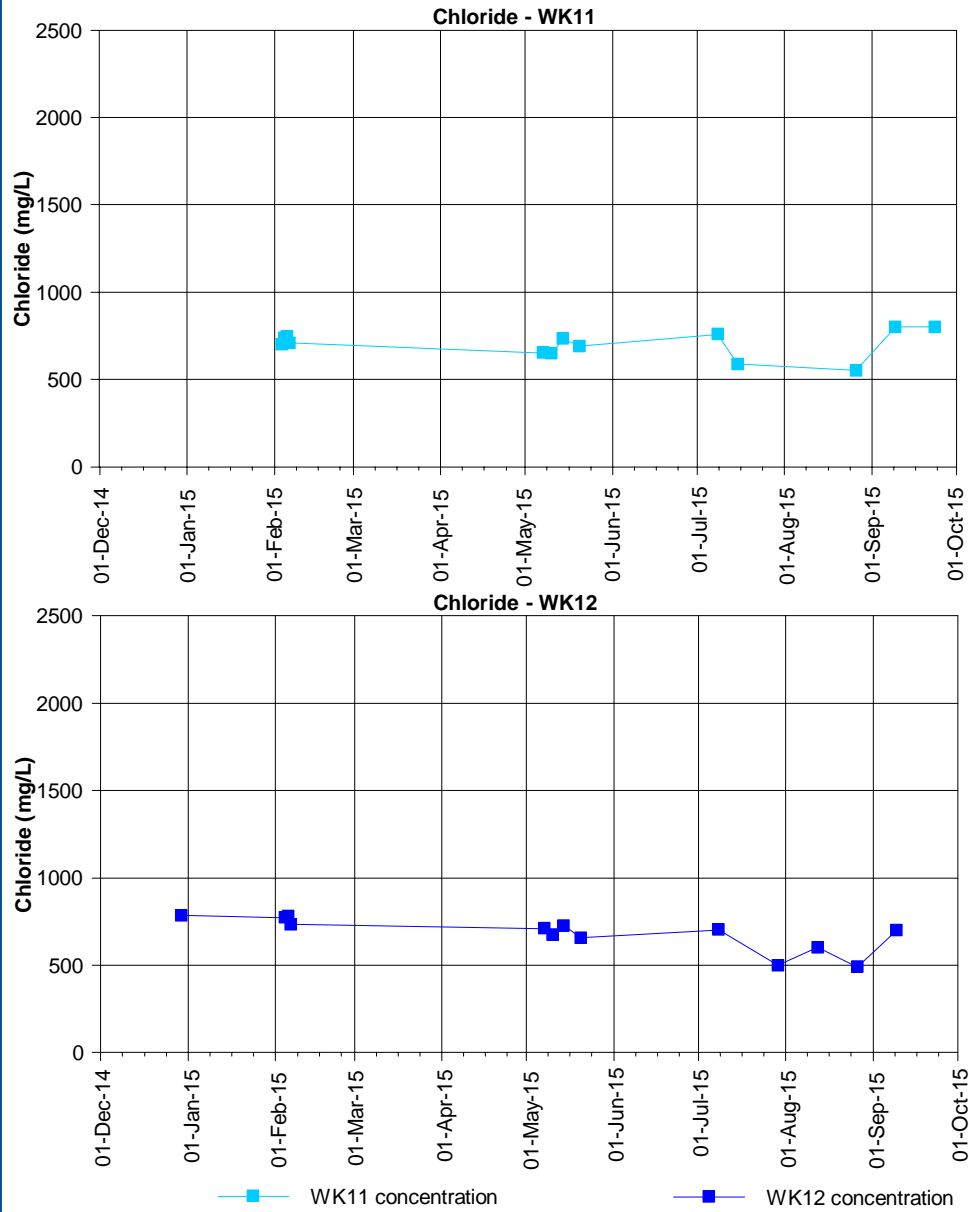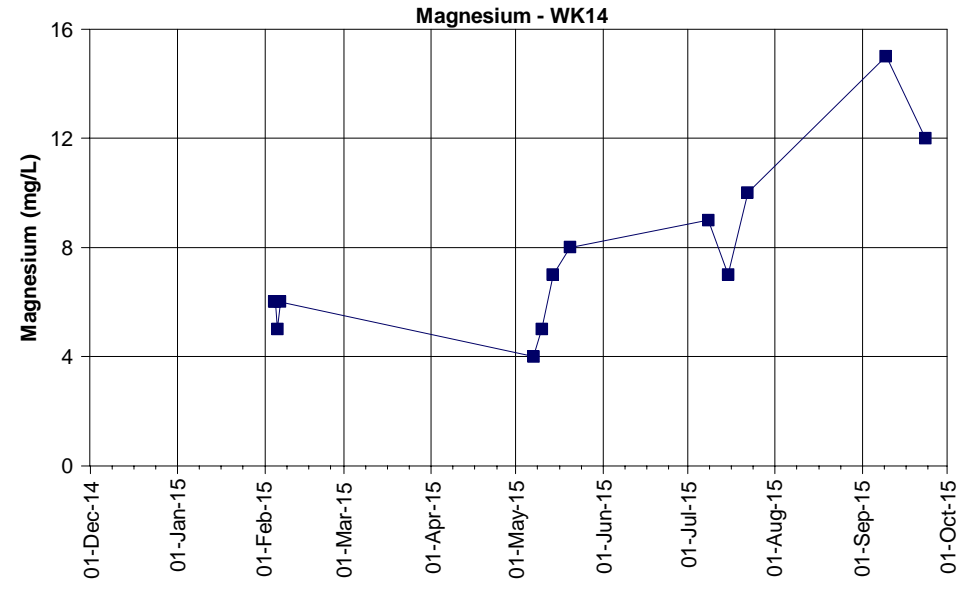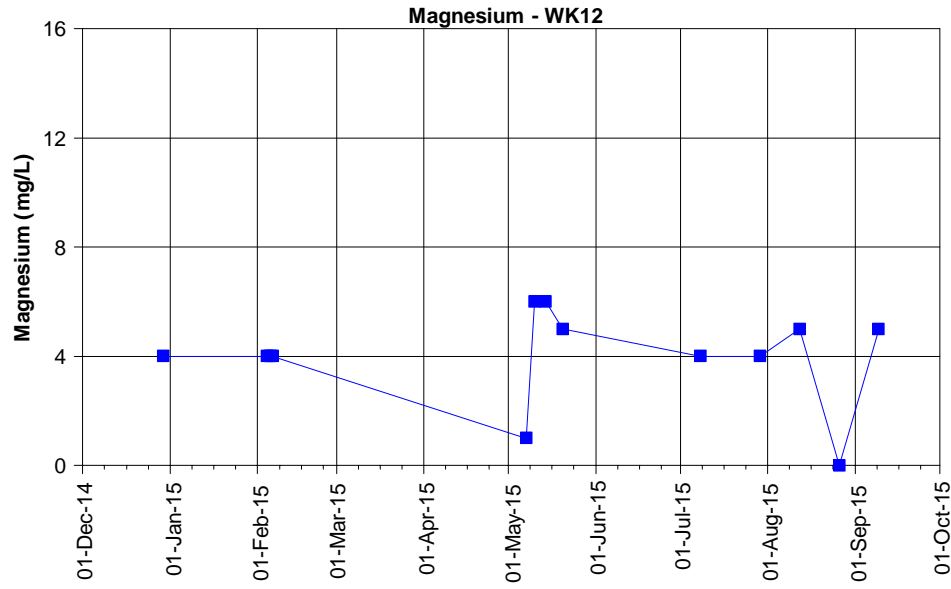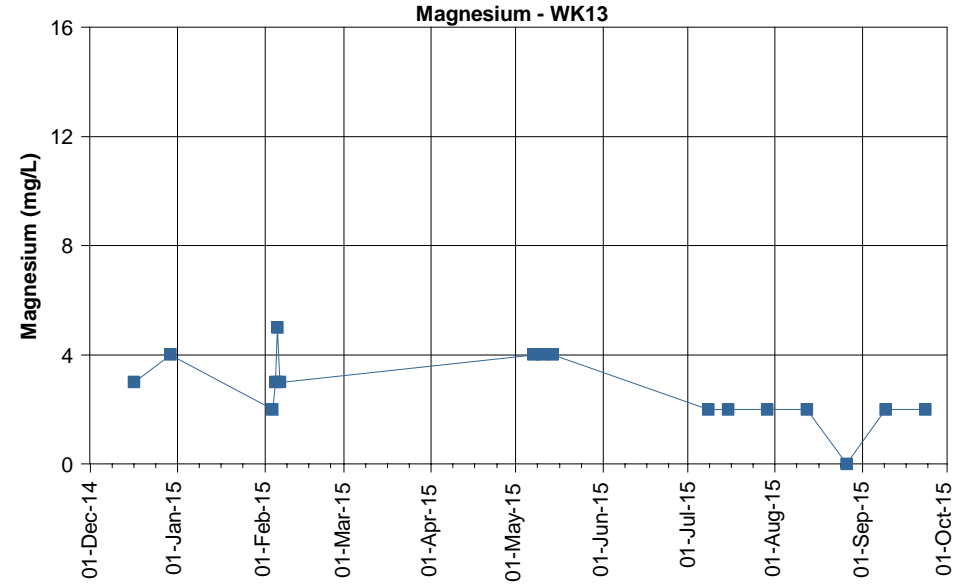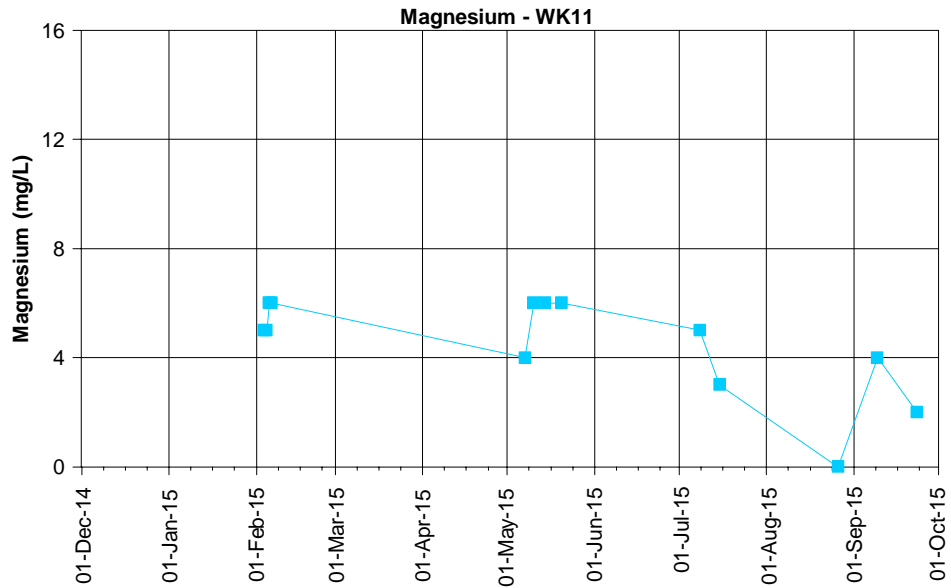





■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E2.5: Magnesium concentrations at the Waukivory pilot wells

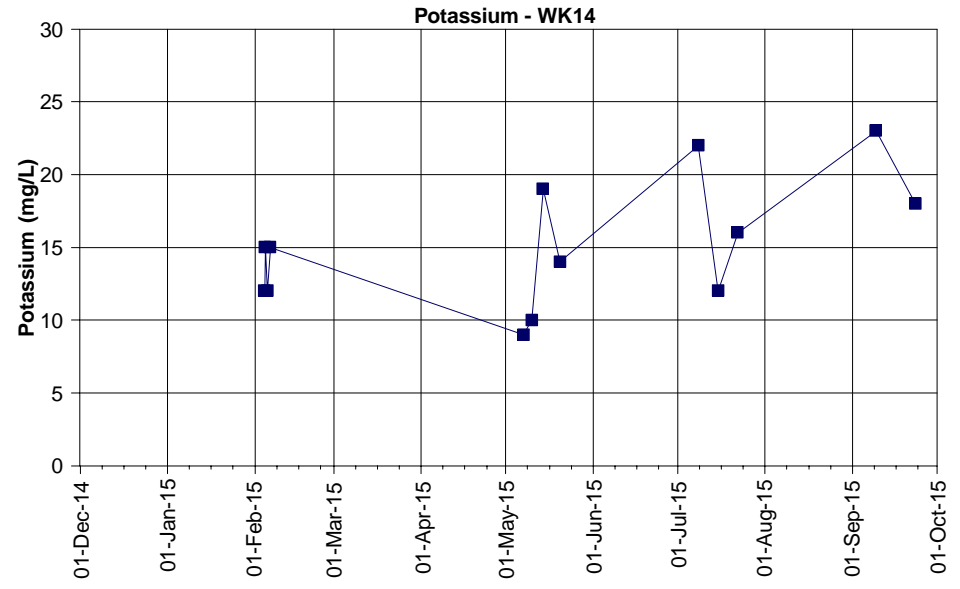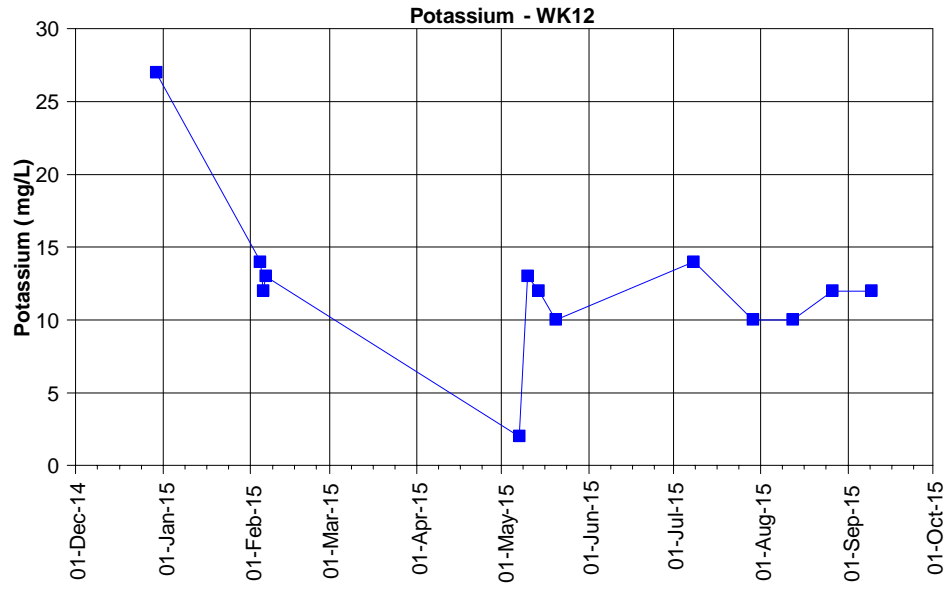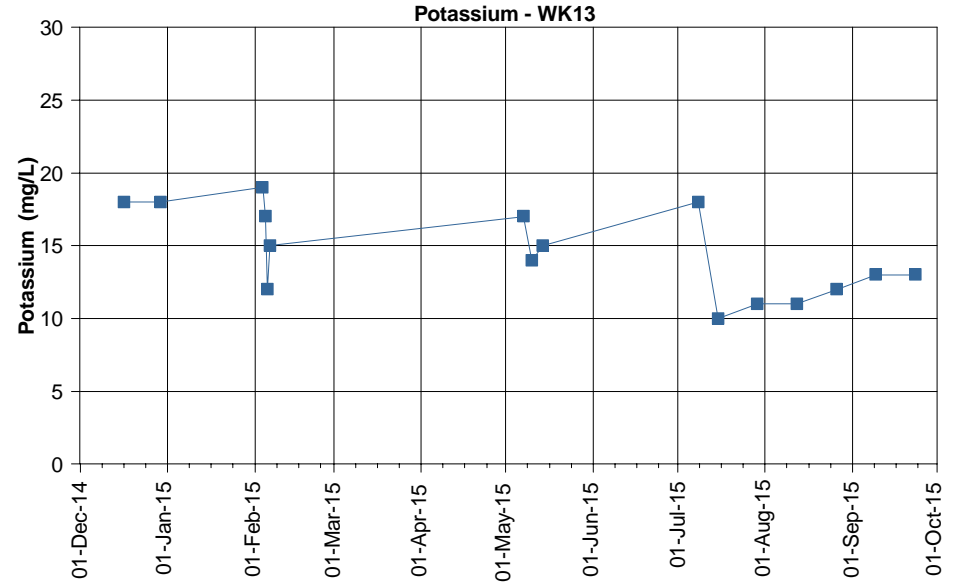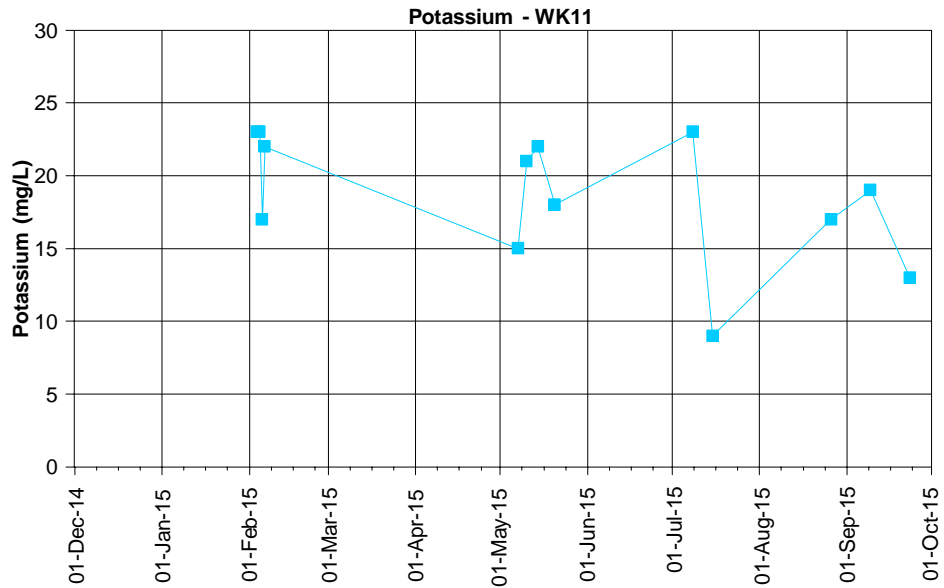

■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E2.6: Potassium concentrations at the Waukivory pilot wells






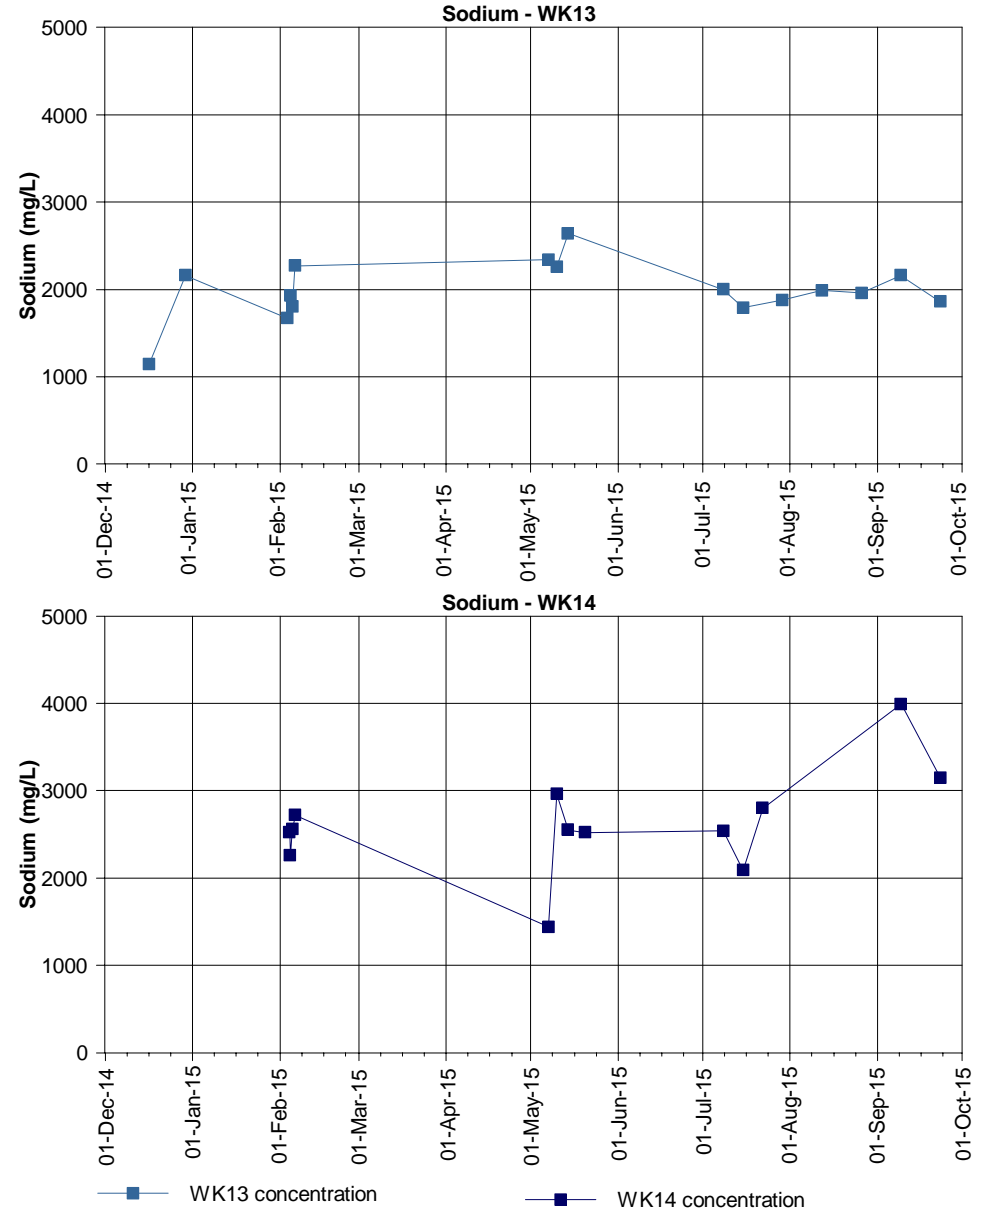


Figure E2.7: Sodium concentrations at the Waukivory pilot wells

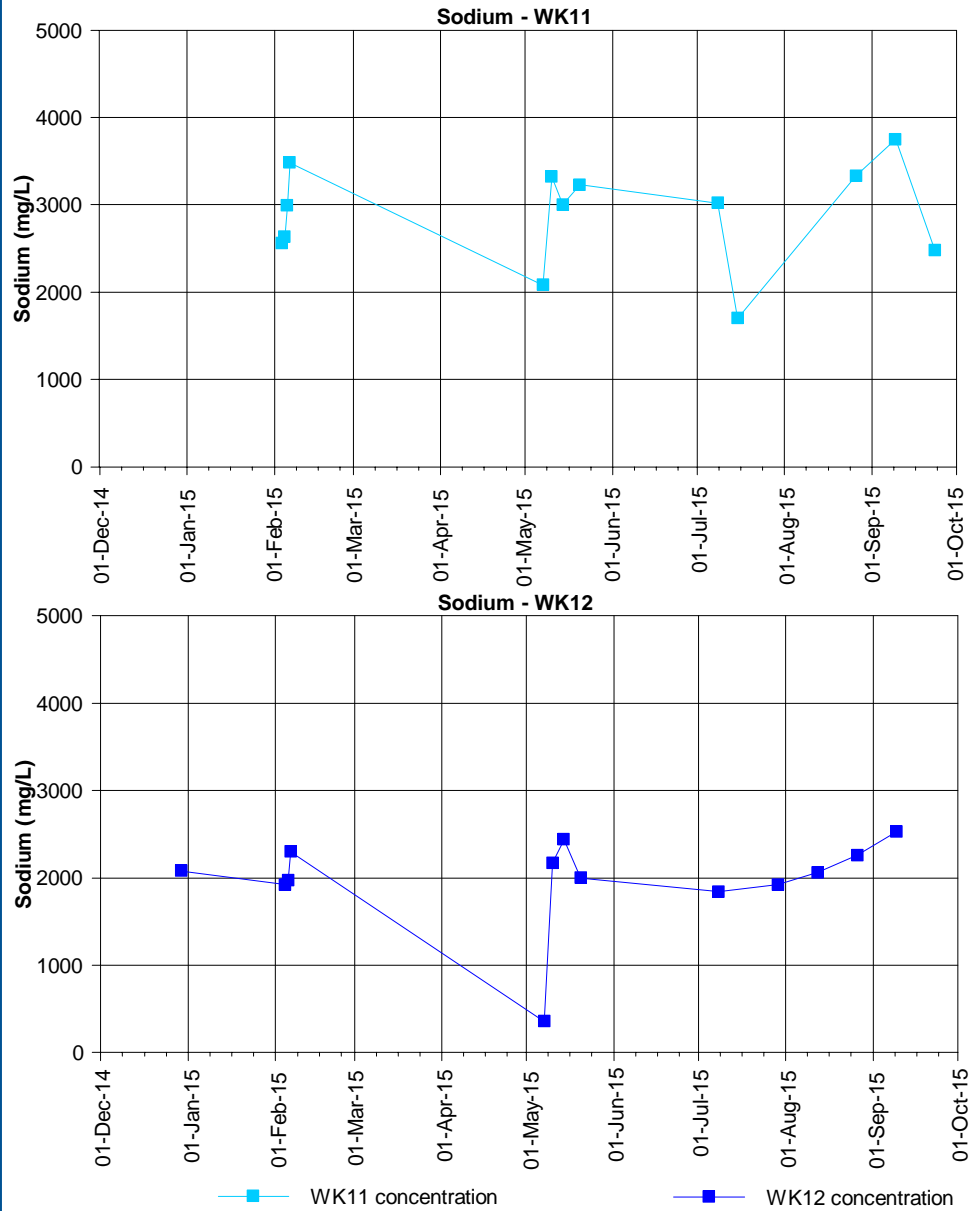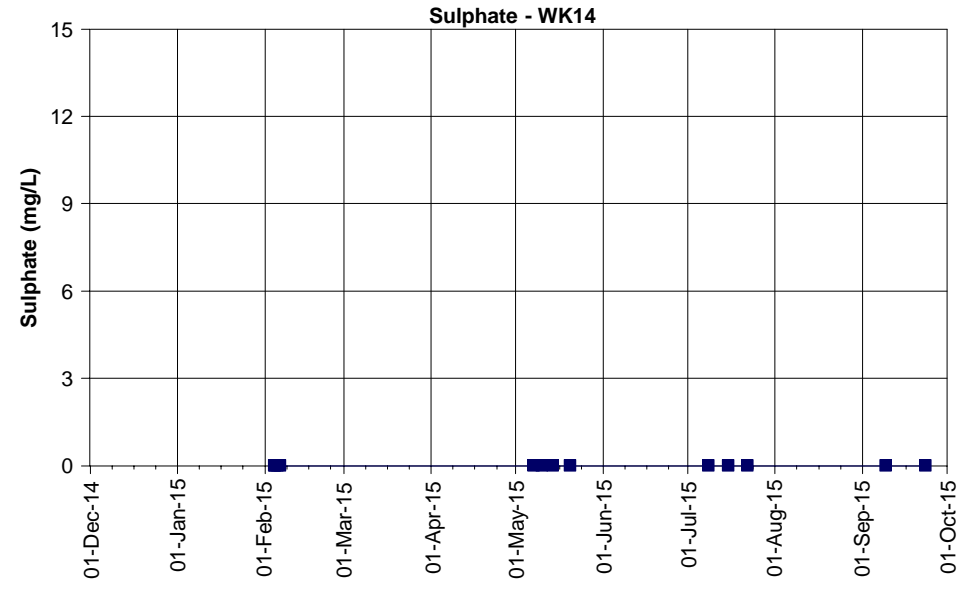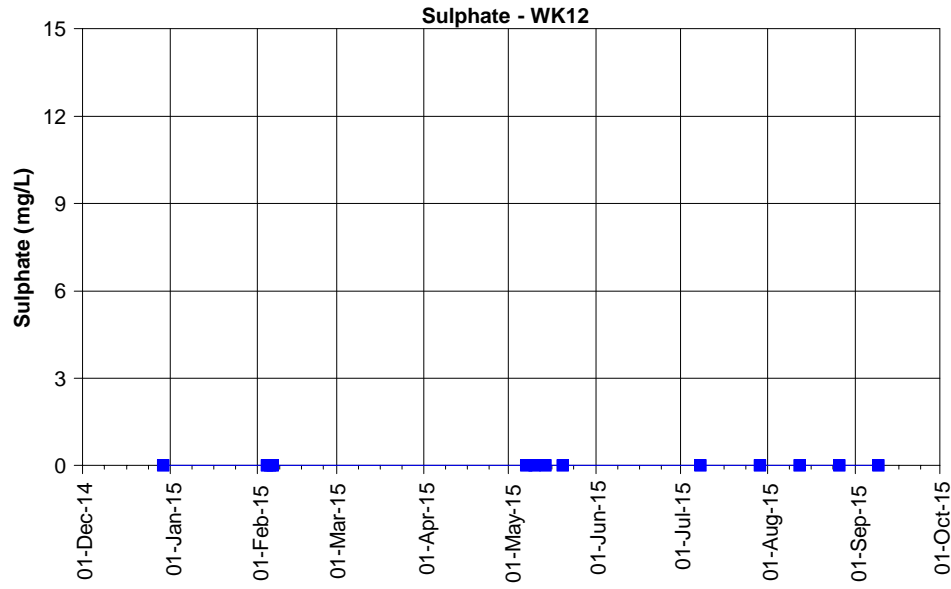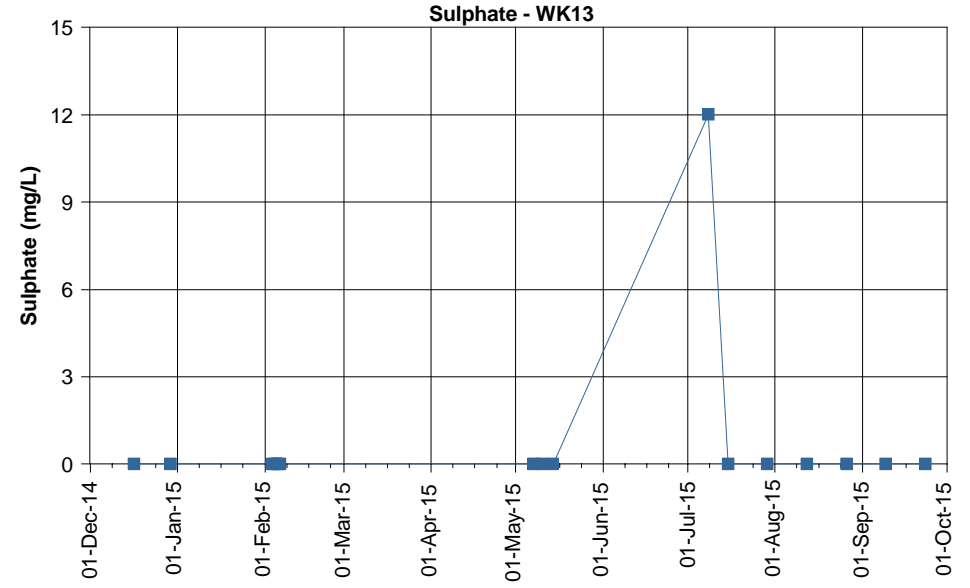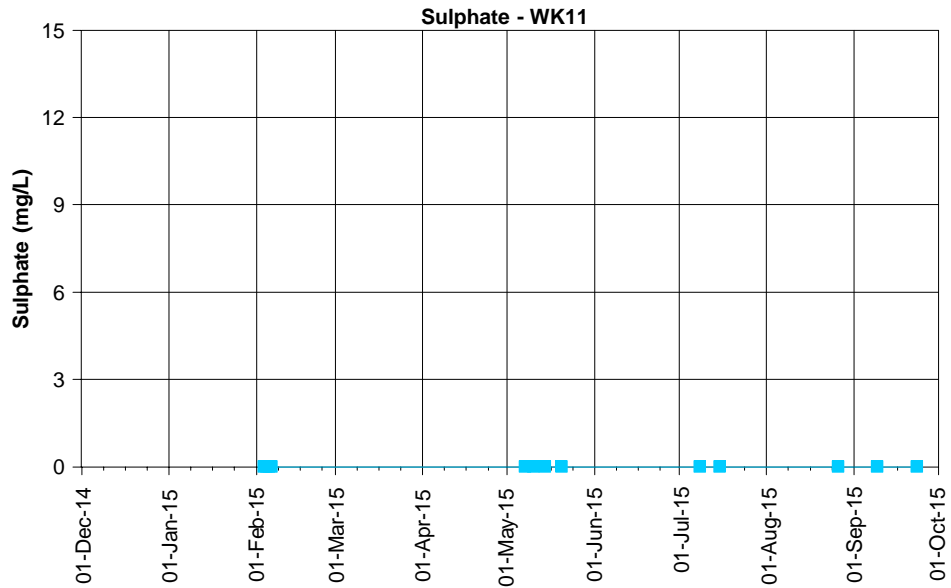





—■— WK11 concentration

—■— WK12 concentration

—■— WK13 concentration





—■— WK14 concentration

Figure E2.8: Sulphate concentrations at the Waukivory pilot wells

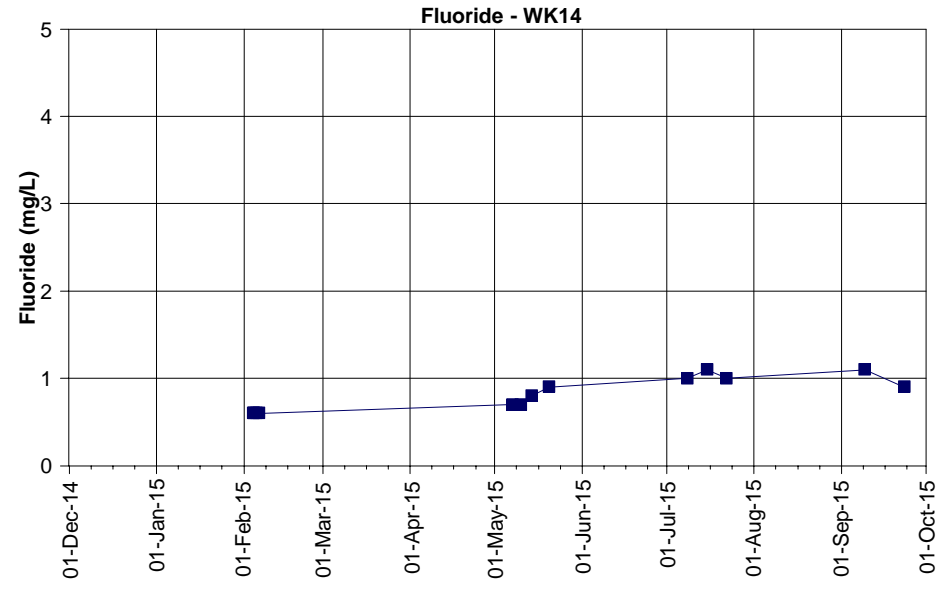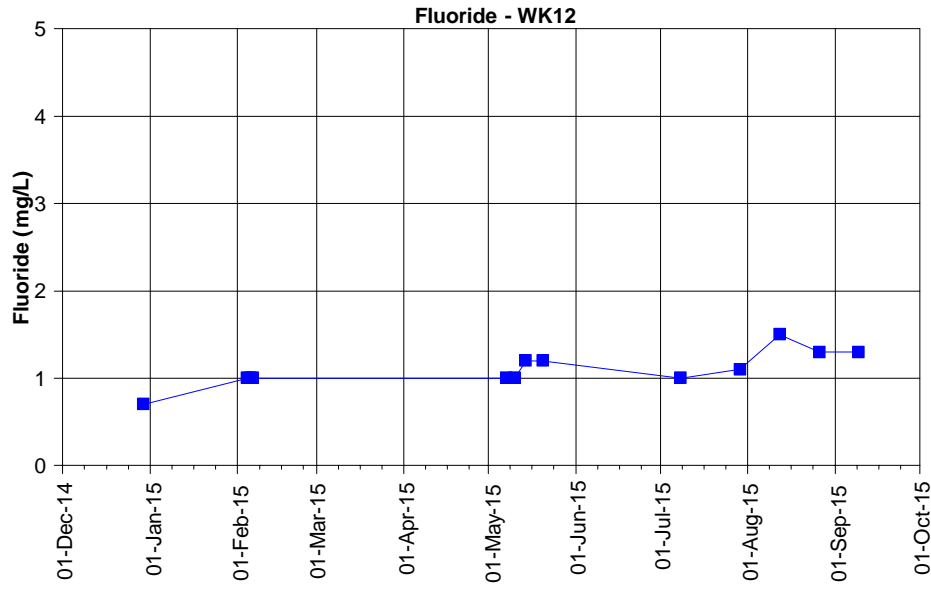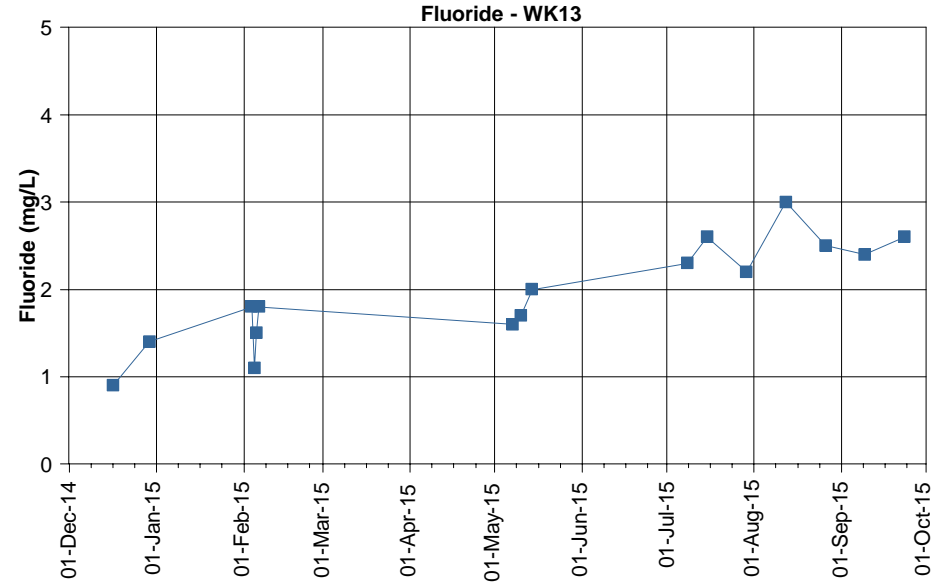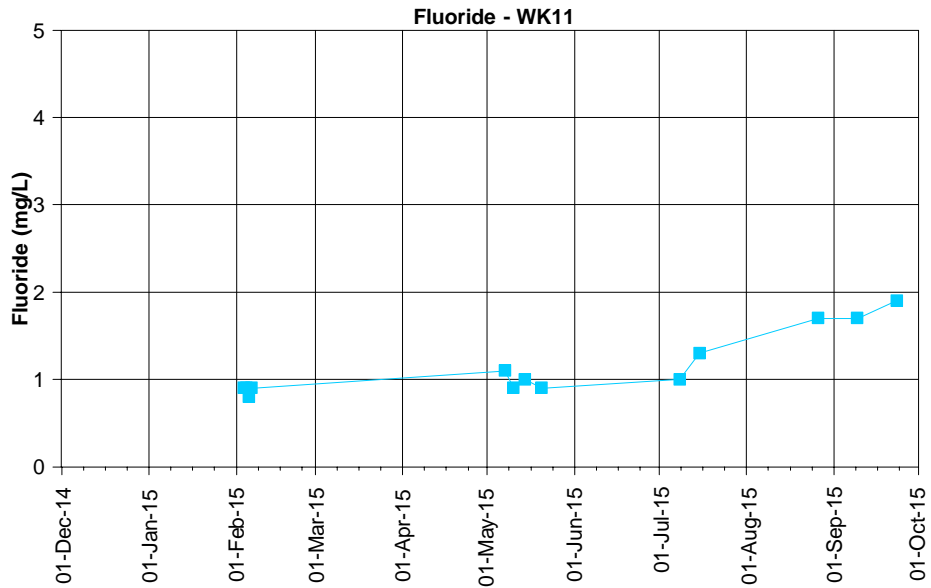

■ WK11 concentration
 ■ WK12 concentration
 ■ WK13 concentration
 ■ WK14 concentration

Figure E2.9: Fluoride concentrations at the Waukivory pilot wells

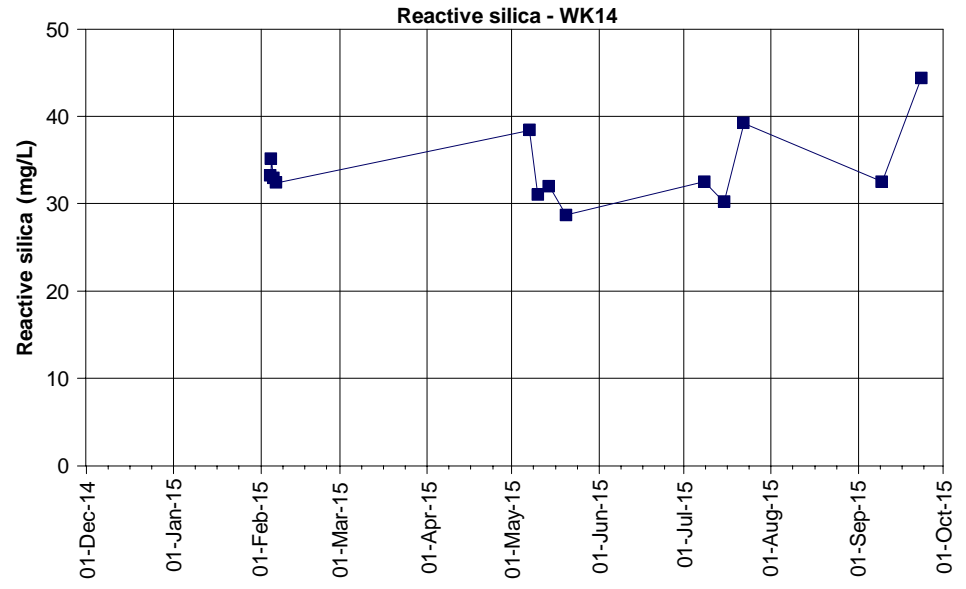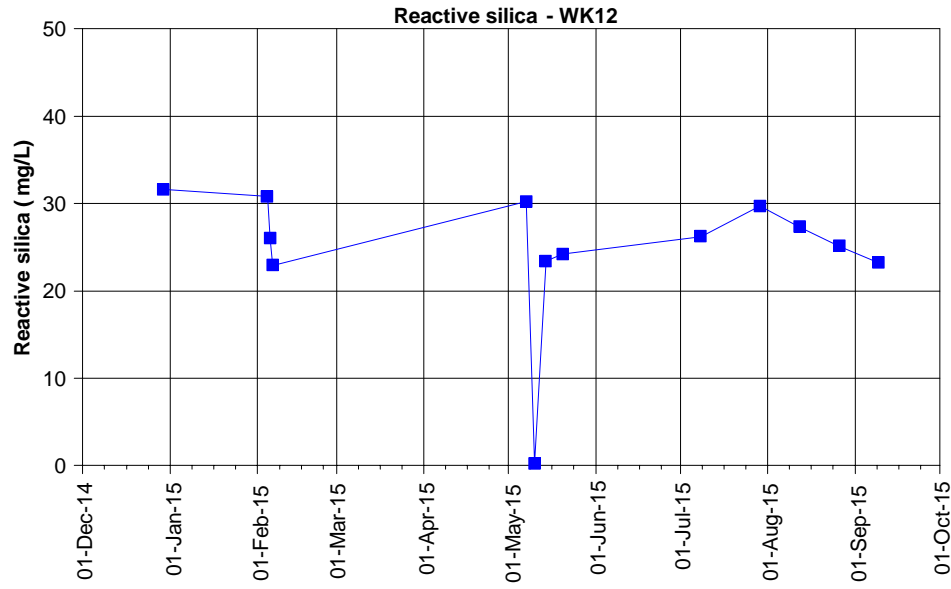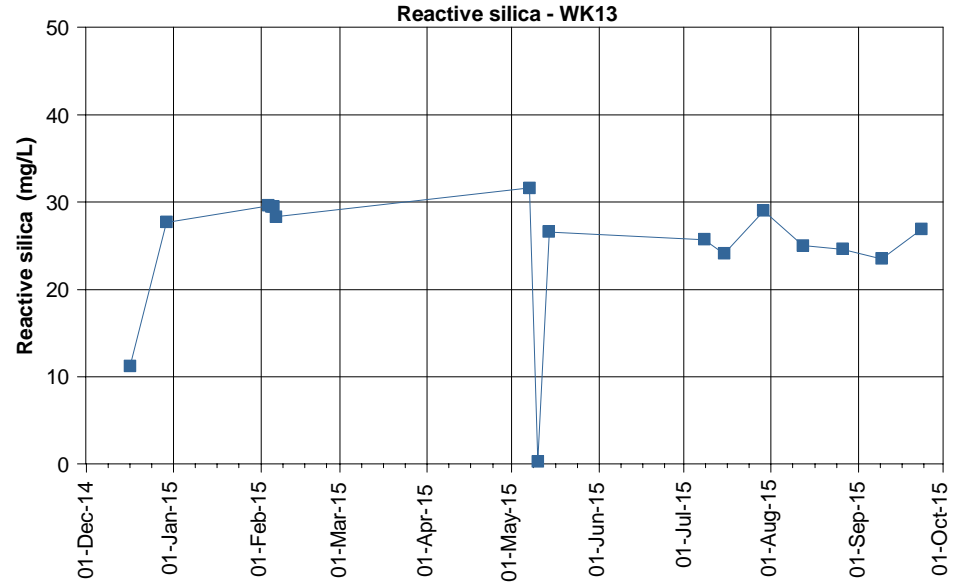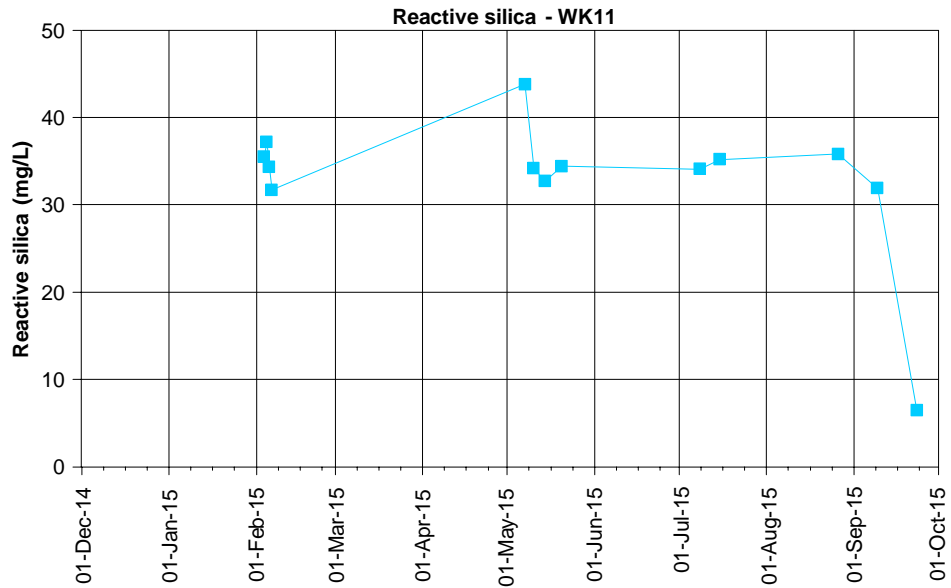

■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E2.10: Reactive silica concentrations at the Waukivory pilot wells

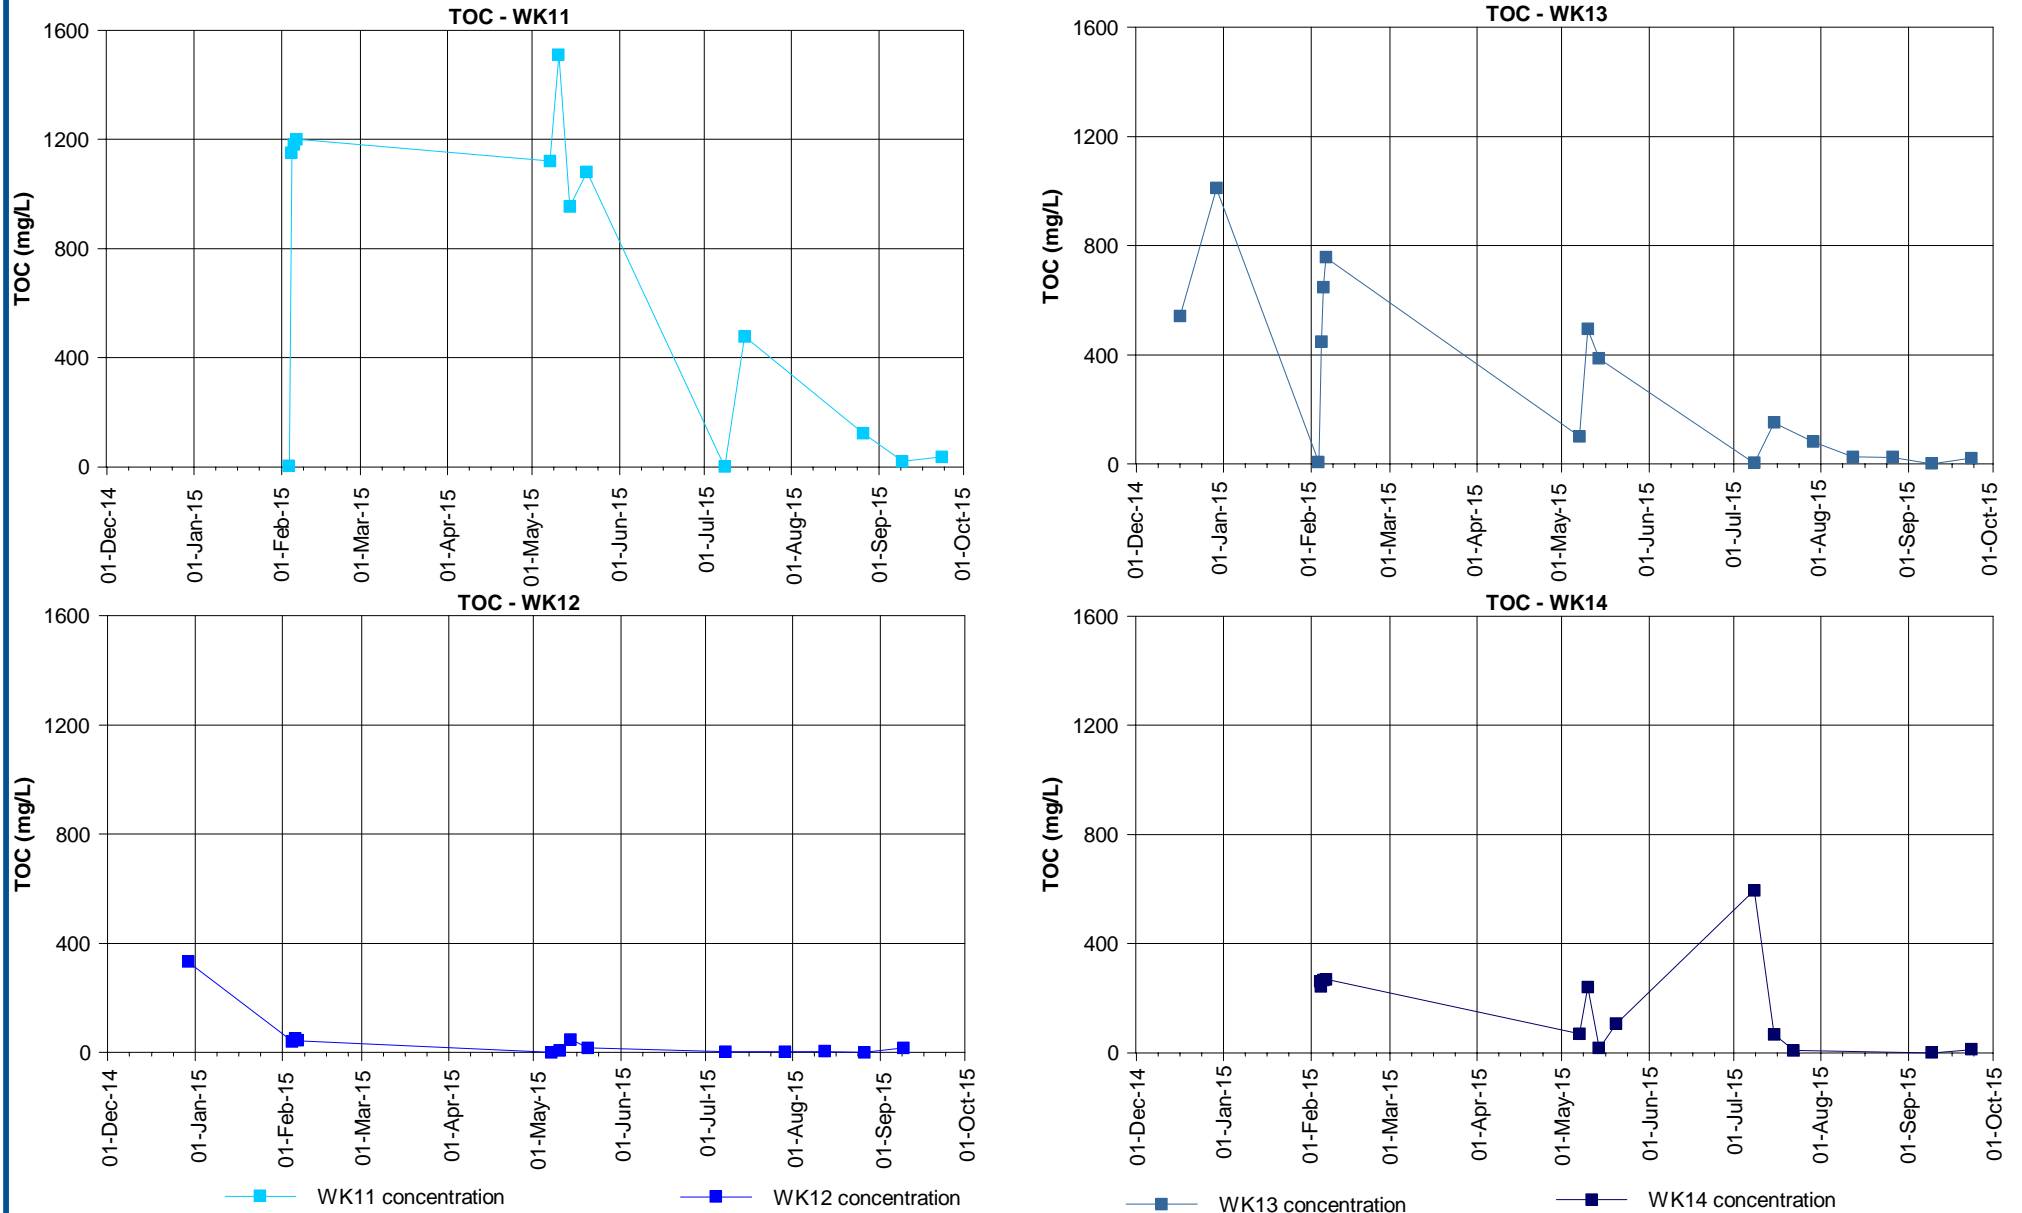


Figure E2.11: Total organic carbon (TOC) concentrations at the Waukivory pilot wells








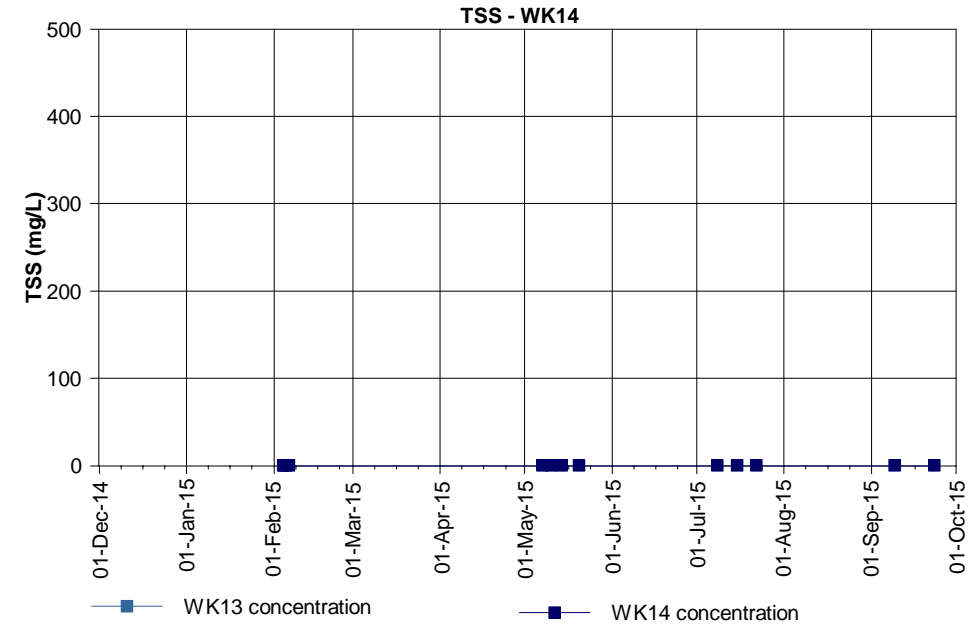


Figure E2.12: Total Suspended Solids at the Waukivory pilot wells

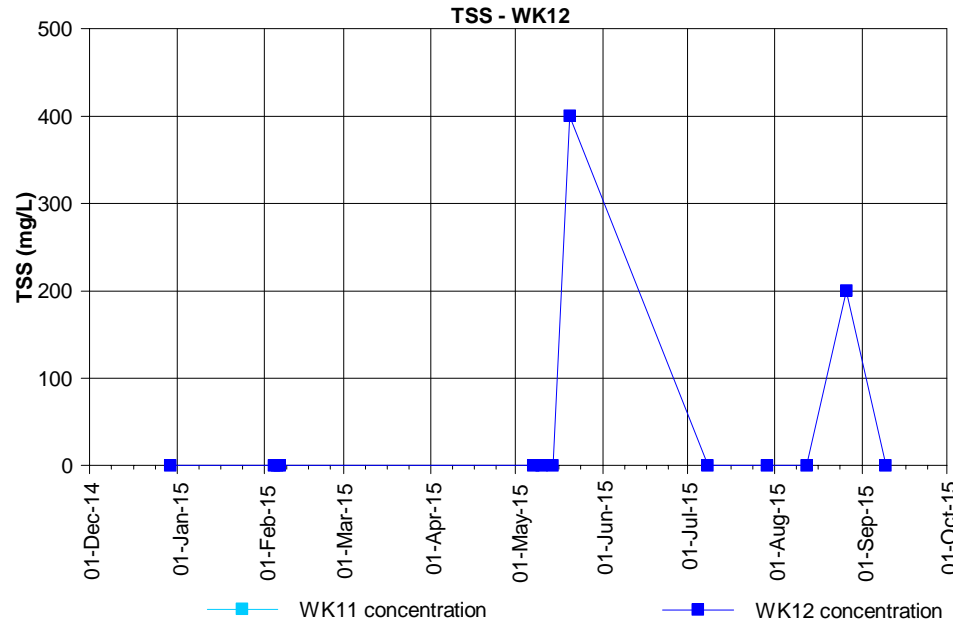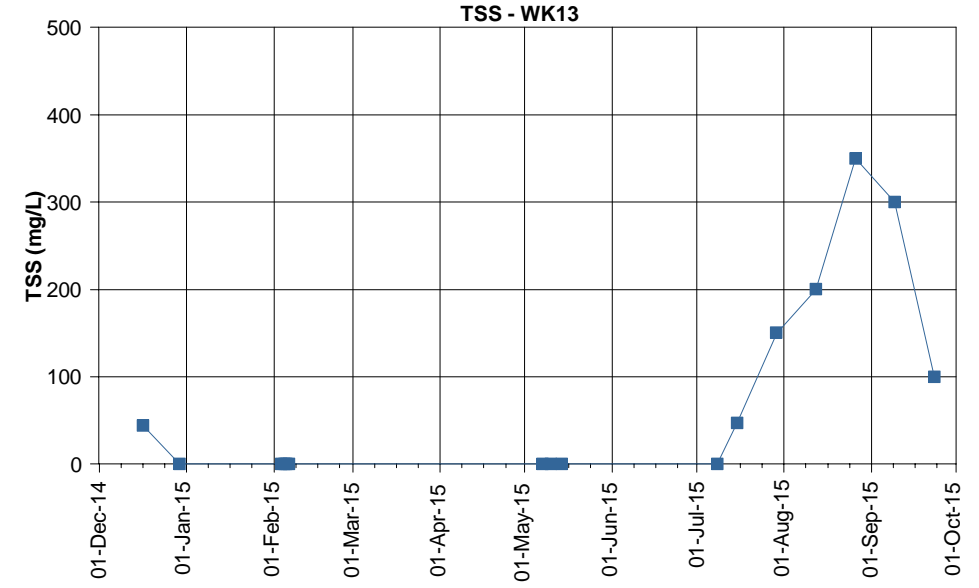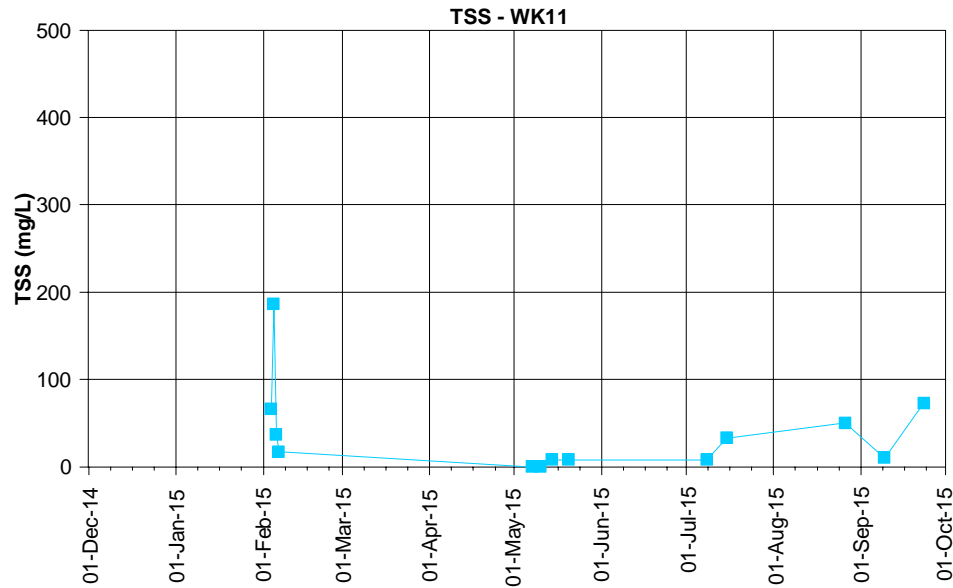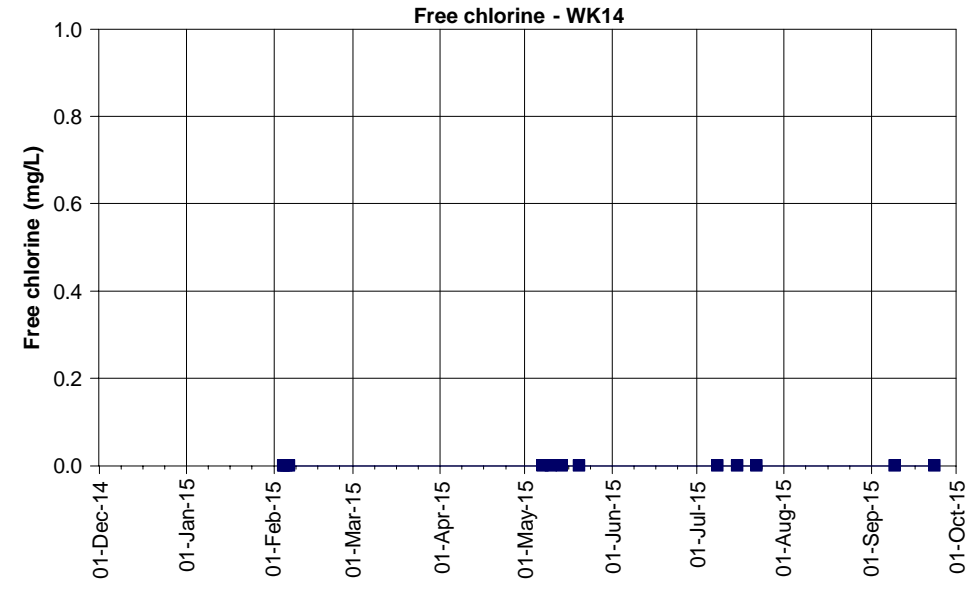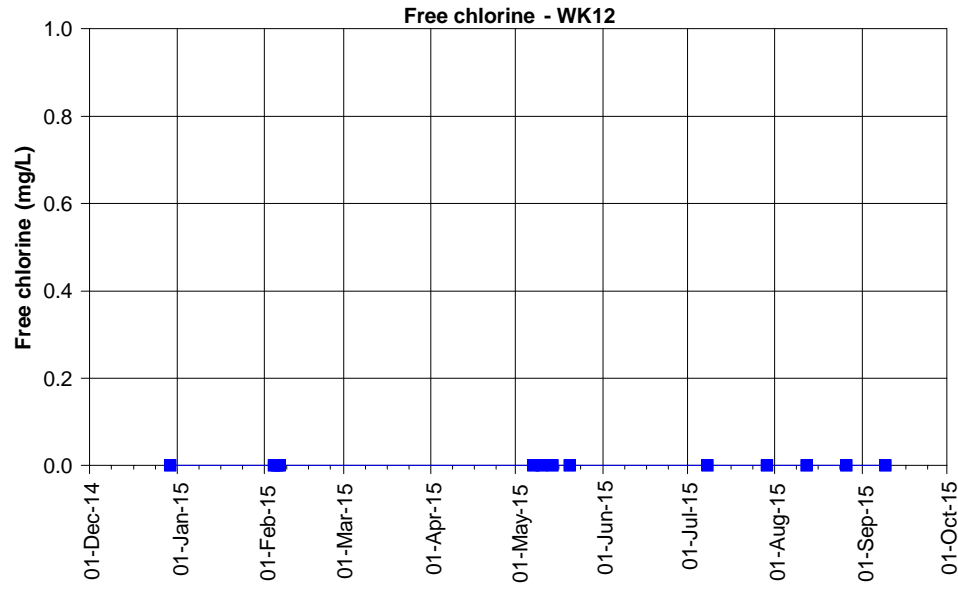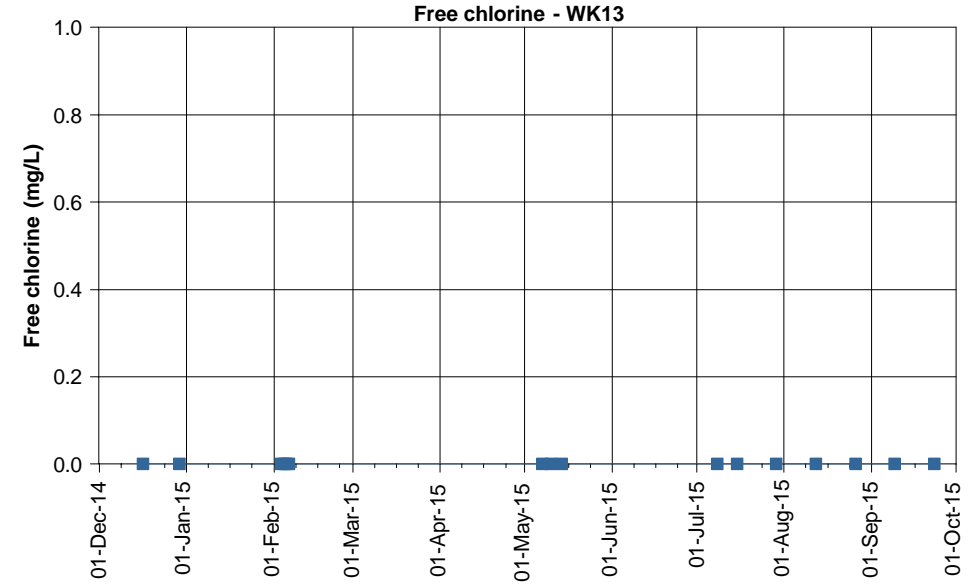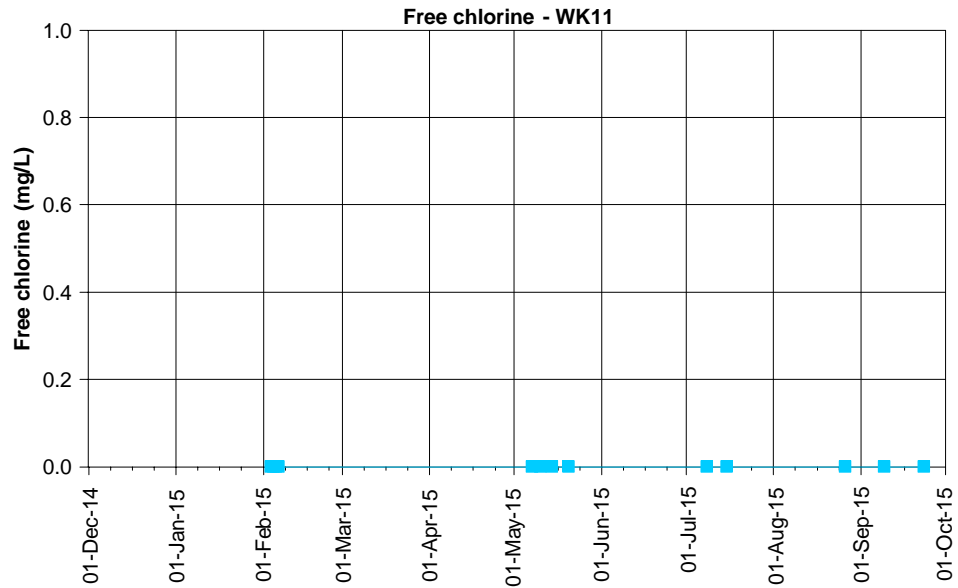





■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E2.13: Laboratory measurements of free chlorine at the Waukivory pilot wells

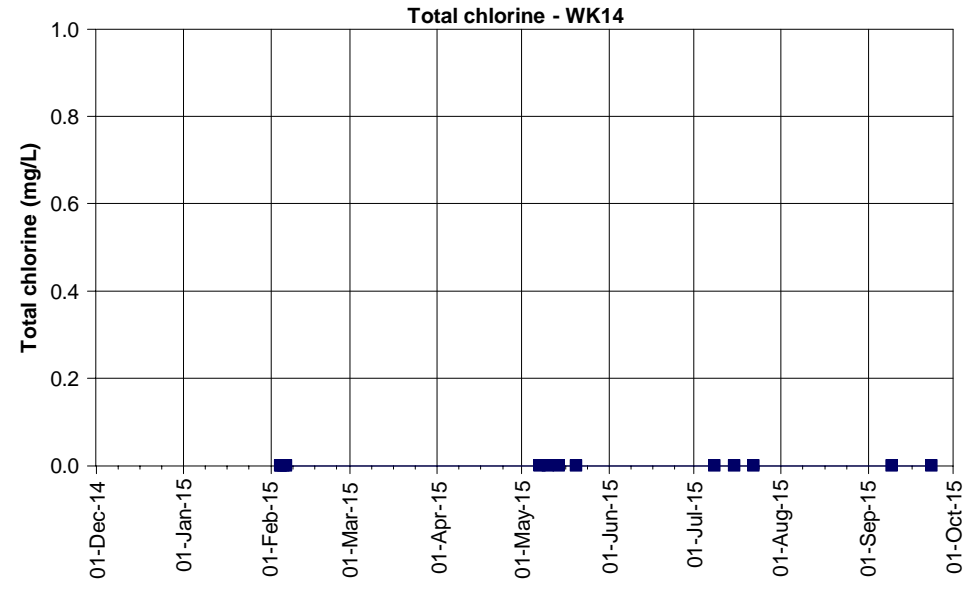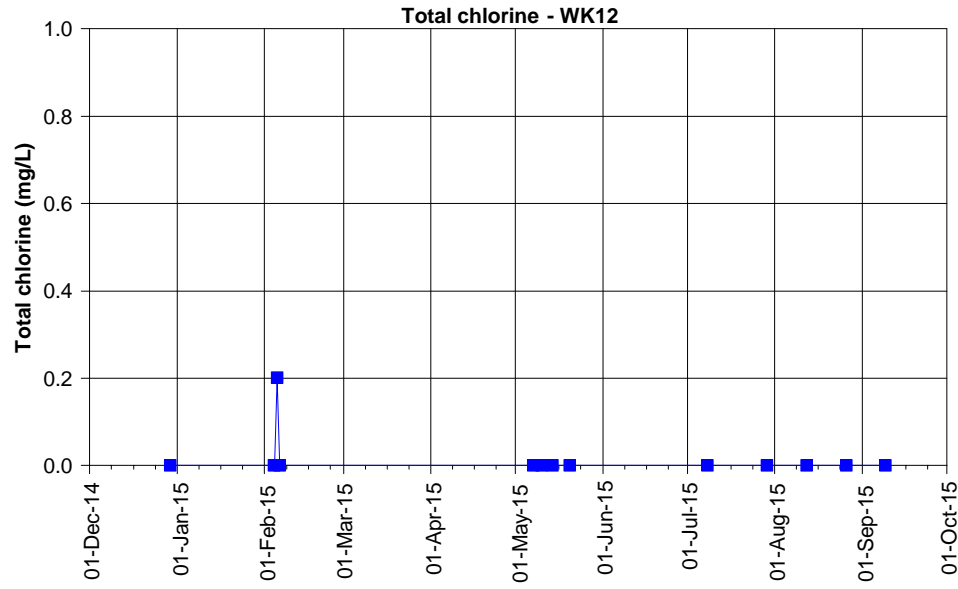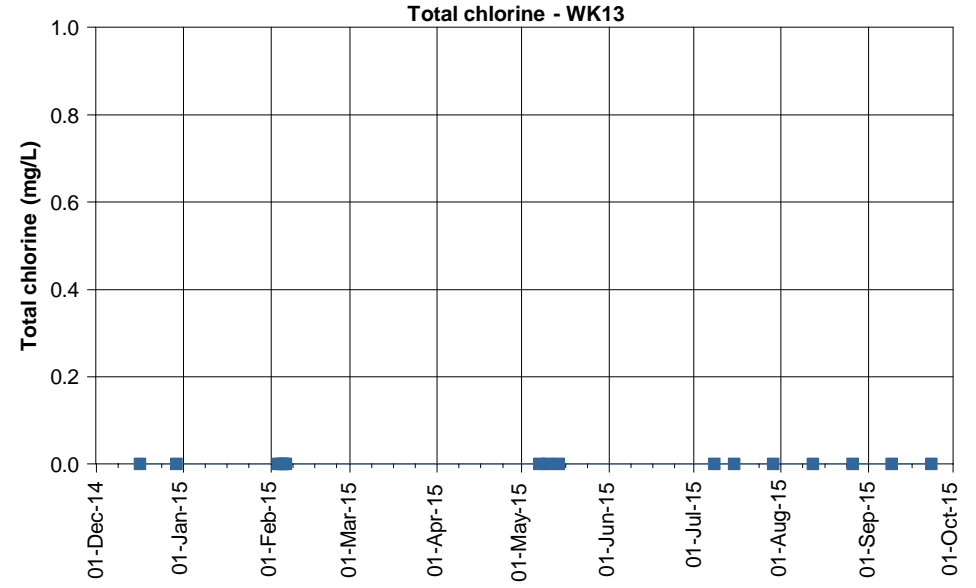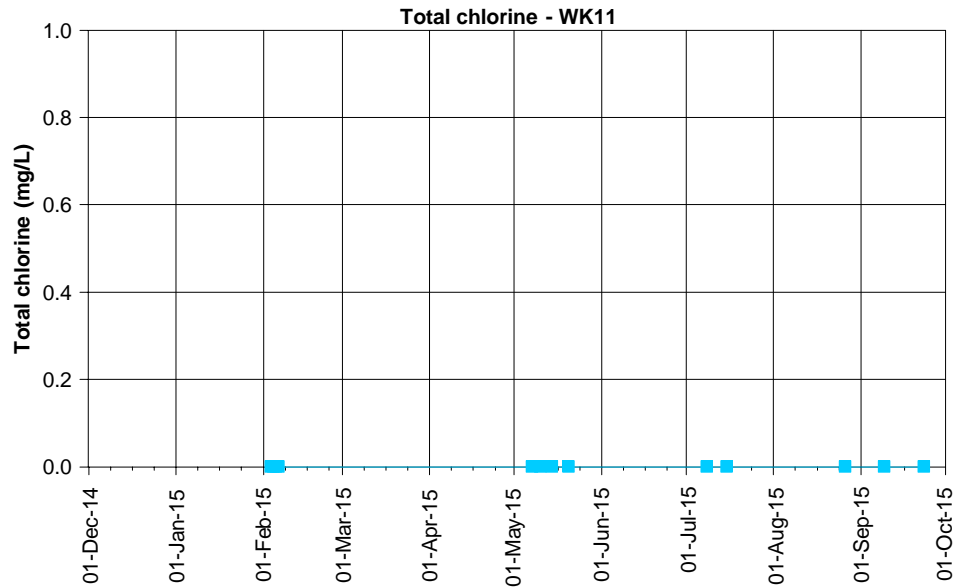

■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E2.14: Laboratory measurements of total chlorine at the Waukivory pilot wells






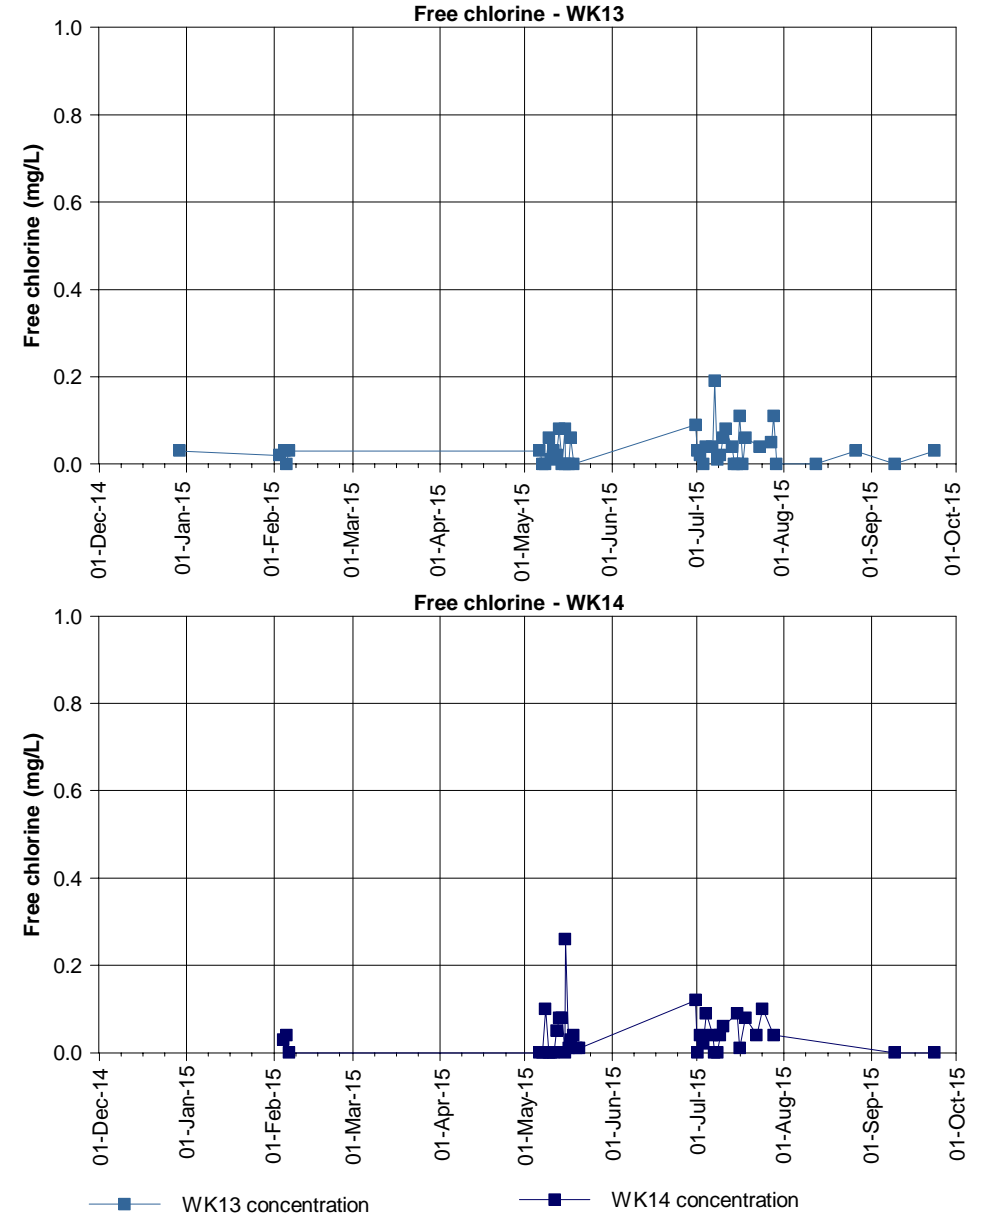


Figure E2.15: Field measurements of free chlorine at the Waukivory pilot wells

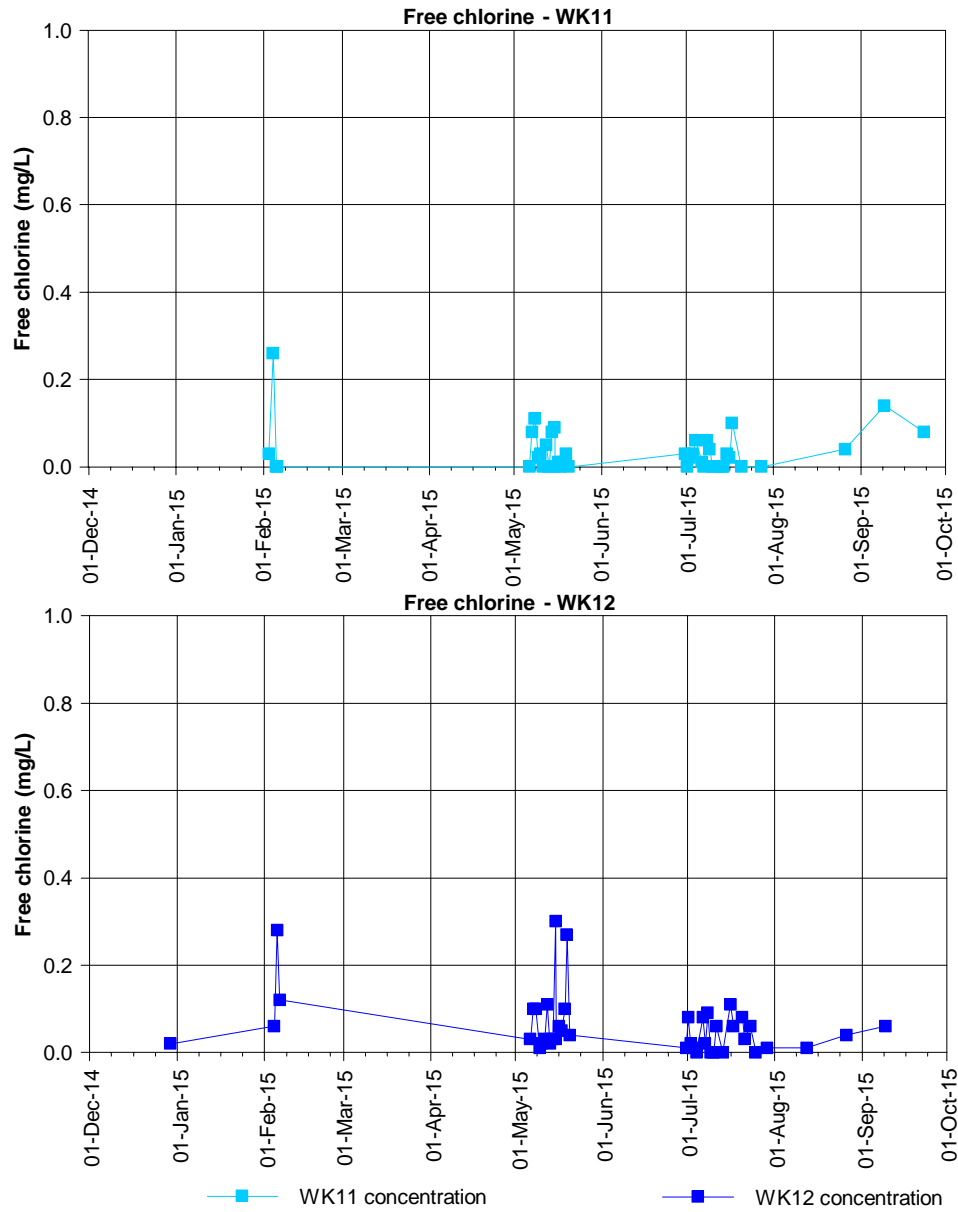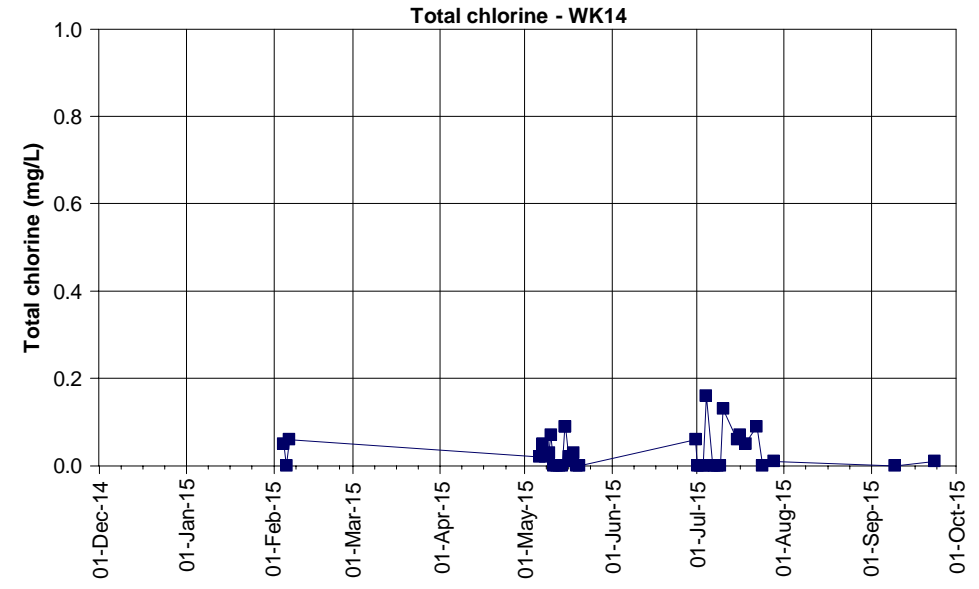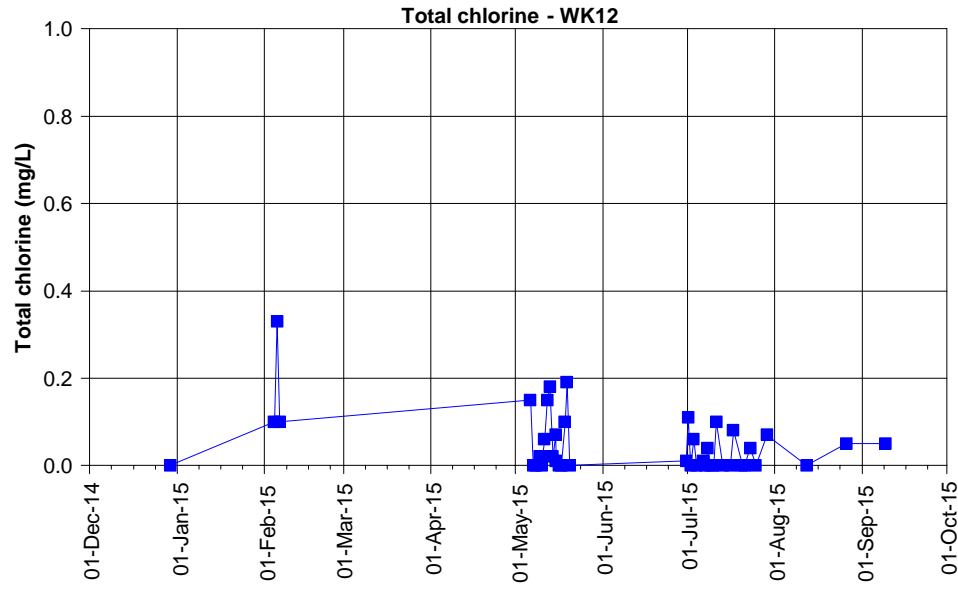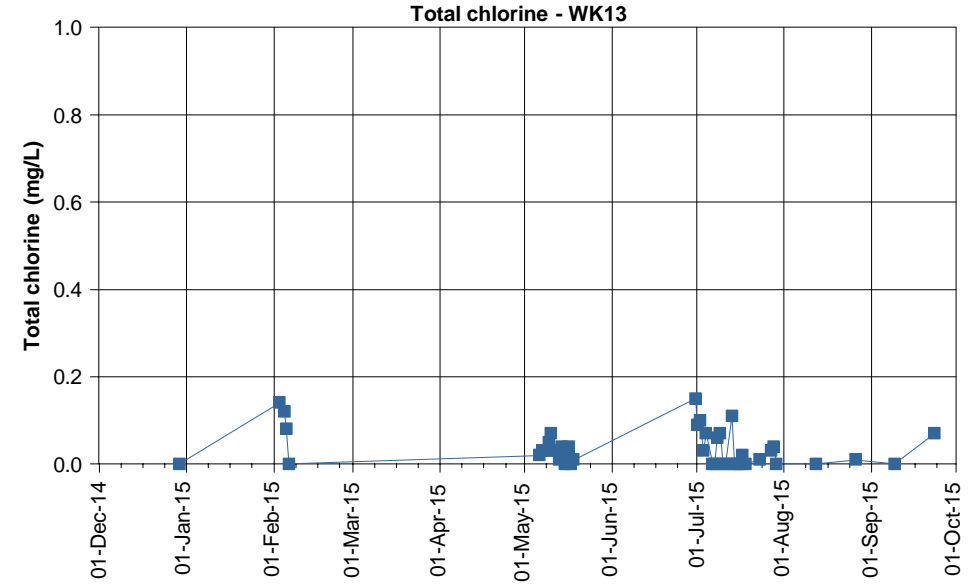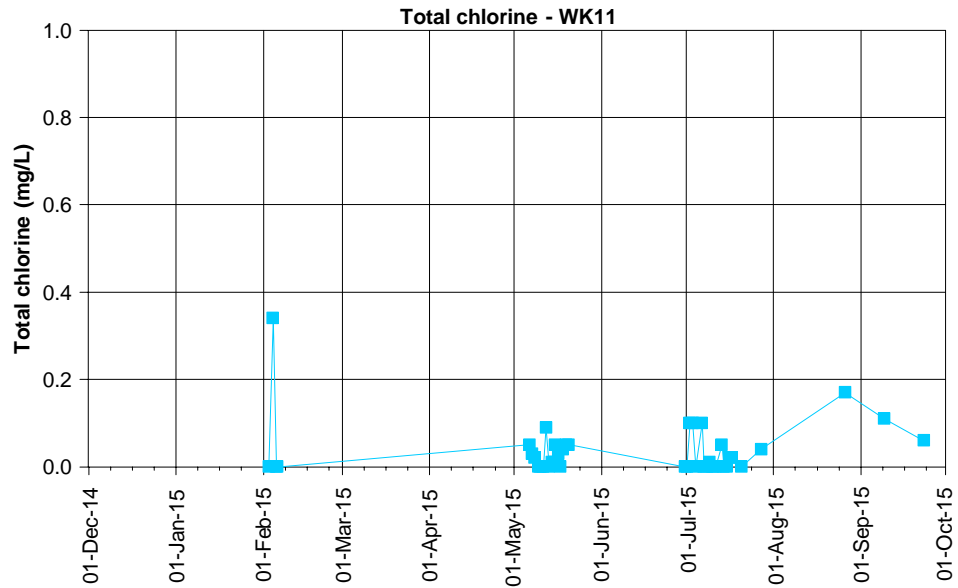

■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E2.16: Field measurements of total chlorine at the Waukivory pilot wells

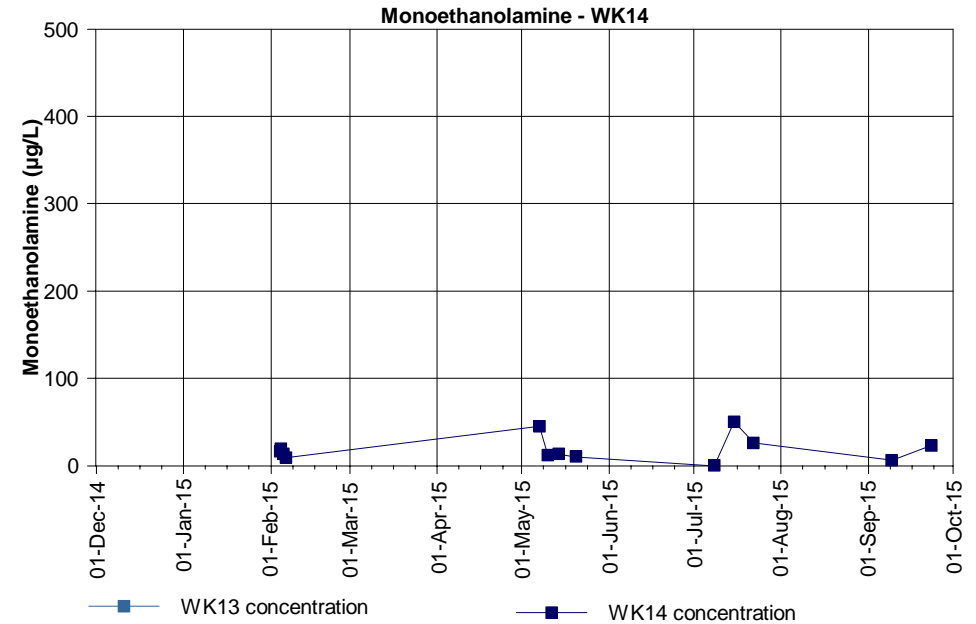
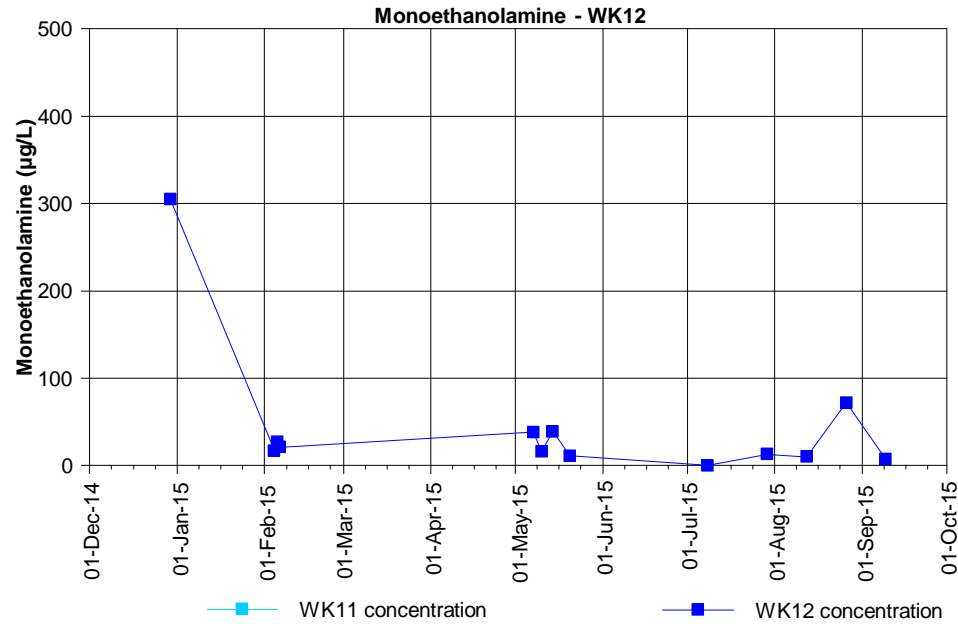
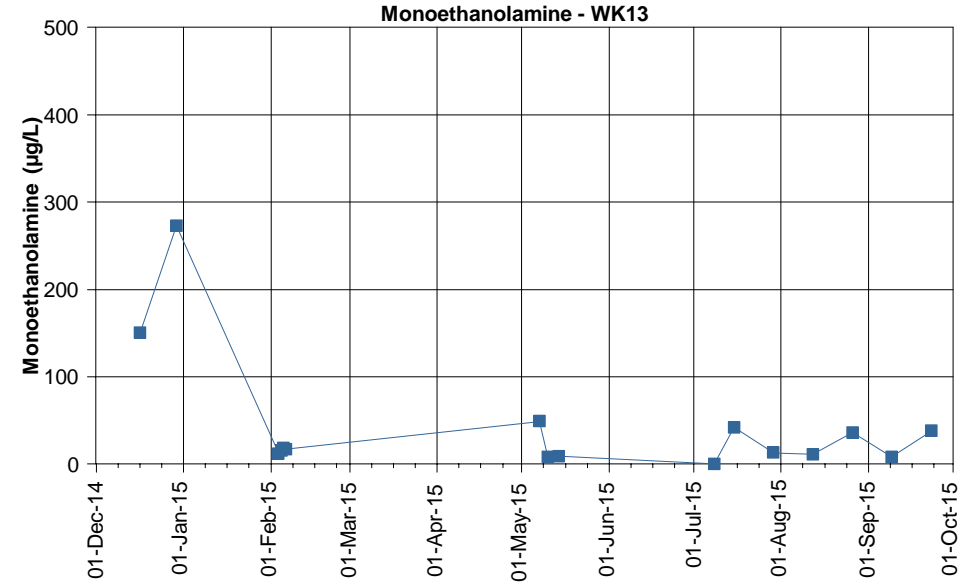
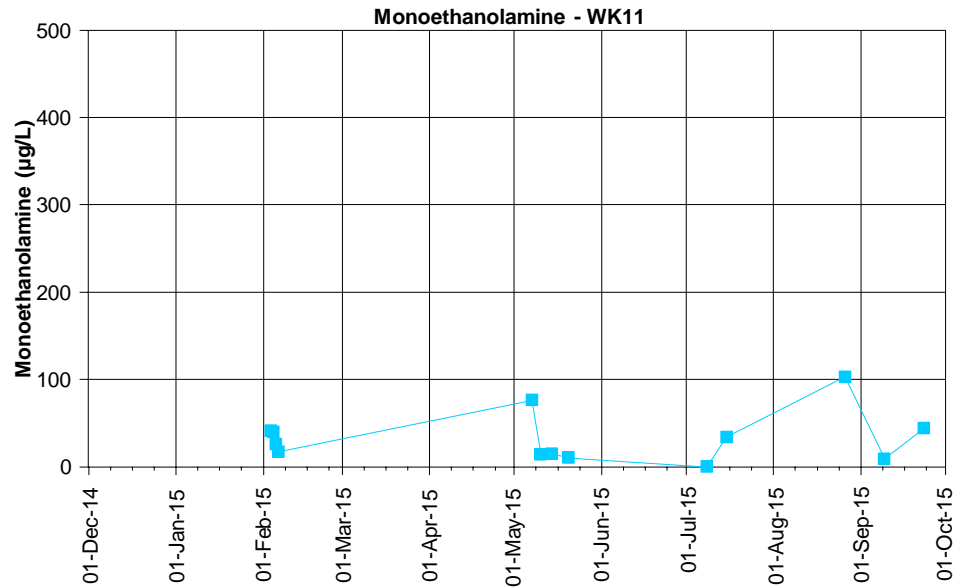


Figure E2.17: Monoethanolamine concentrations at the Waukivory pilot wells

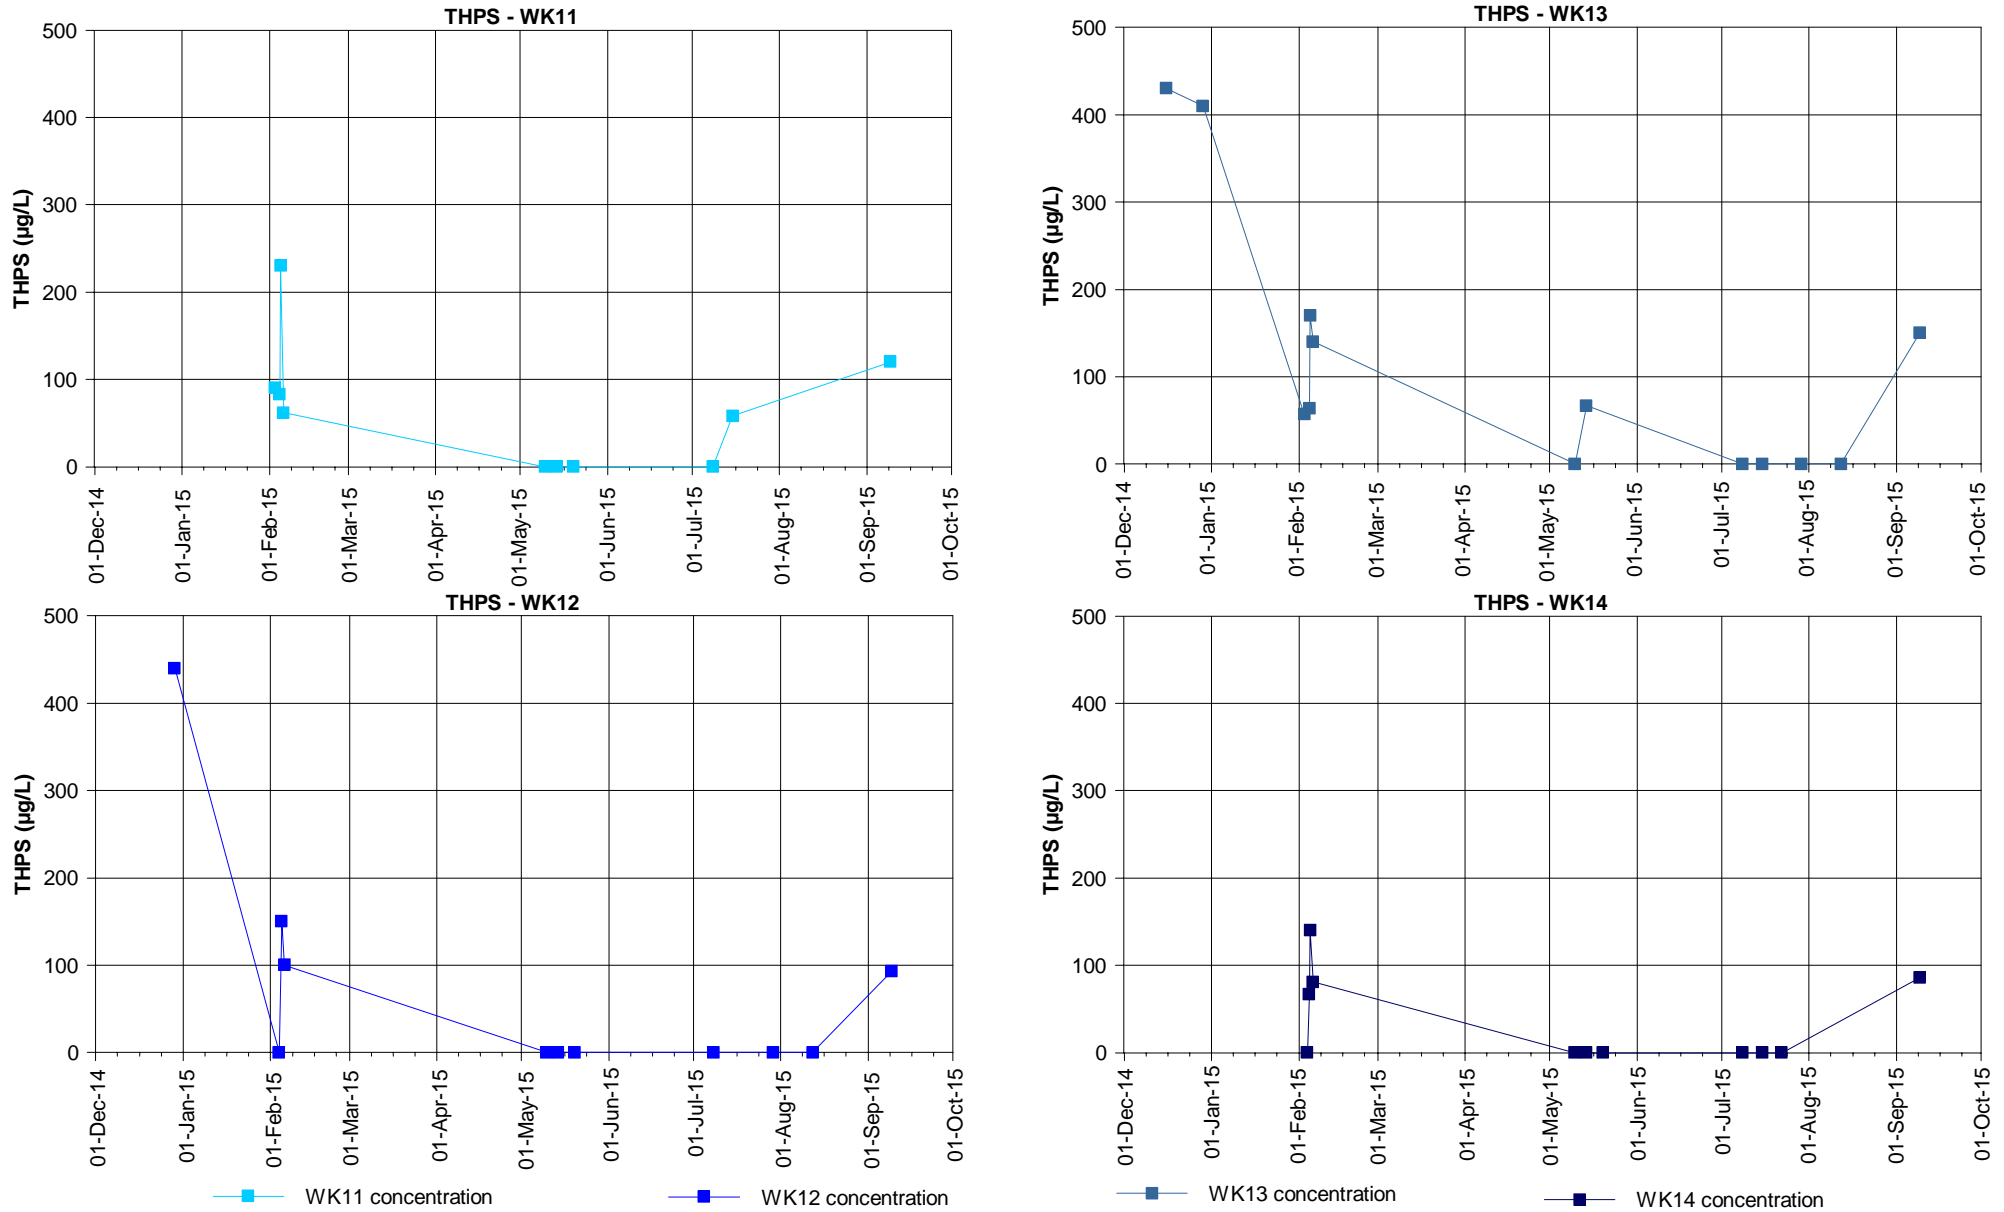


Figure E2.18: THPS concentrations at the Waukivory pilot wells

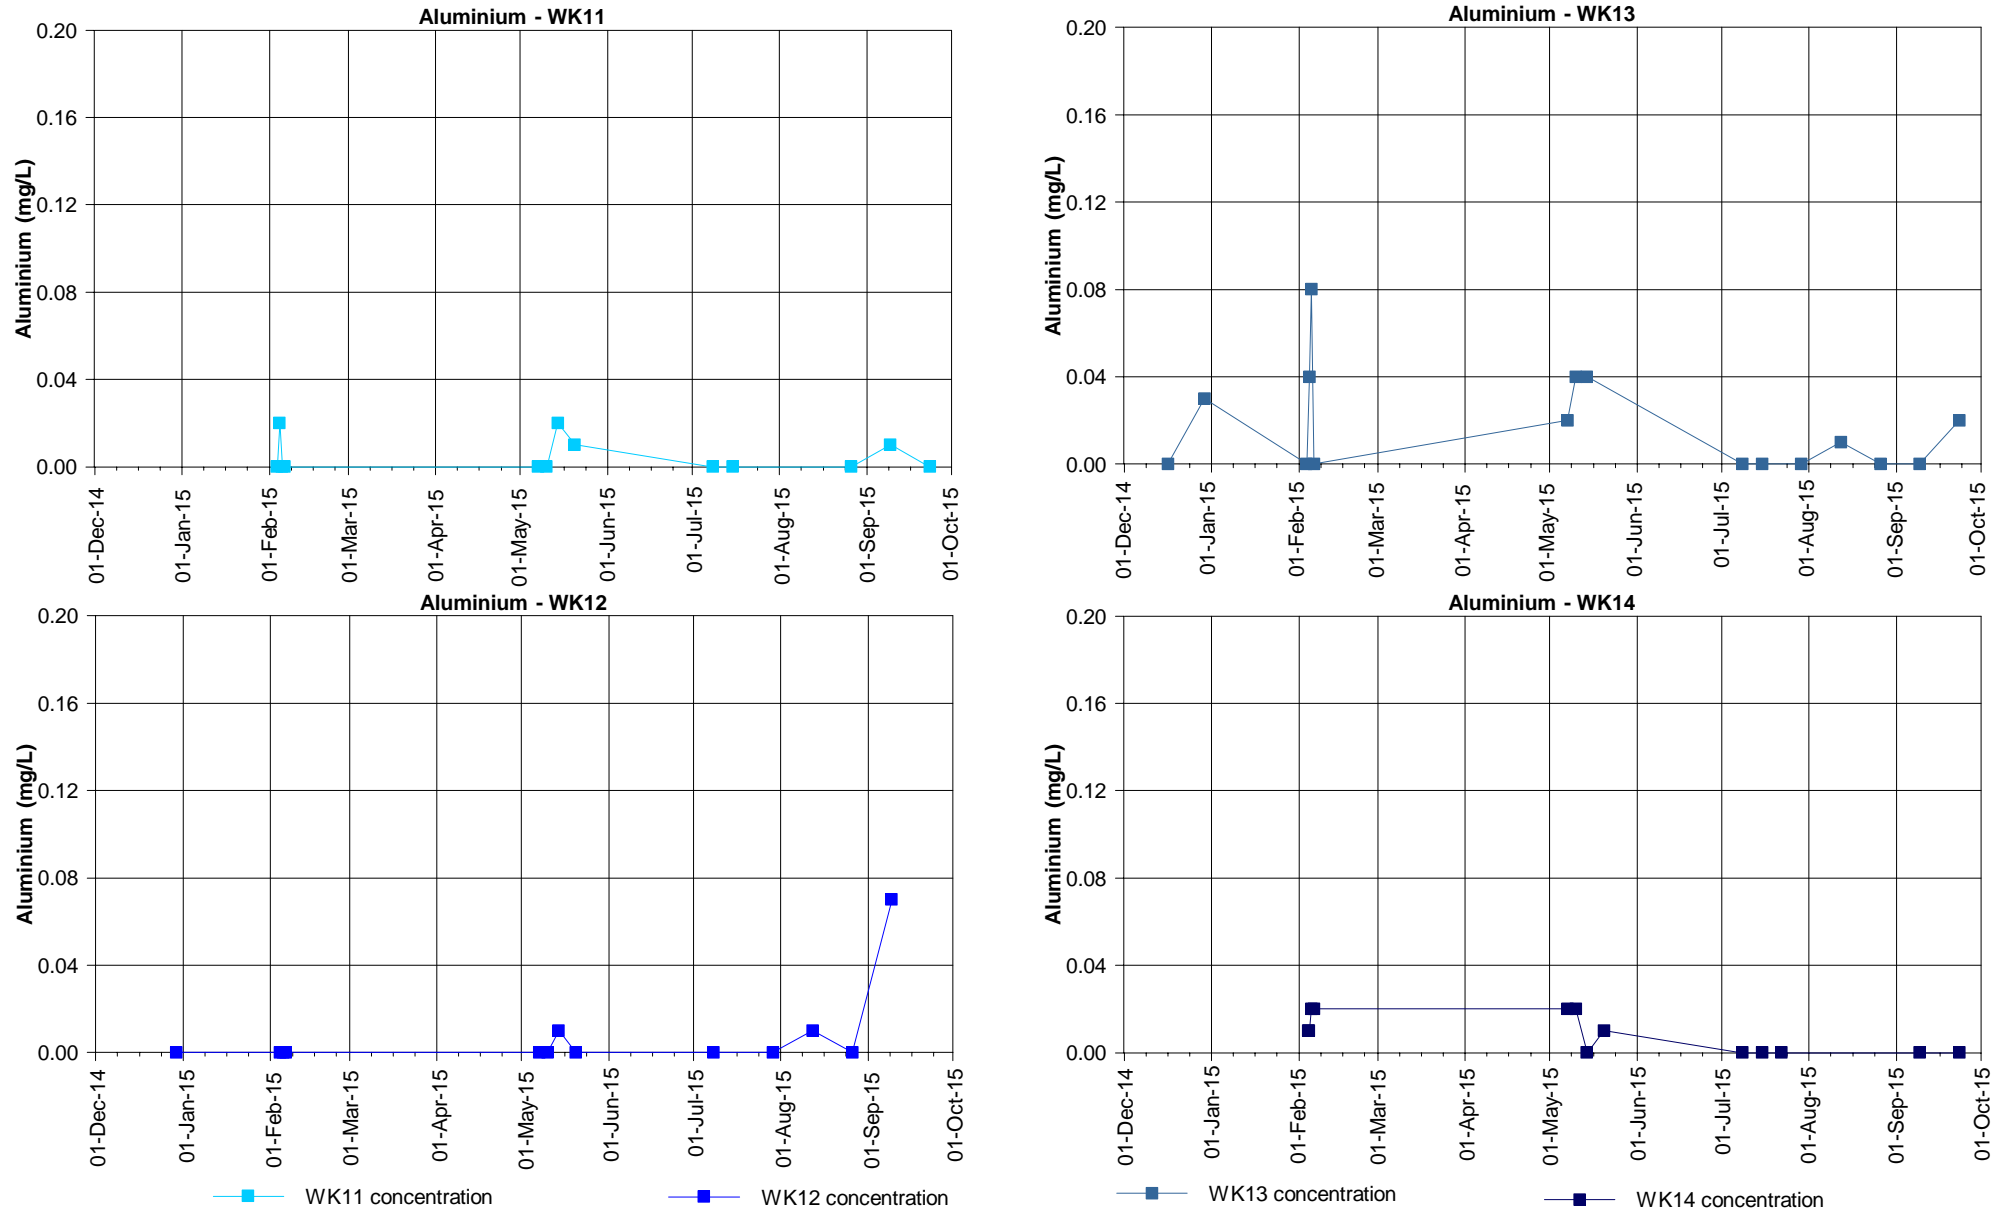


Figure E3.1: Aluminium concentrations at the Waukivory pilot wells

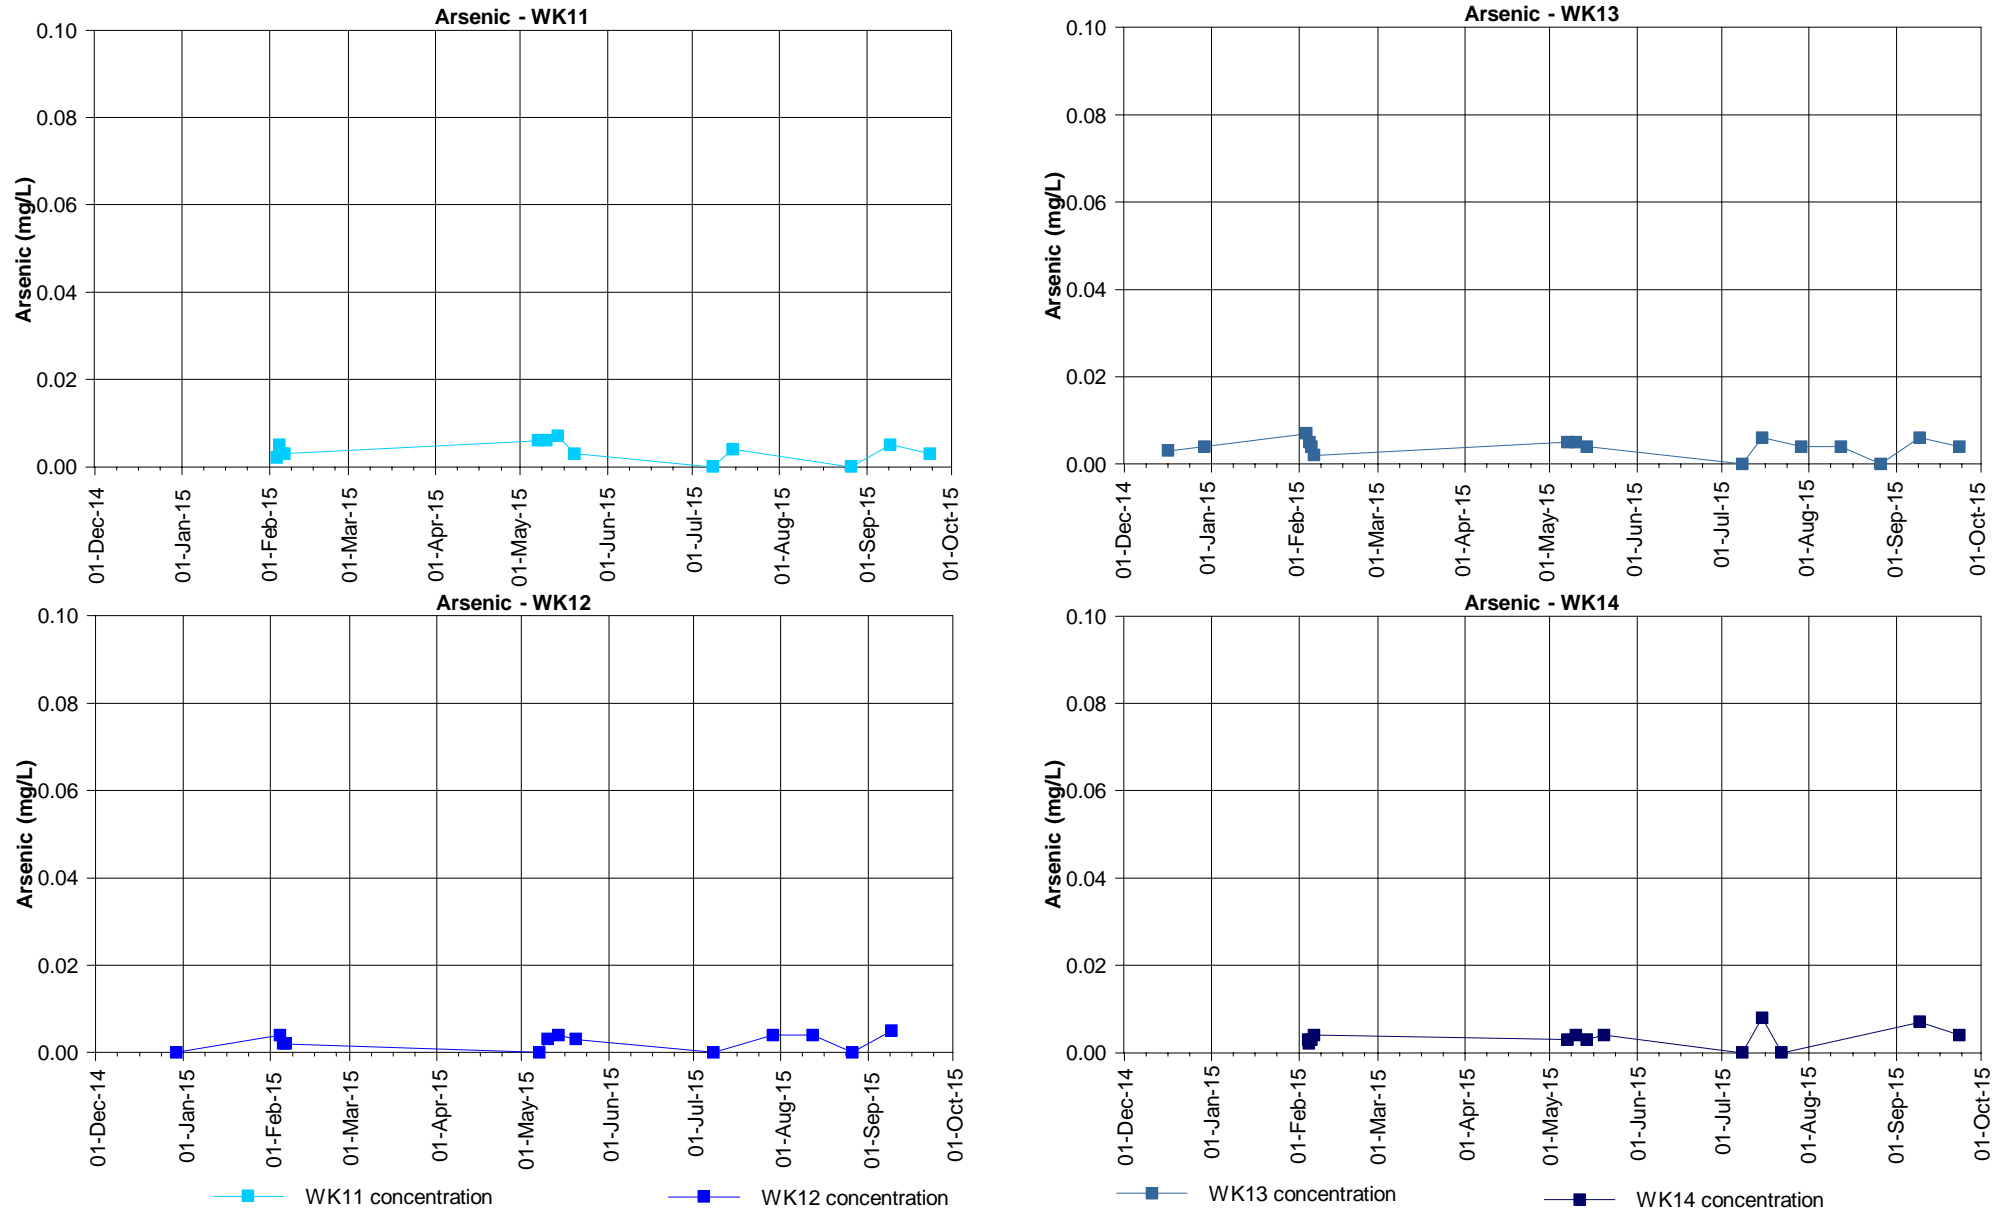


Figure E3.2: Arsenic concentrations at the Waukivory pilot wells

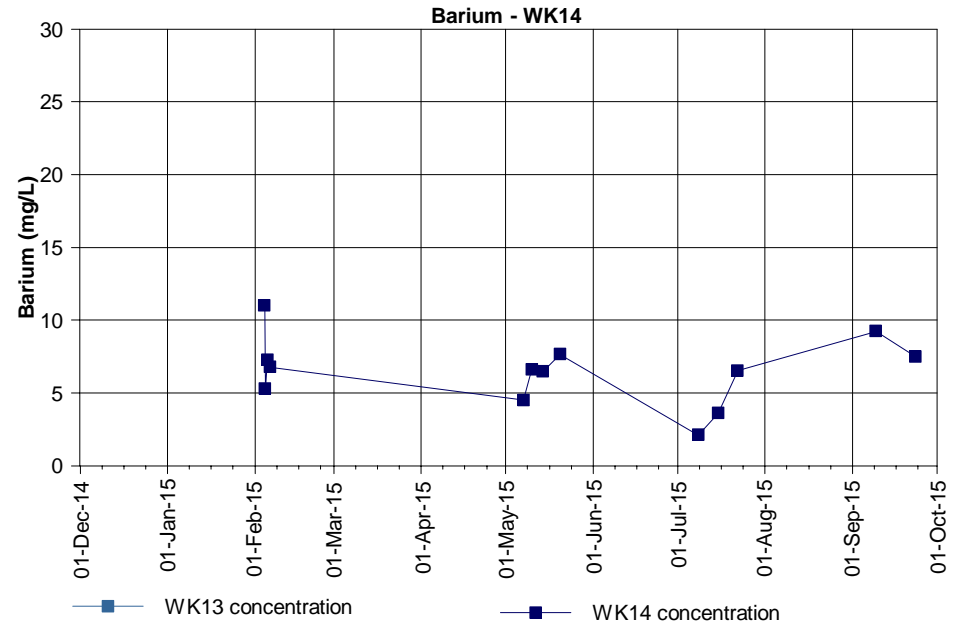
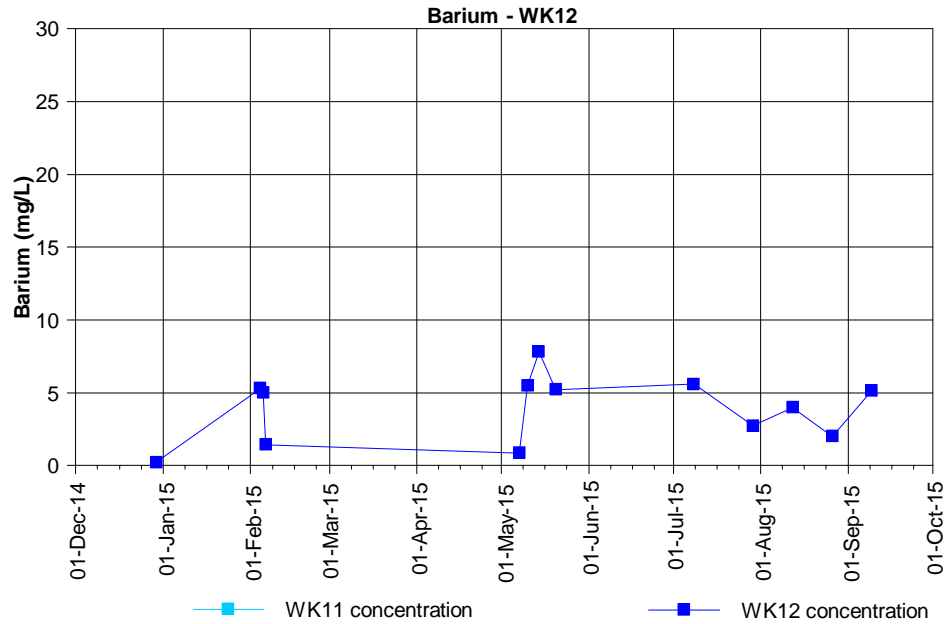
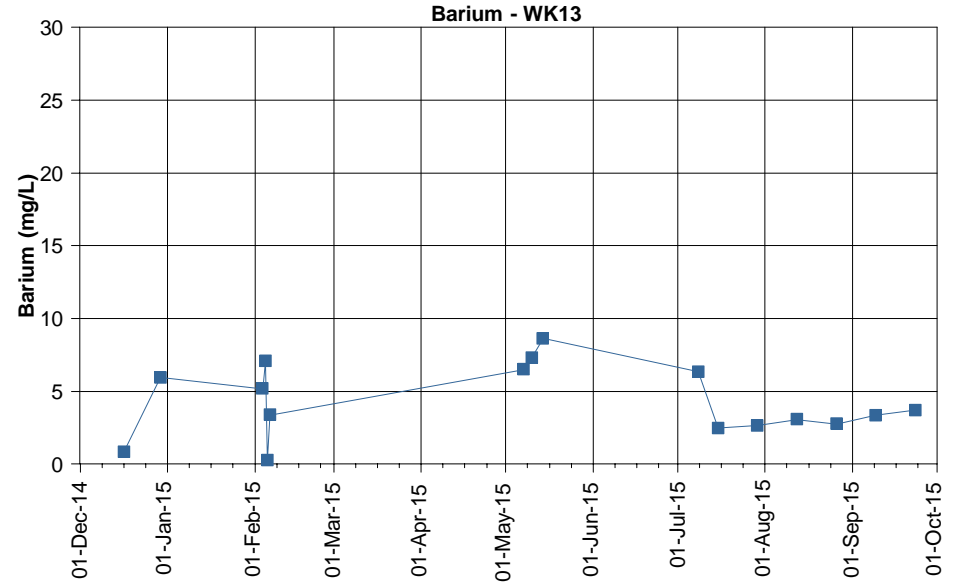
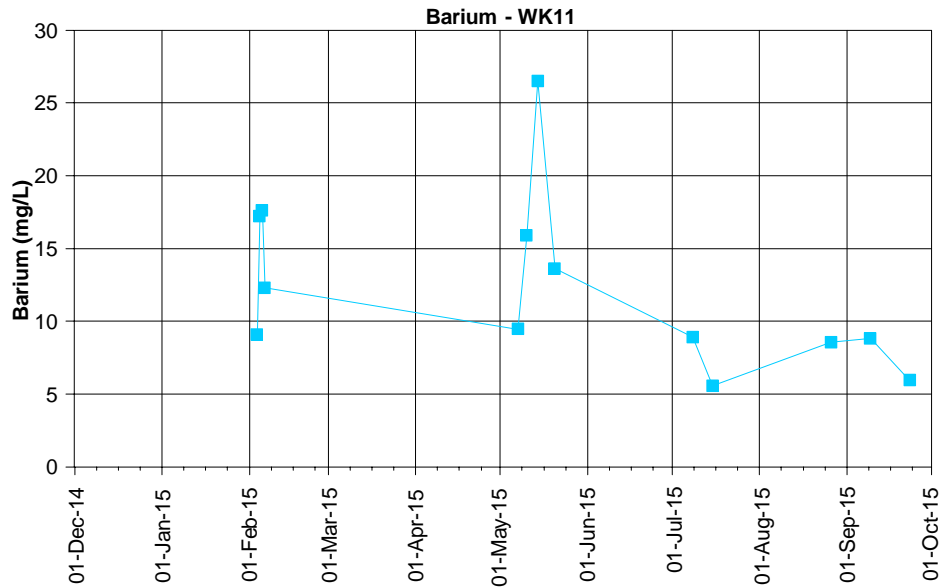


Figure E3.3: Barium concentrations at the Waukivory pilot wells





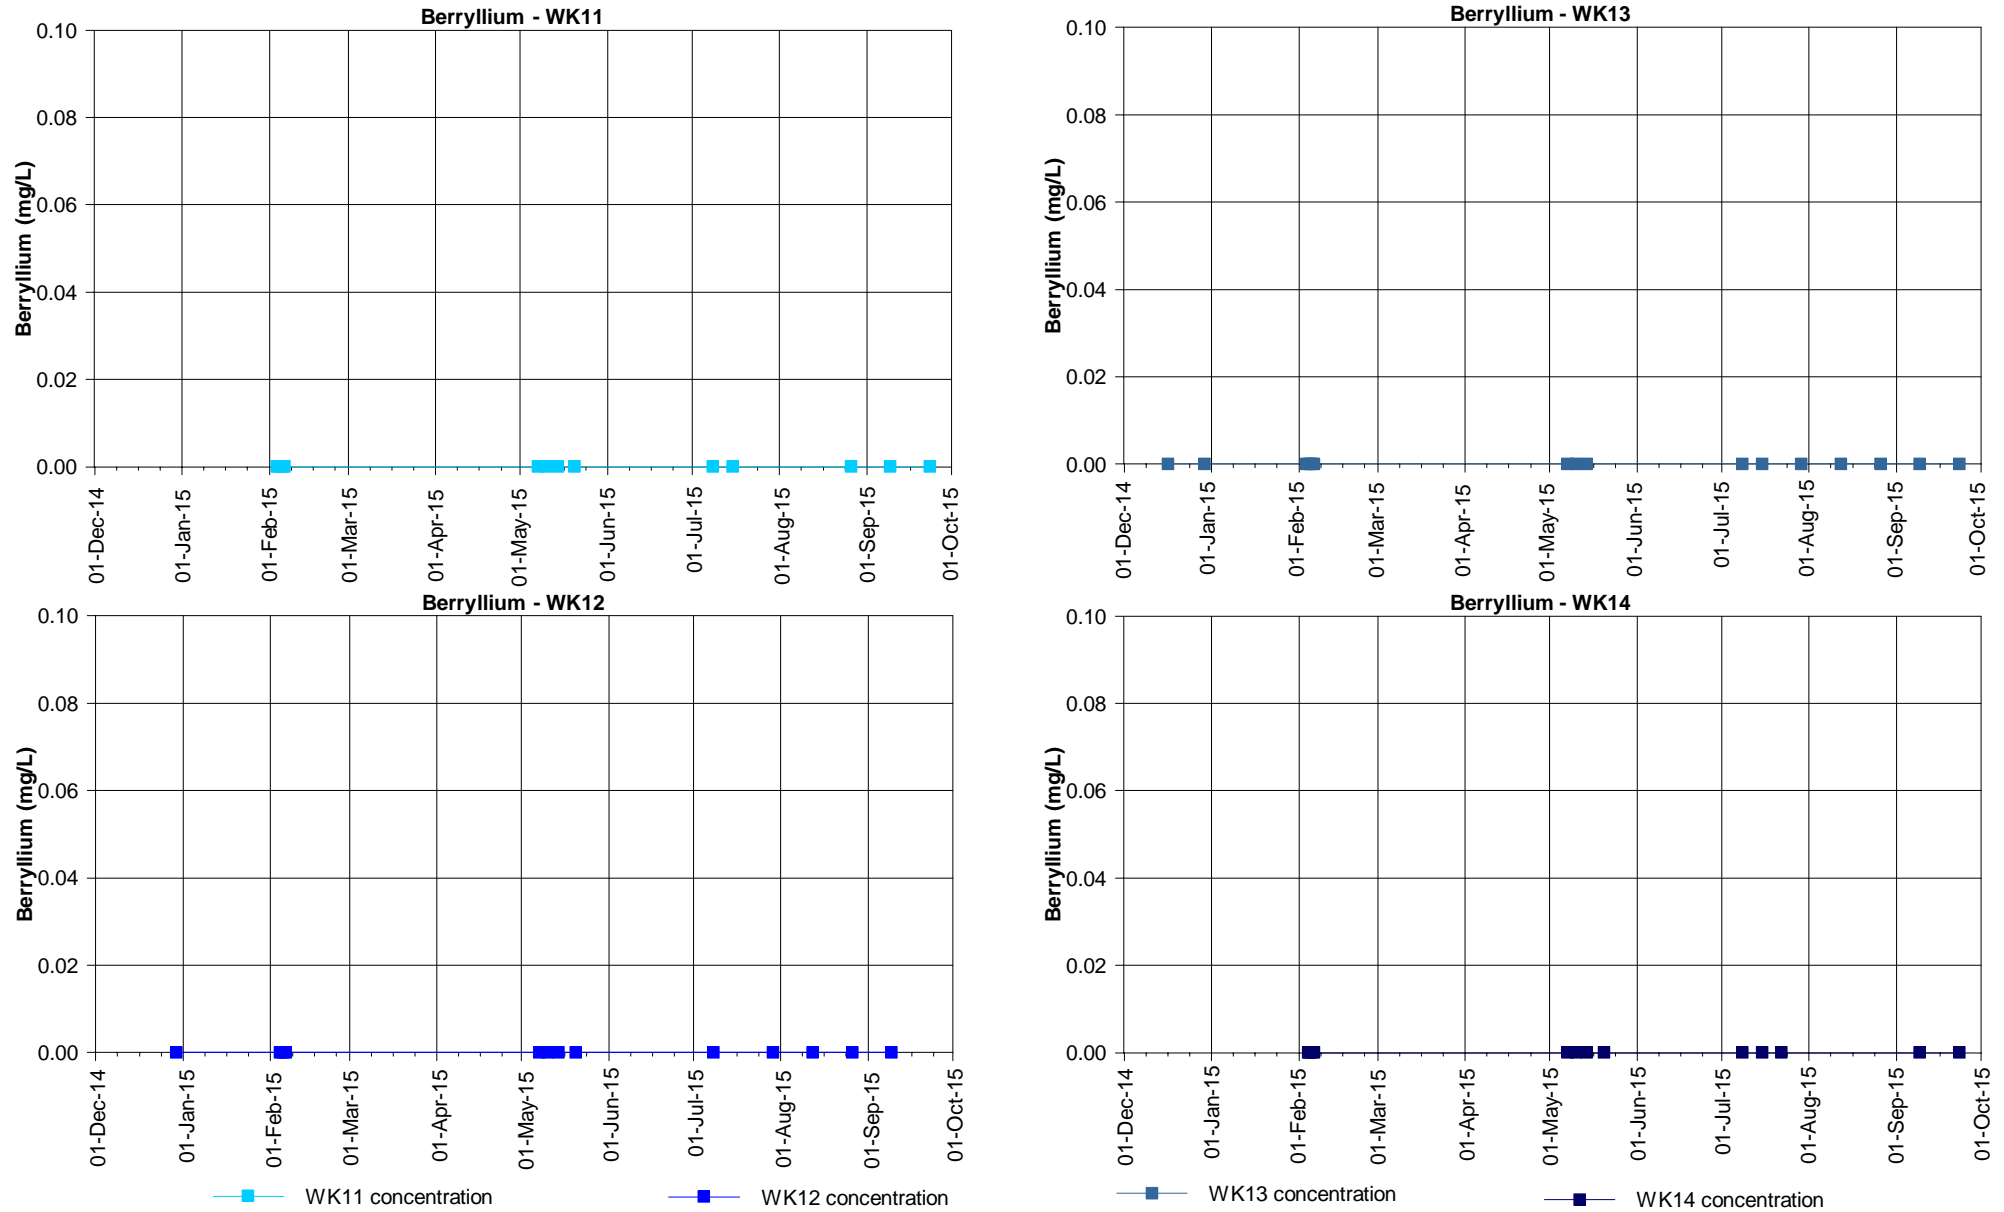


Figure E3.4: Beryllium concentrations at the Waukivory pilot wells

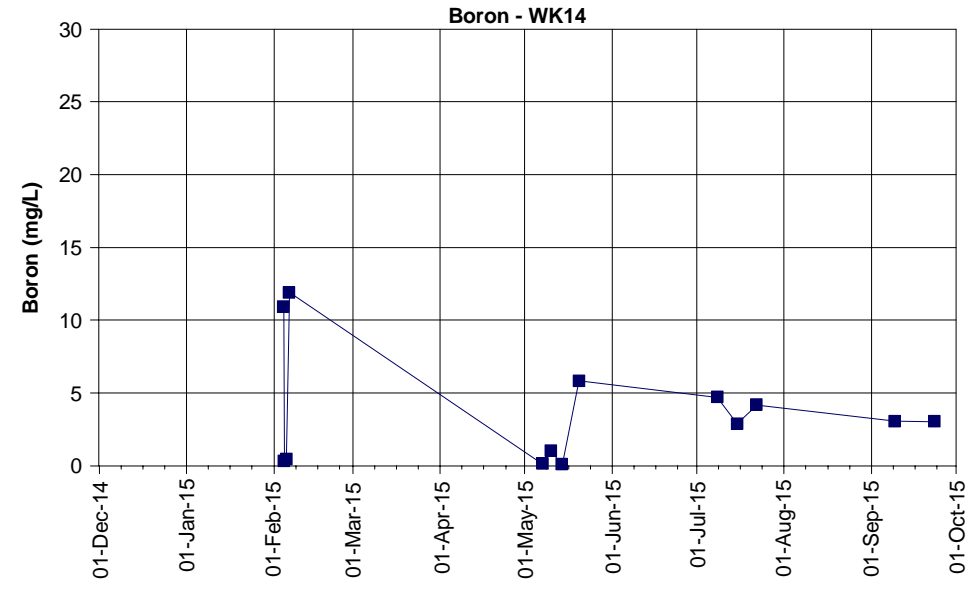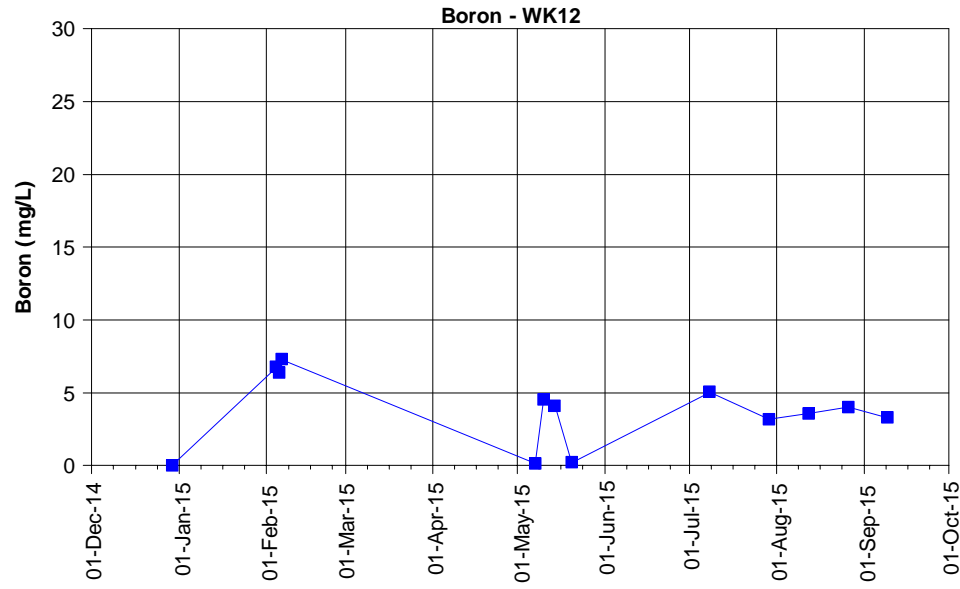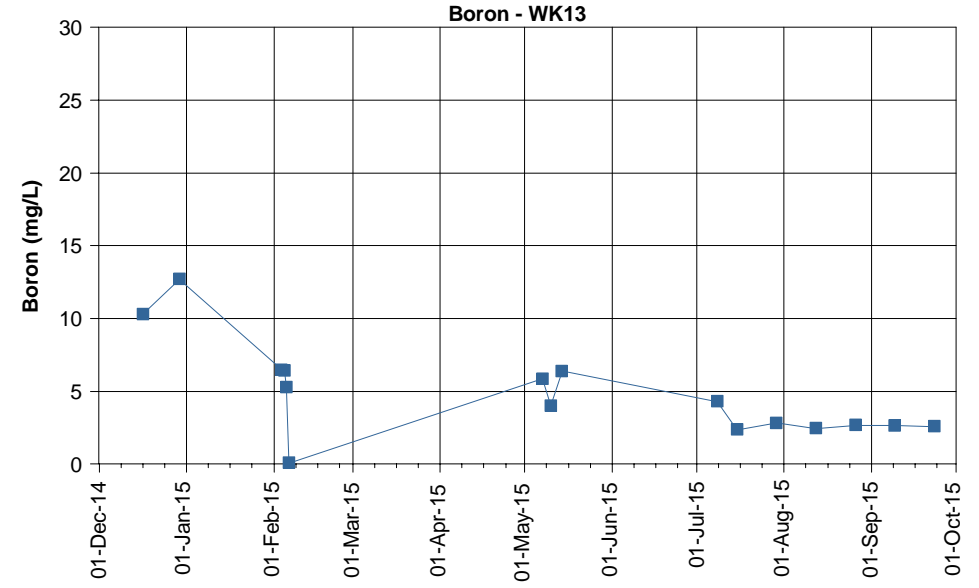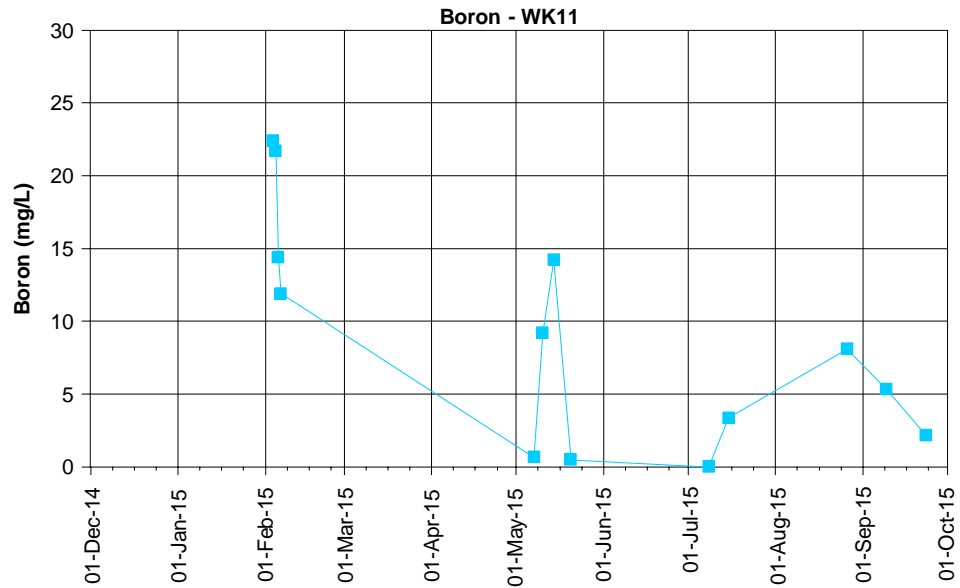

■ WK11 concentration
 ■ WK12 concentration
 ■ WK13 concentration
 ■ WK14 concentration

Figure E3.5: Boron concentrations at the Waukivory pilot wells

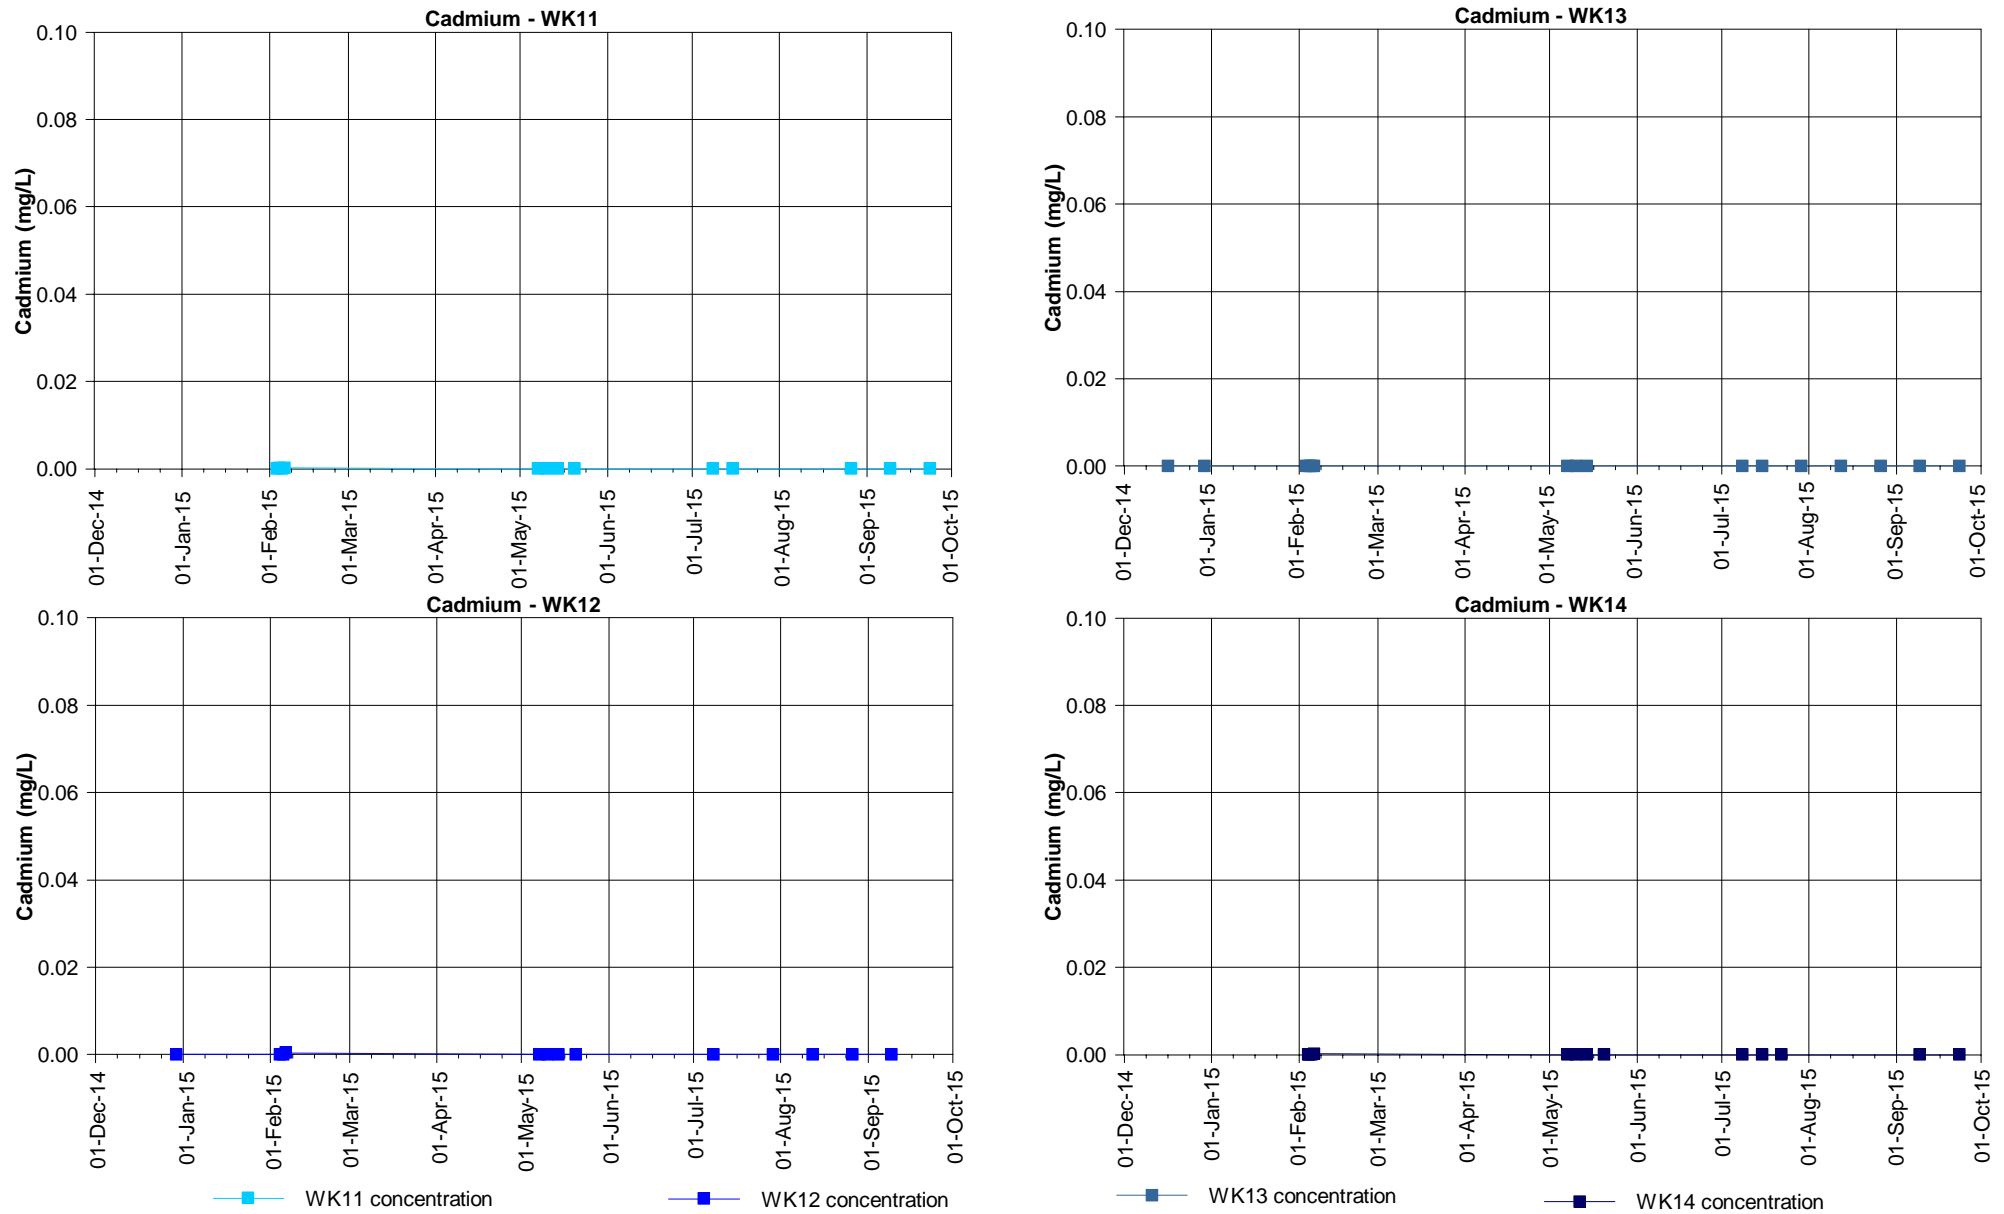


Figure E3.6: Cadmium concentrations at the Waukivory pilot wells

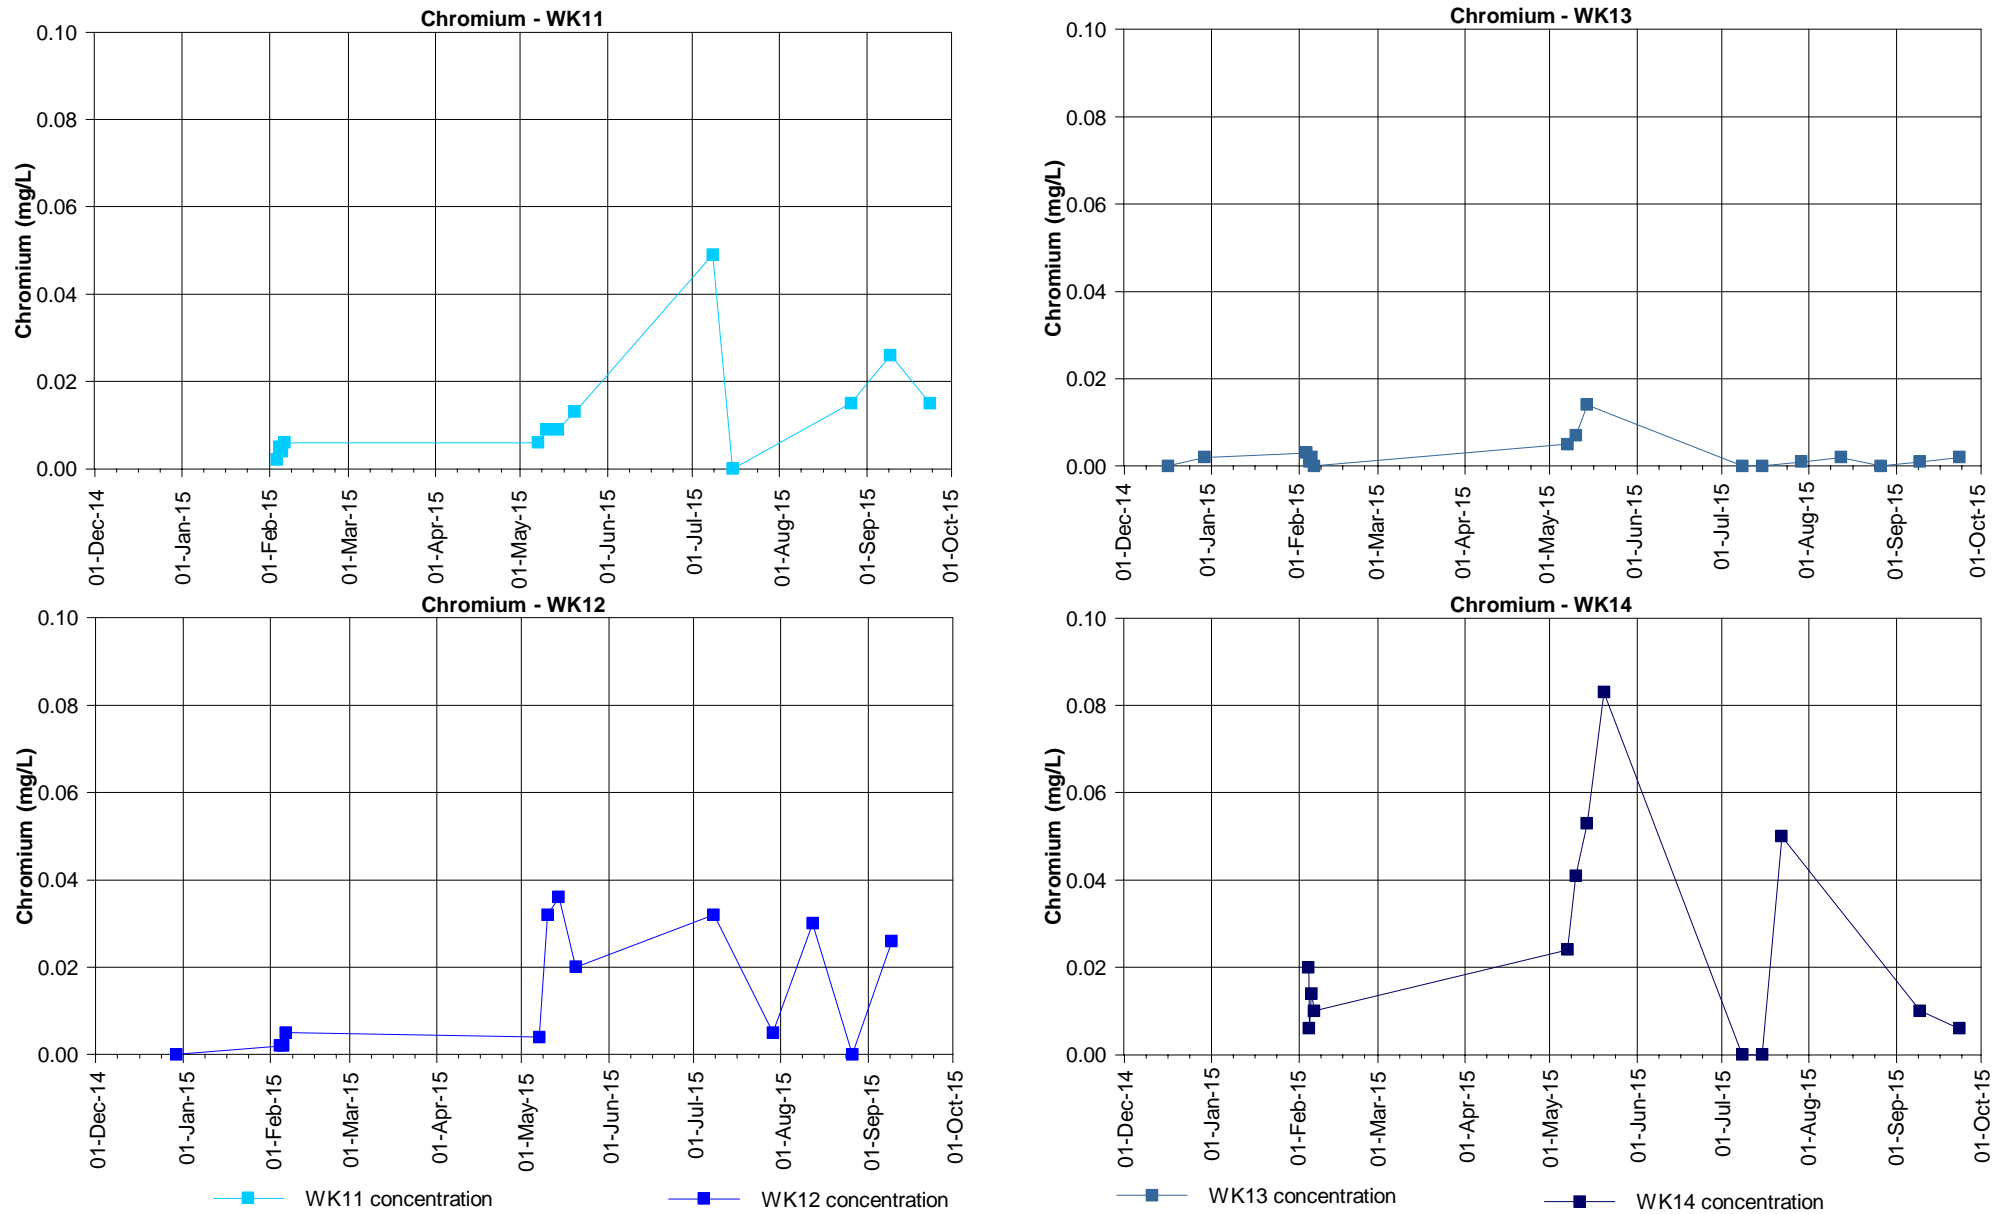


Figure E3.7: Chromium concentrations at the Waukivory pilot wells

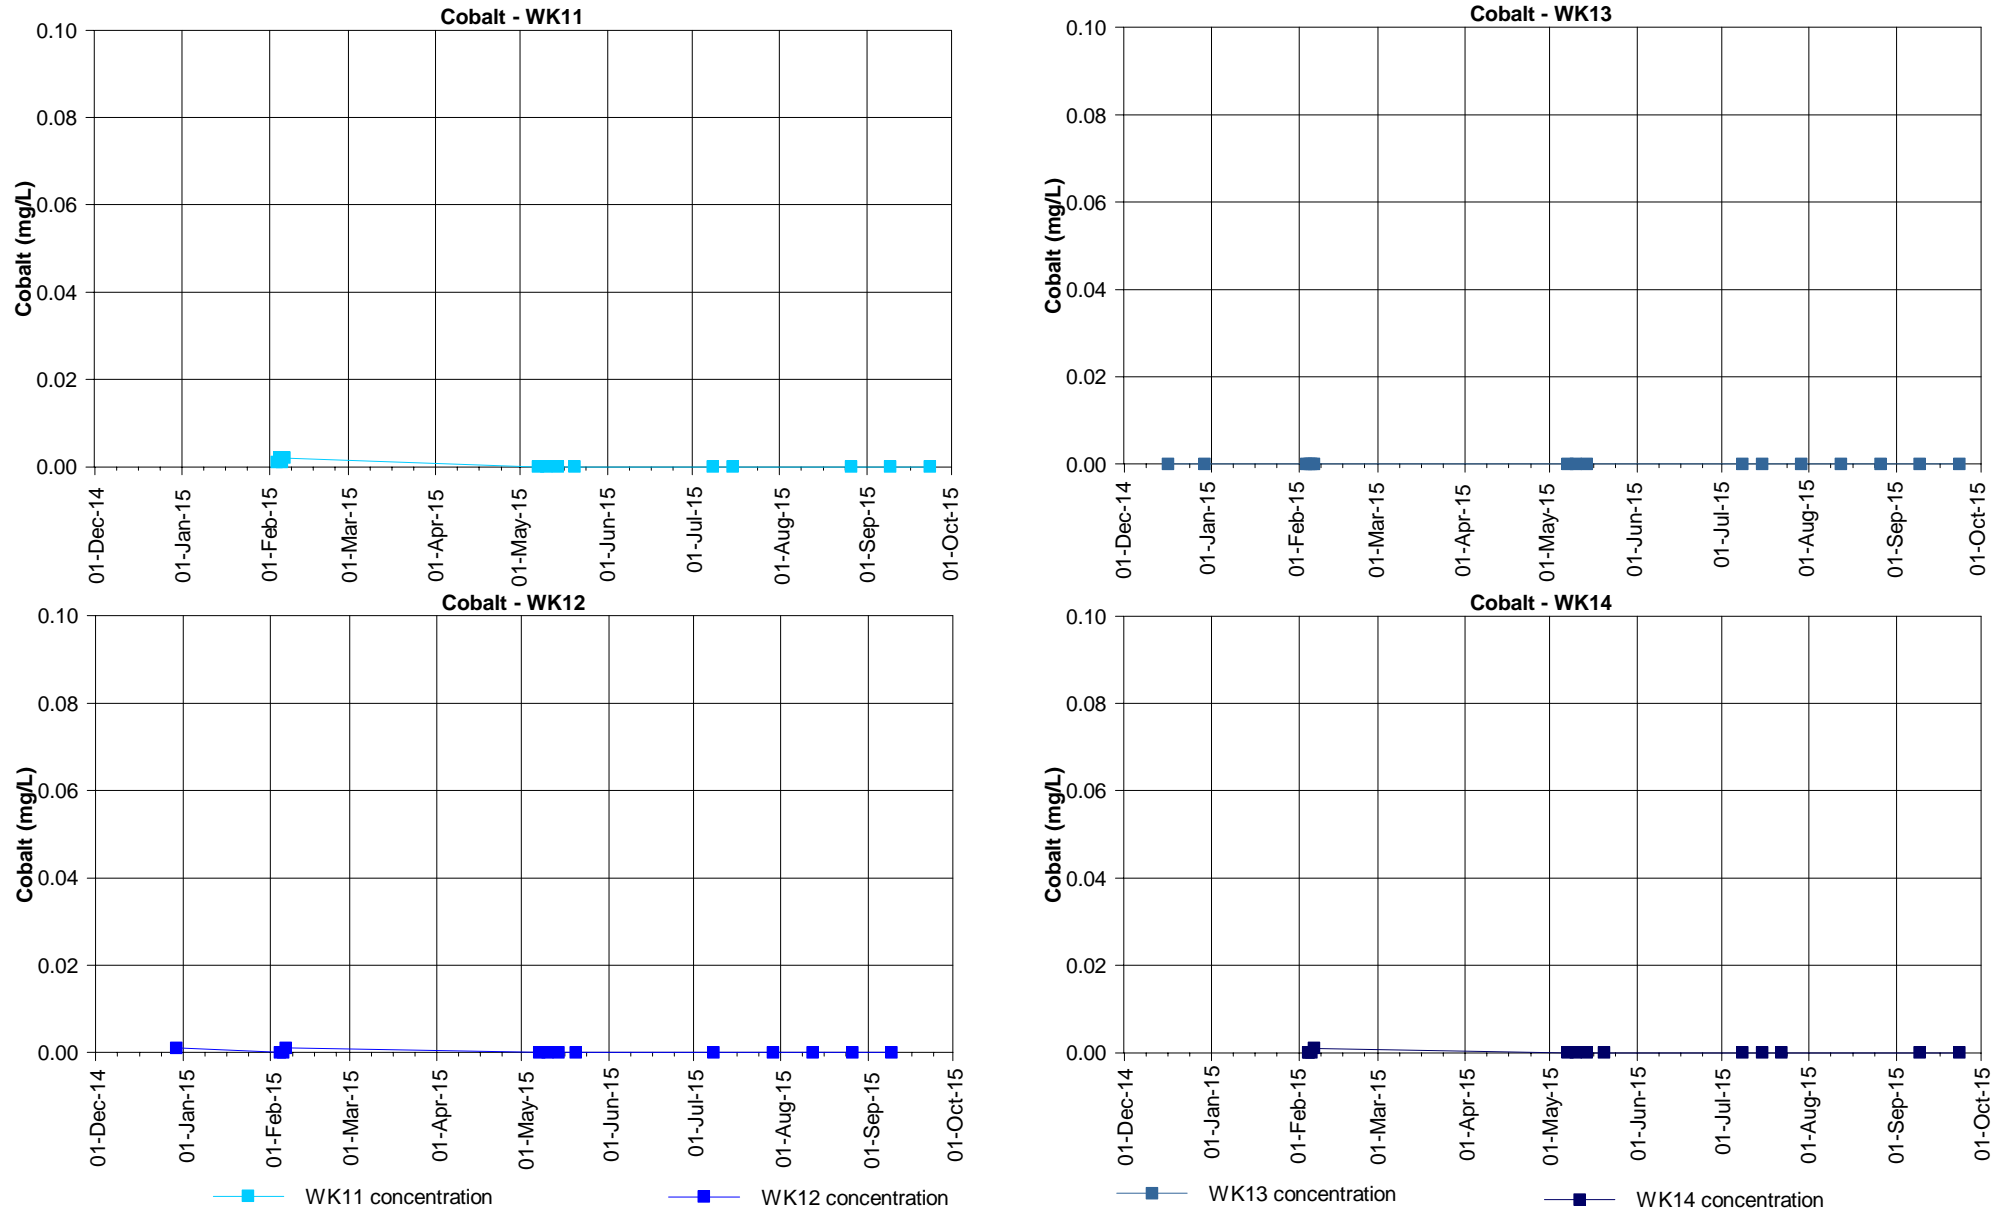


Figure E3.8: Cobalt concentrations at the Waukivory pilot wells

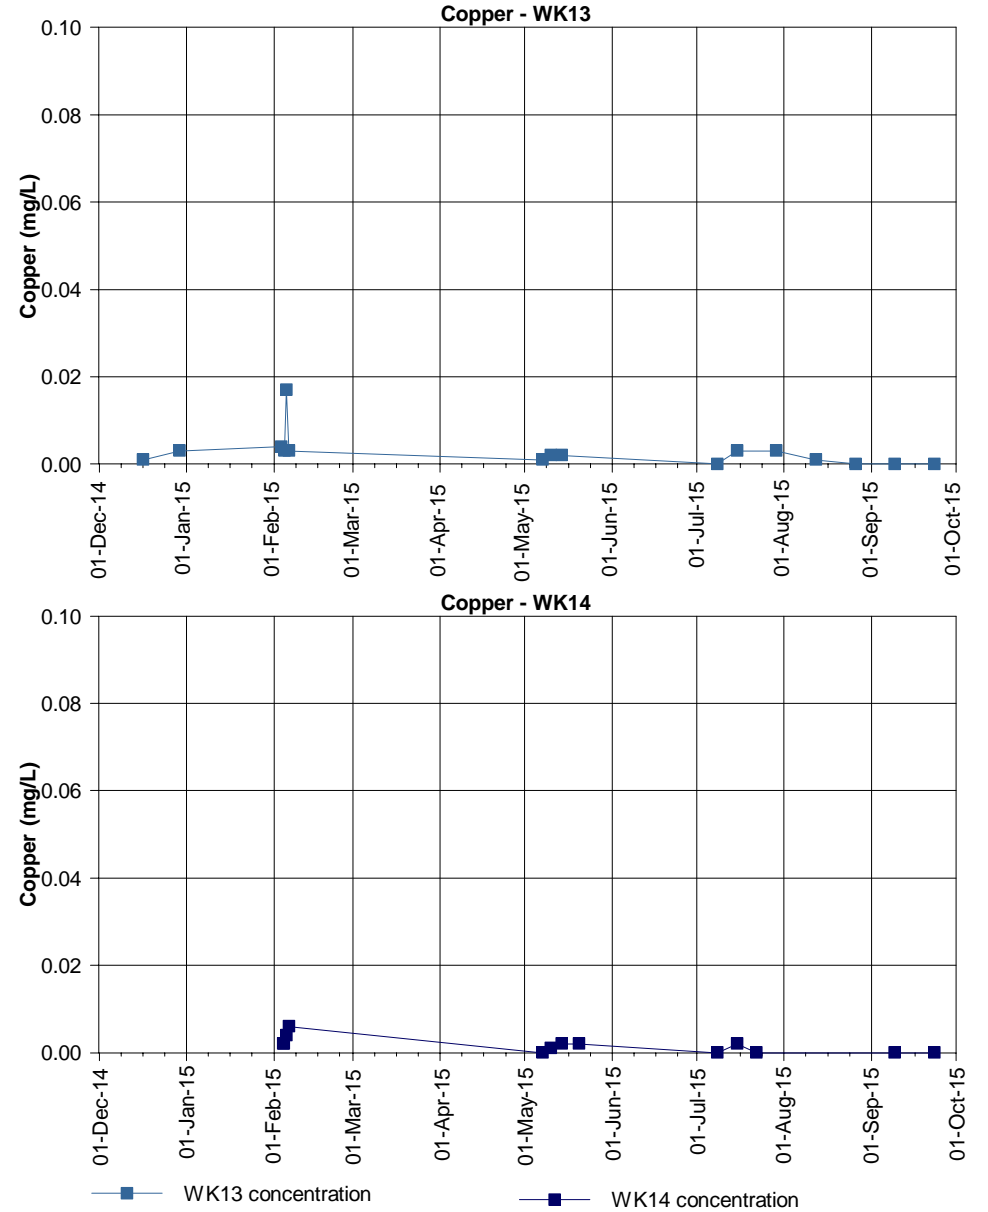
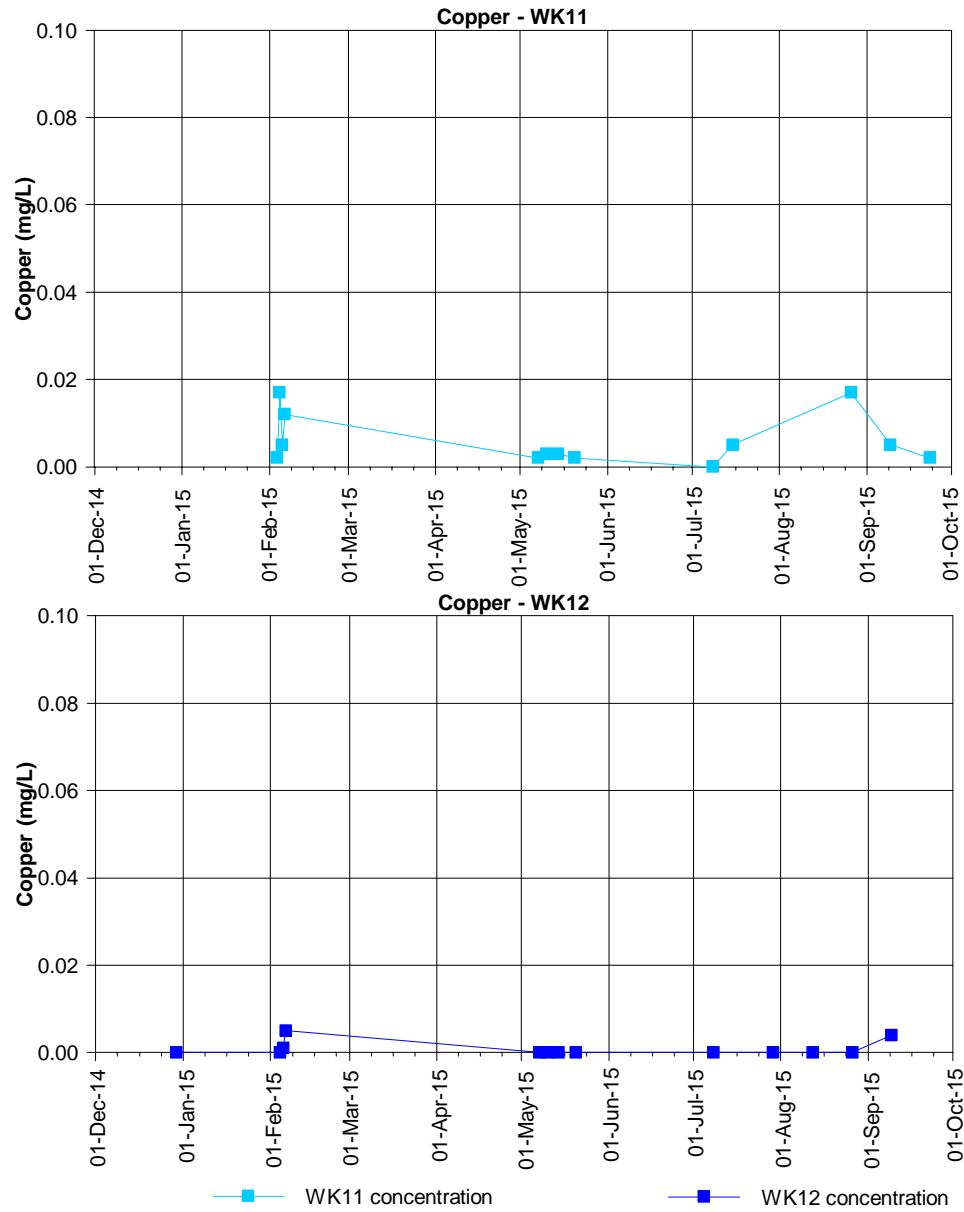


Figure E3.9: Copper concentrations at the Waukivory pilot wells

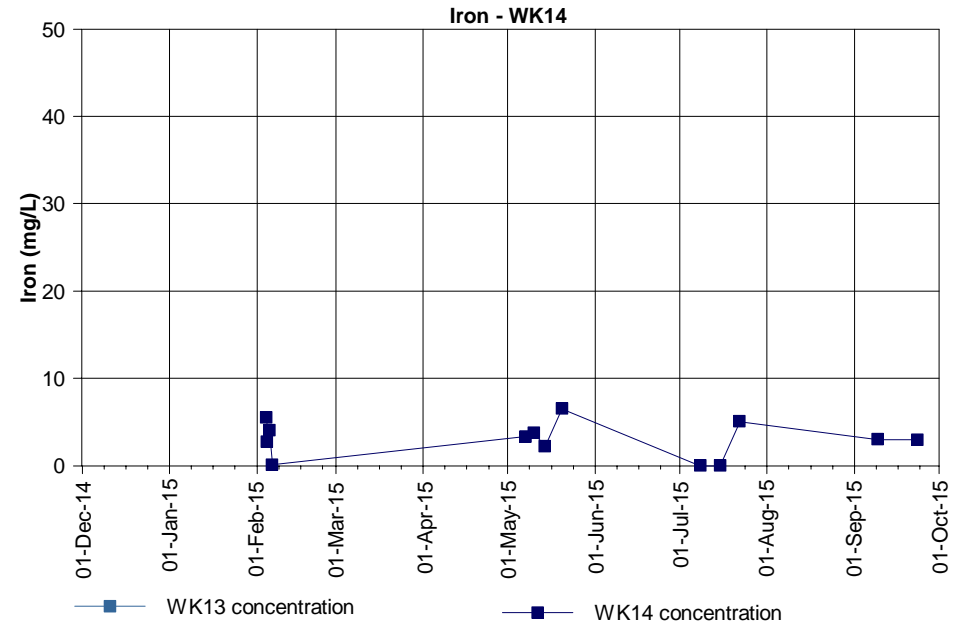
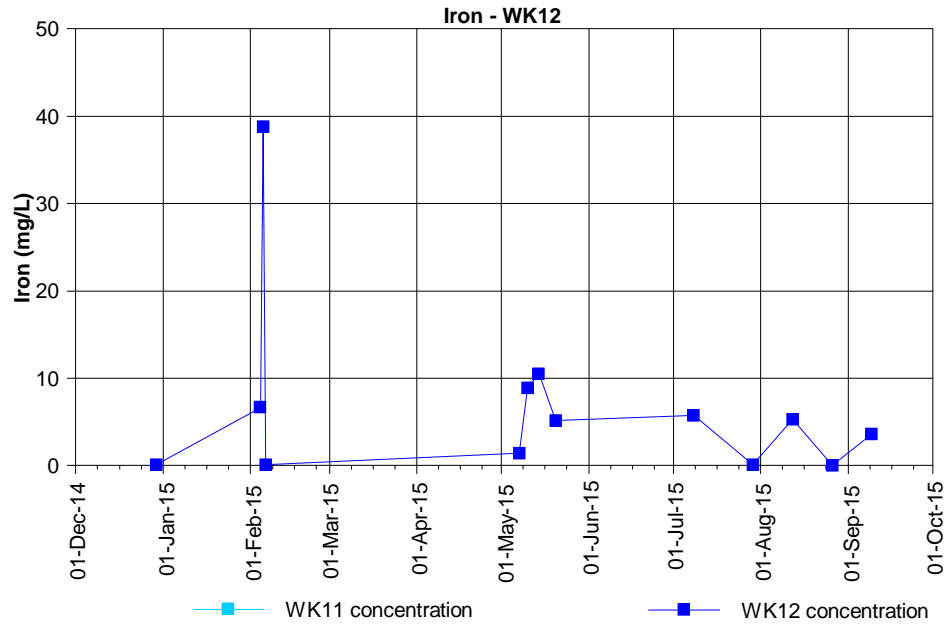
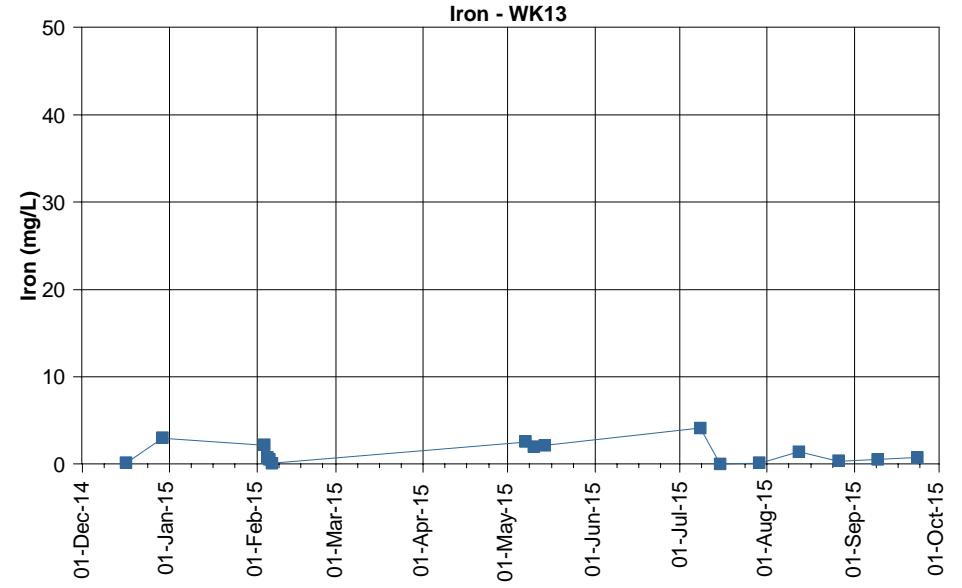
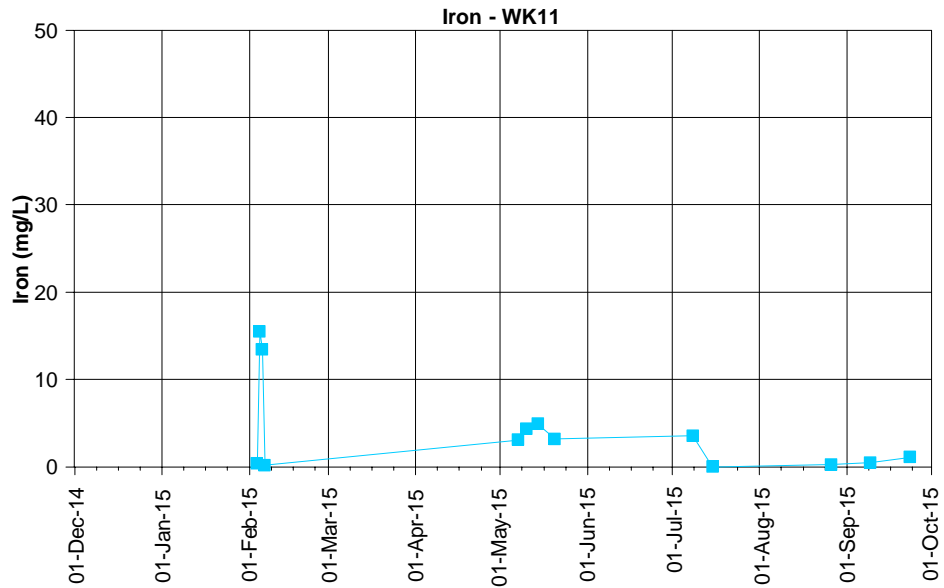


Figure E3.10: Iron concentrations at the Waukivory pilot wells





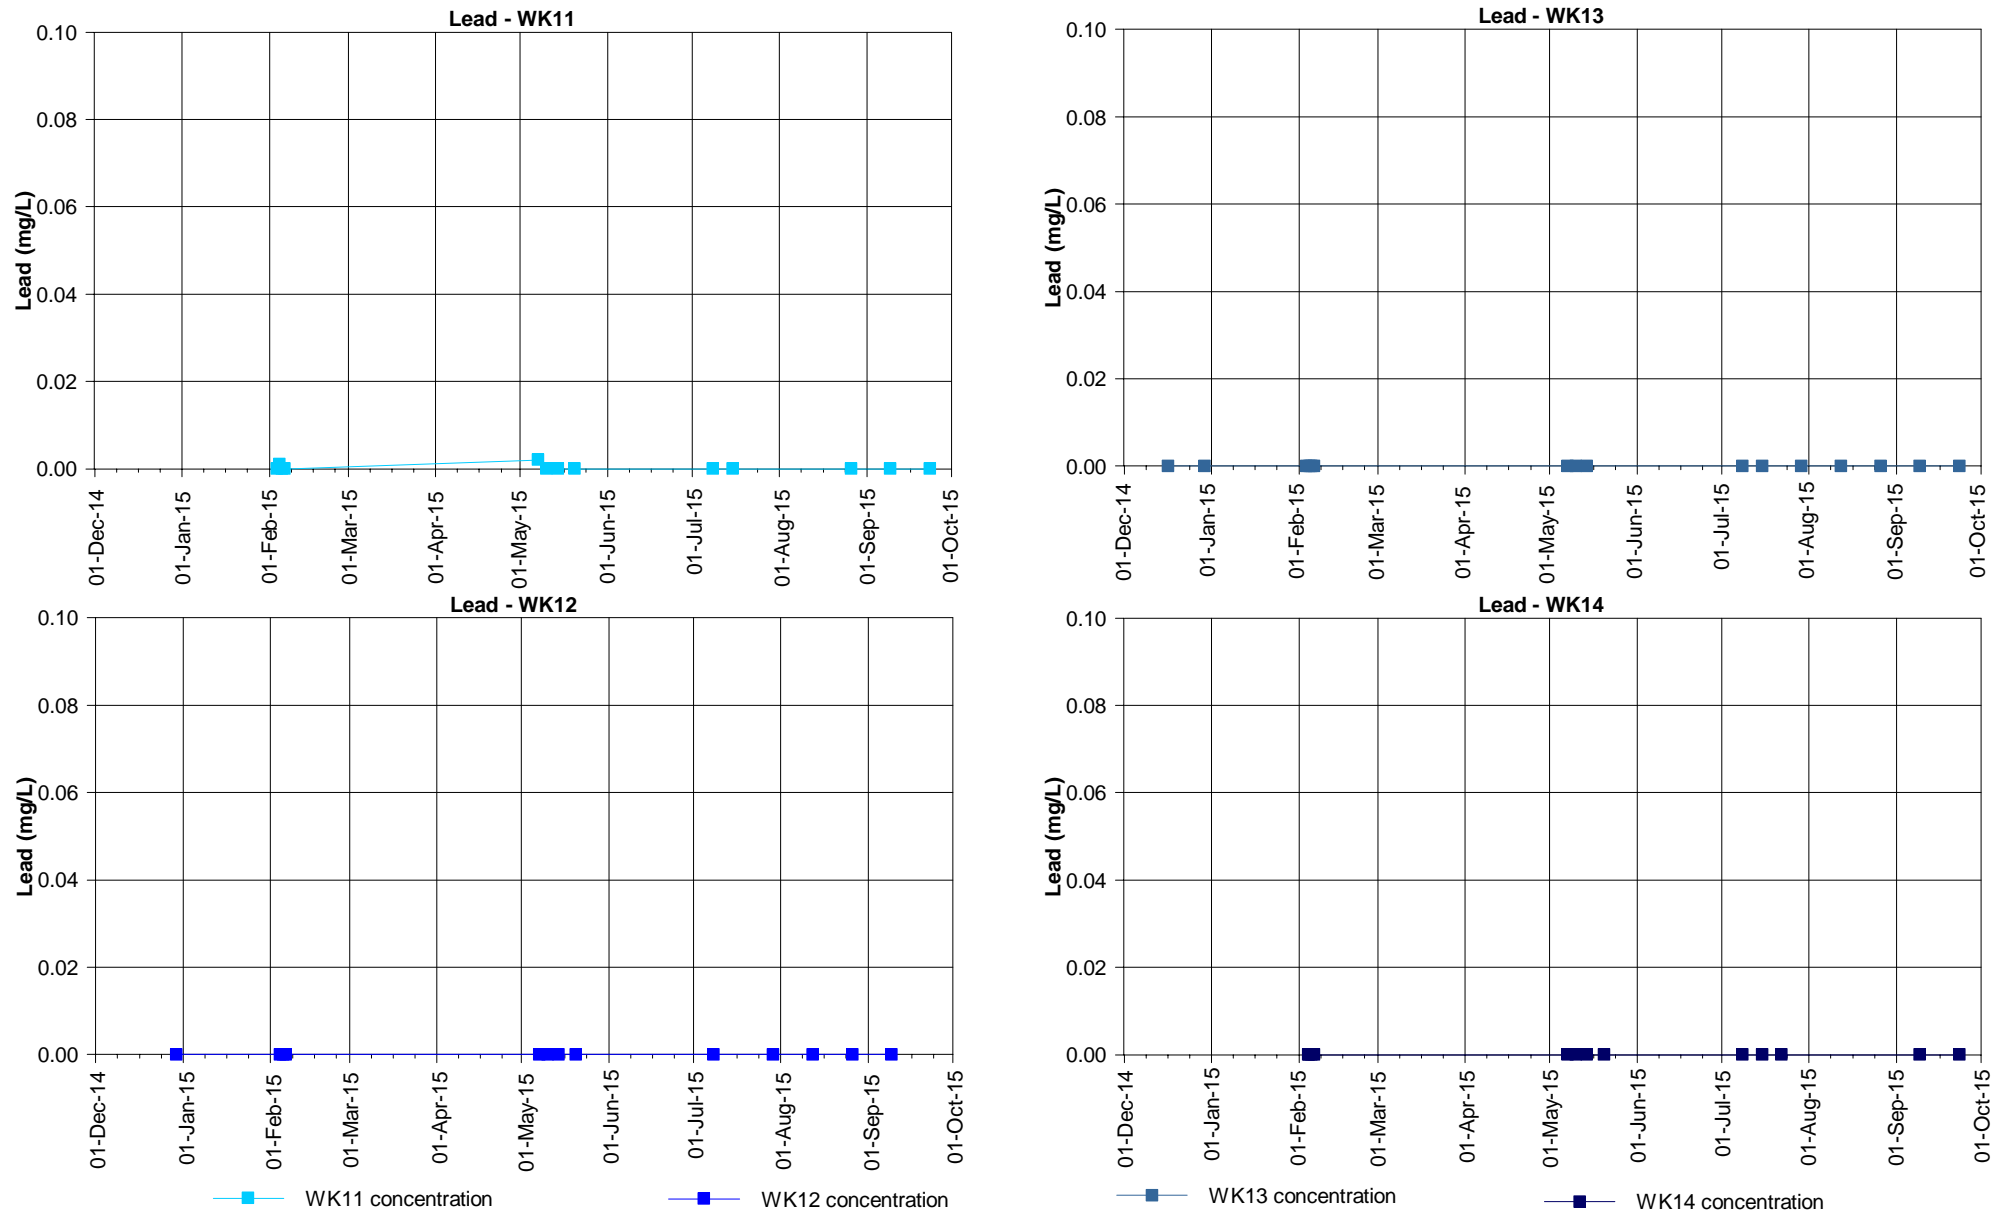


Figure E3.11: Lead concentrations at the Waukivory pilot wells

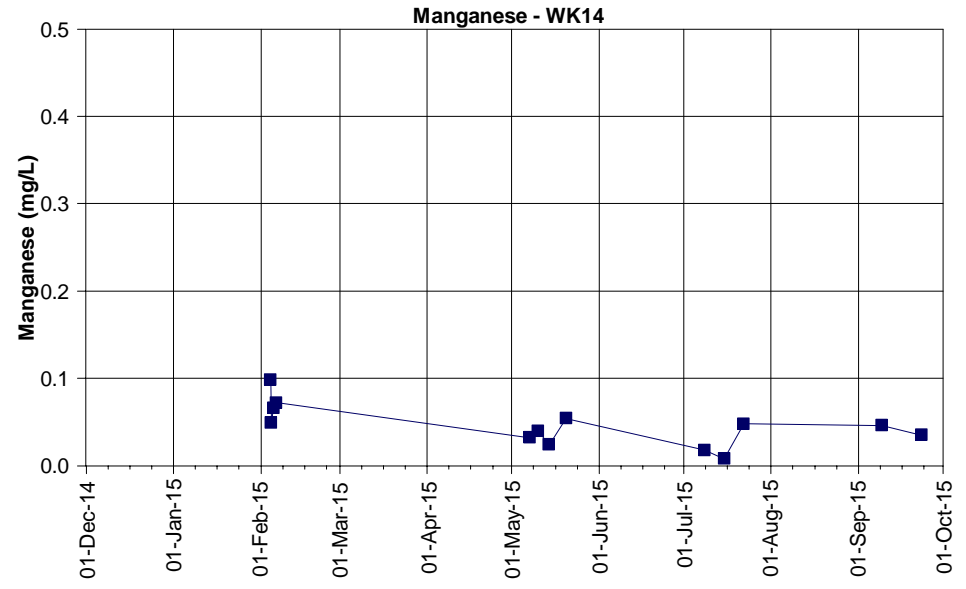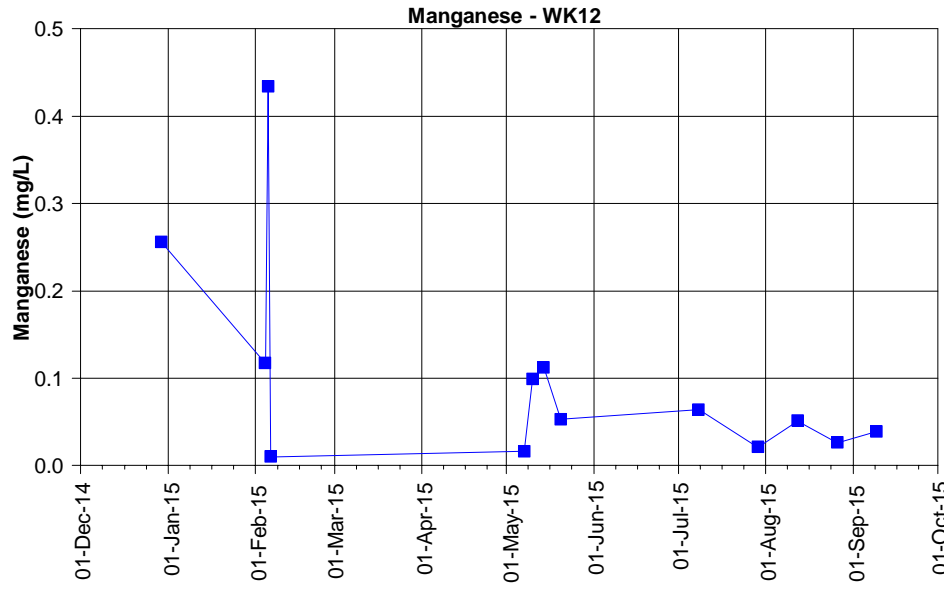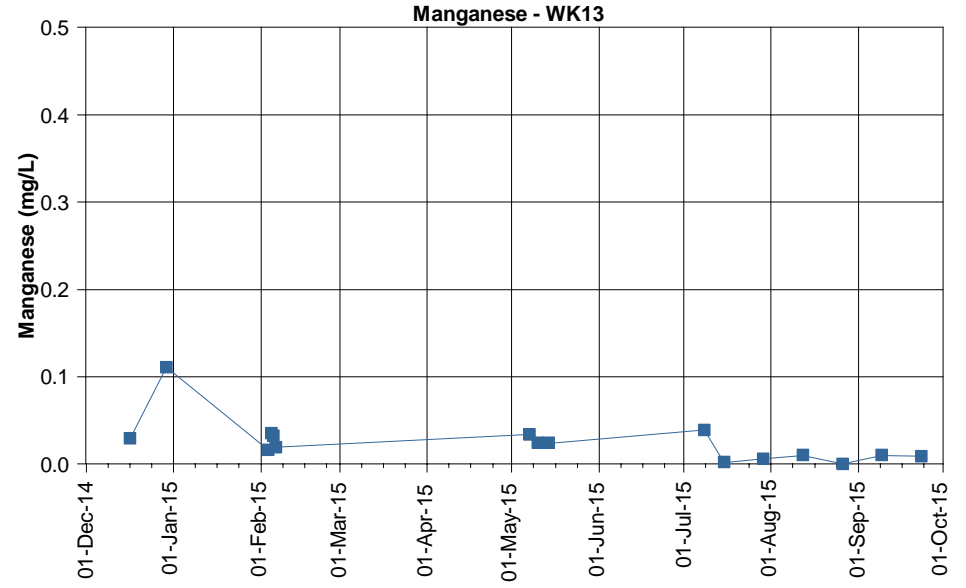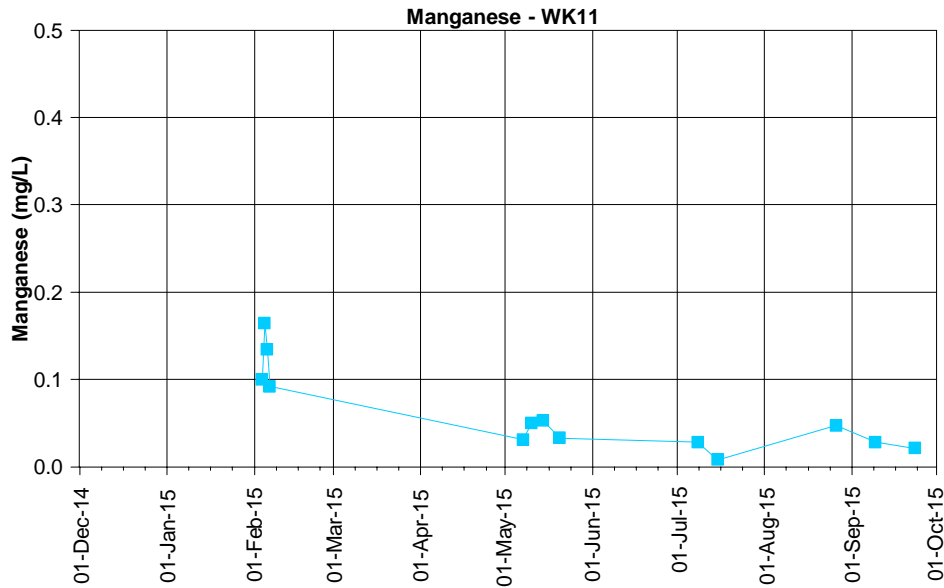

■ WK11 concentration
 ■ WK12 concentration
 ■ WK13 concentration
 ■ WK14 concentration

Figure E3.12: Manganese concentrations at the Waukivory pilot wells

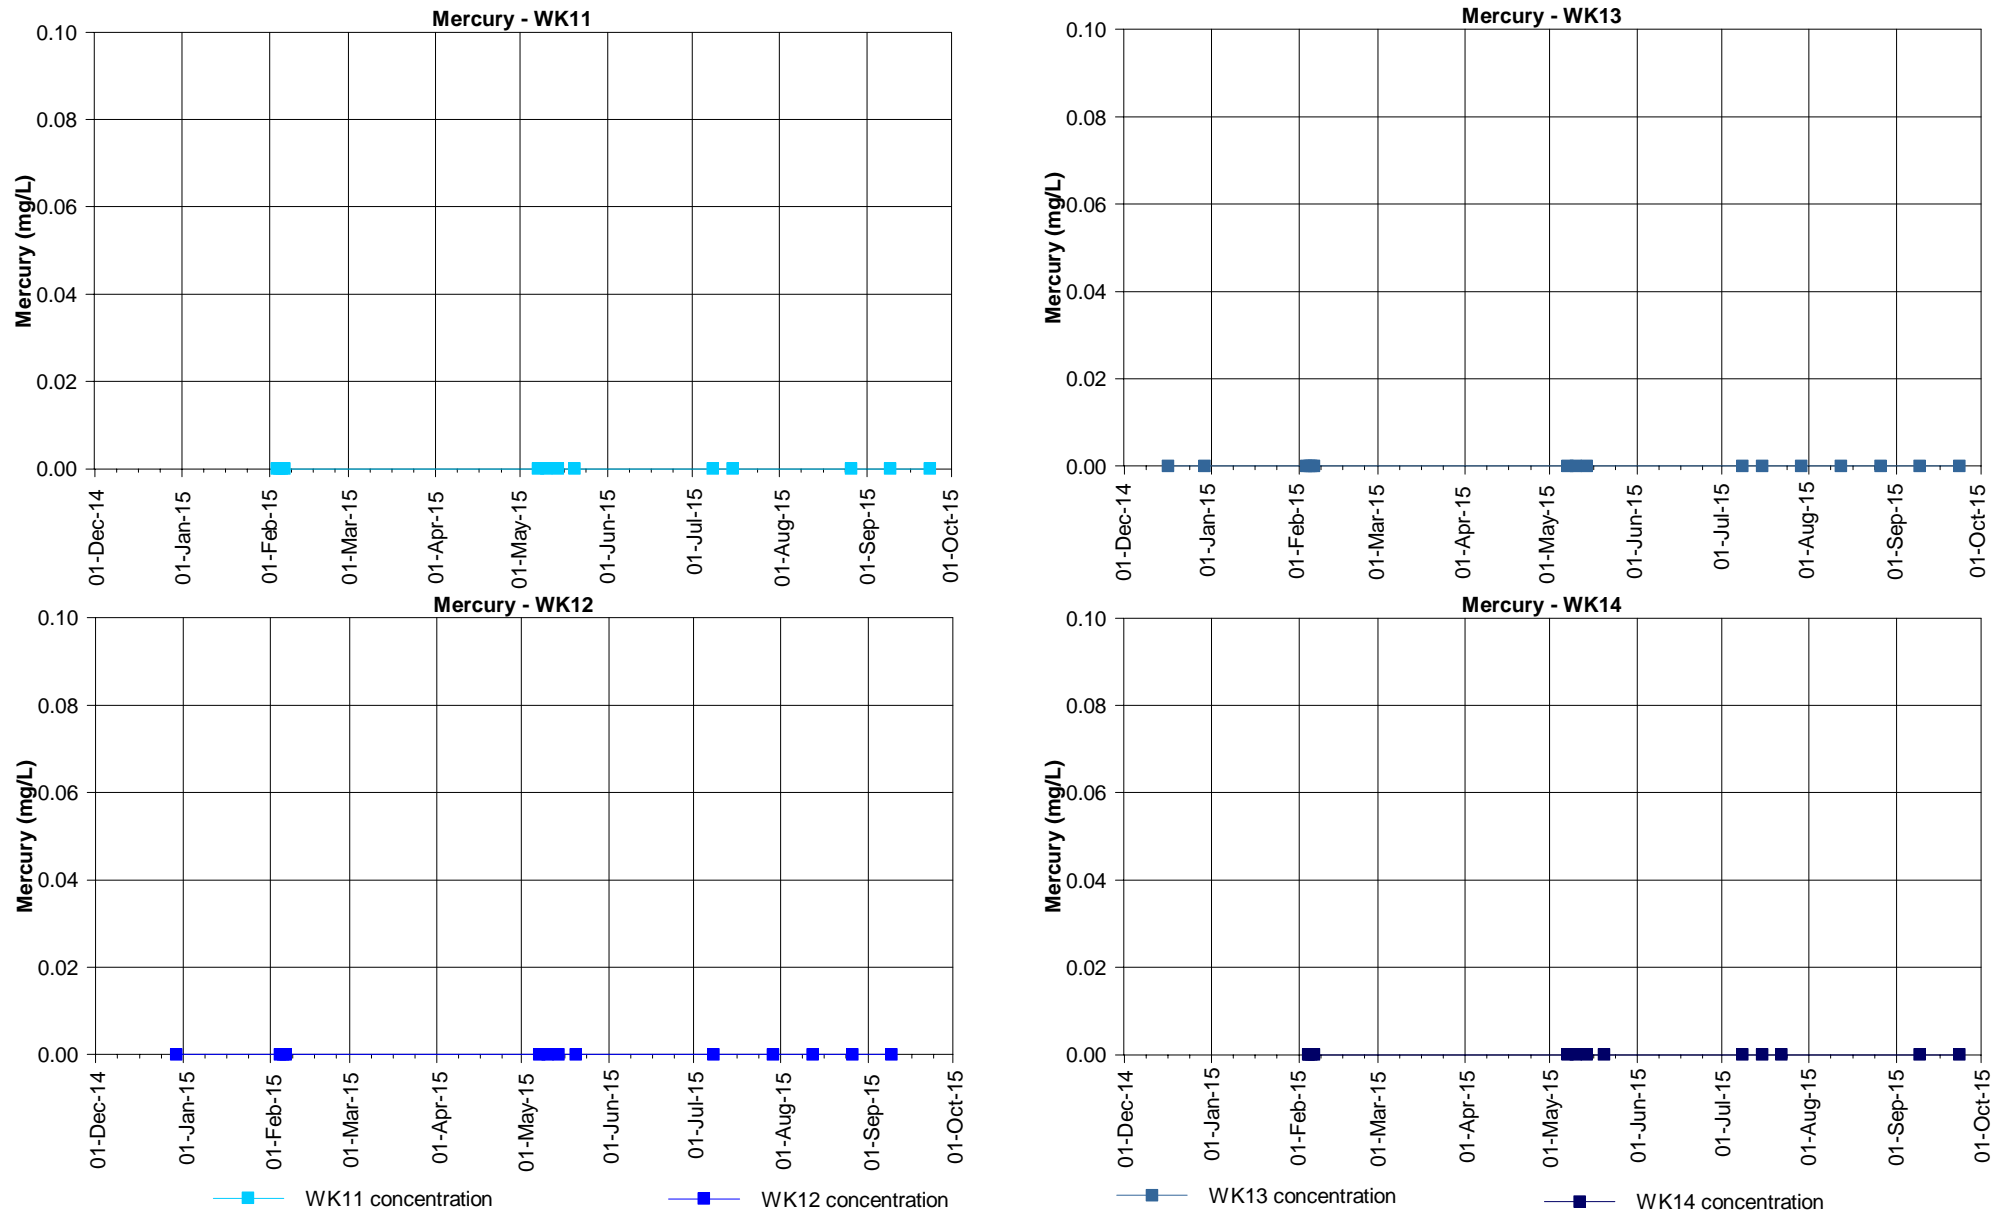


Figure E3.13: Mercury concentrations at the Waukivory pilot wells

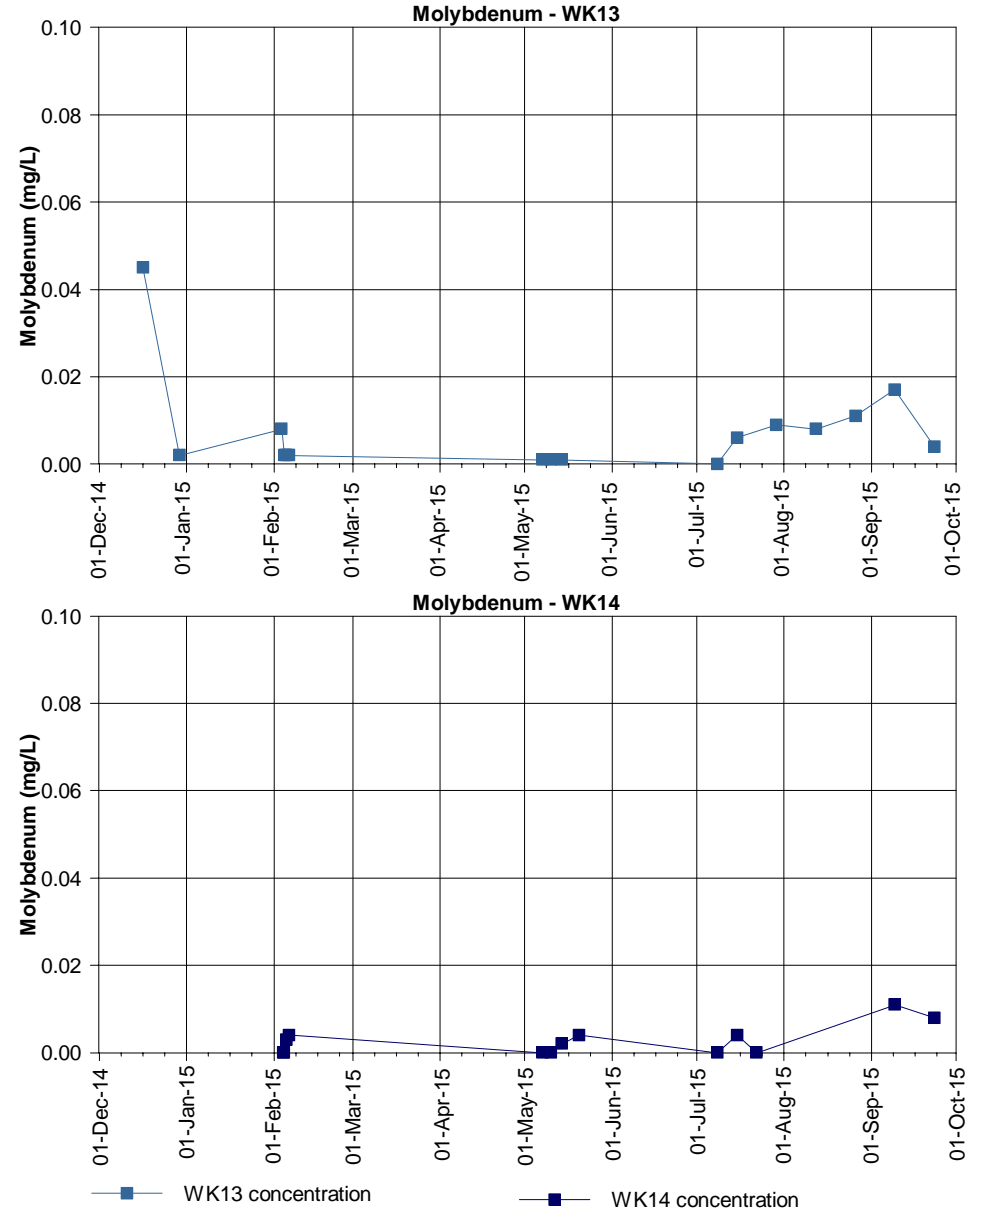
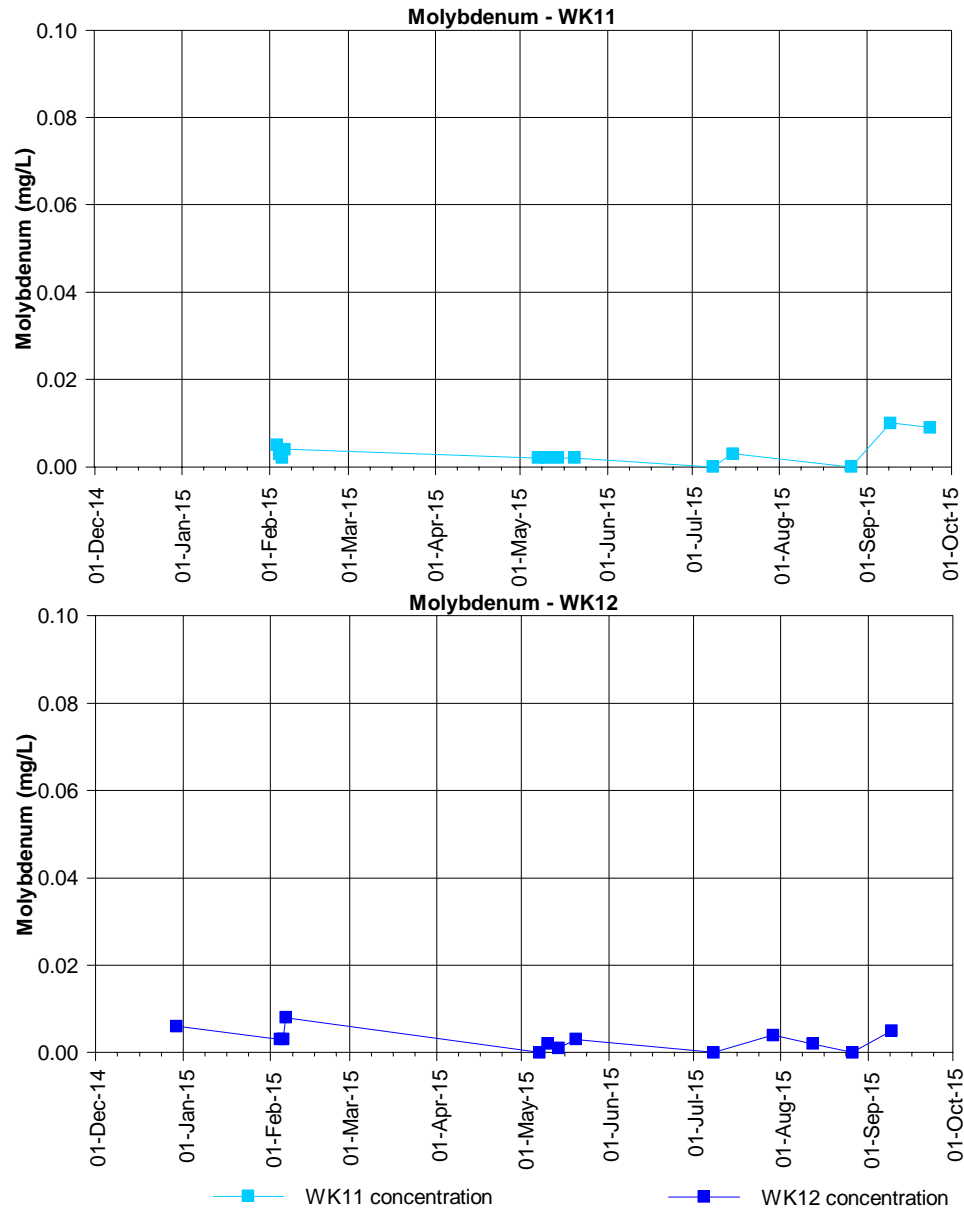


Figure E3.14: Molybdenum concentrations at the Waukivory pilot wells

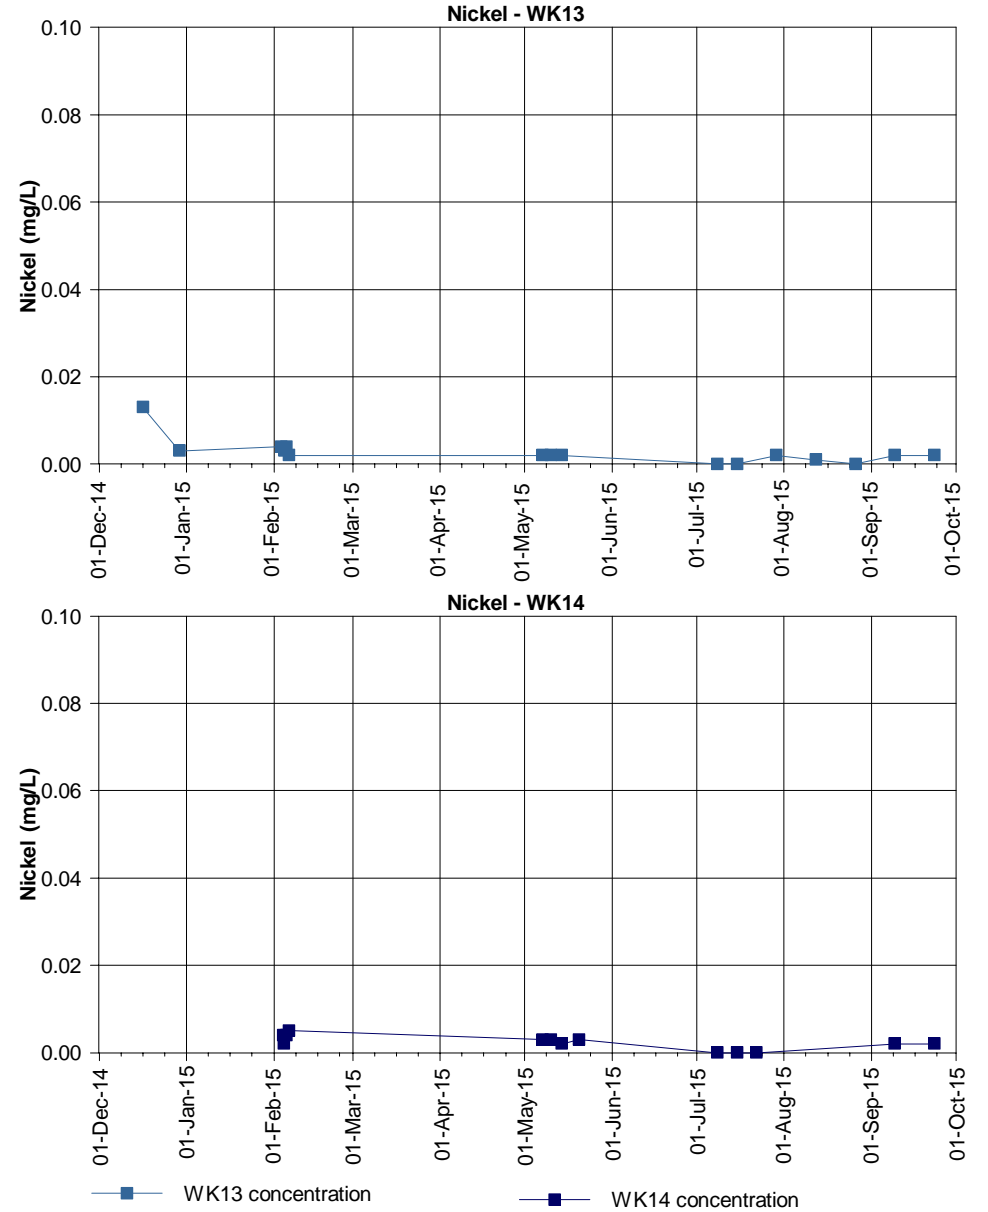
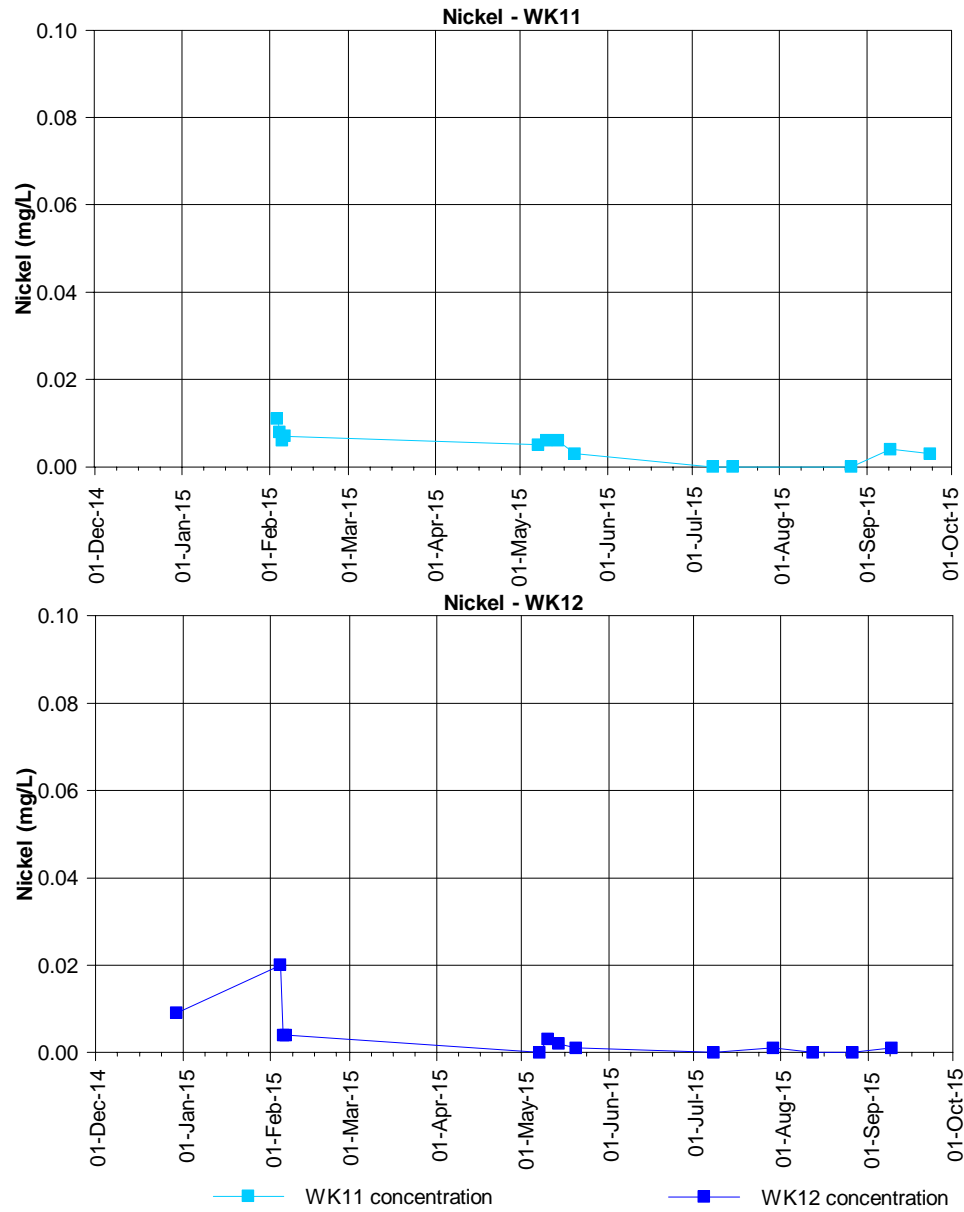


Figure E3.15: Nickel concentrations at the Waukivory pilot wells





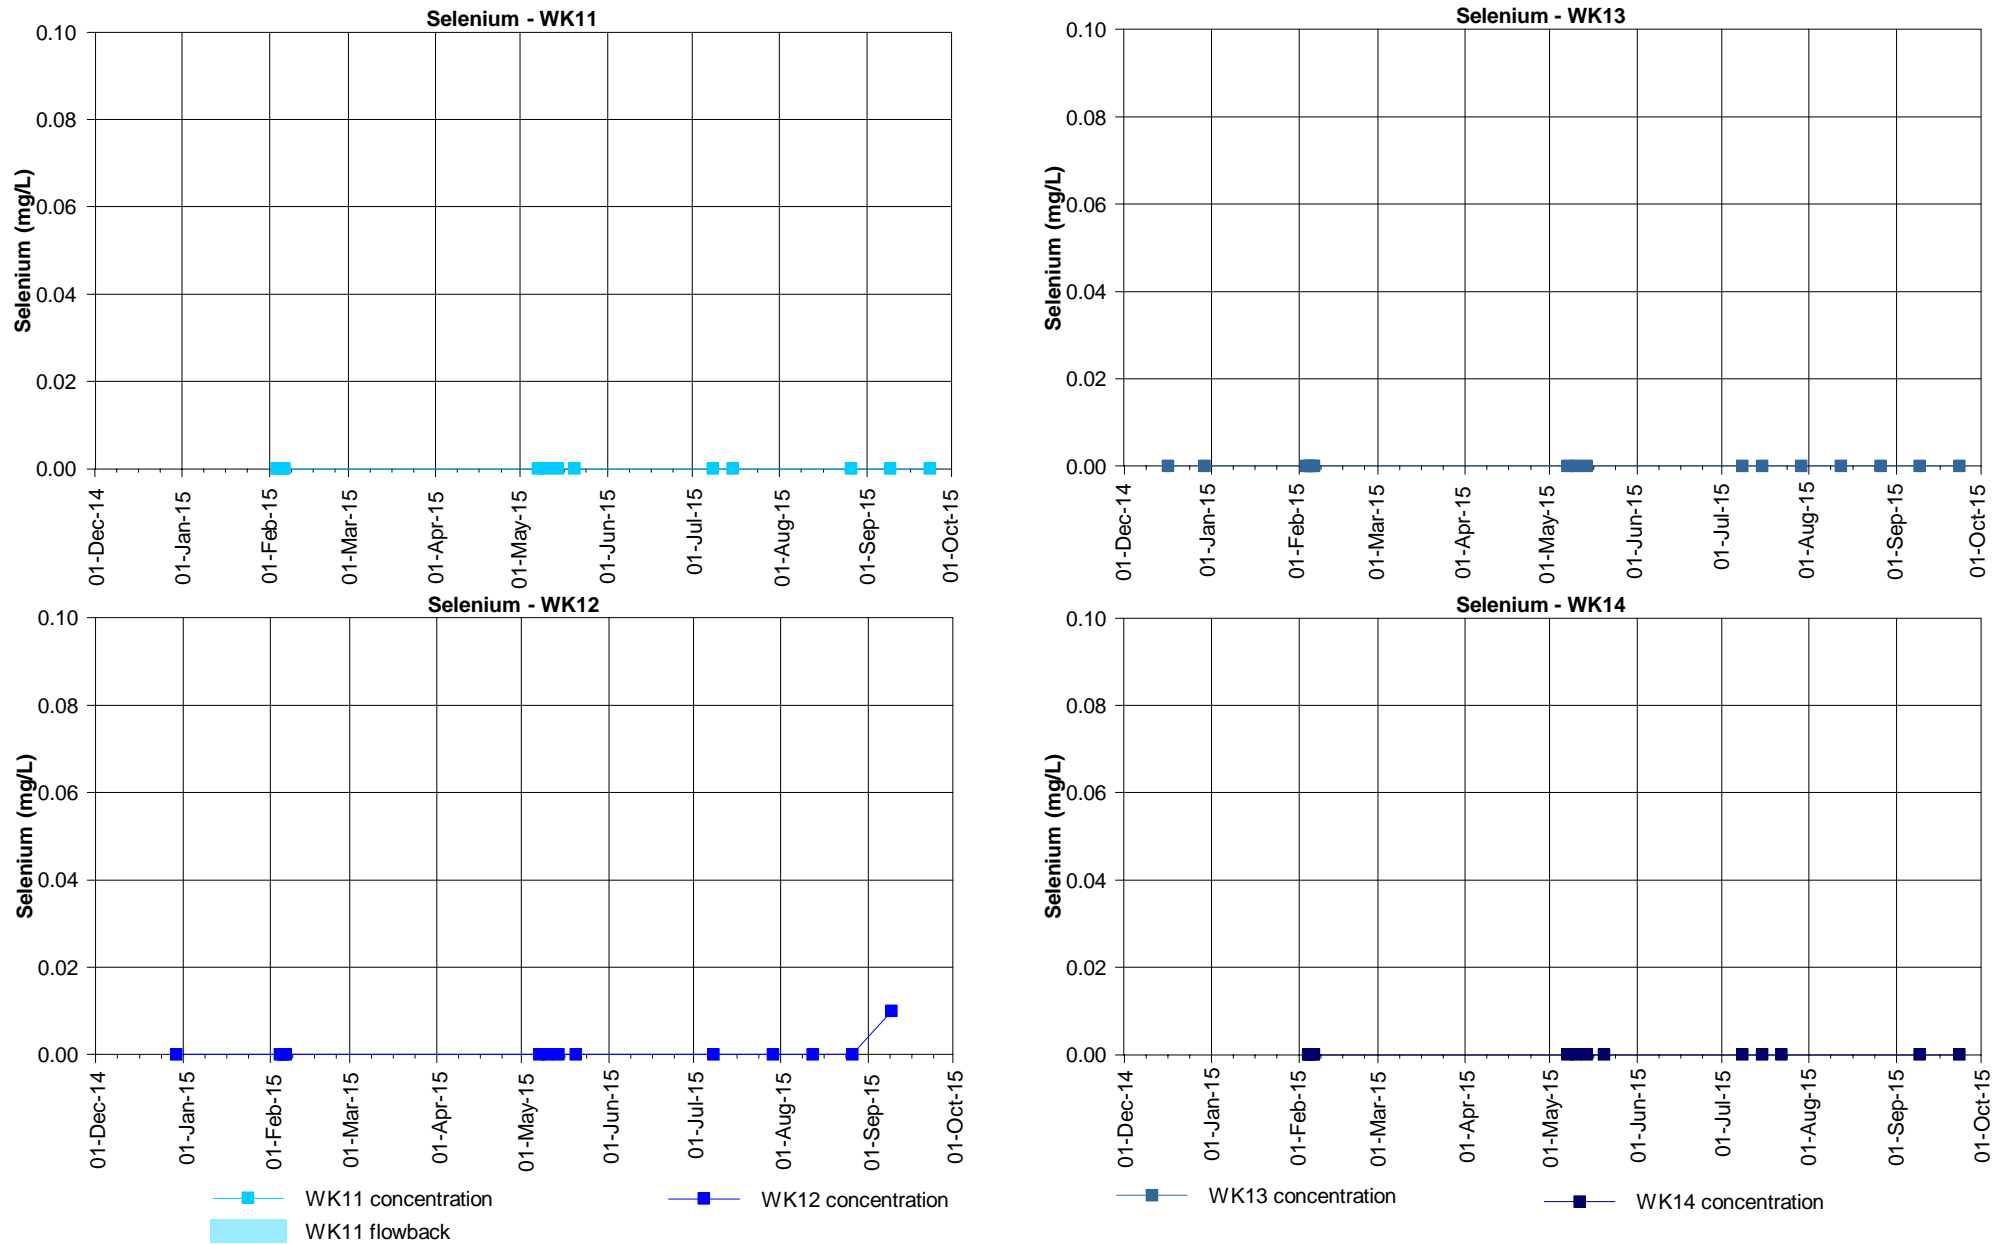


Figure E3.16: Selenium concentrations at the Waukivory pilot wells

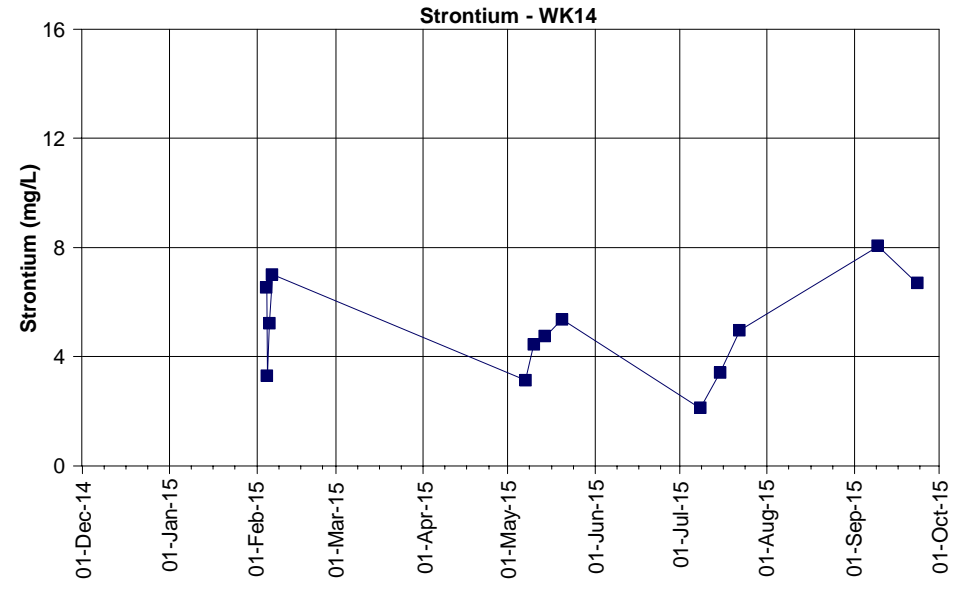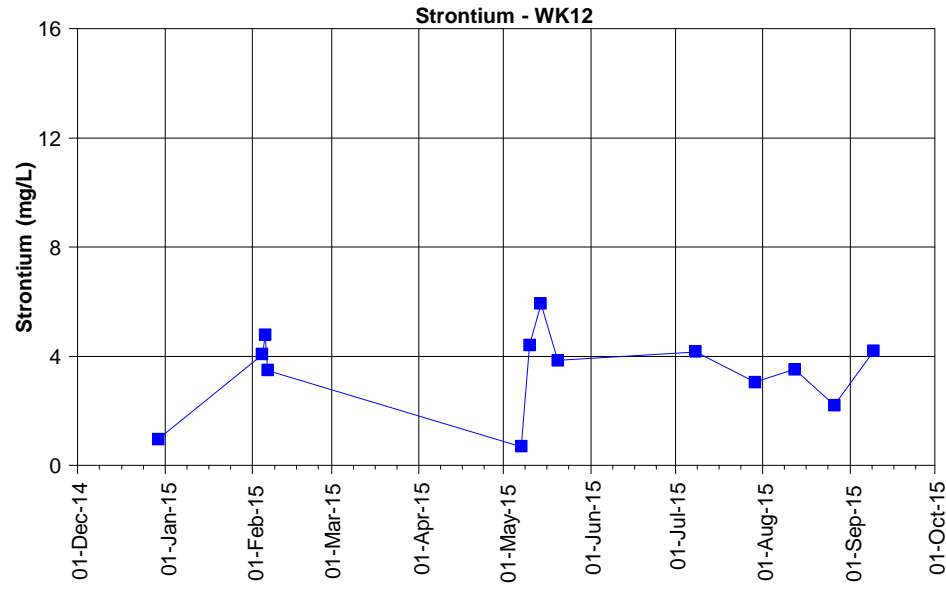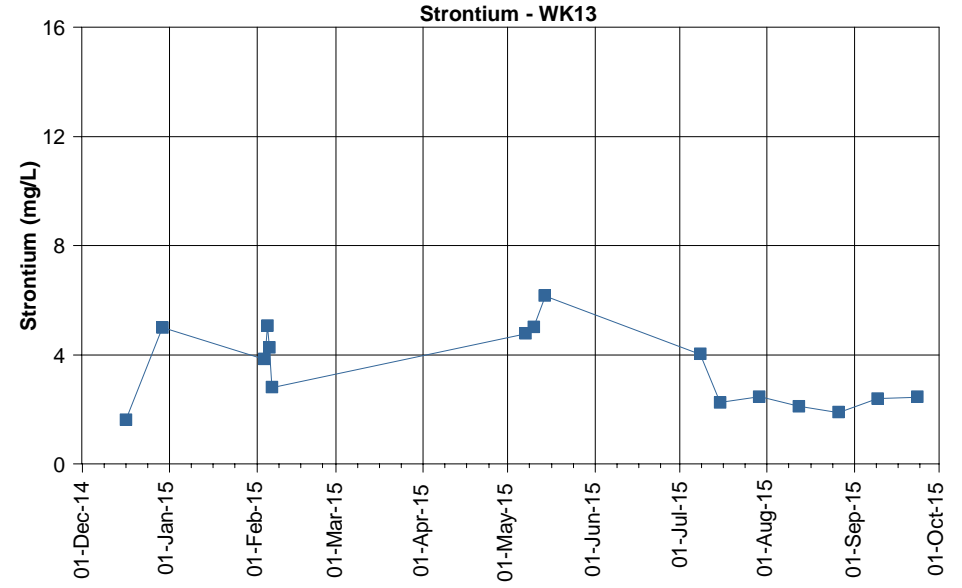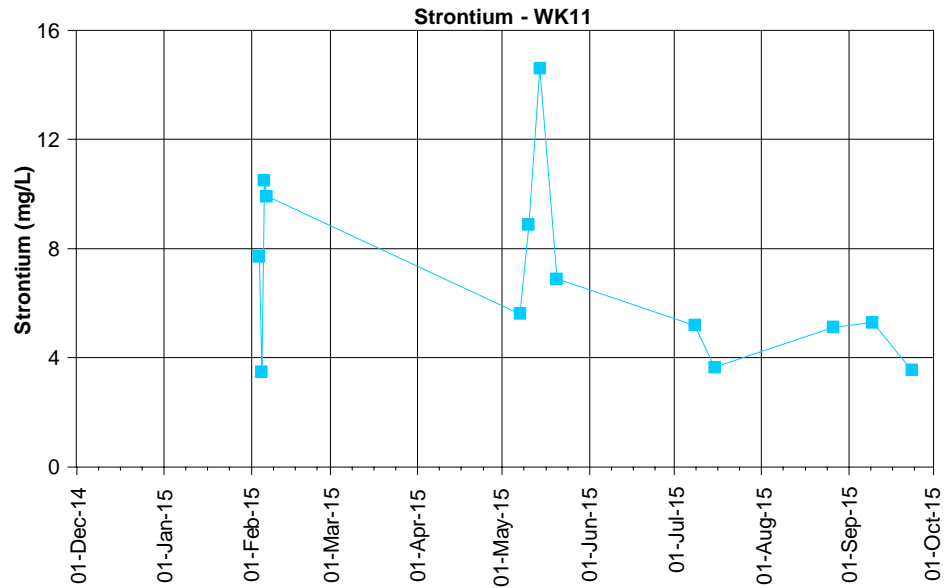

■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E3.17: Strontium concentrations at the Waukivory pilot wells

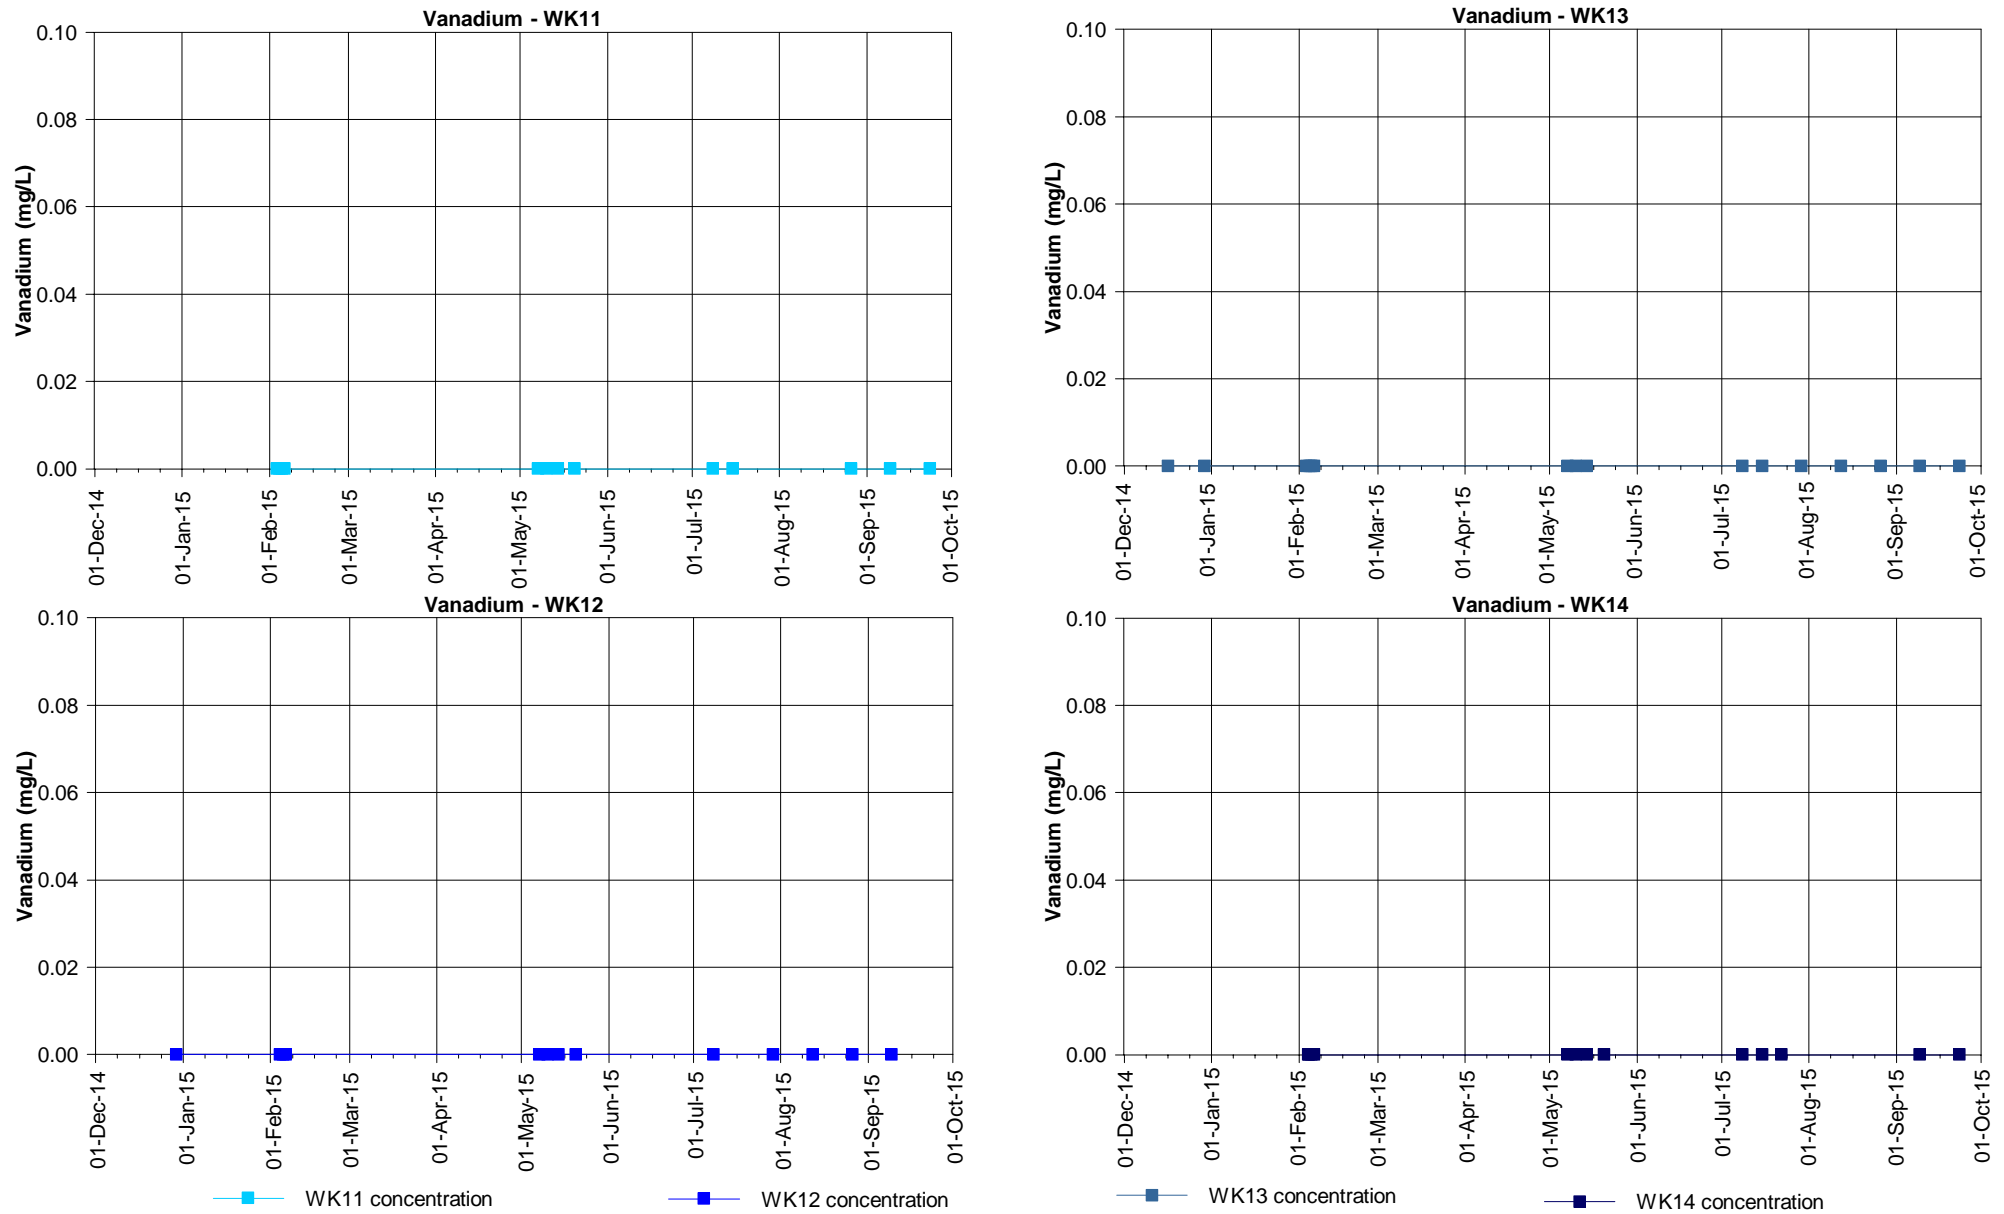


Figure E3.18: Vanadium concentrations at the Waukivory pilot wells

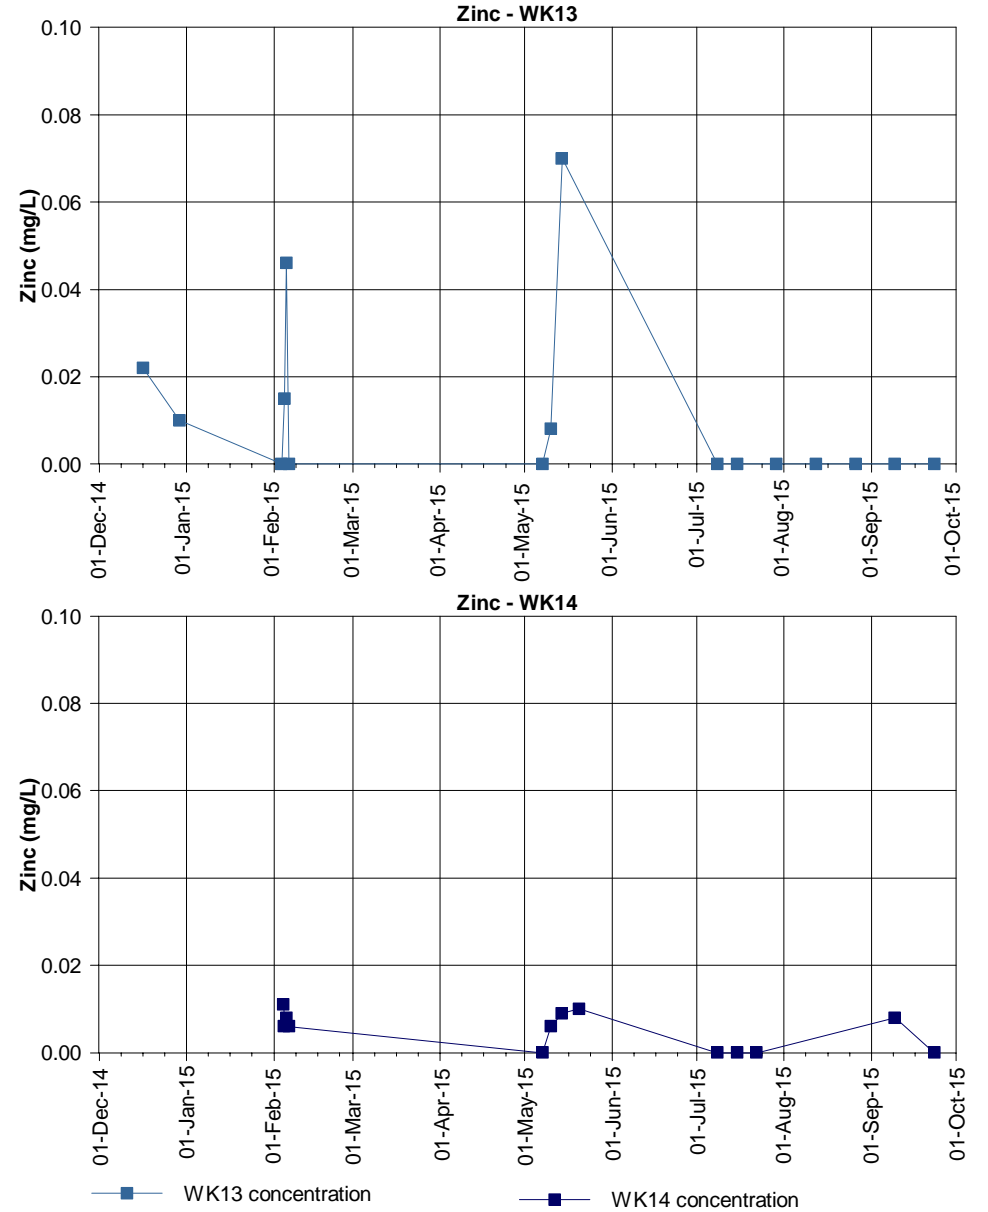
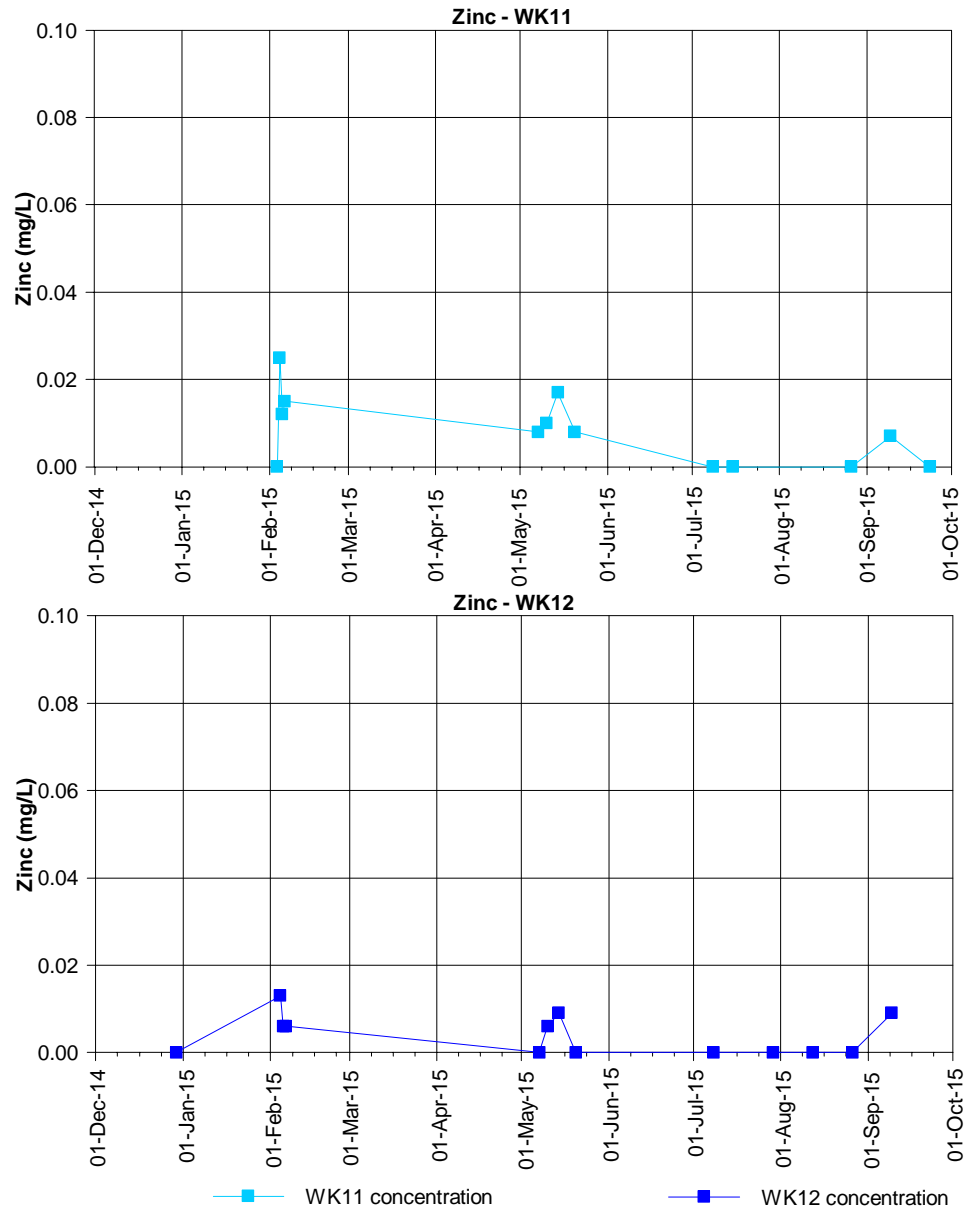


Figure E3.19: Zinc concentrations at the Waukivory pilot wells

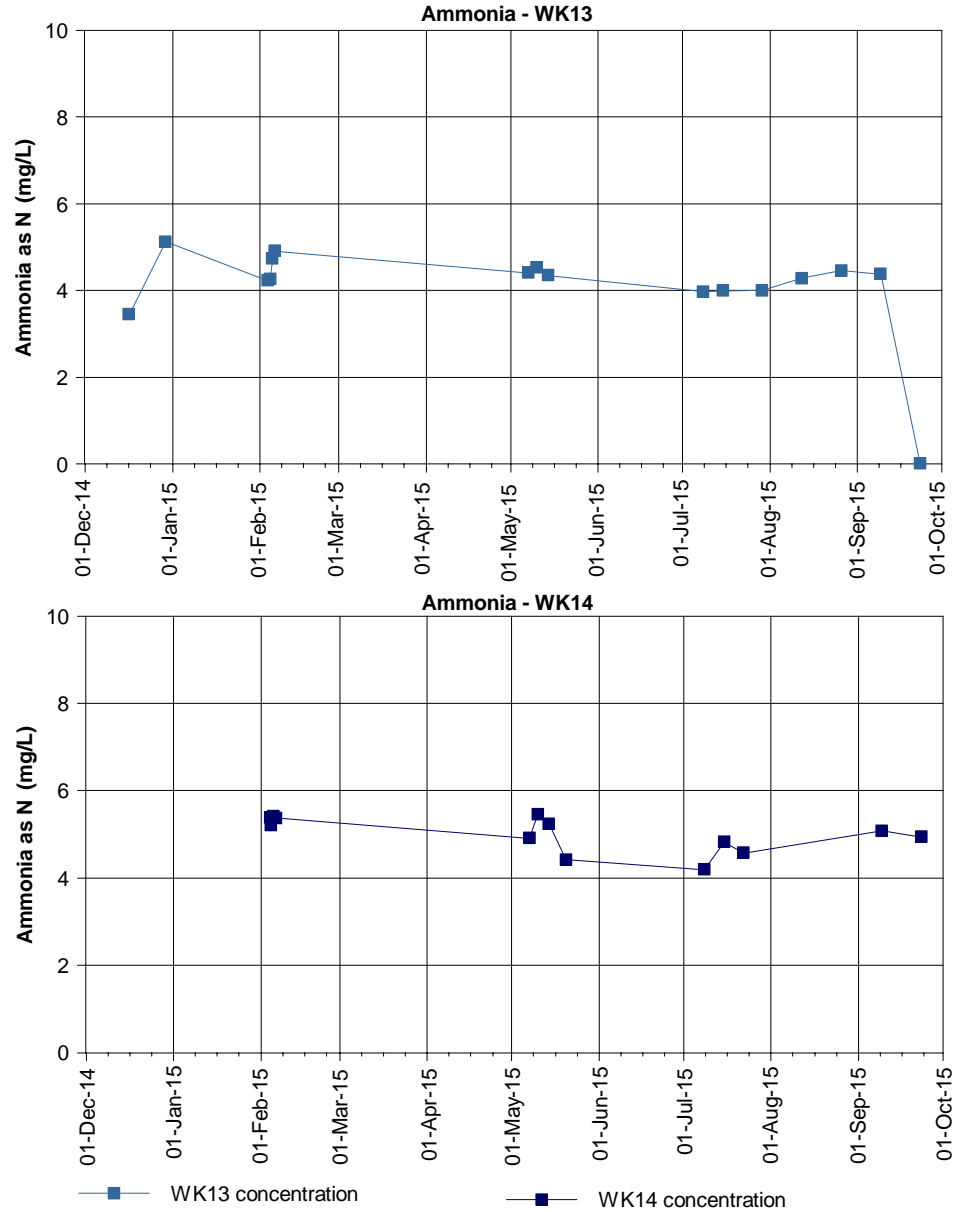
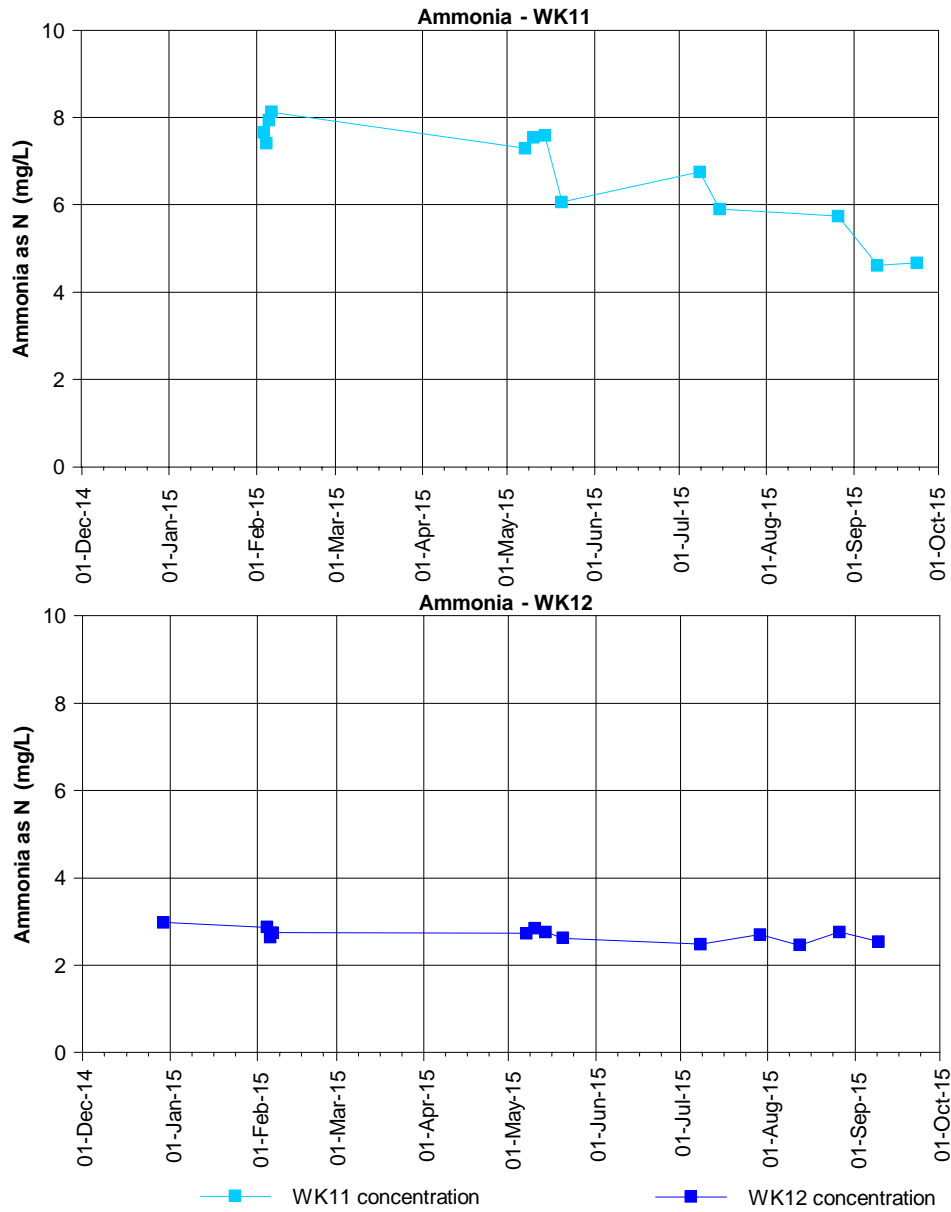


Figure E4.1: Ammonia concentrations and flowback volumes at the Waukivory pilot wells

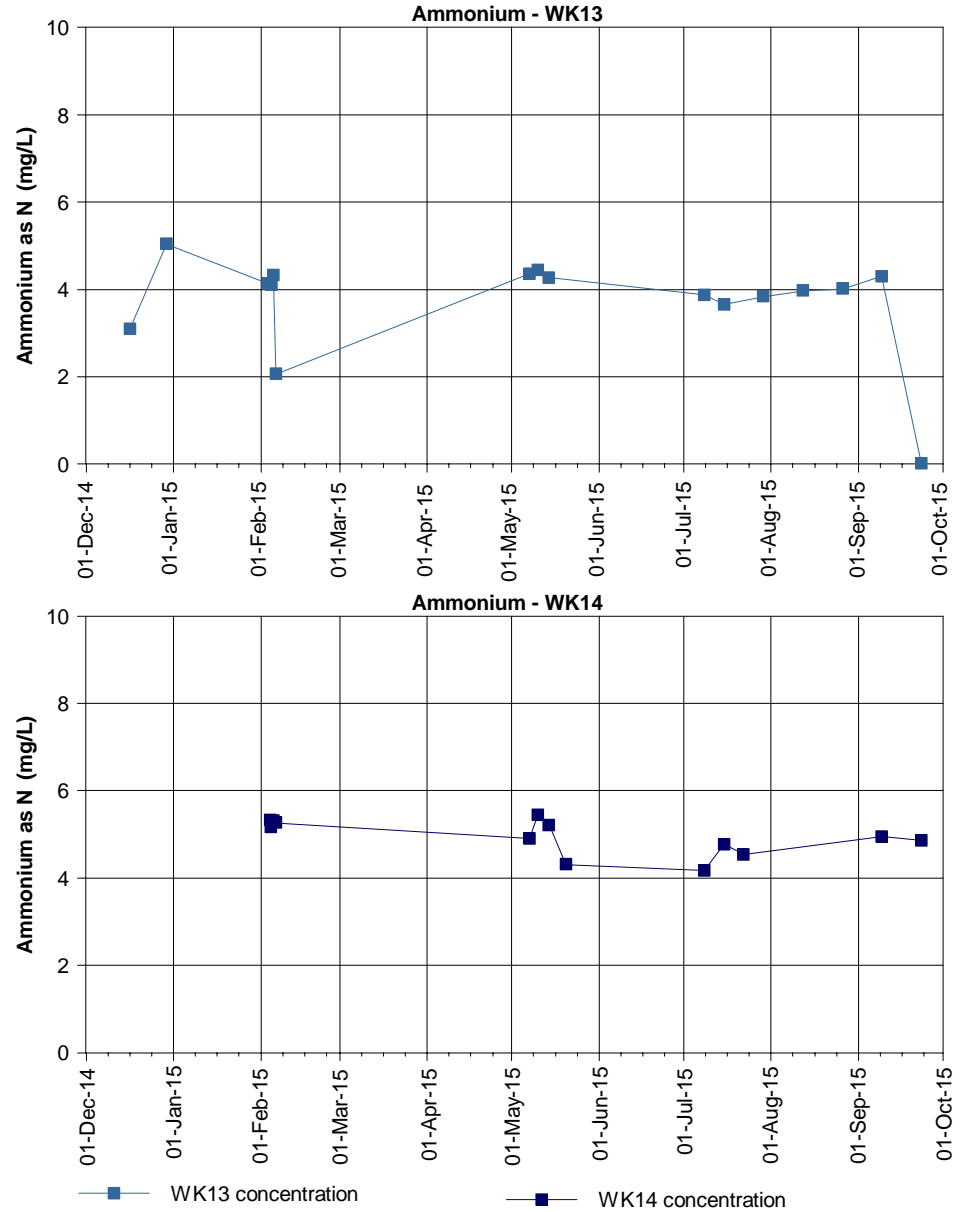
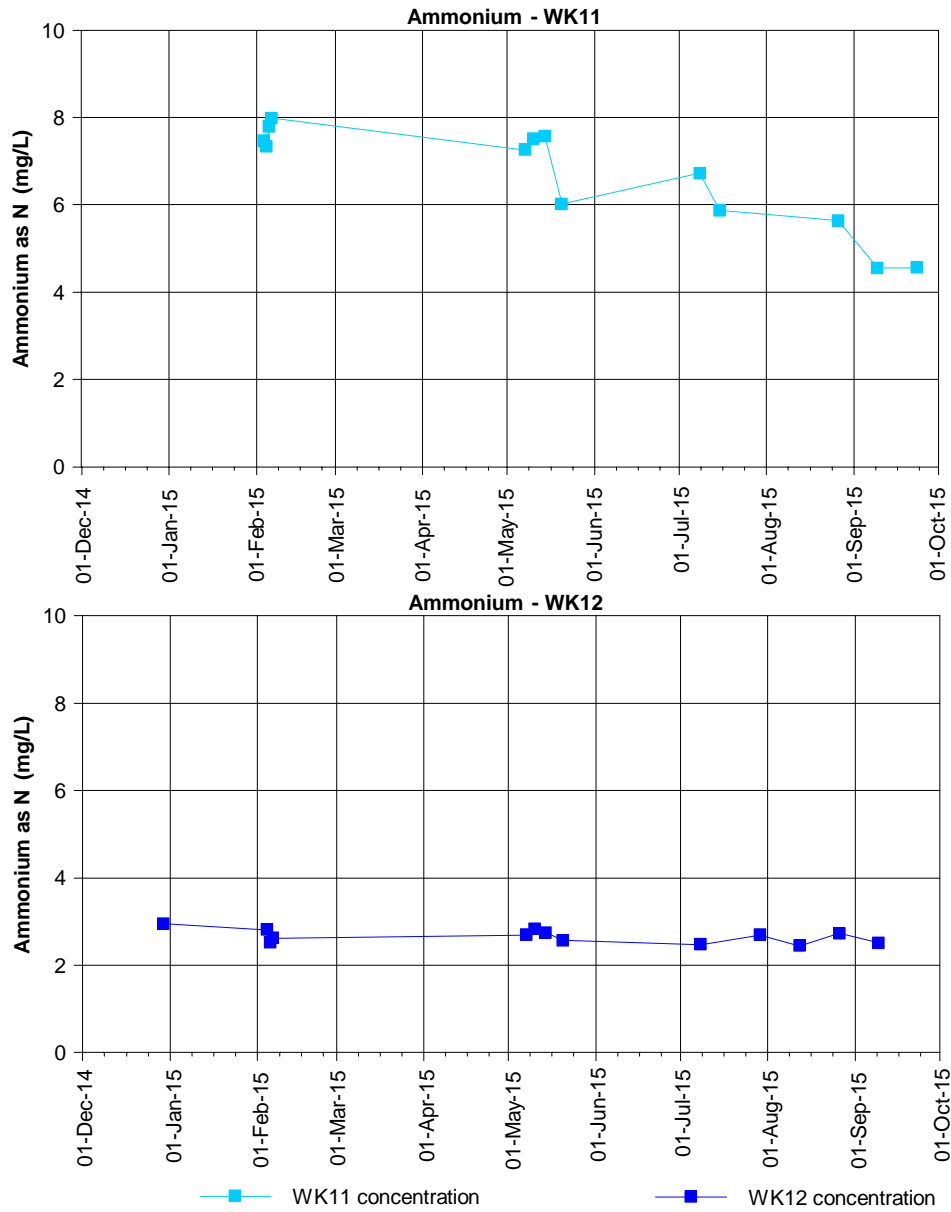


Figure E4.2: Ammonium concentrations at the Waukivory pilot wells

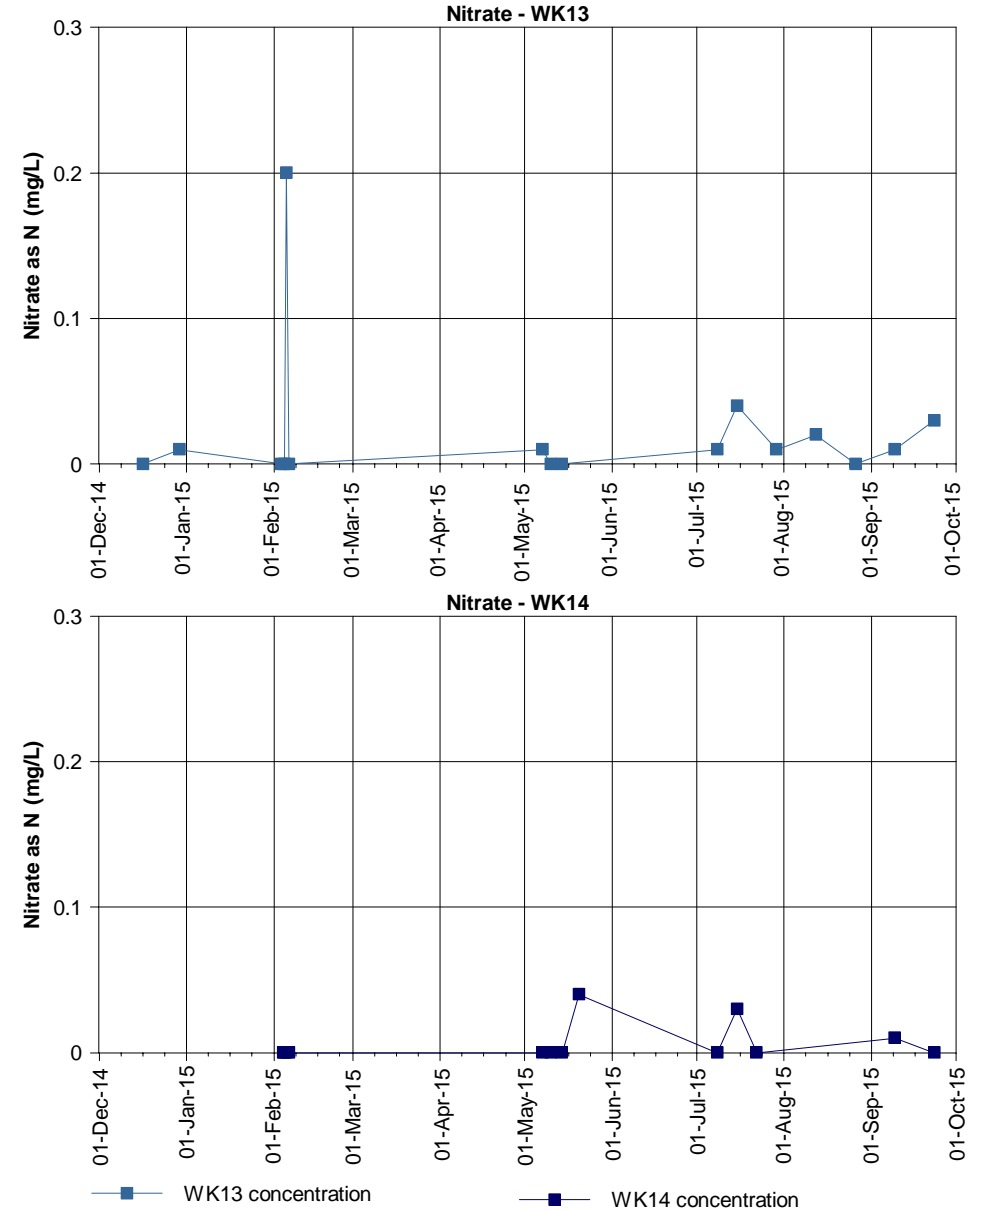
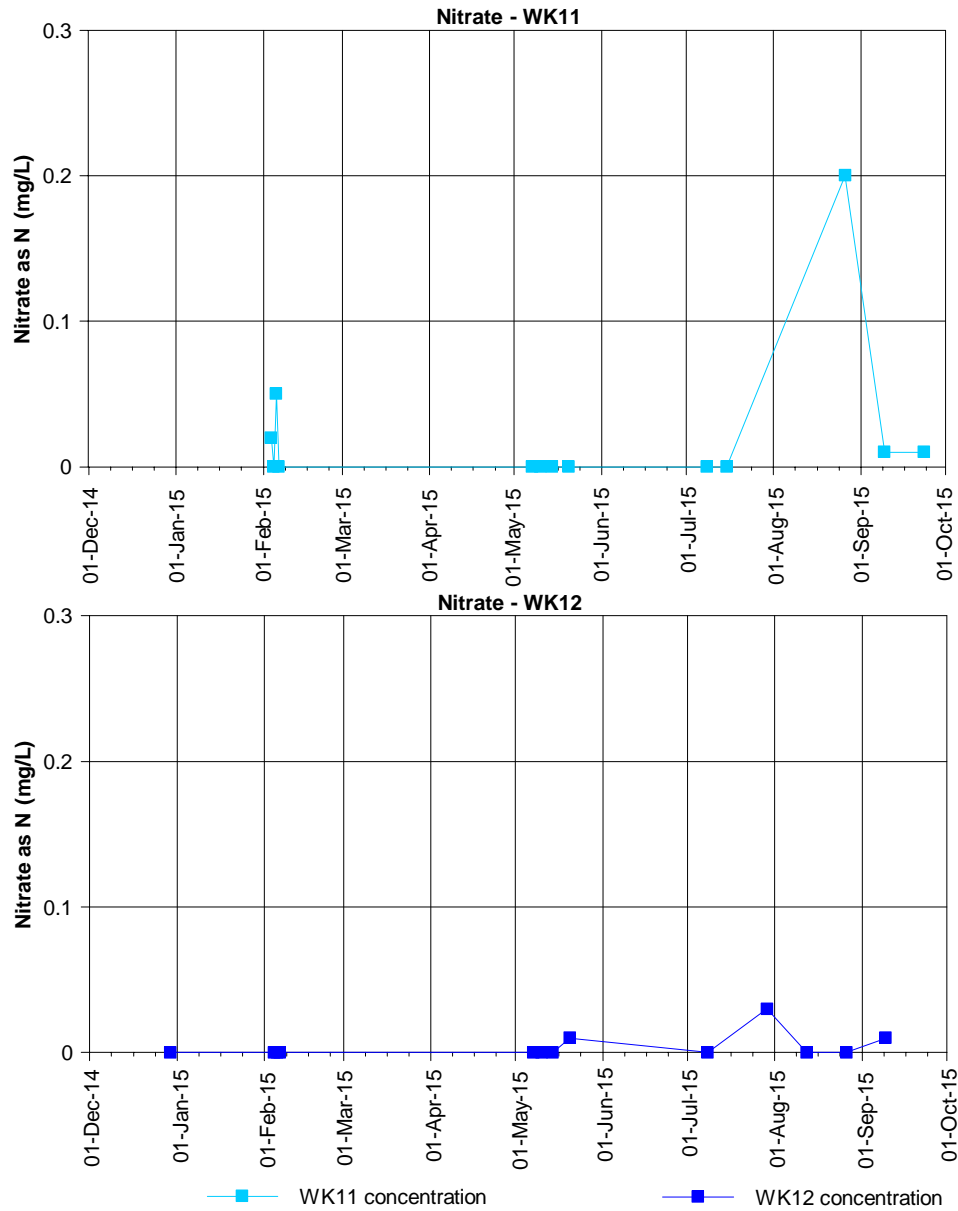


Figure E4.3: Nitrate concentrations at the Waukivory pilot wells

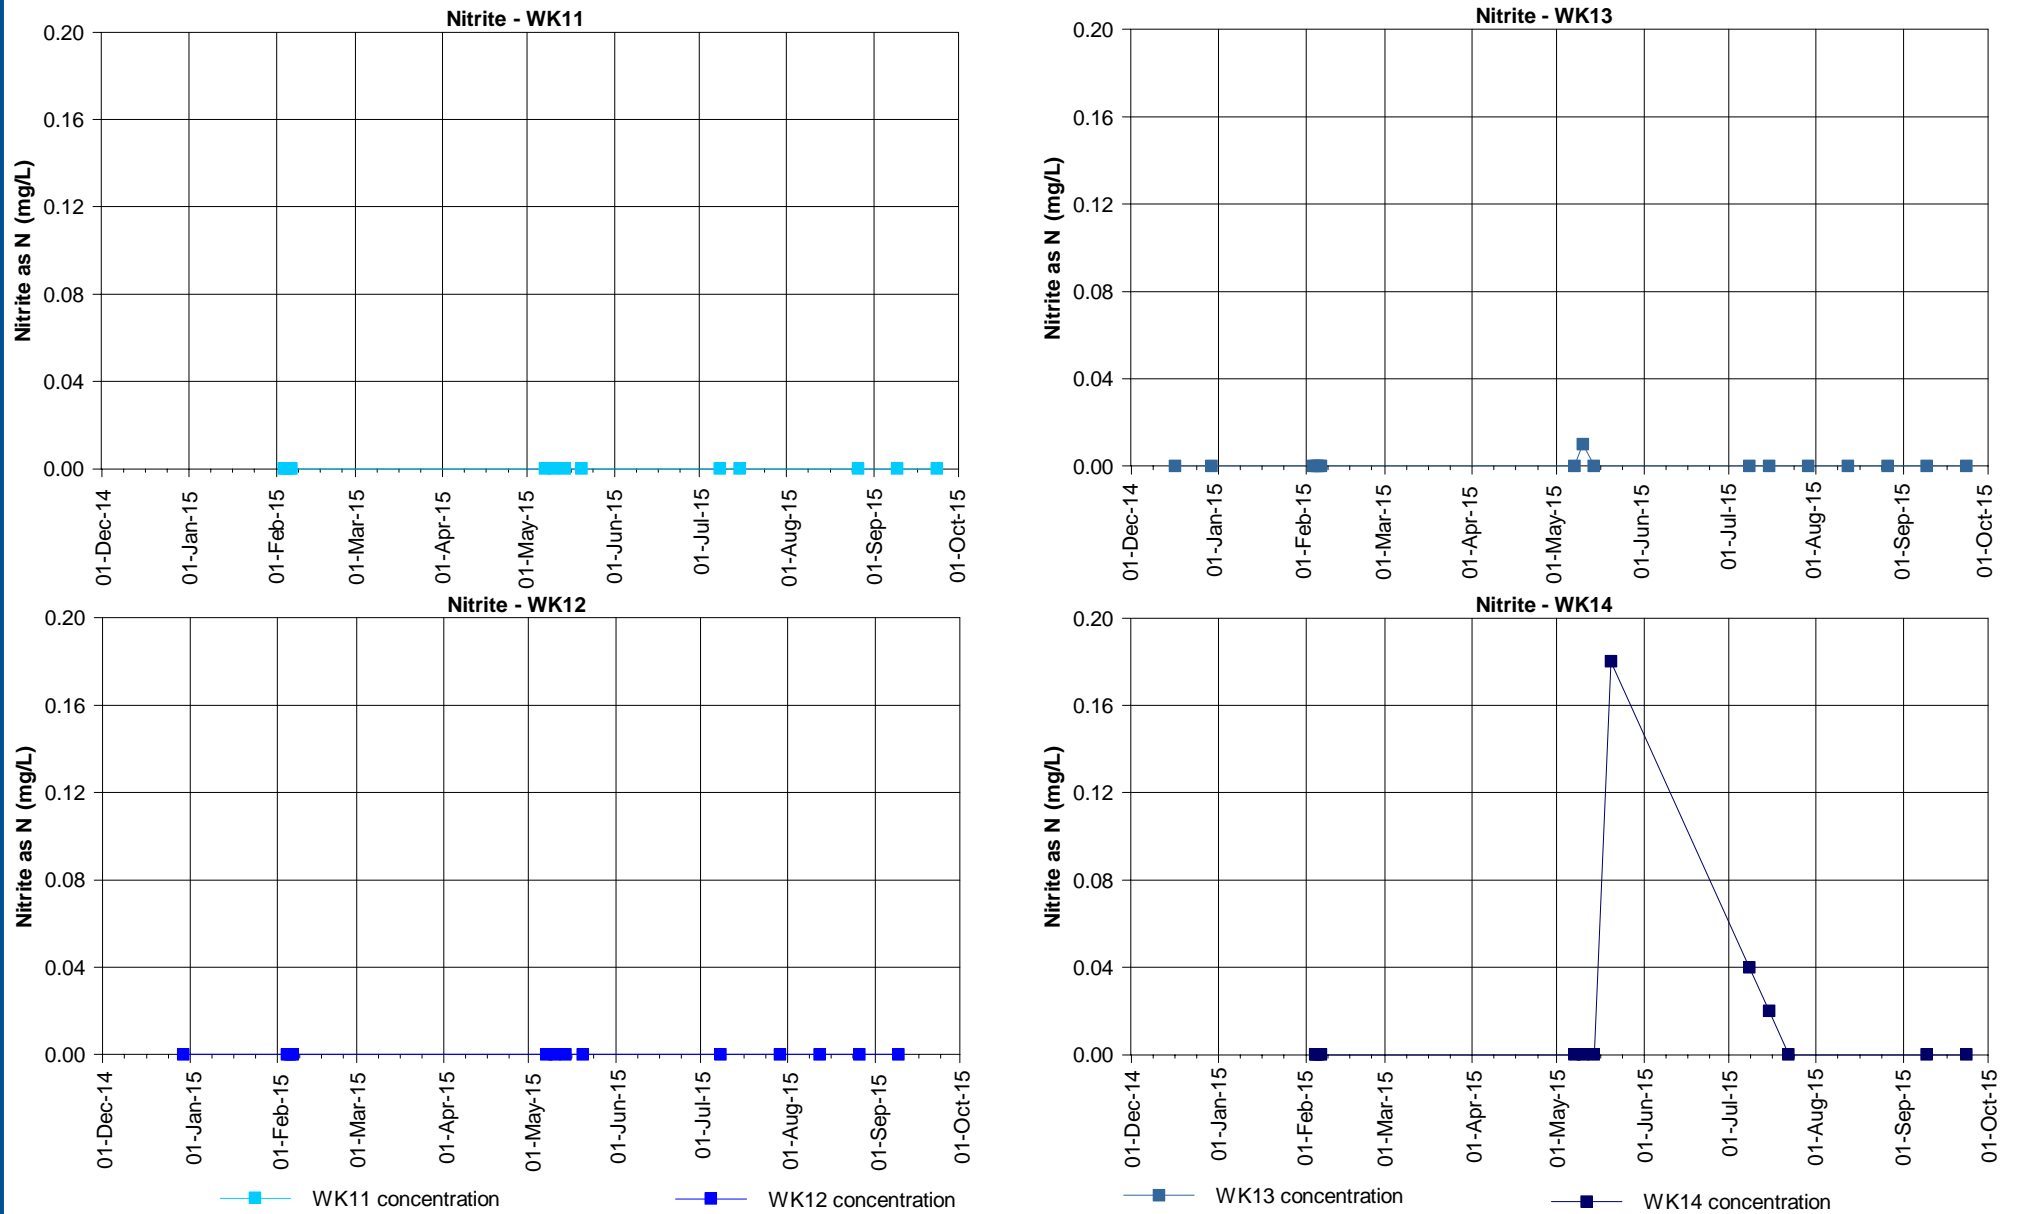


Figure E4.4: Nitrite concentrations at the Waukivory pilot wells

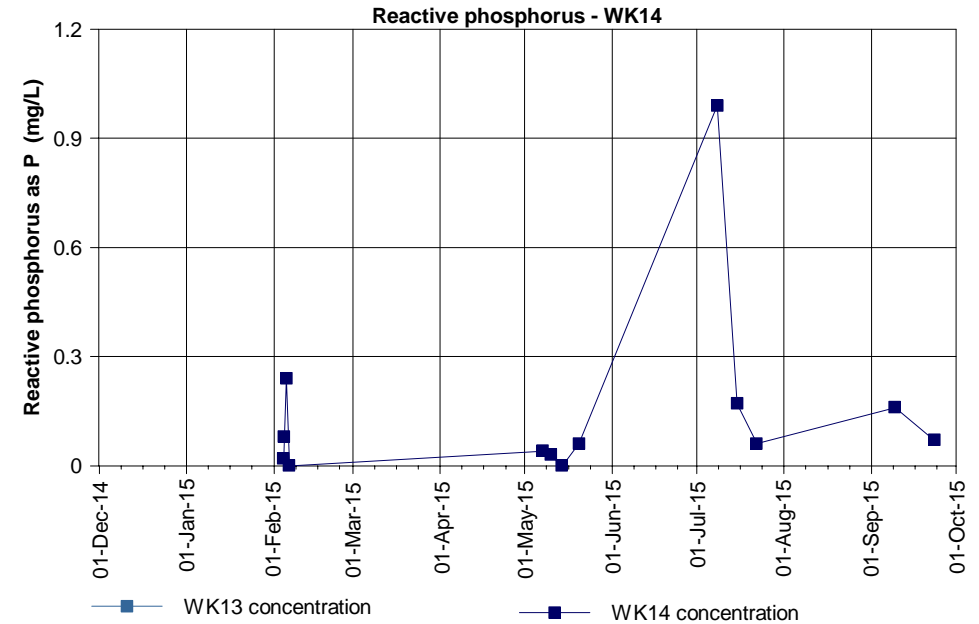
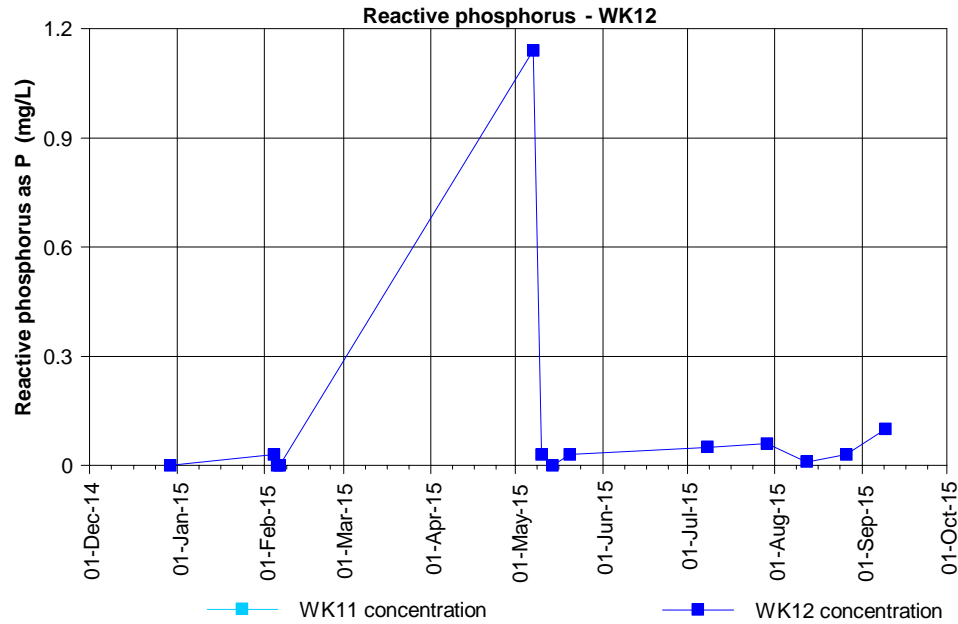
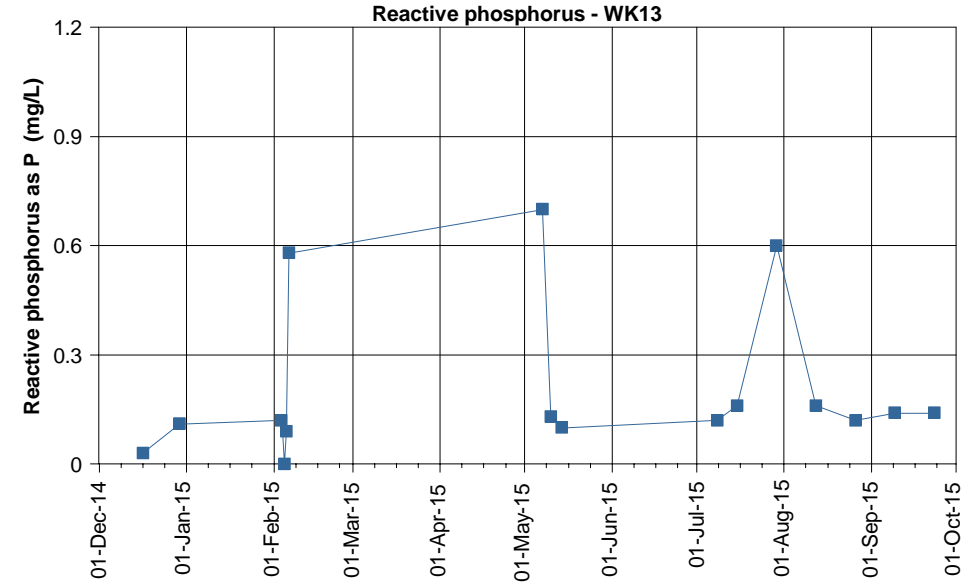
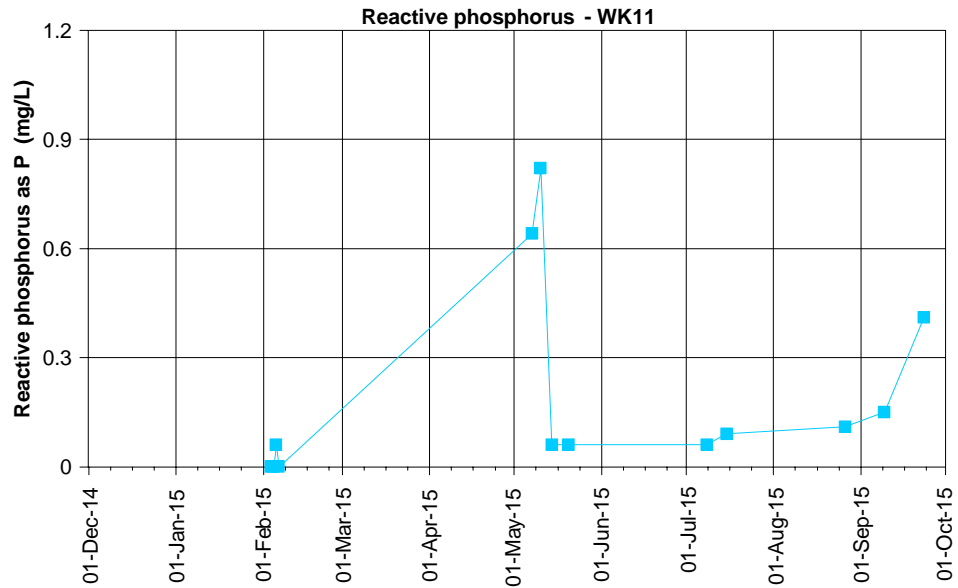


Figure E4.5: Reactive phosphorus concentrations at the Waukivory pilot wells

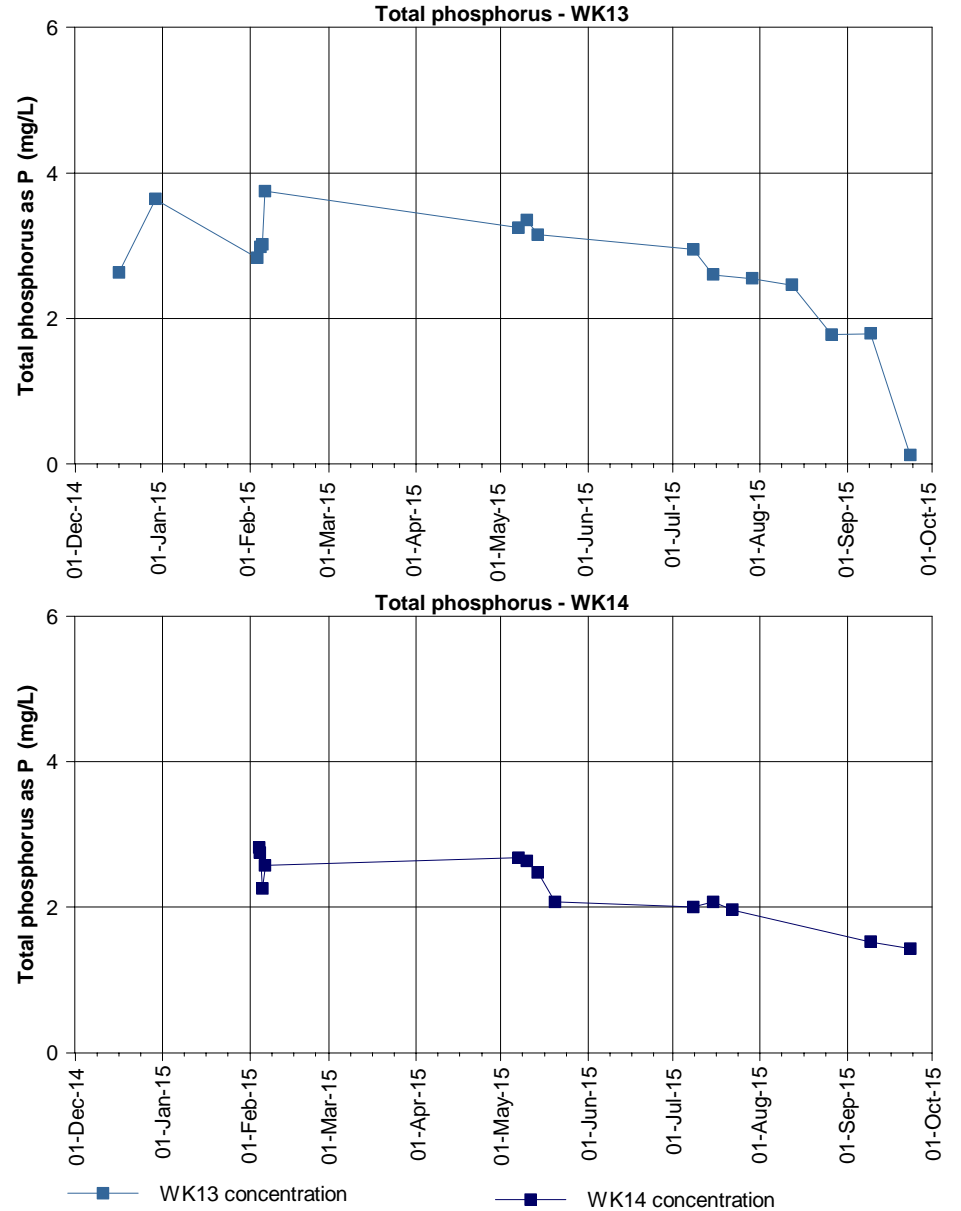
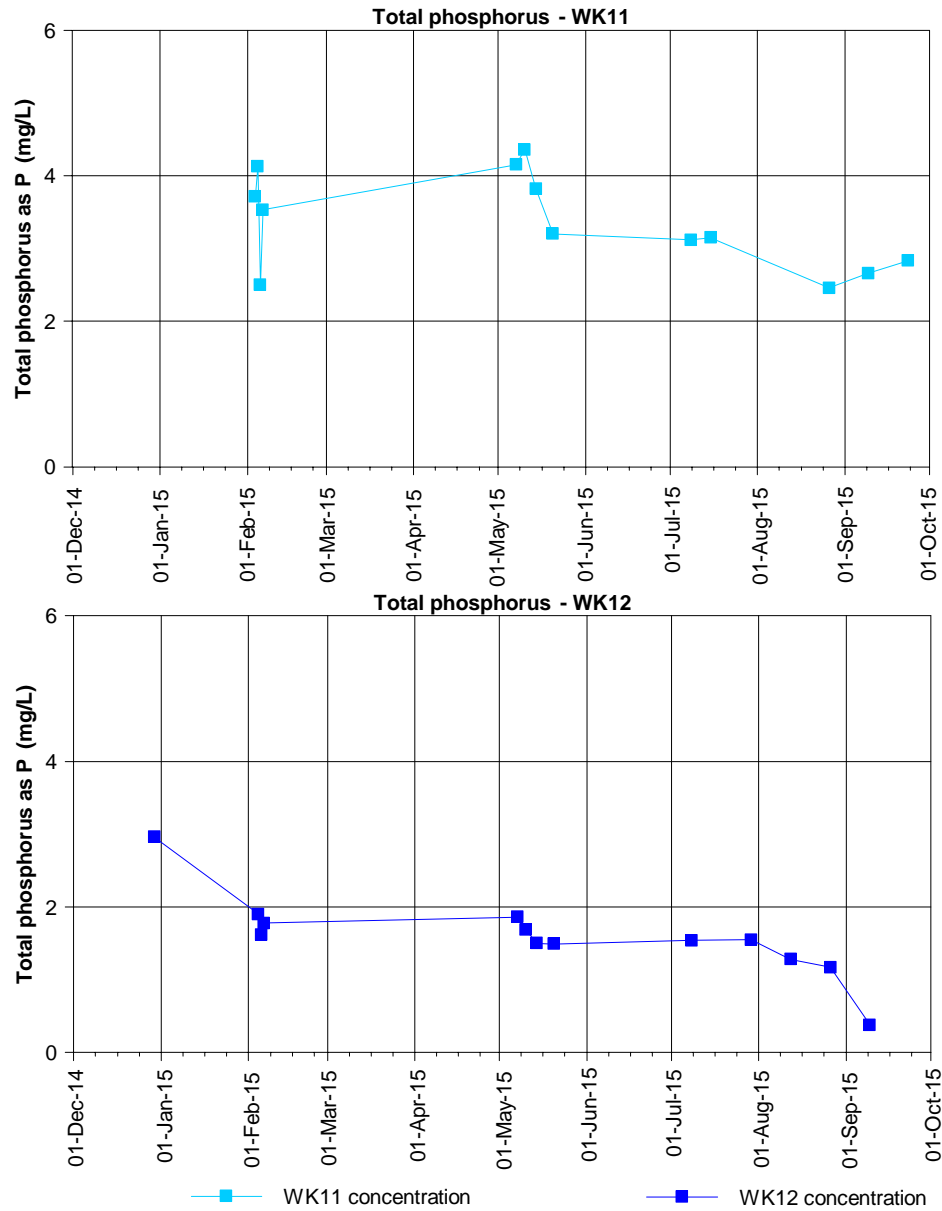


Figure E4.6: Total phosphorus concentrations at the Waukivory pilot wells






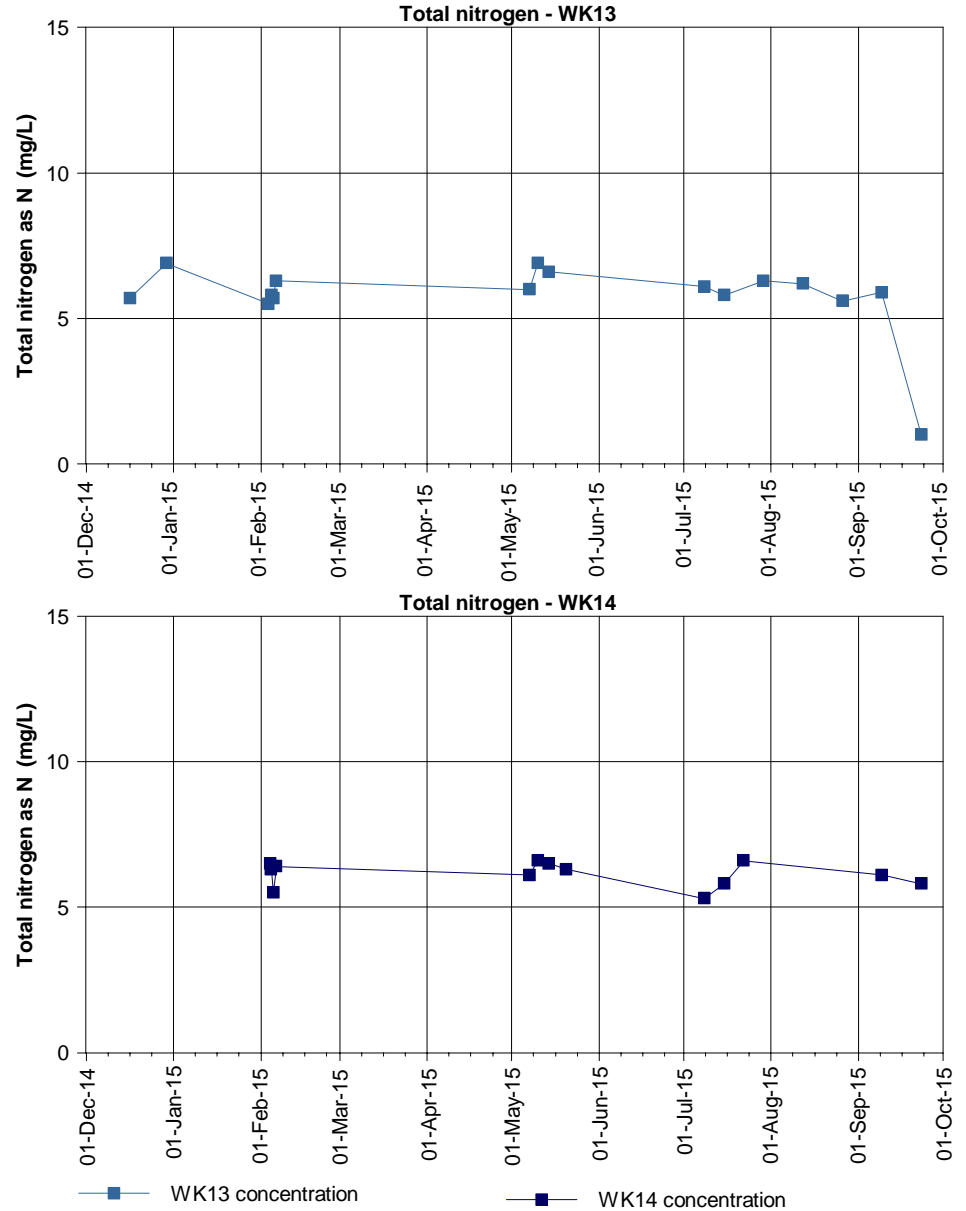


Figure E4.7: Total nitrogen concentrations at the Waukivory pilot wells

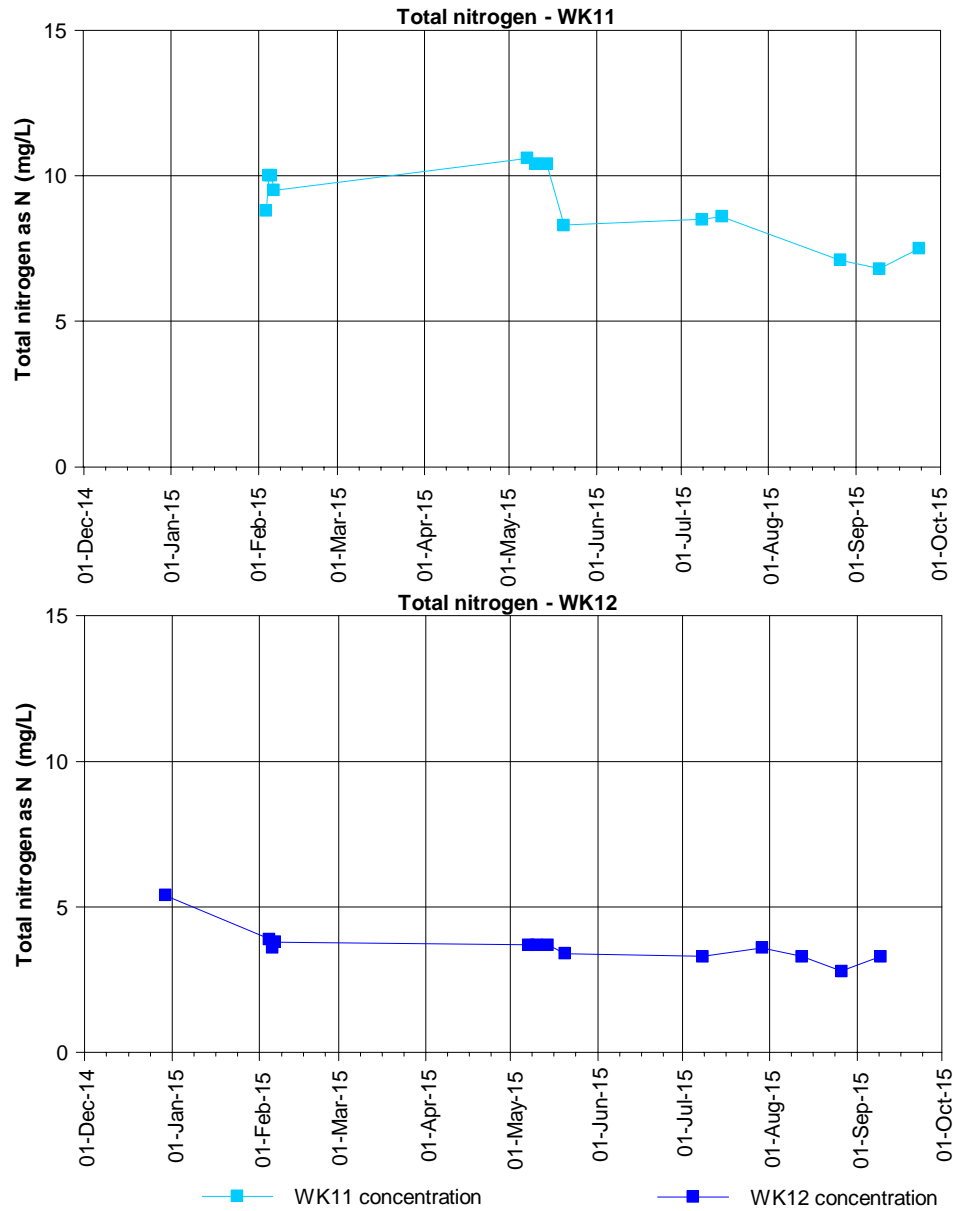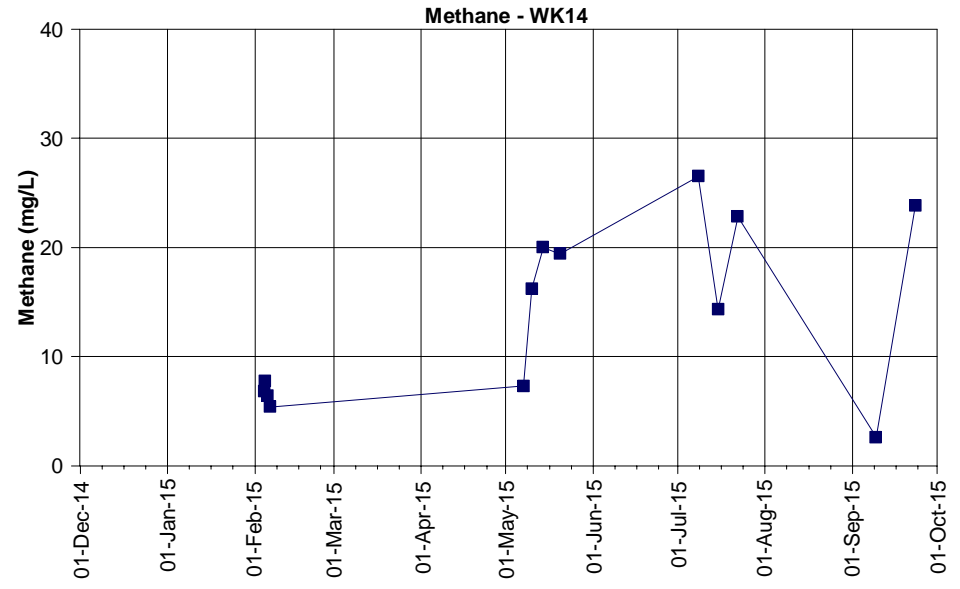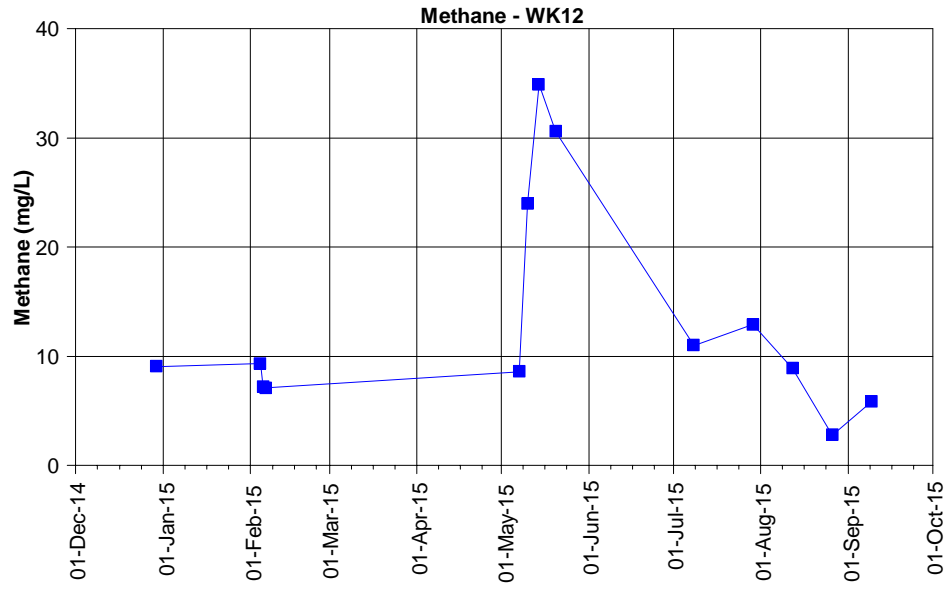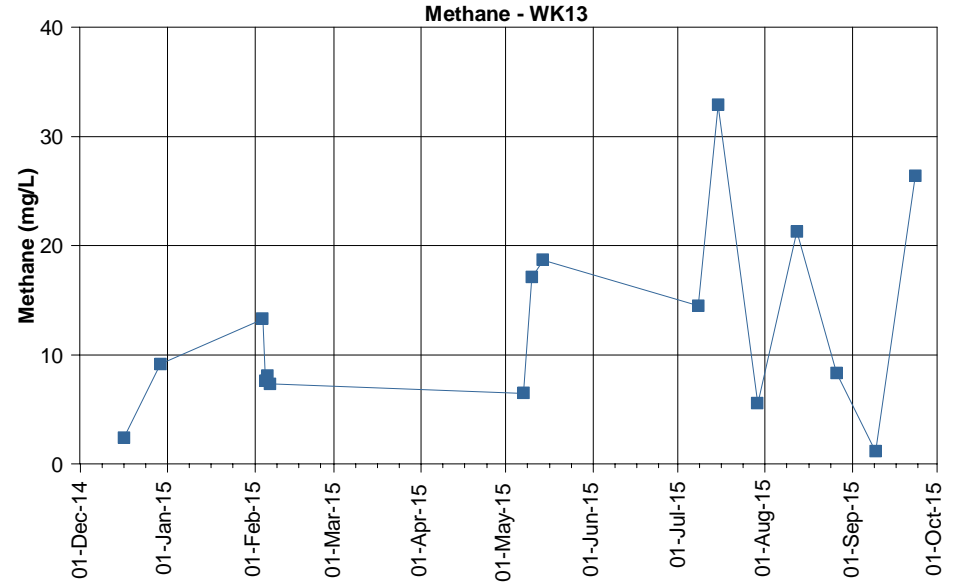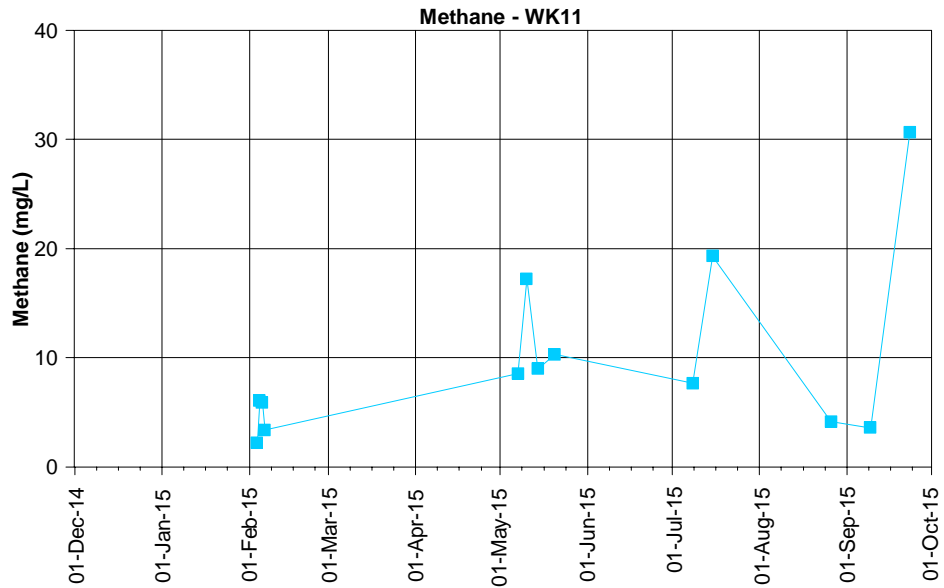

■ WK11 concentration

■ WK12 concentration

■ WK13 concentration

■ WK14 concentration

Figure E5.1: Methane concentrations at the Waukivory pilot wells






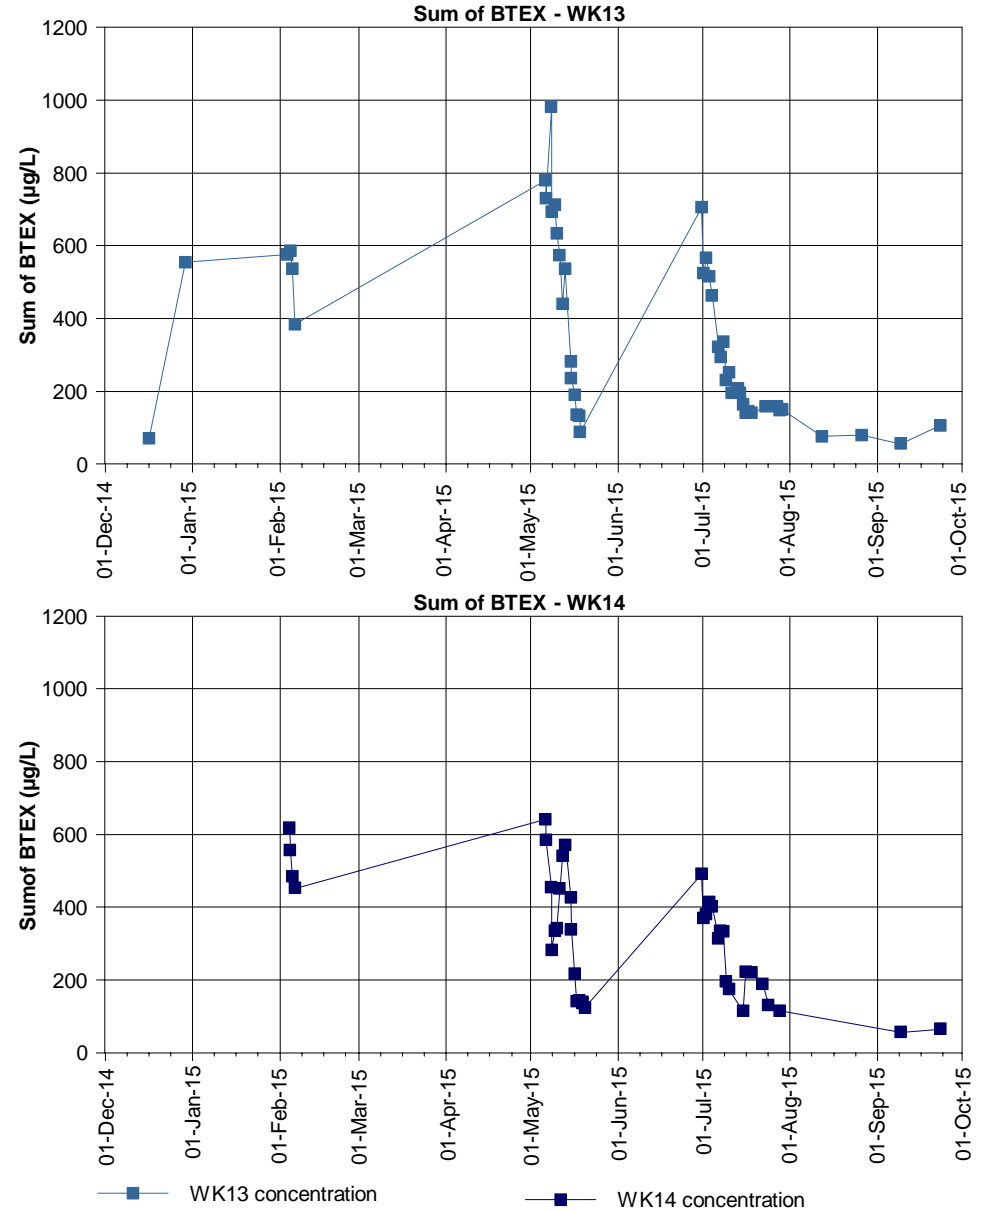


Figure E6.1: Sum of BTEX concentrations at the Waukivory pilot wells

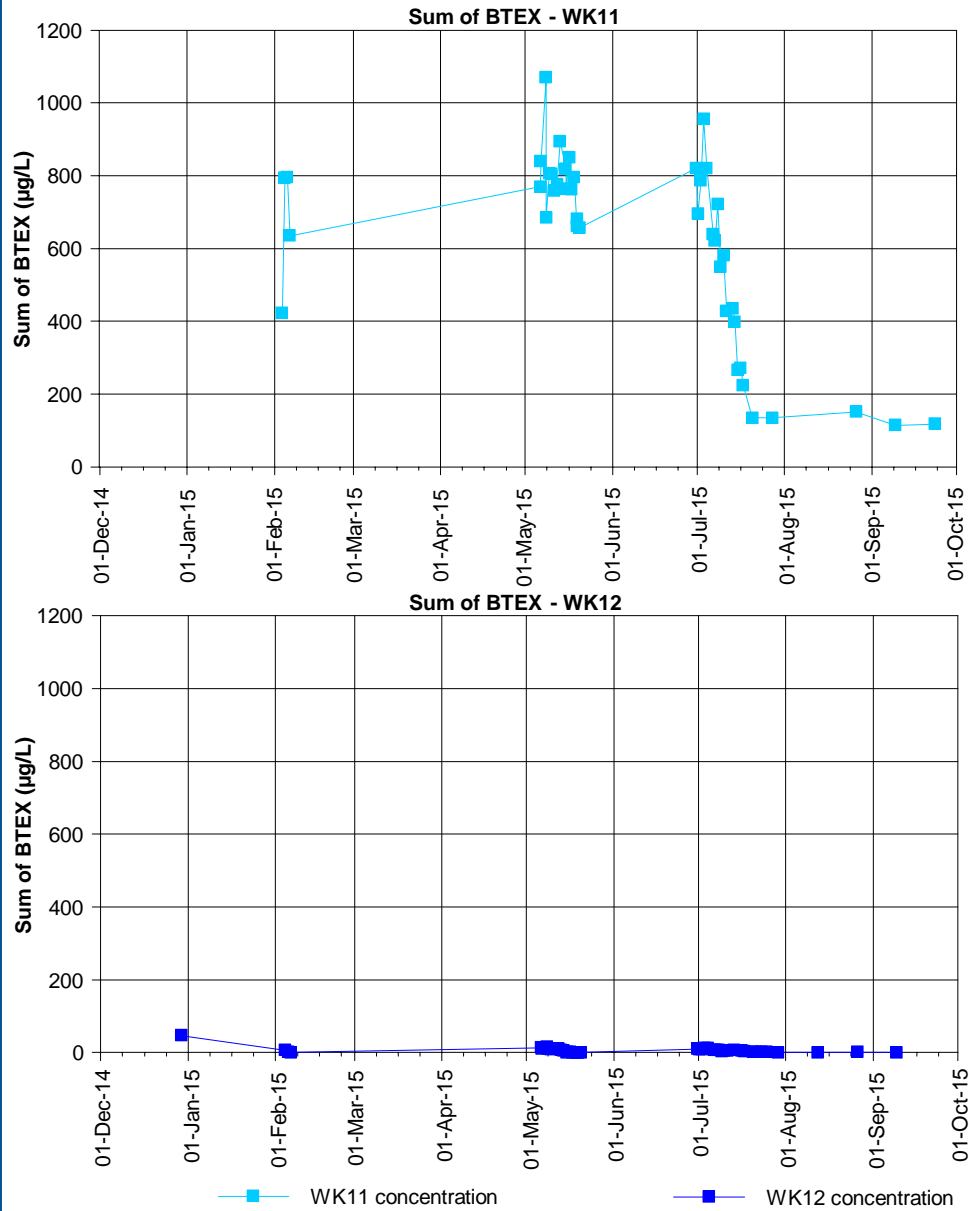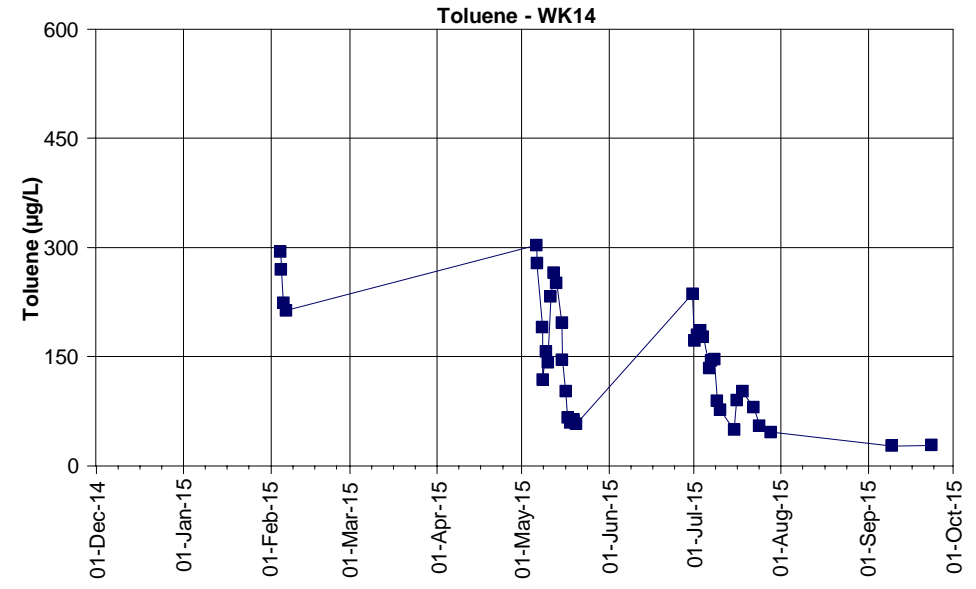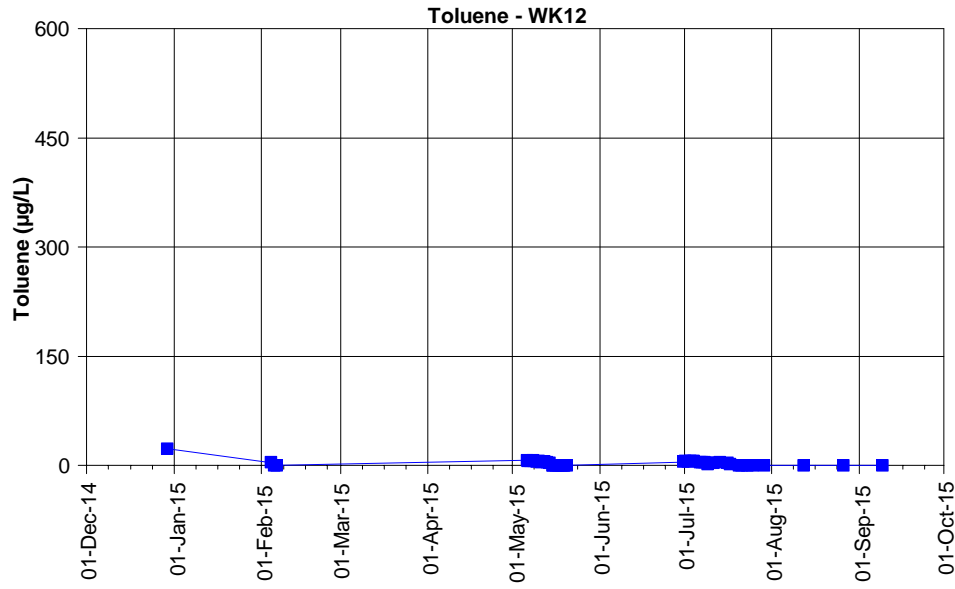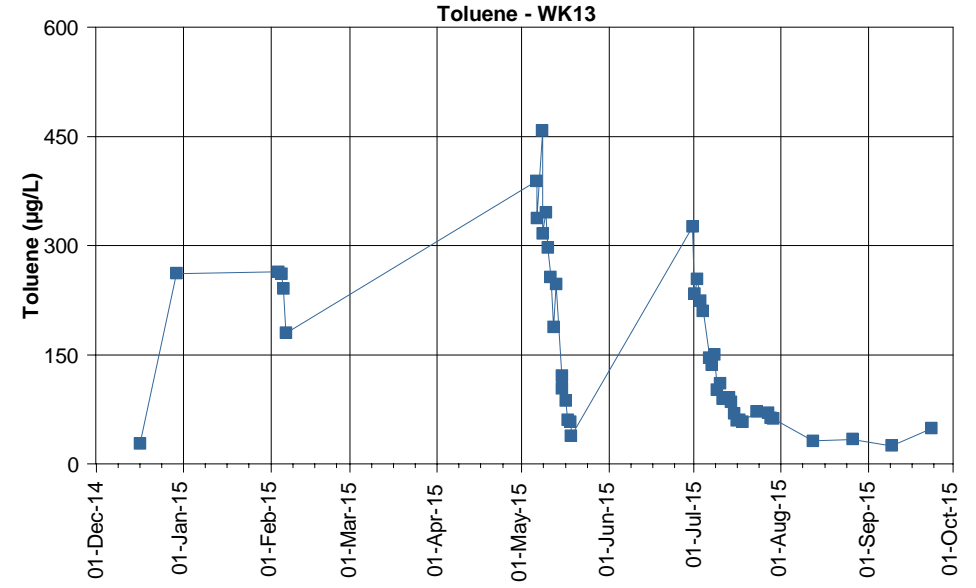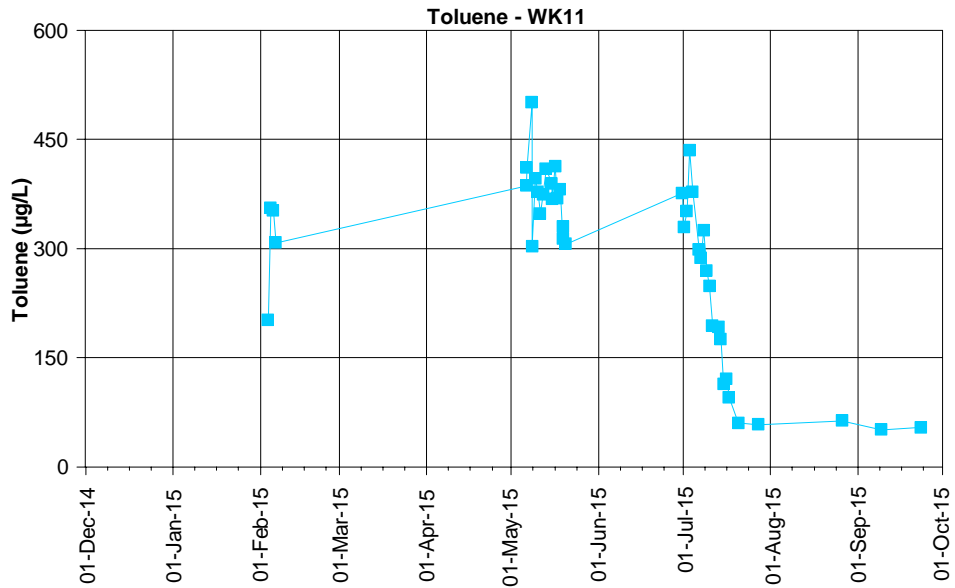

■ WK11 concentration
 ■ WK12 concentration
 ■ WK13 concentration
 ■ WK14 concentration

Figure E6.3: Toluene concentrations at the Waukivory pilot wells








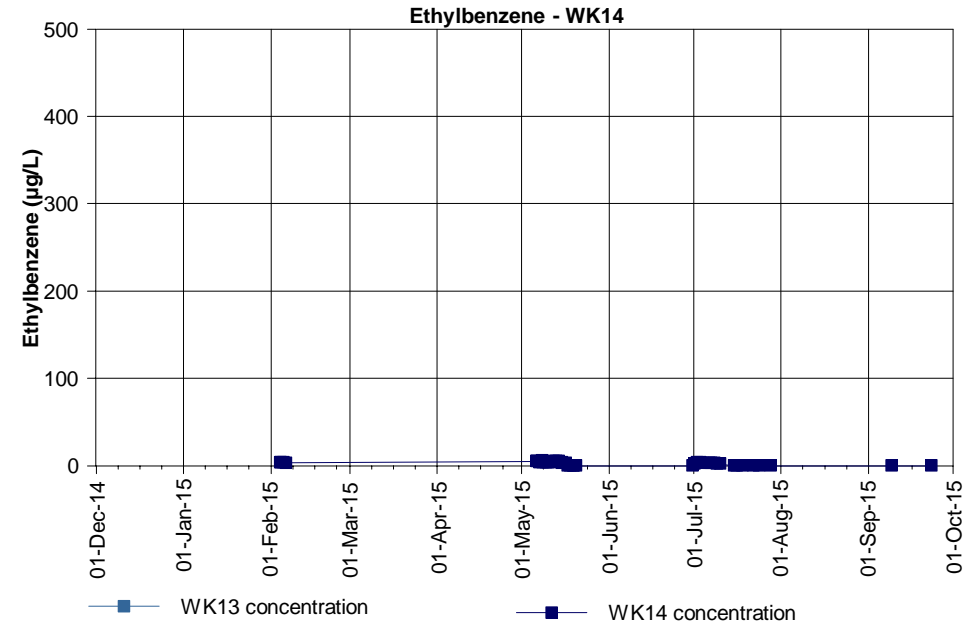


Figure E6.4: Ethylbenzene total concentrations at the Waukivory pilot wells

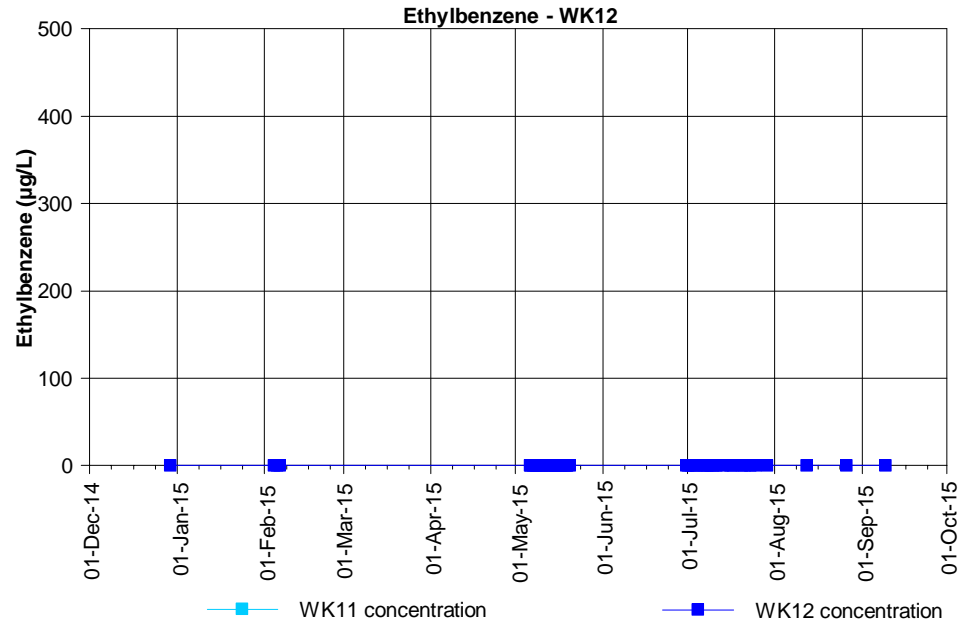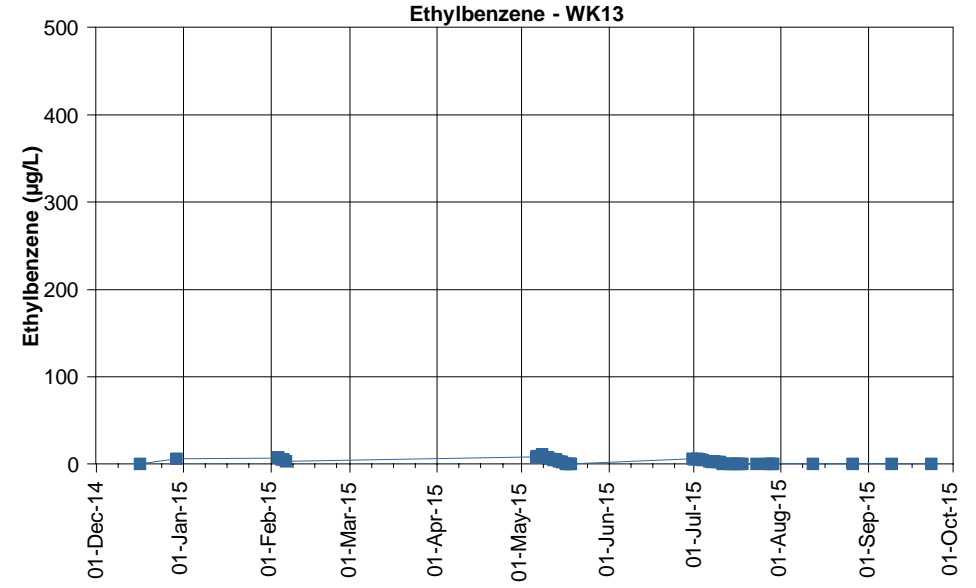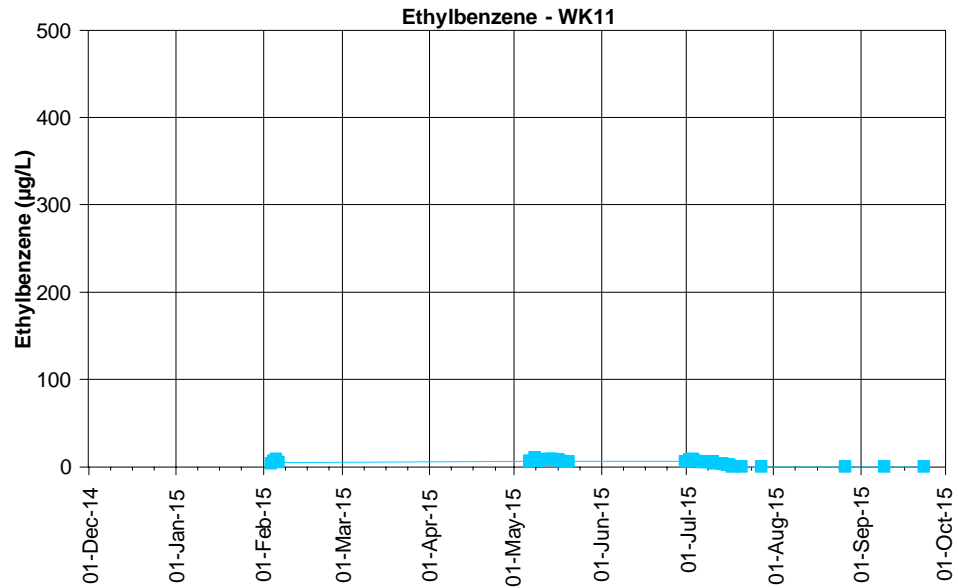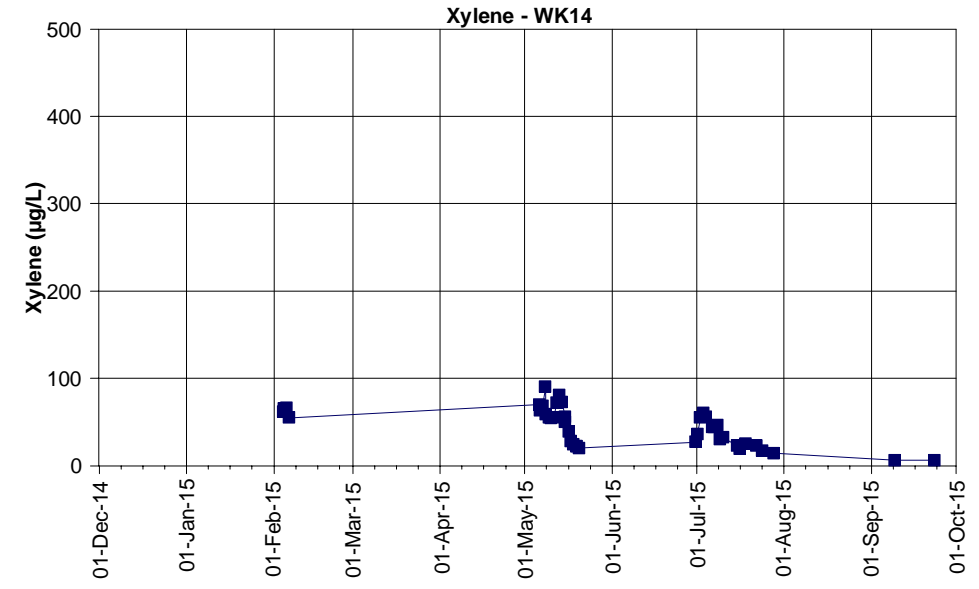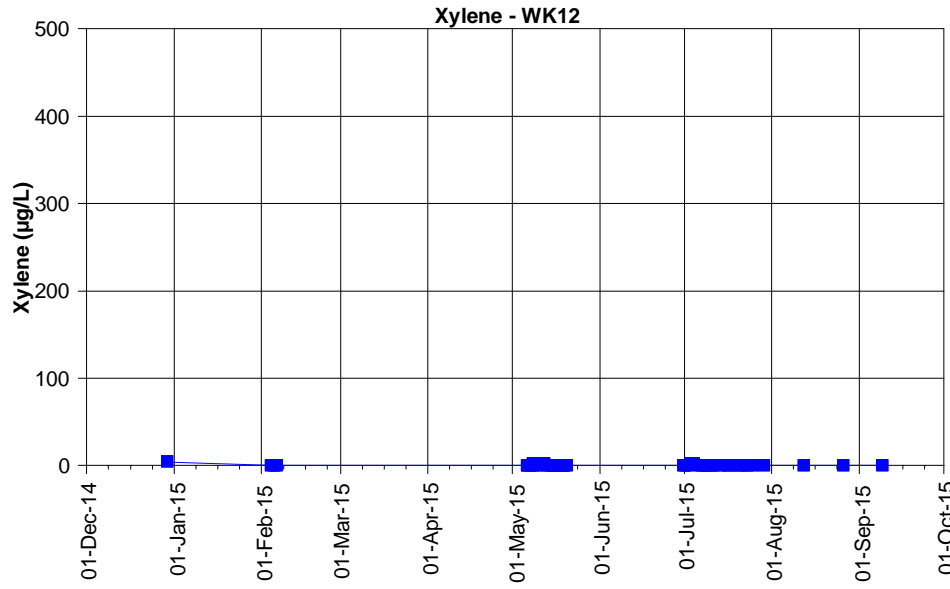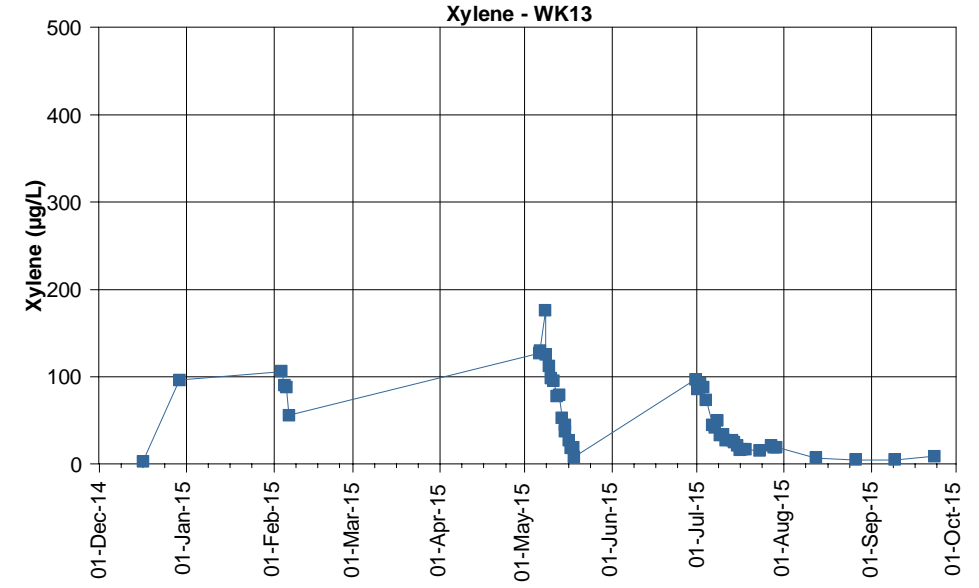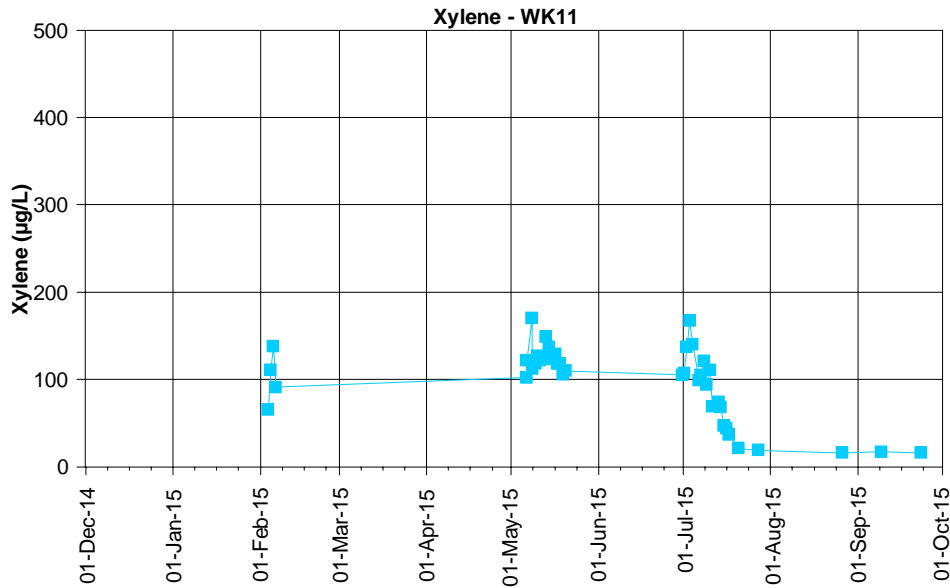

WK11 concentration

WK12 concentration

WK13 concentration

WK14 concentration

Figure E6.5: Xylene total concentrations at the Waukivory pilot wells

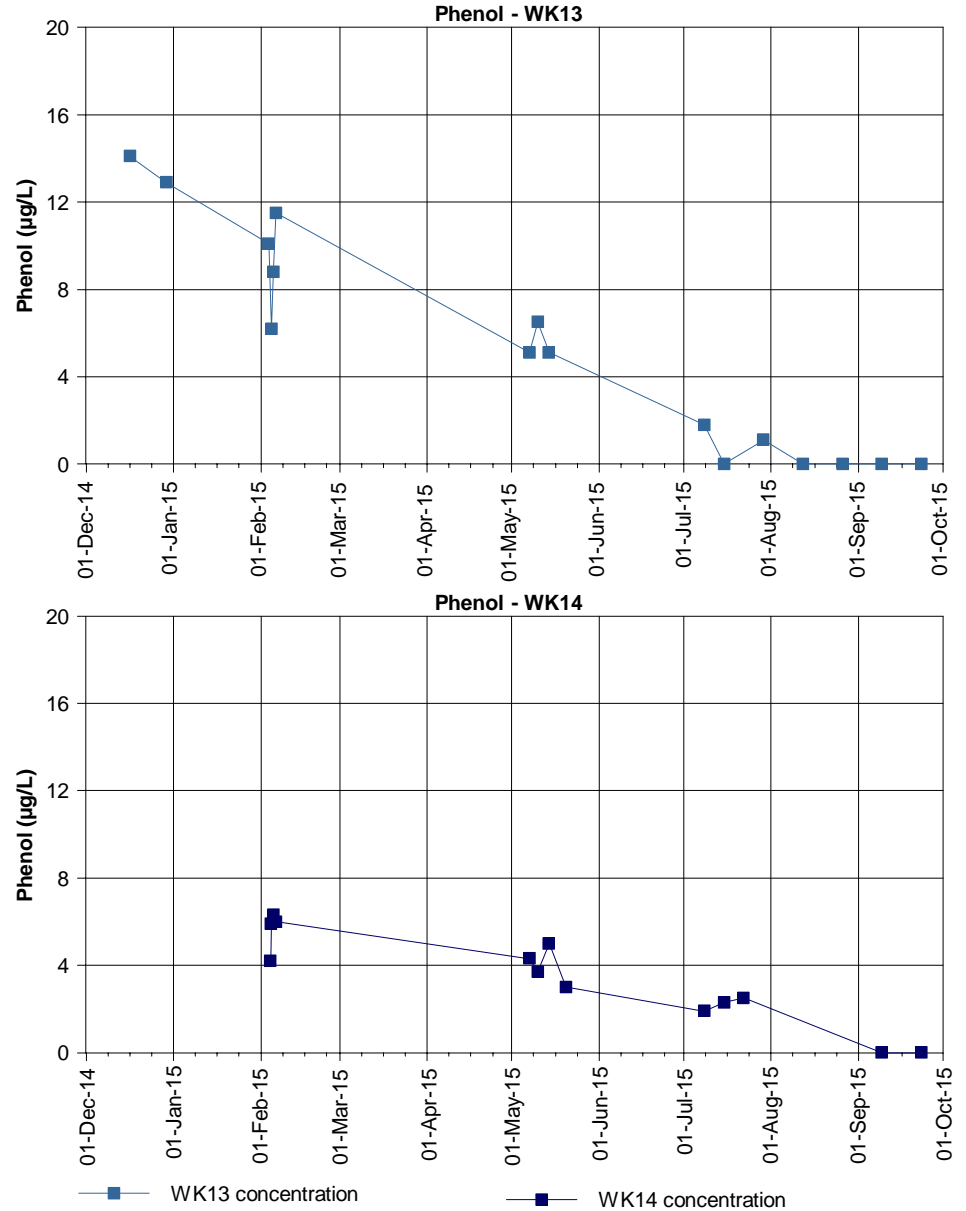
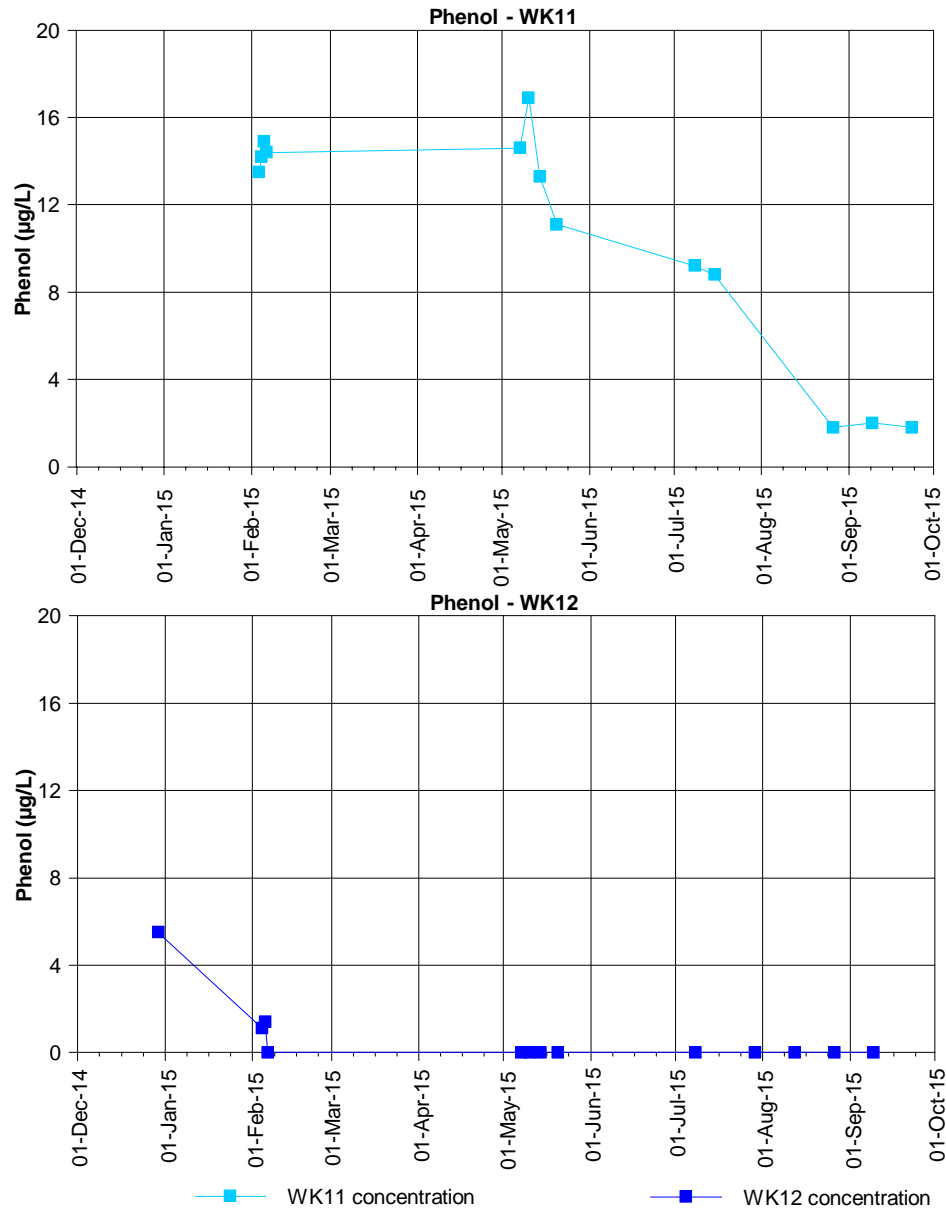


Figure E7.1: Phenol concentrations at the Waukivory pilot wells

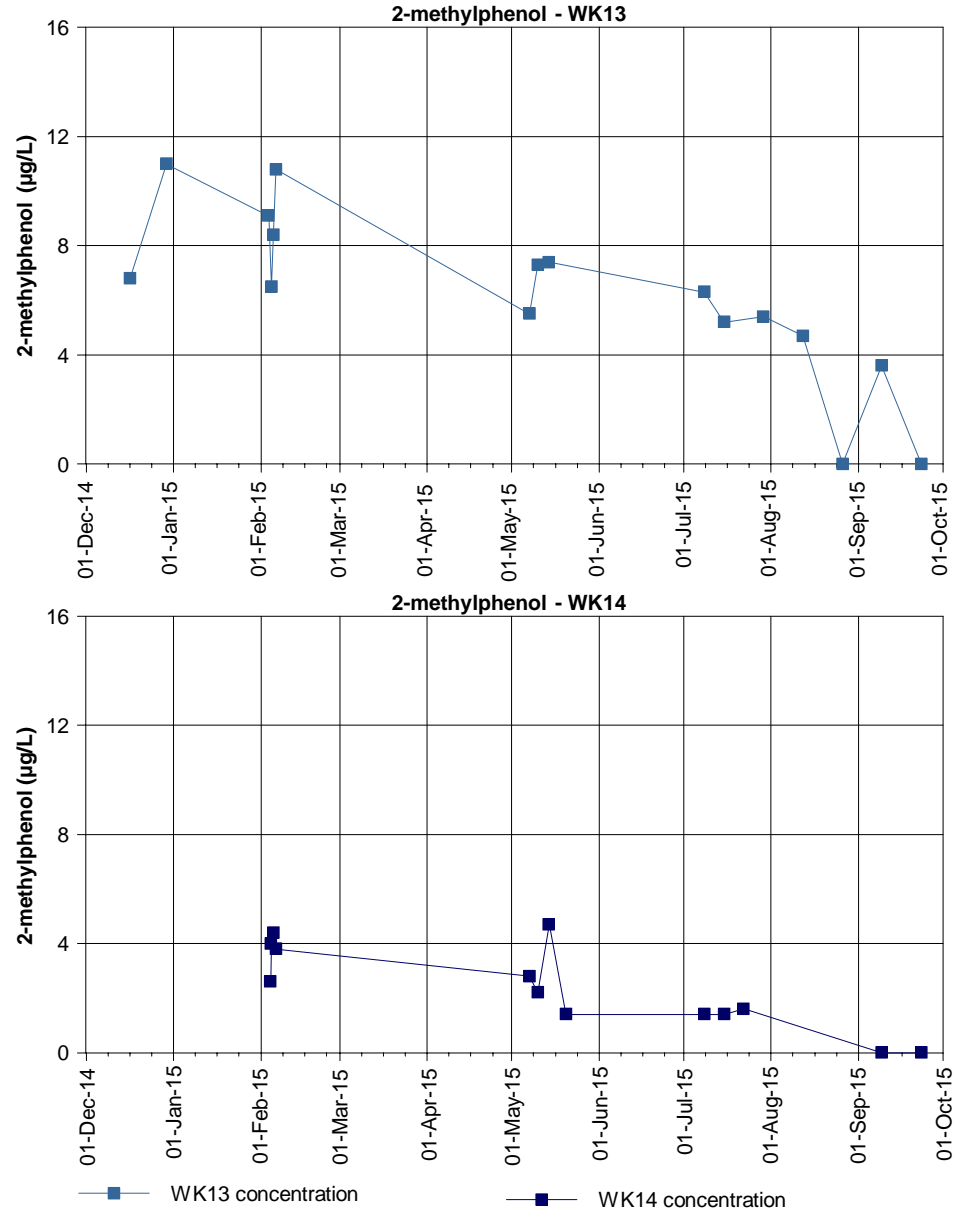
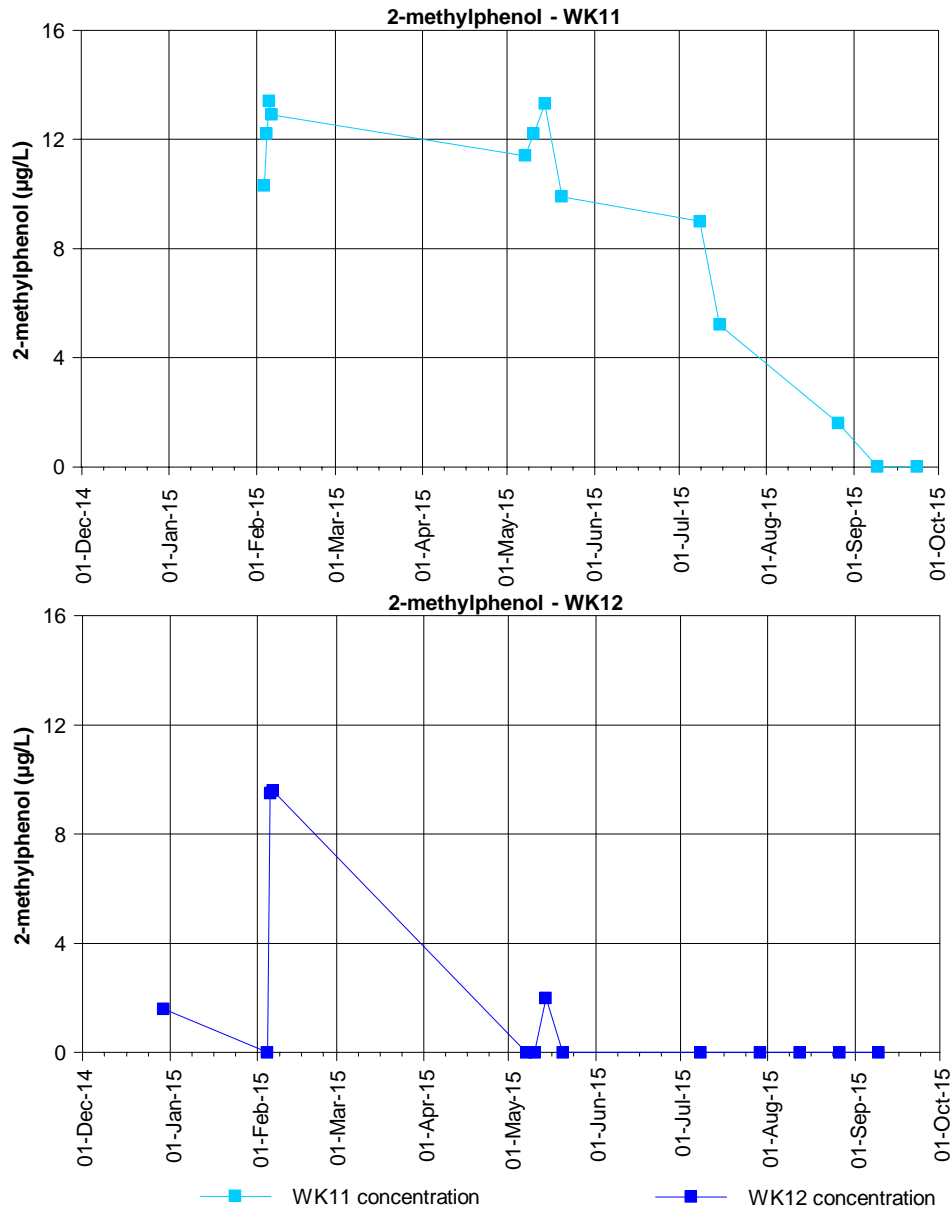


Figure E7.2: 2-methylphenol concentrations at the Waukivory pilot wells

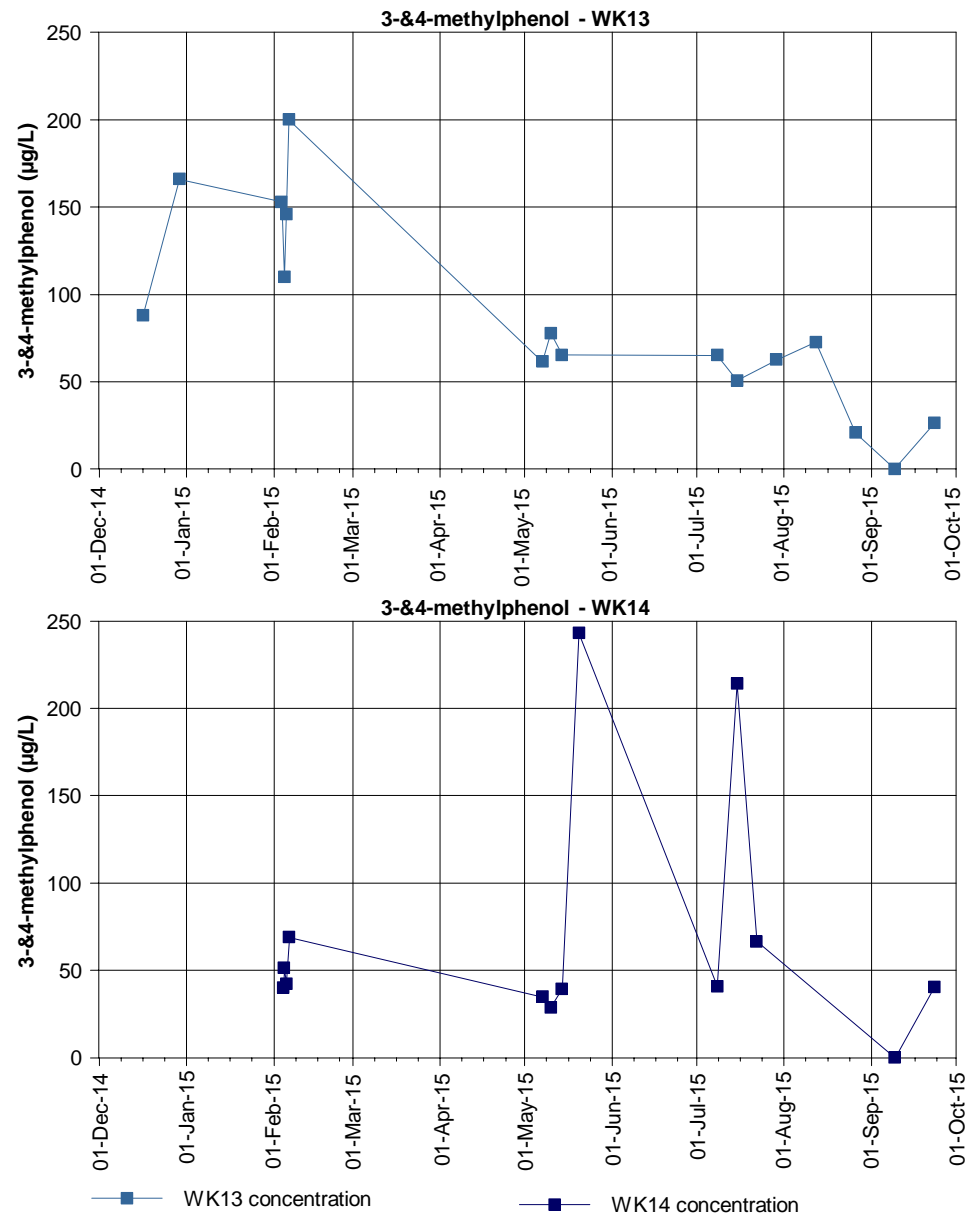
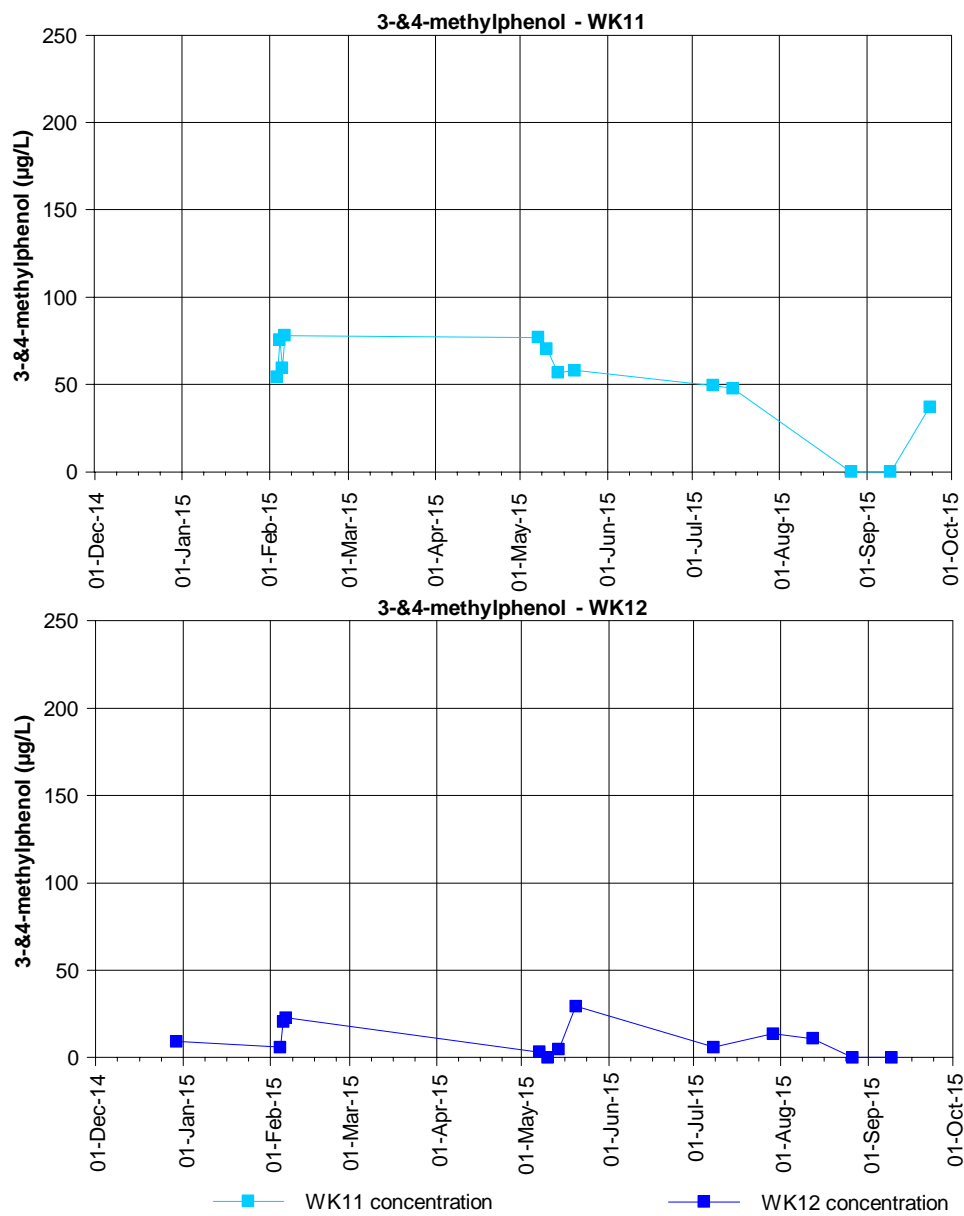


Figure E7.3: 3-&4-methylphenol concentrations at the Waukivory pilot wells

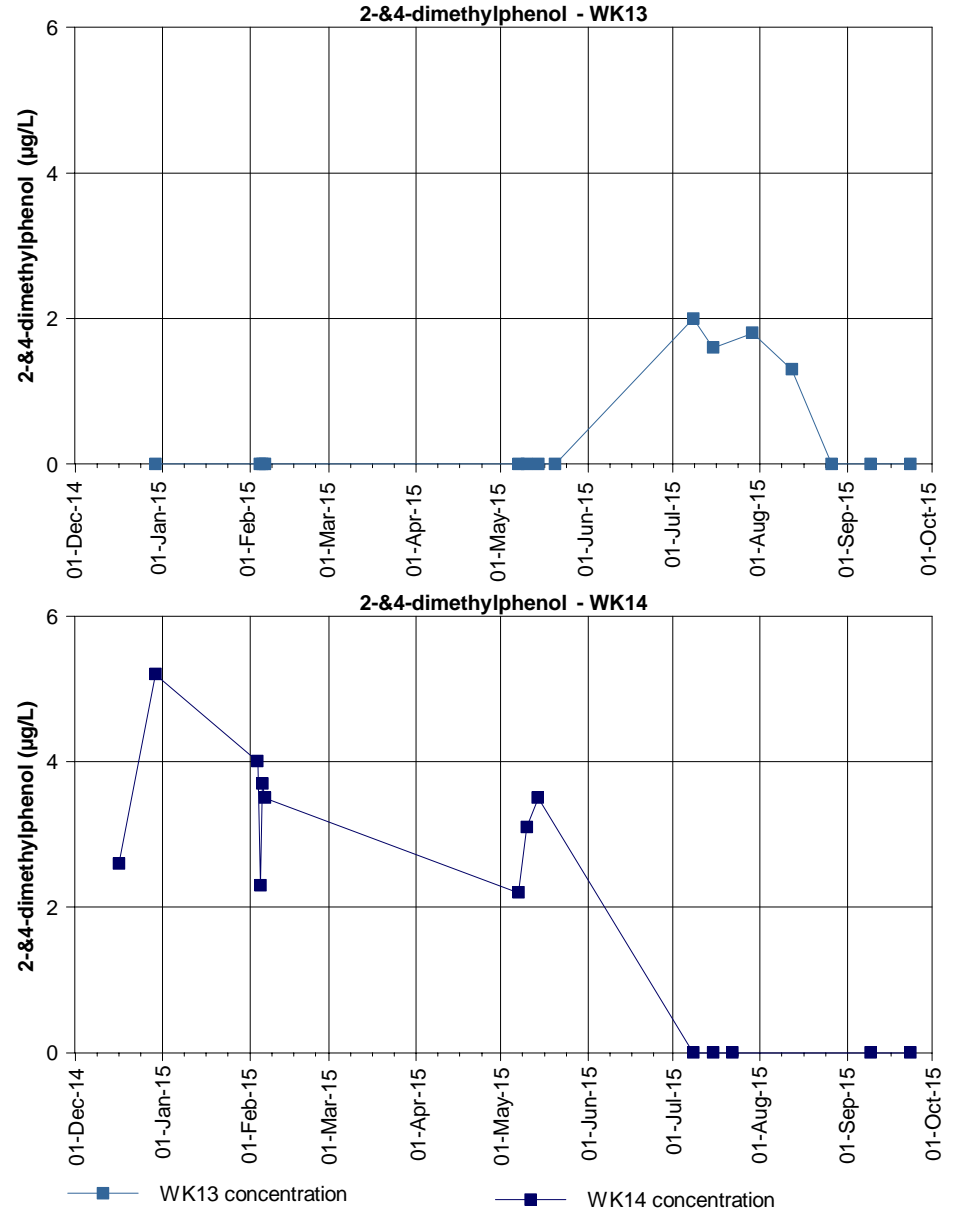
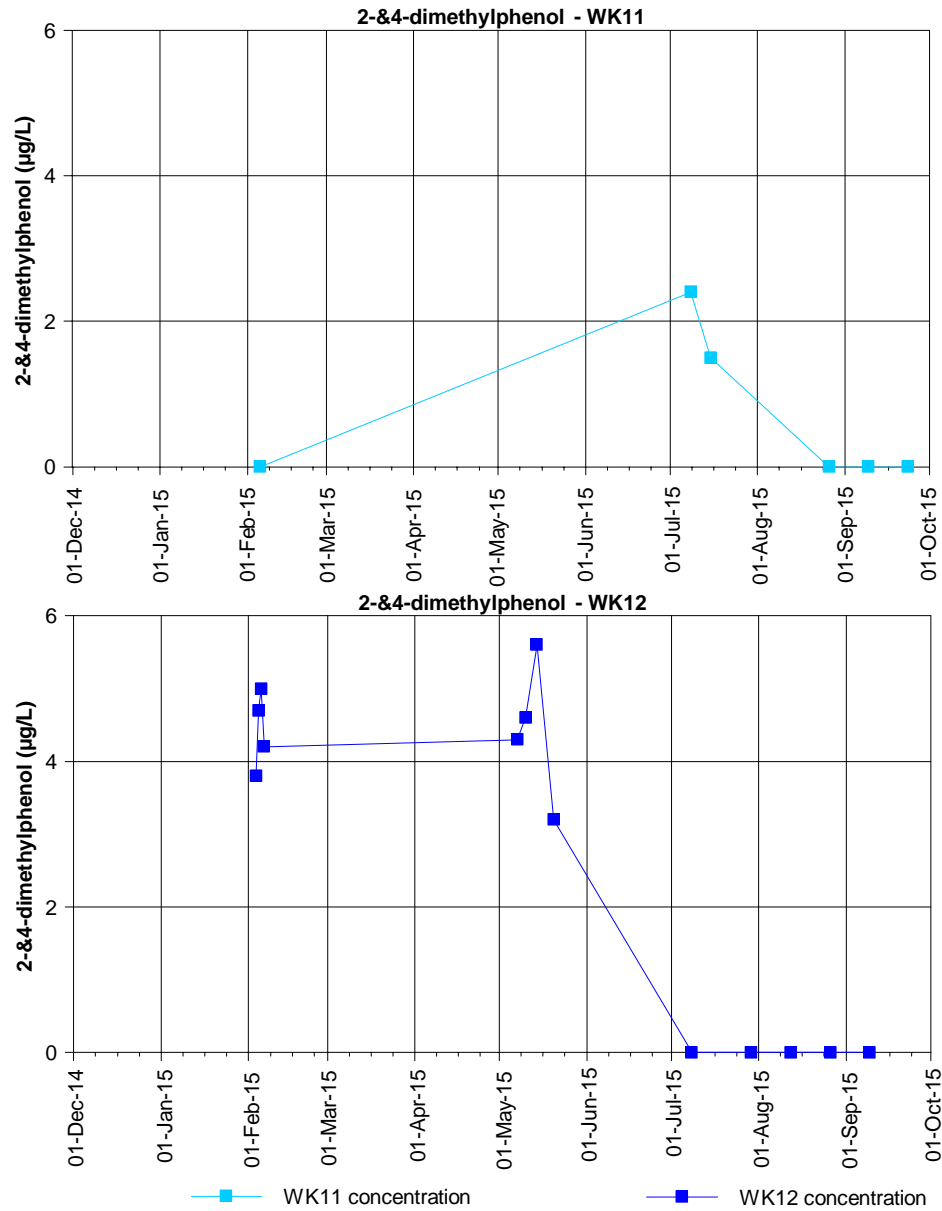


Figure E7.4: 2-&4-dimethylphenol concentrations at the Waukivory pilot wells

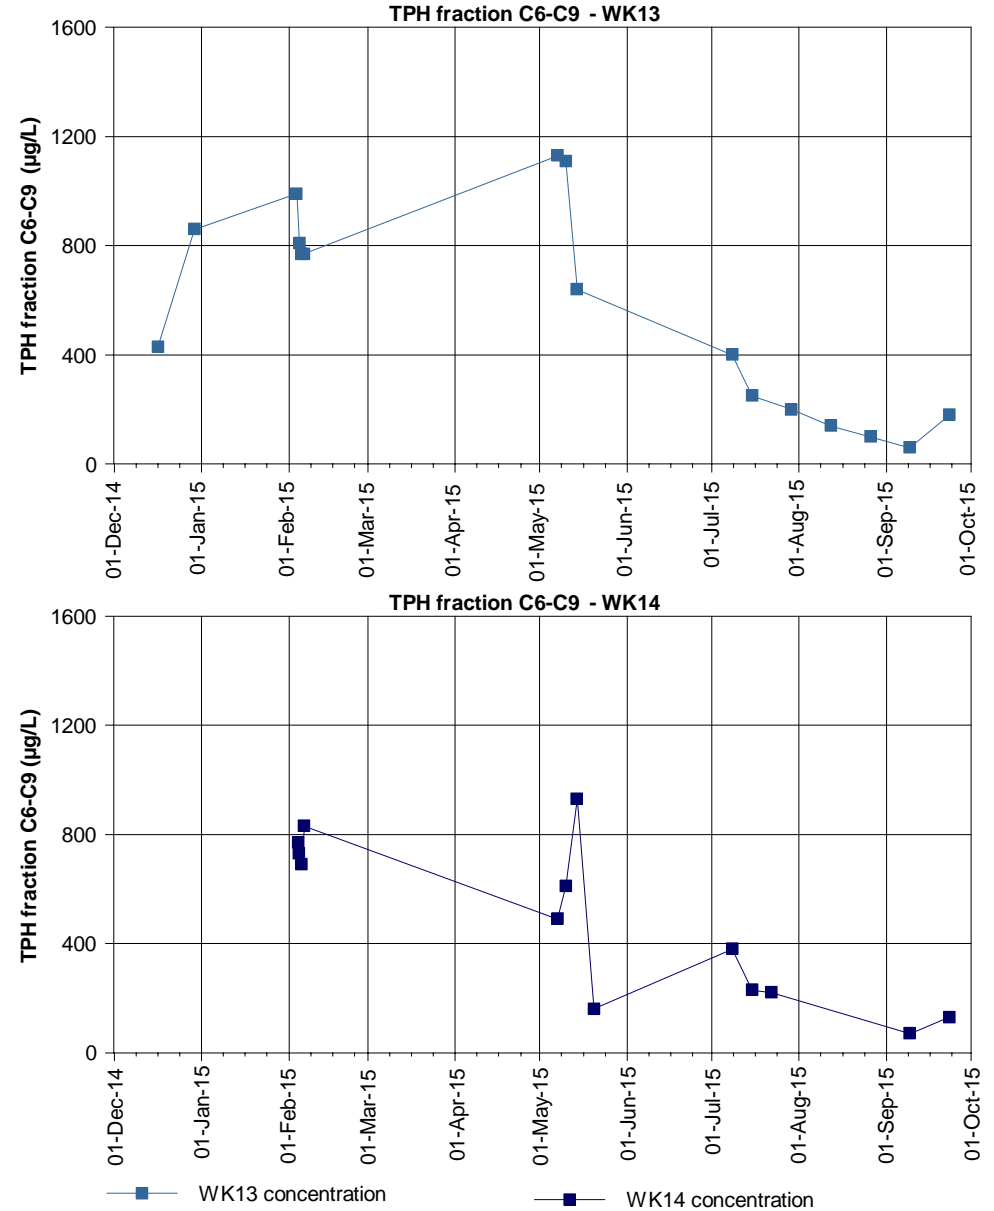
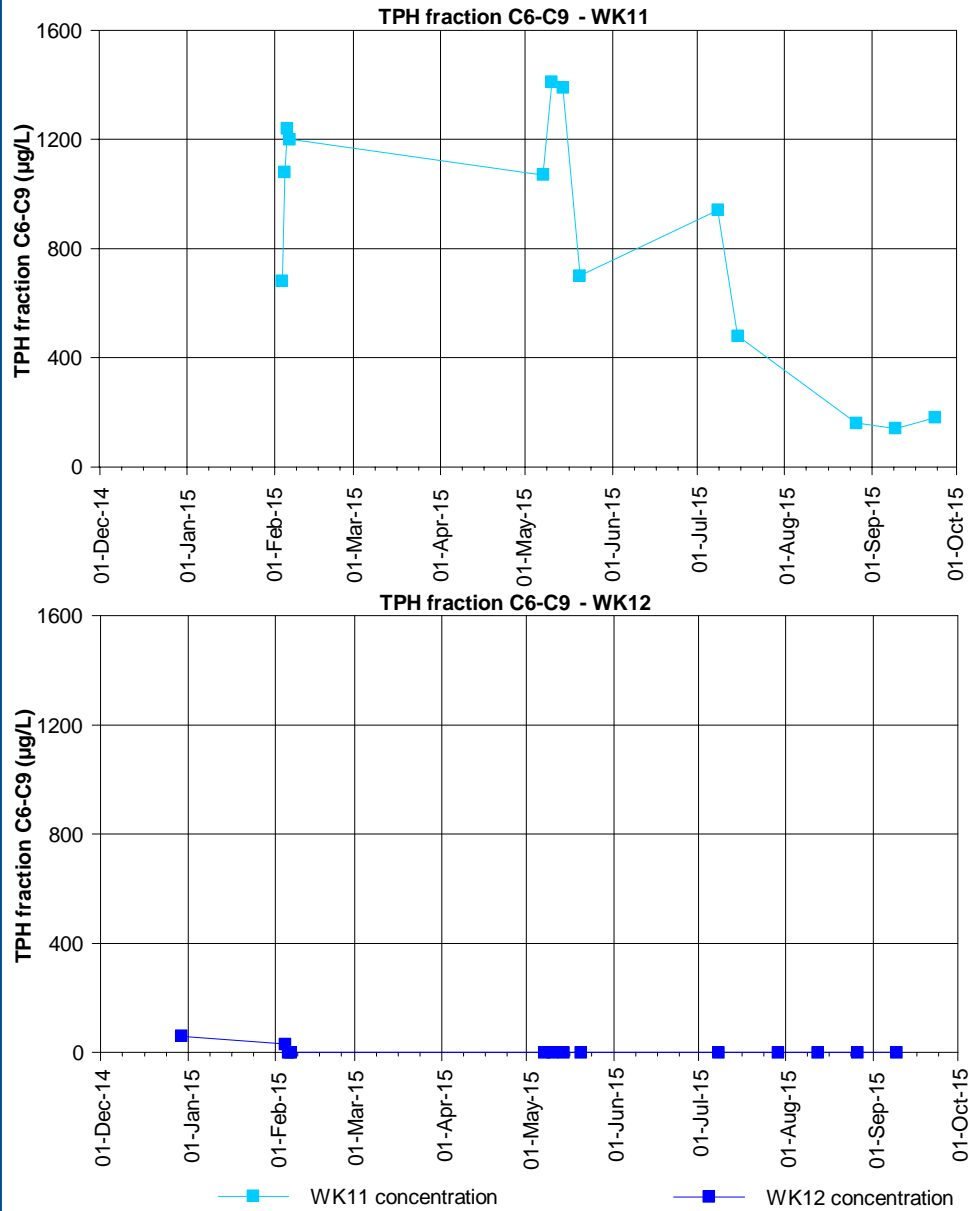


Figure E7.5: TPH fractions C6-C9 at the Waukivory pilot wells

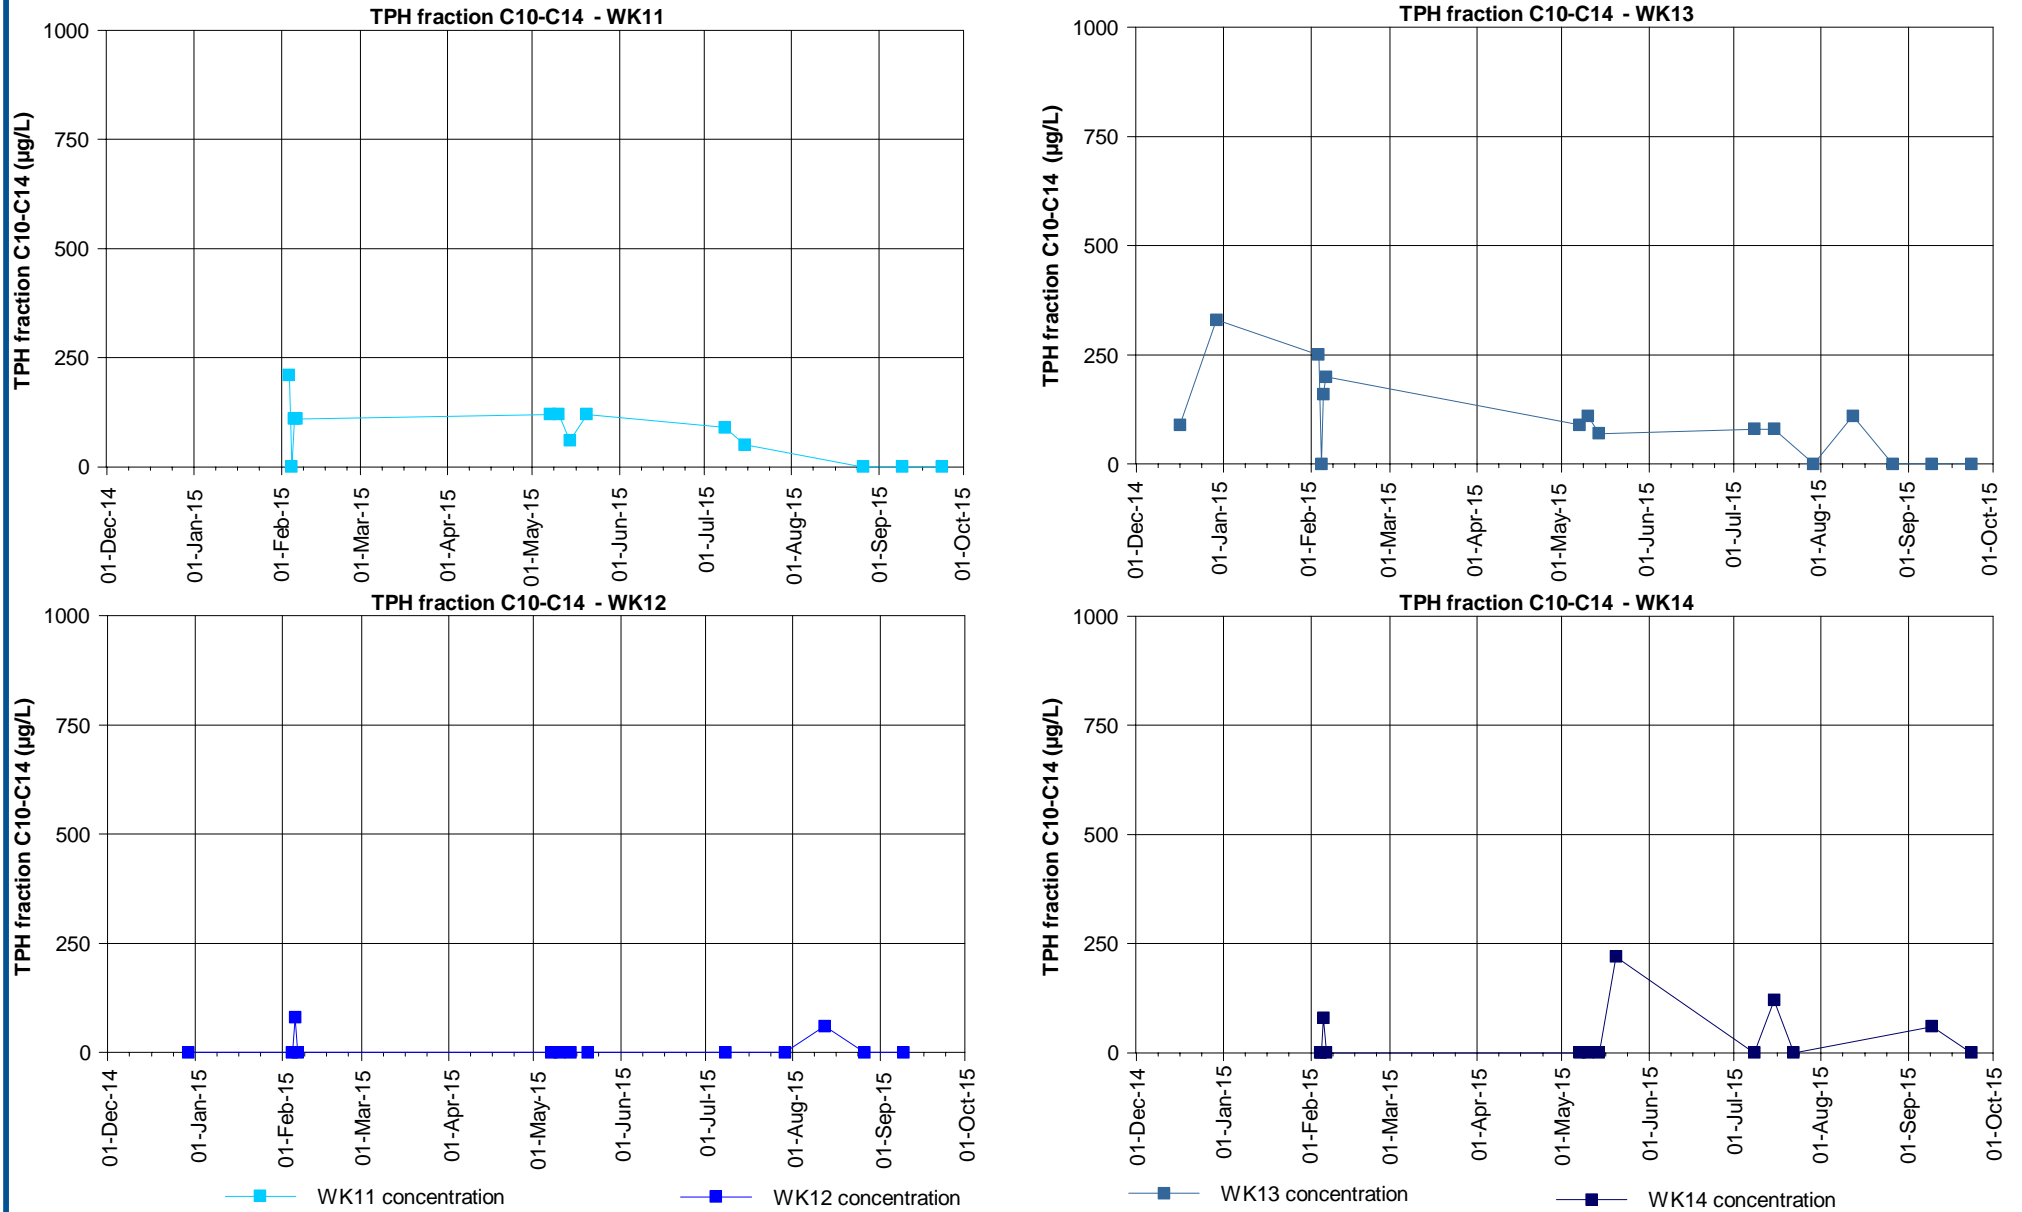


Figure E7.6: TPH fractions C10-C14 at the Waukivory pilot wells

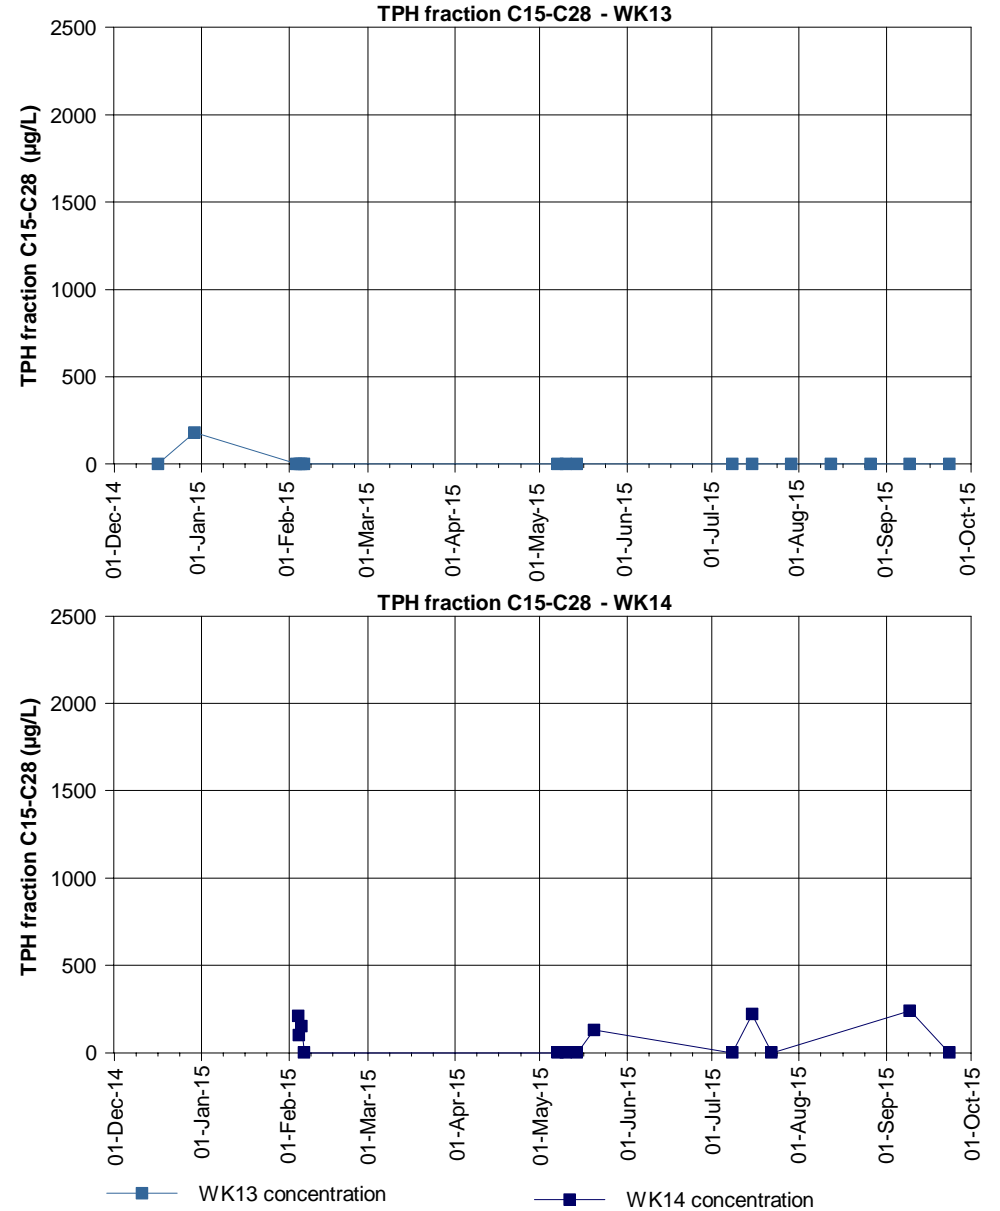
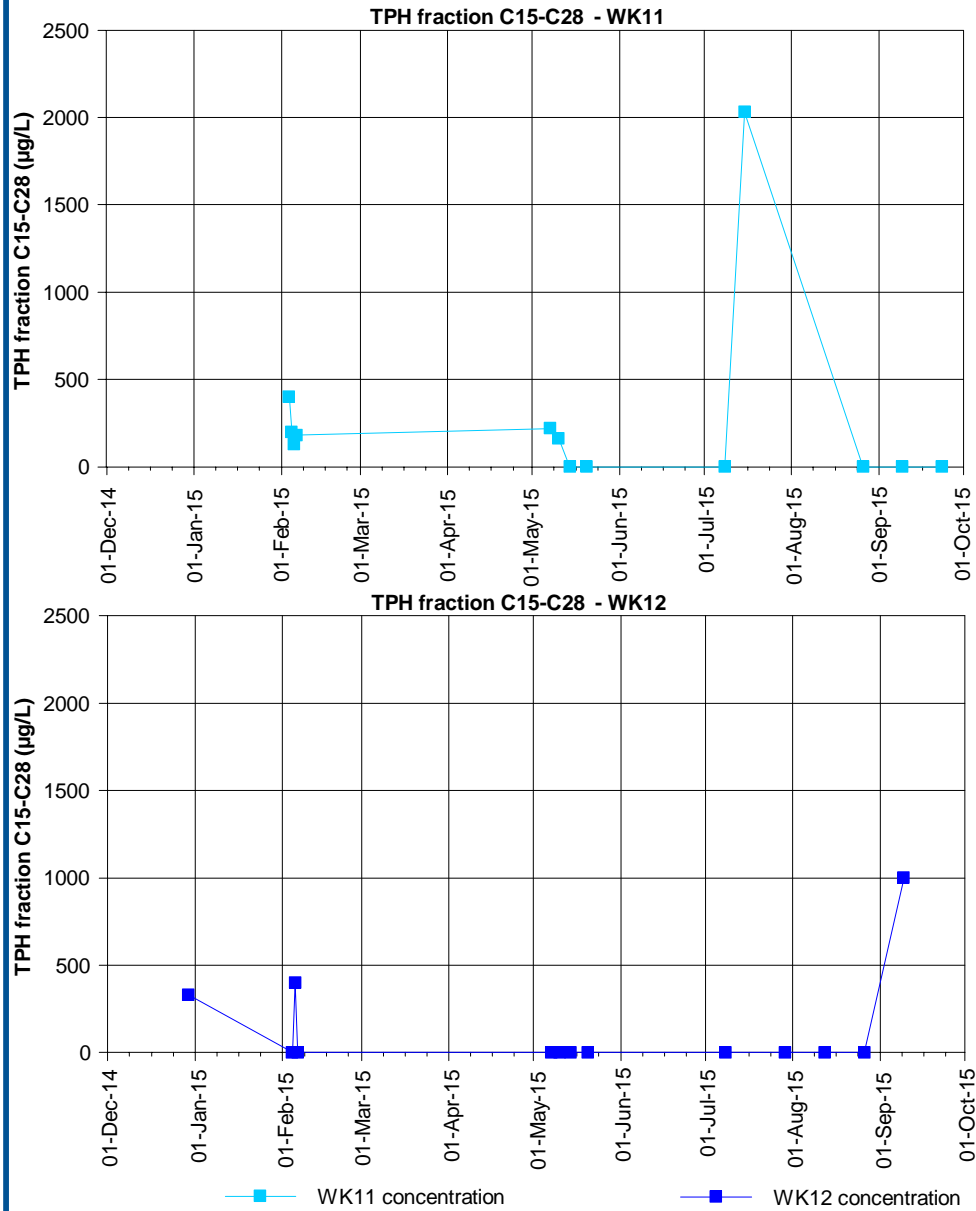


Figure E7.7: TPH fractions C15-C28 at the Waukivory pilot wells






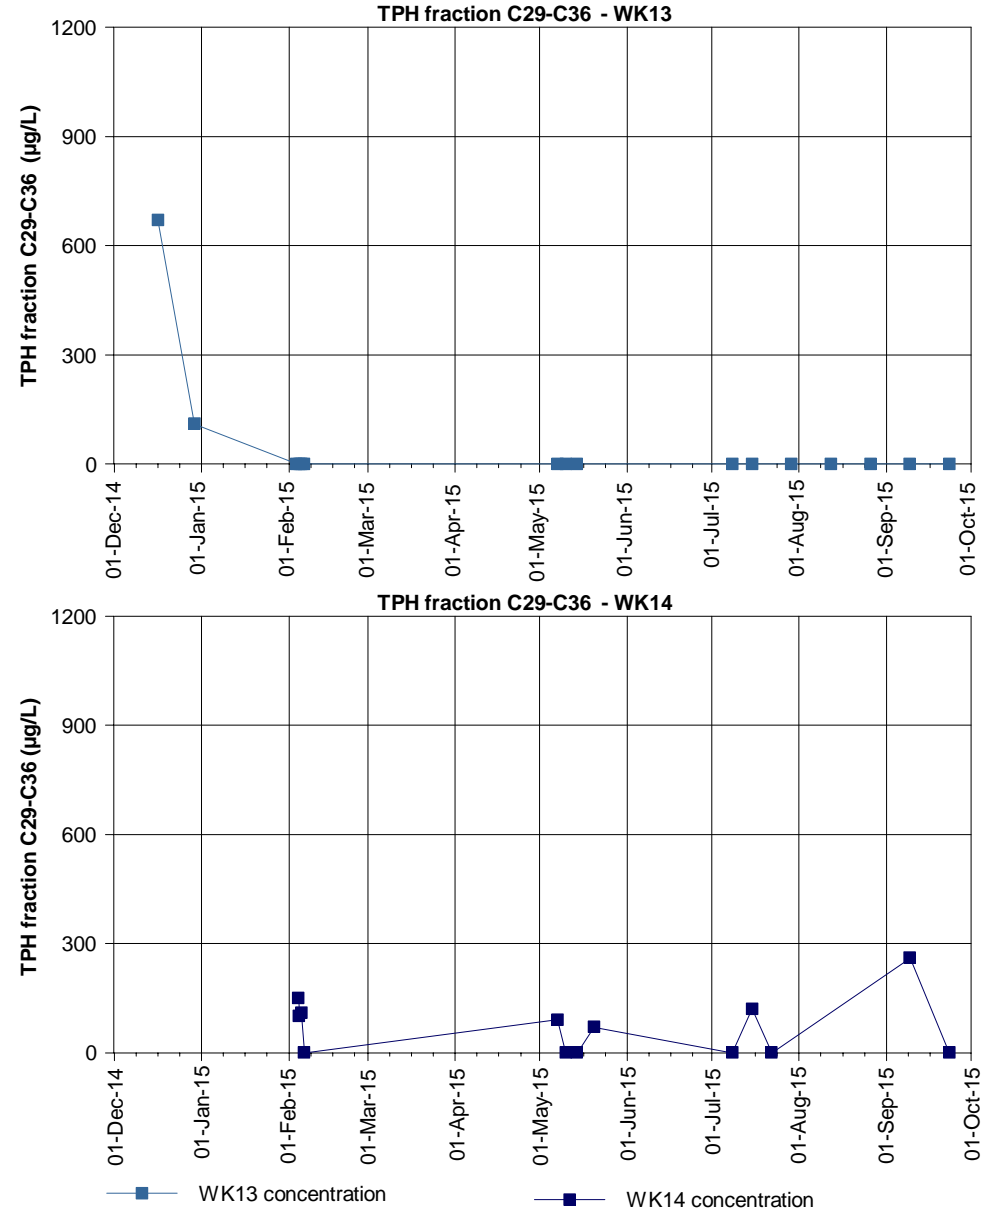


Figure E7.8: TPH fractions C29-C36 at the Waukivory pilot wells

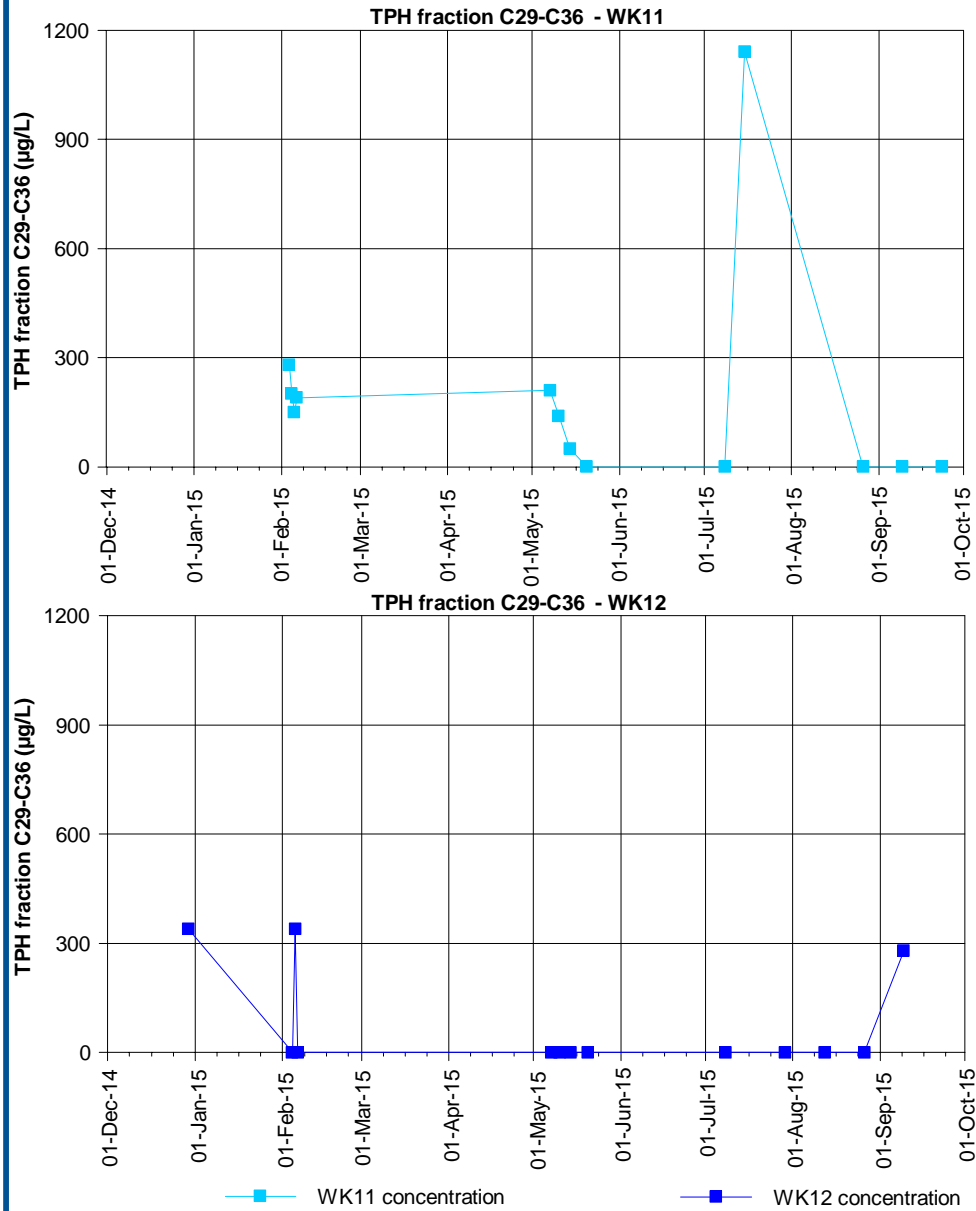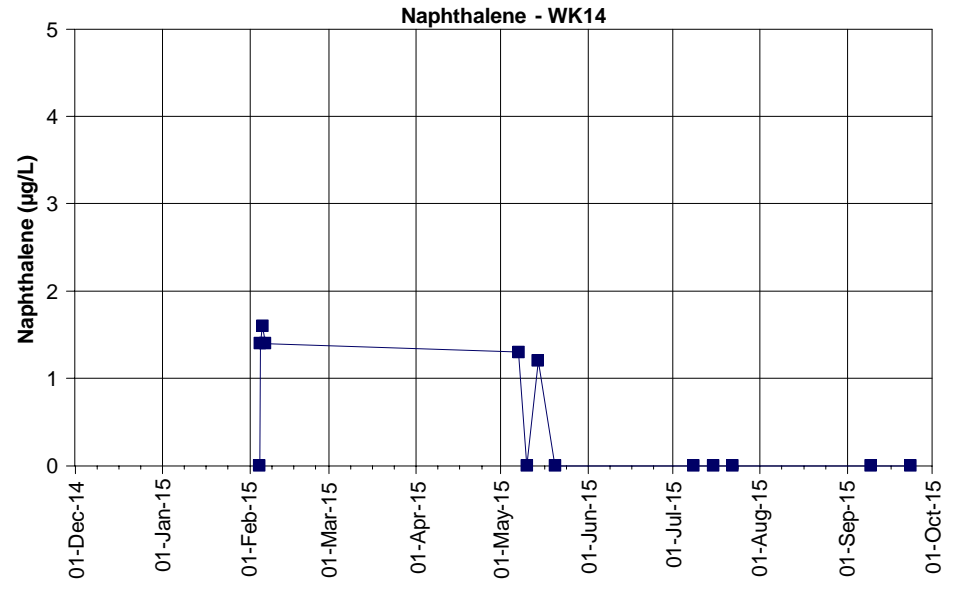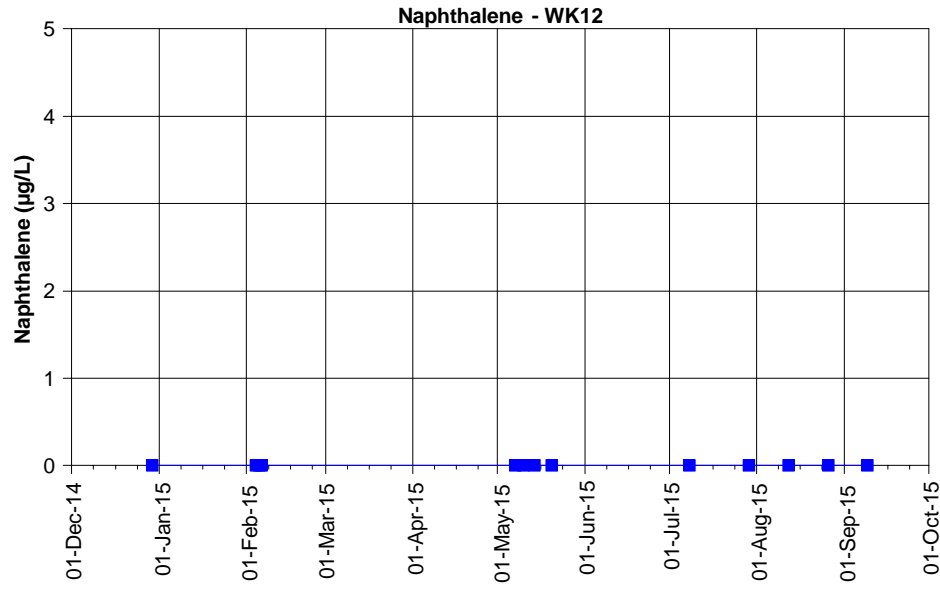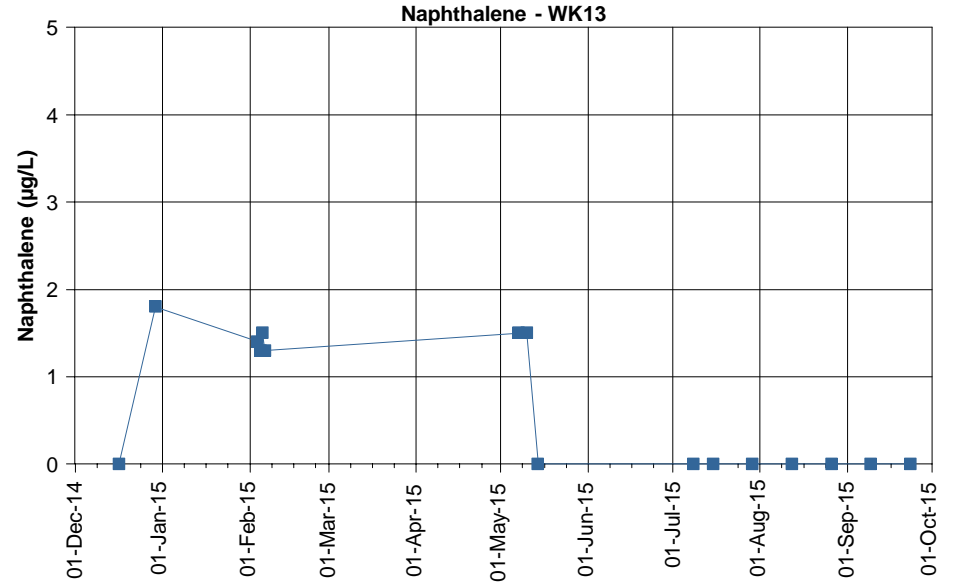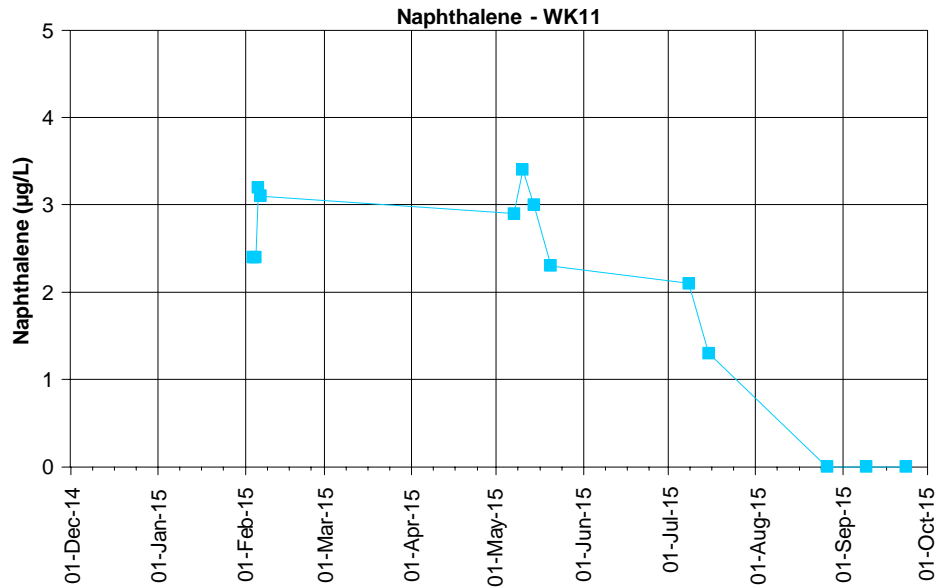

■ WK11 concentration
 ■ WK12 concentration

■ WK13 concentration
 ■ WK14 concentration

Figure E7.9: Naphthalene at the Waukivory pilot wells

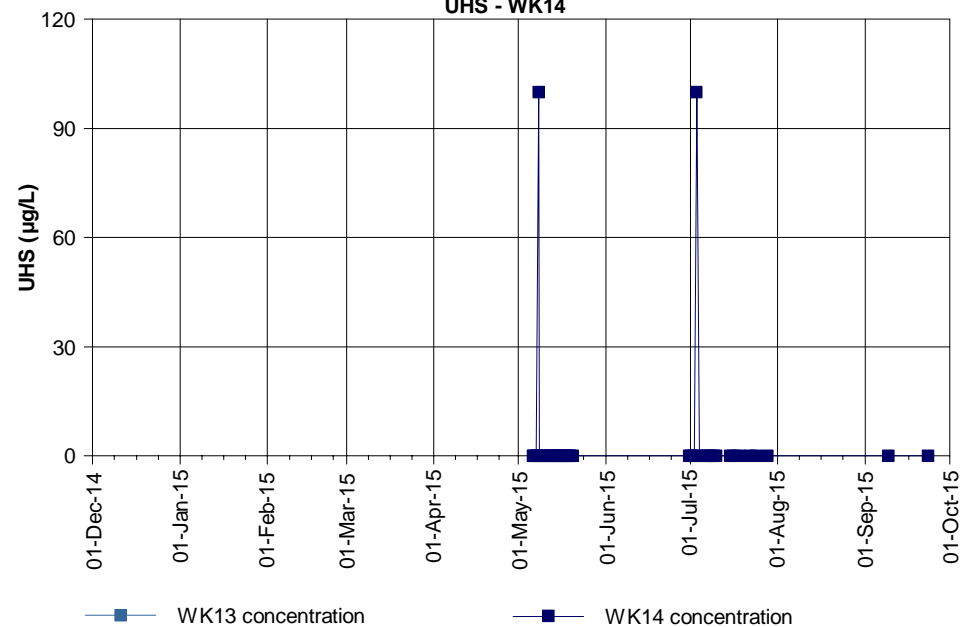
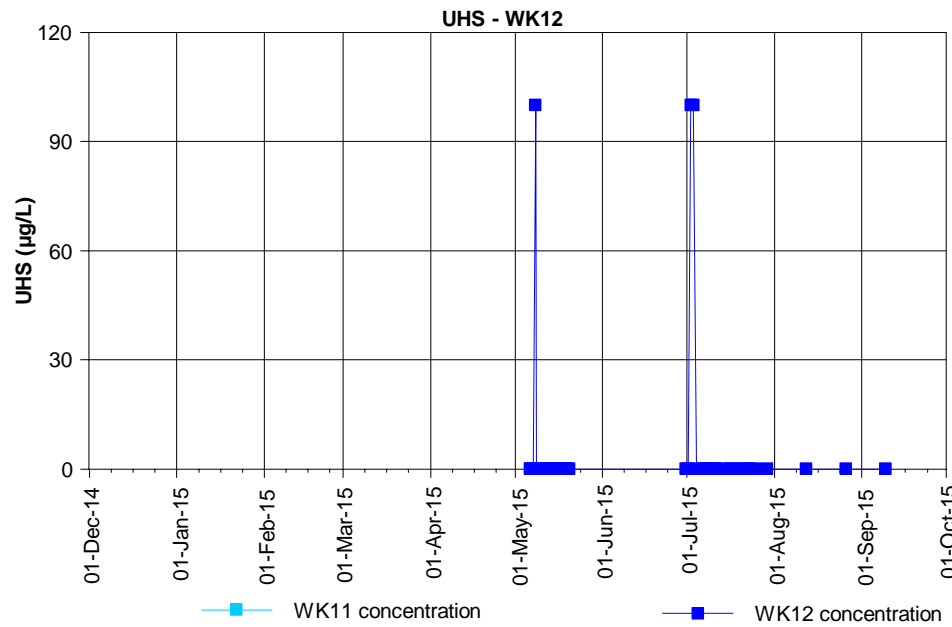
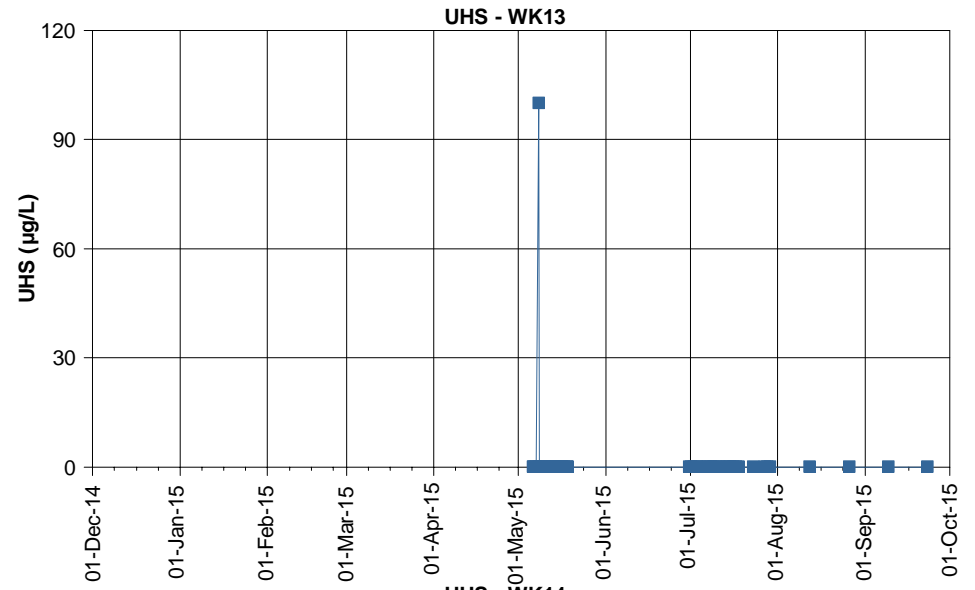
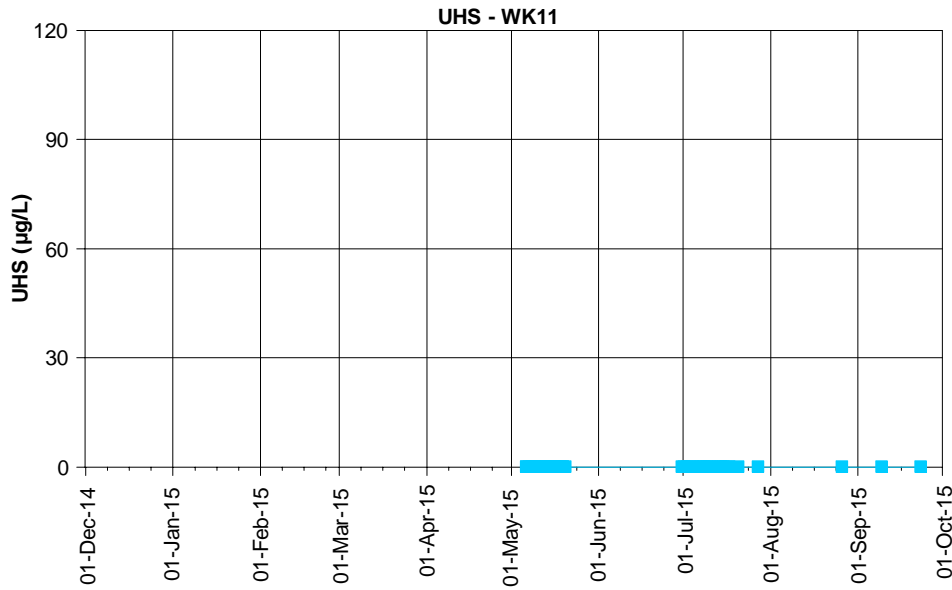


Figure 8.1: Unionized hydrogen sulphide concentrations at the Waukivory pilot wells

Appendix F

AST2 analyte time-series hydrographs



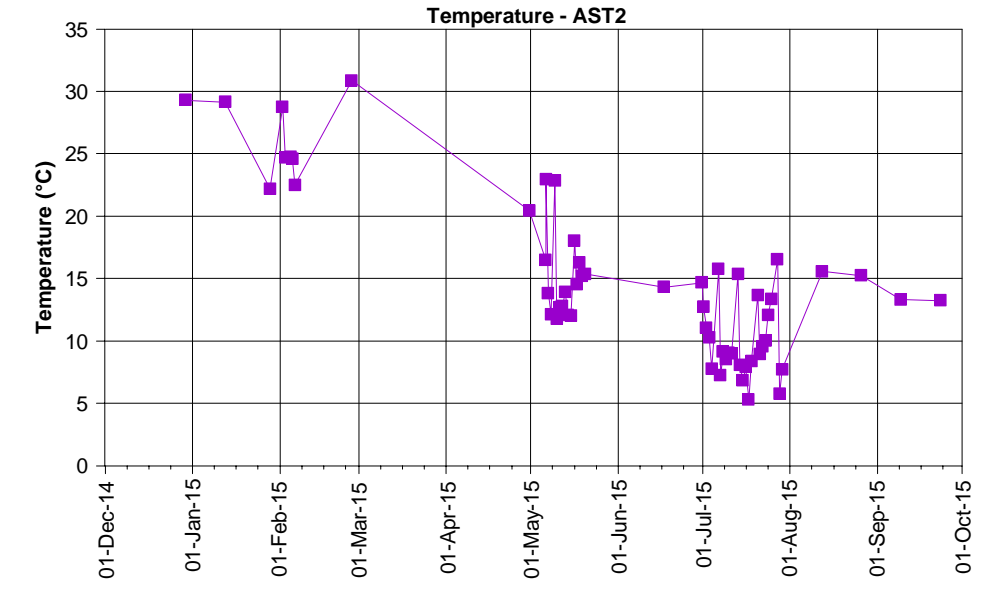
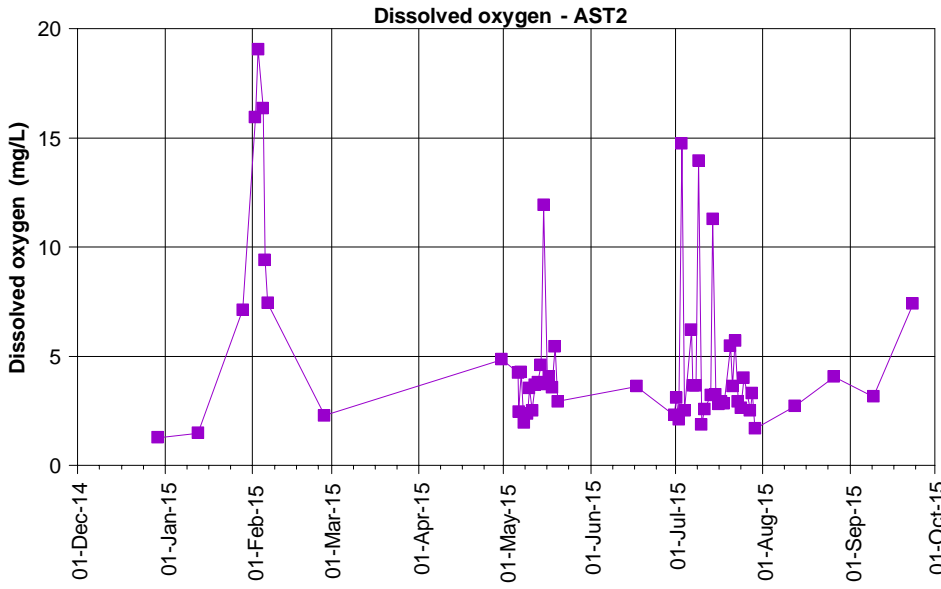
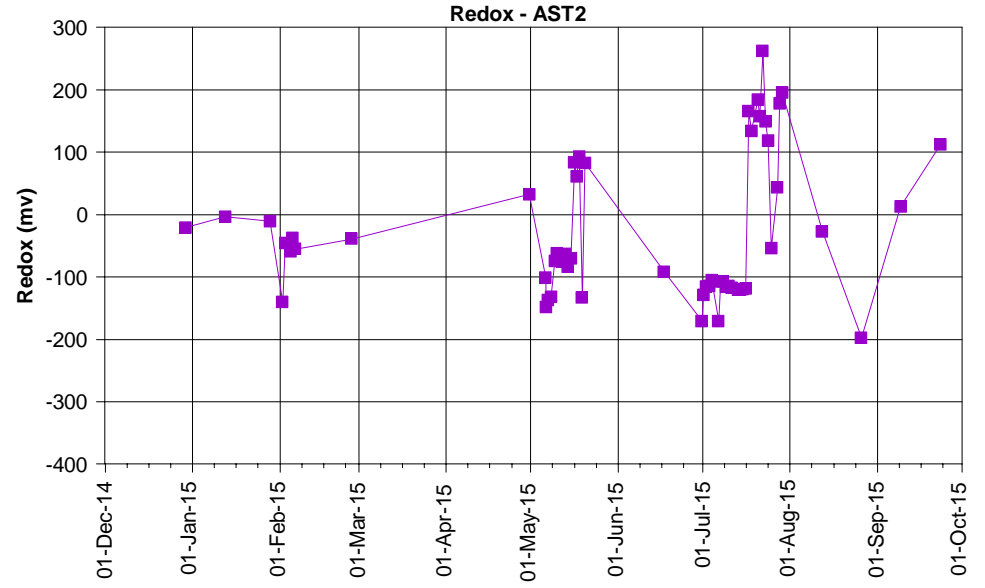
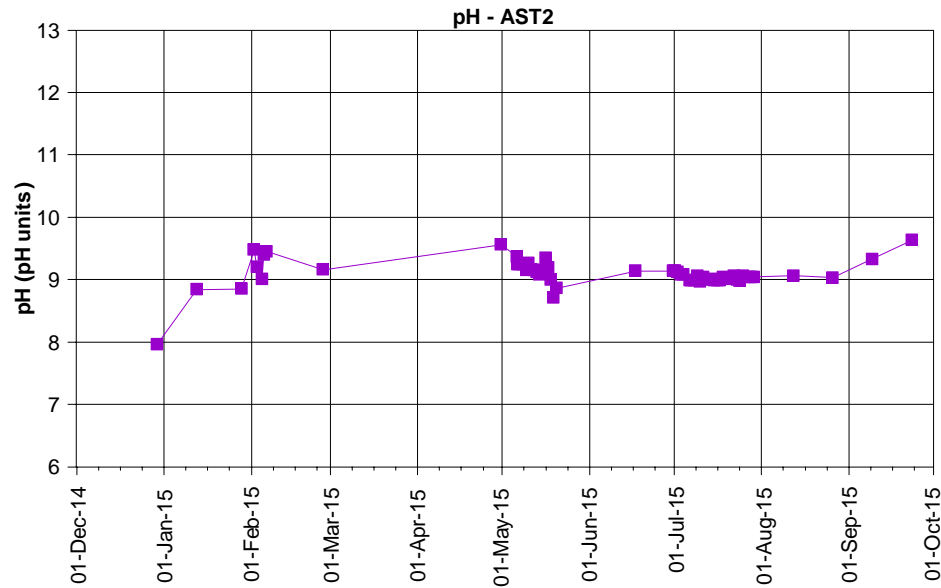


Figure F1.1: Field measurements of pH, redox, dissolved oxygen and temperature at AST2.






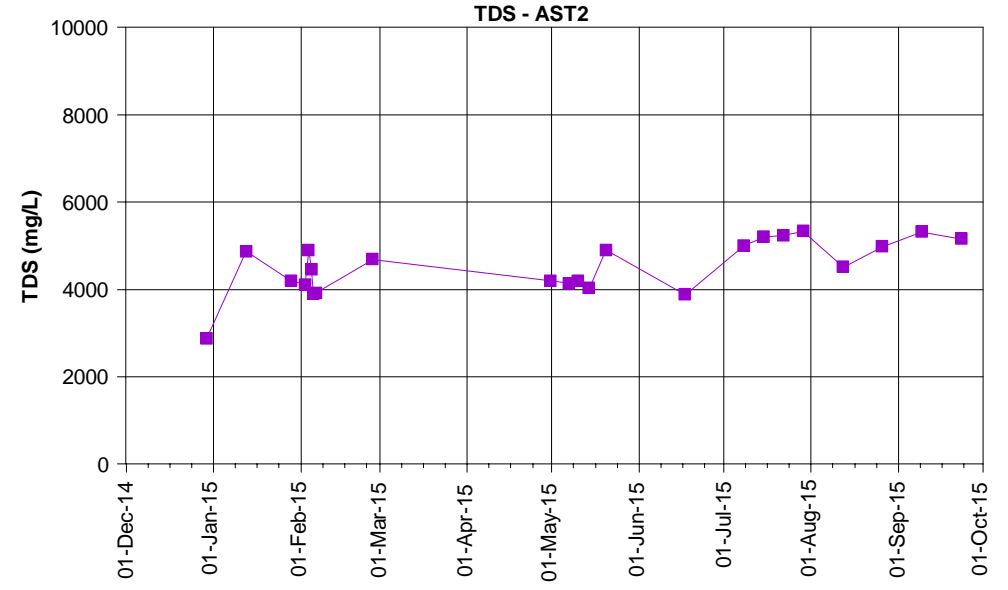


Figure F1.2: Laboratory measurements of electrical conductivity and Total Dissolved Solids (TDS) at AST2.

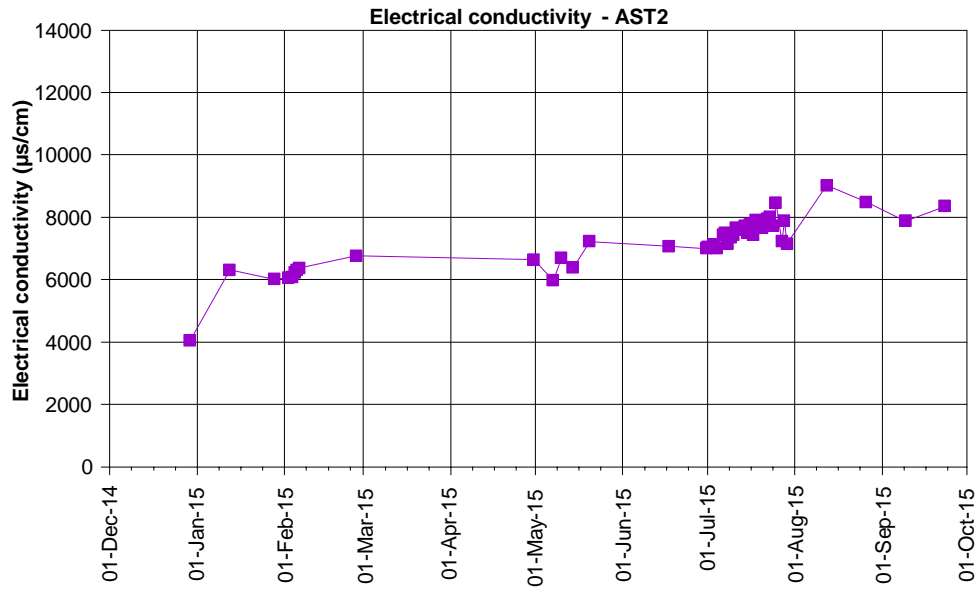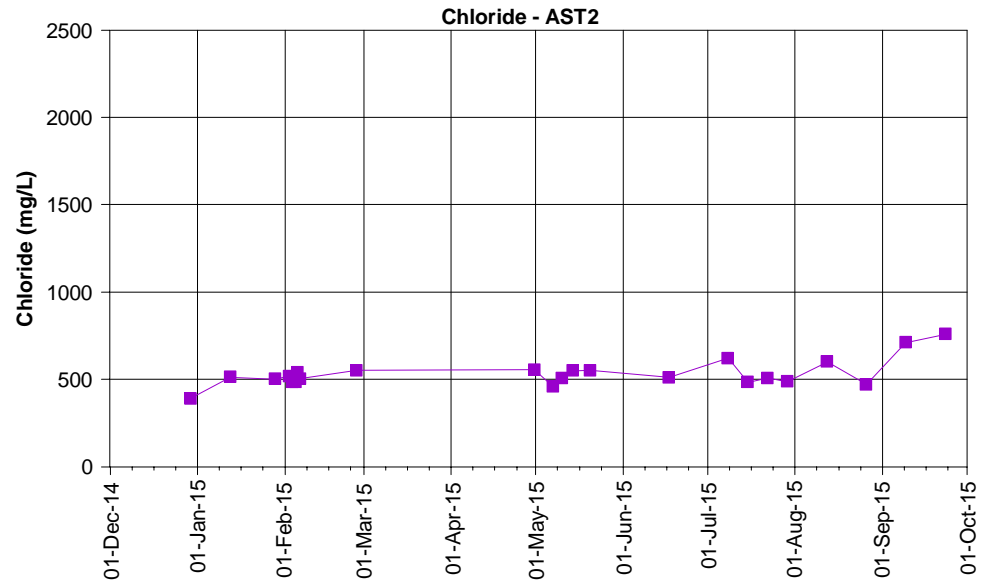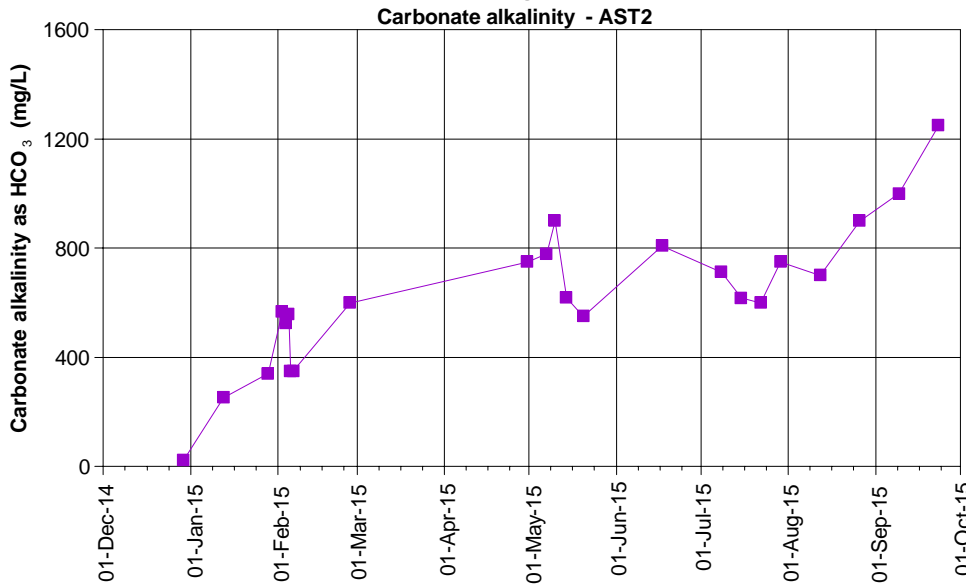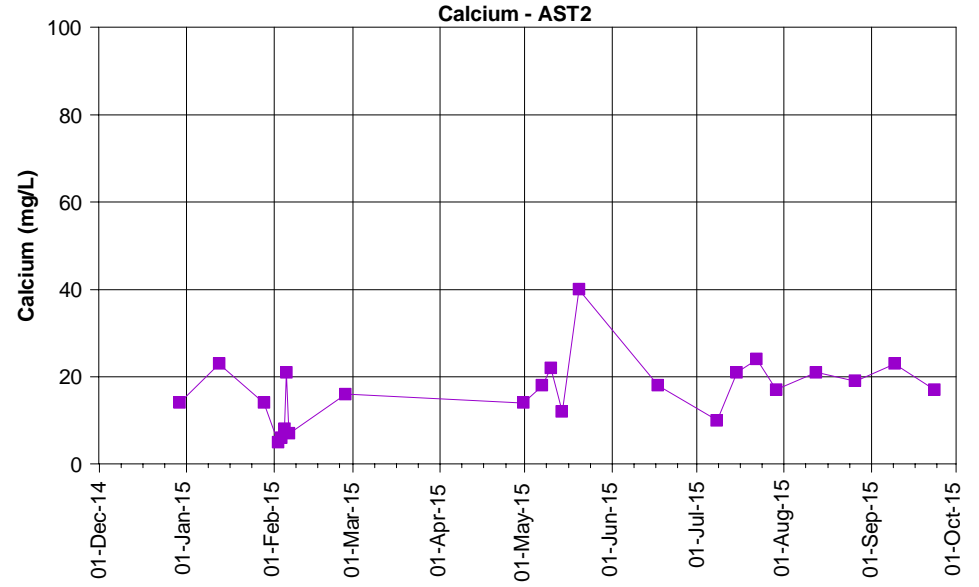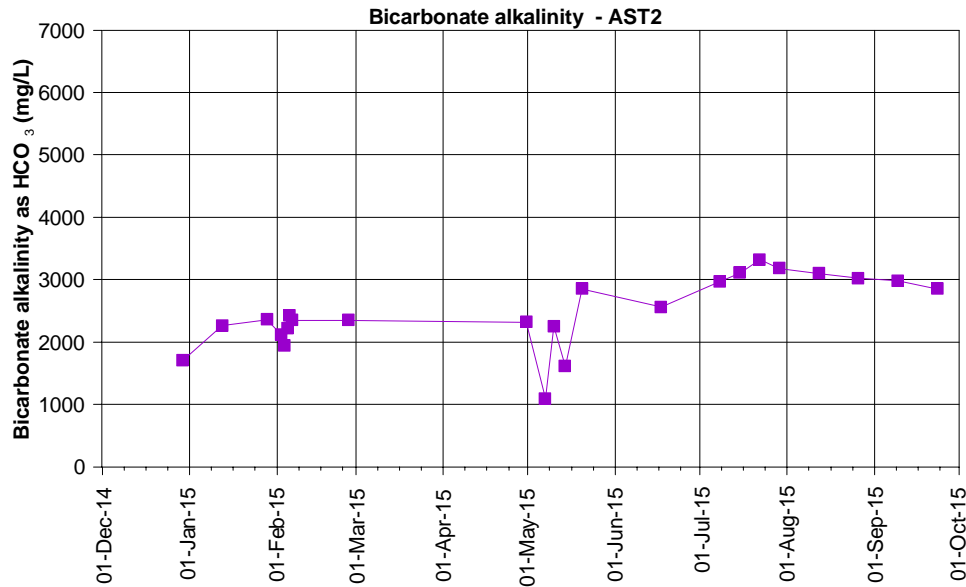

Chloride method analysis ED0045

Figure F2.1: Bicarbonate alkalinity, carbonate alkalinity, calcium and chloride concentrations at AST2

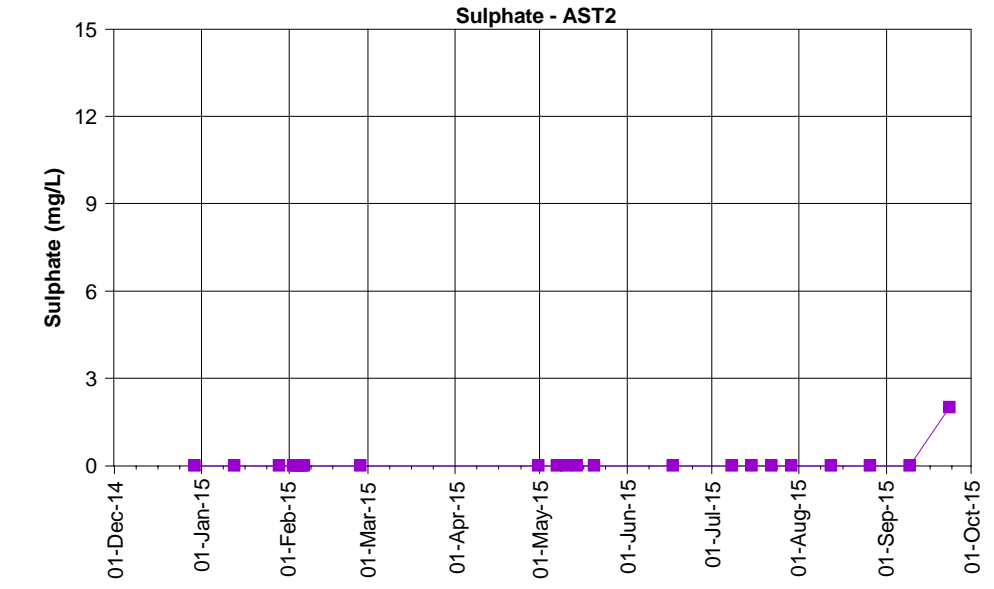
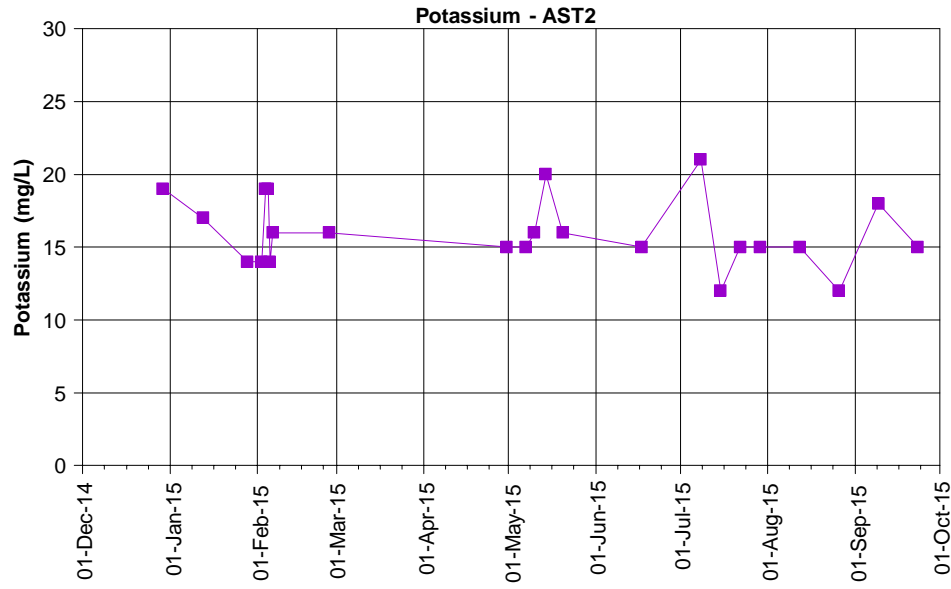
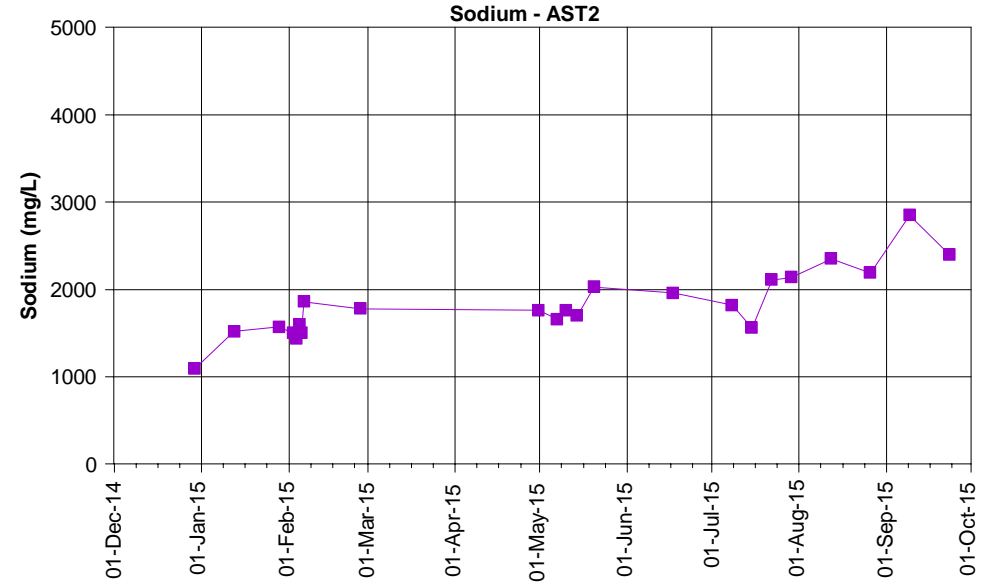
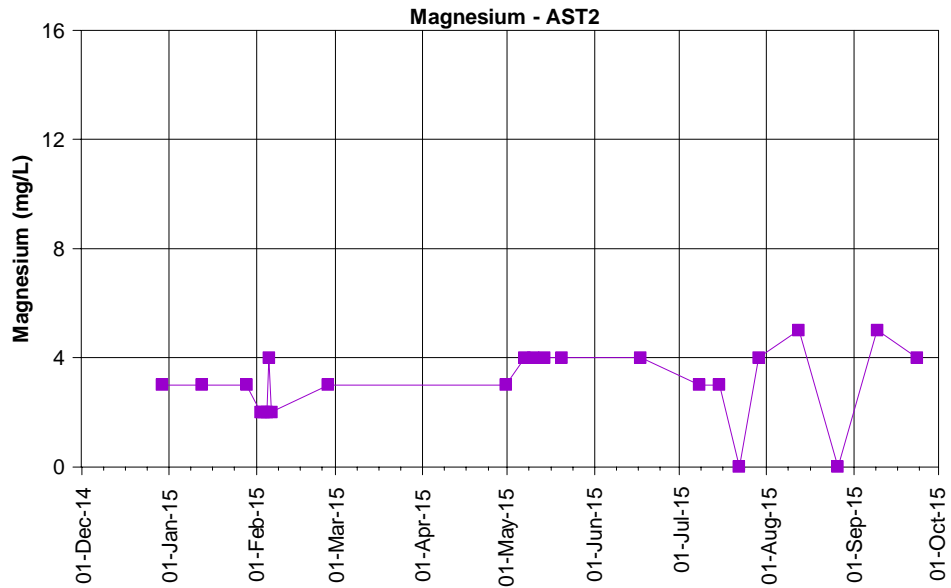


Figure F2.2: Magnesium, potassium, sodium and sulphate concentrations at AST2

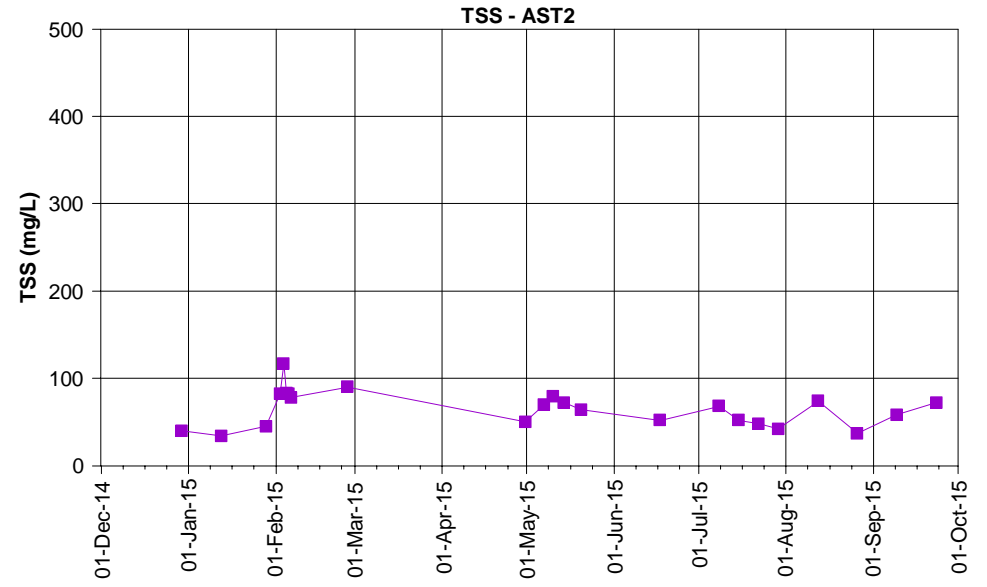
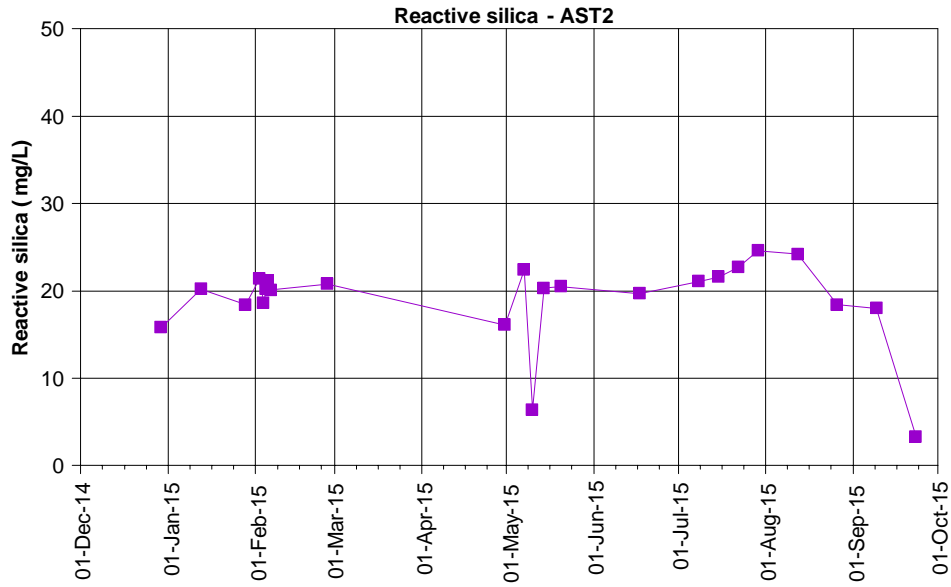
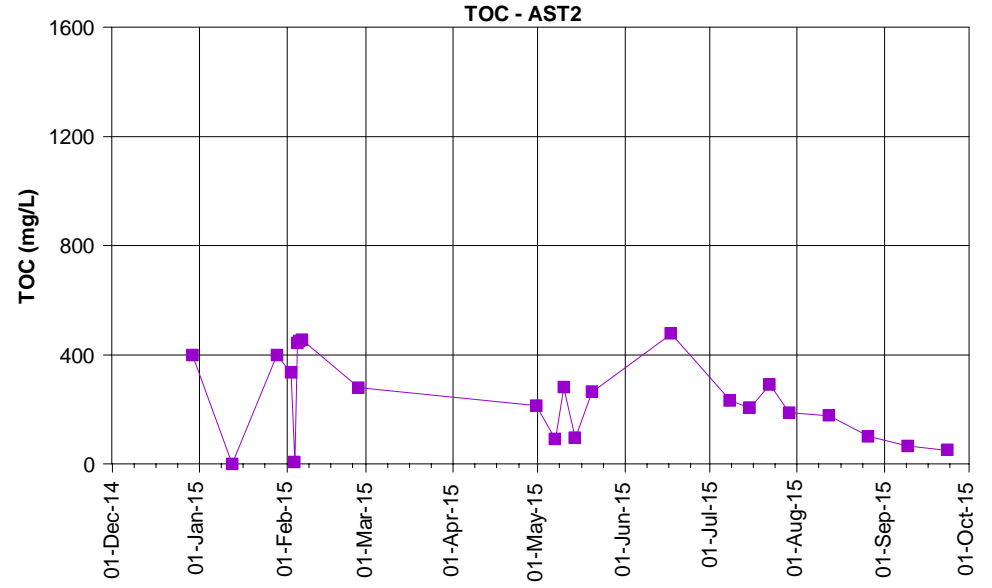
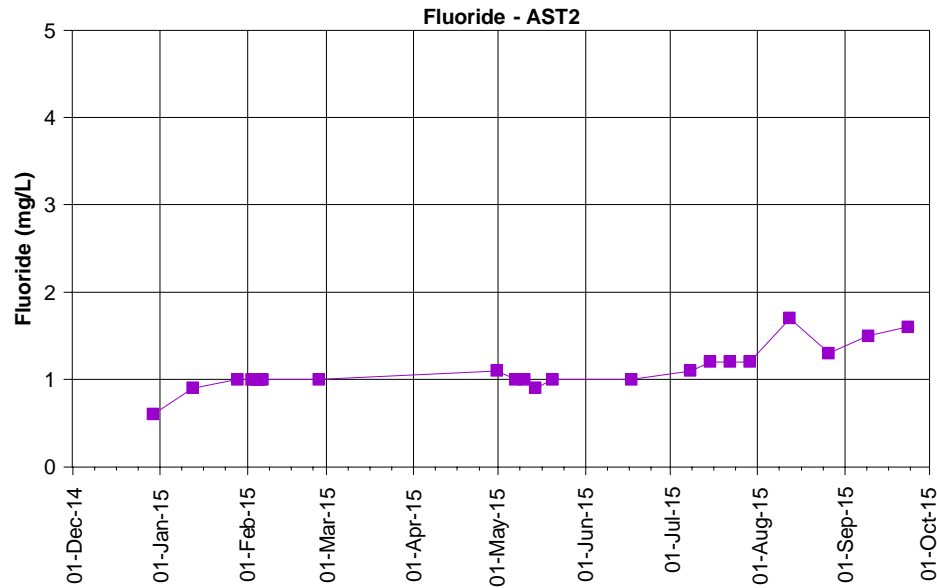


Figure F2.3: Fluoride, reactive silica, total organic carbon (TOC) and total suspended solids (TSS) concentrations at AST2

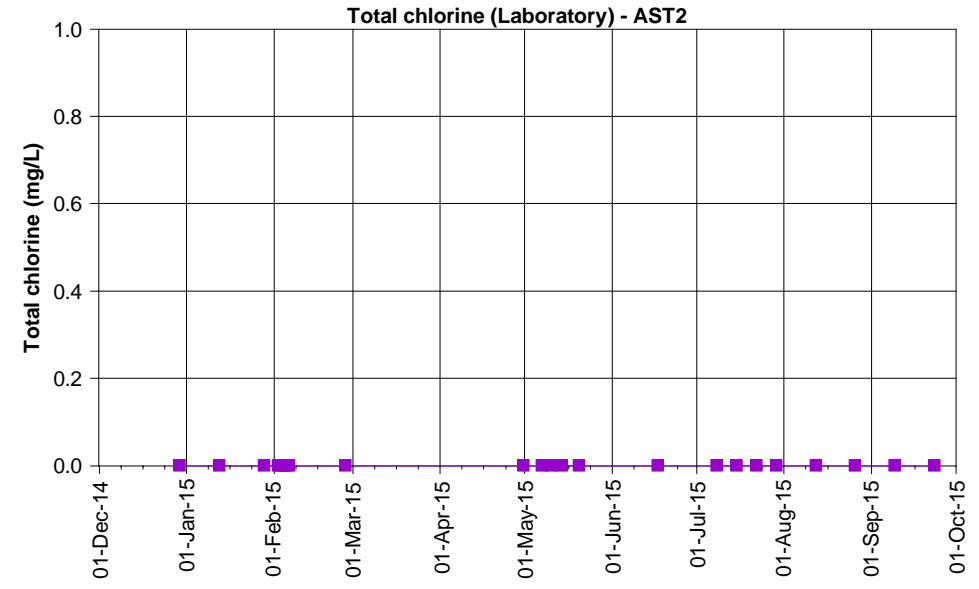
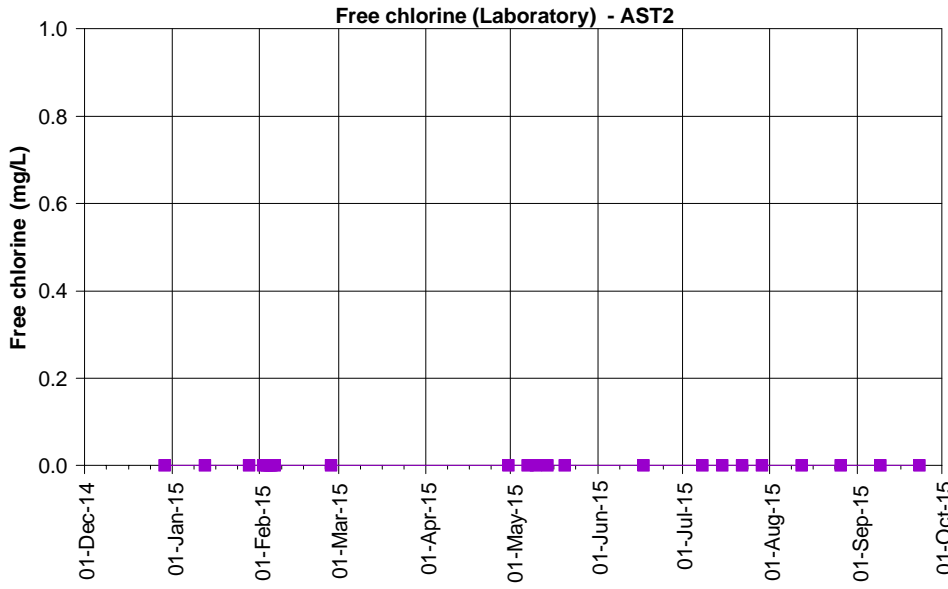
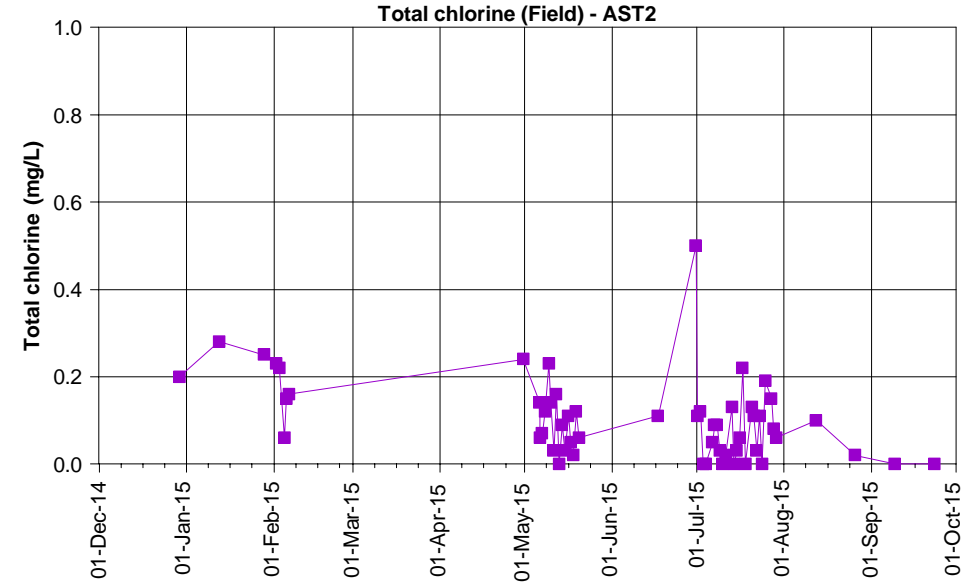
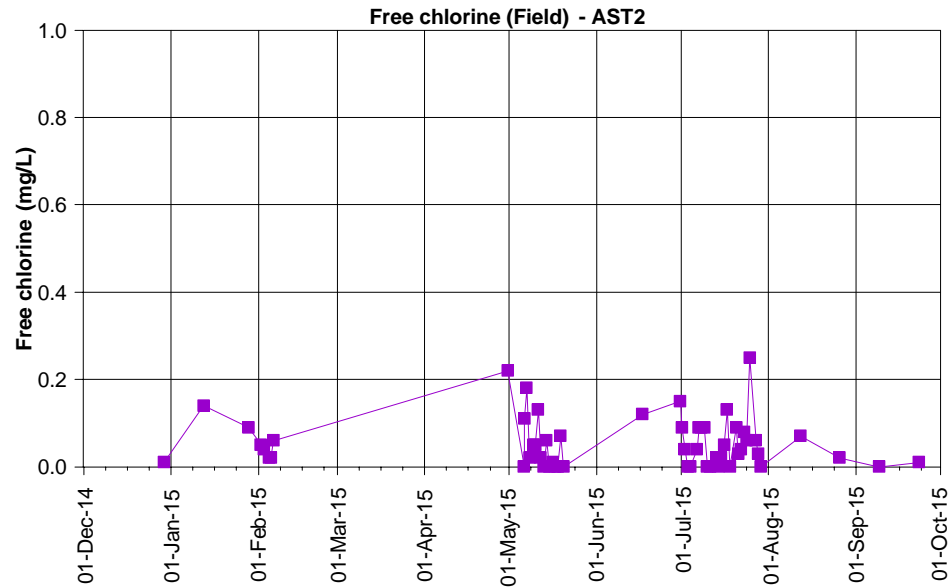


Figure F2.4: Field and laboratory measurements of free and total chlorine at AST2.

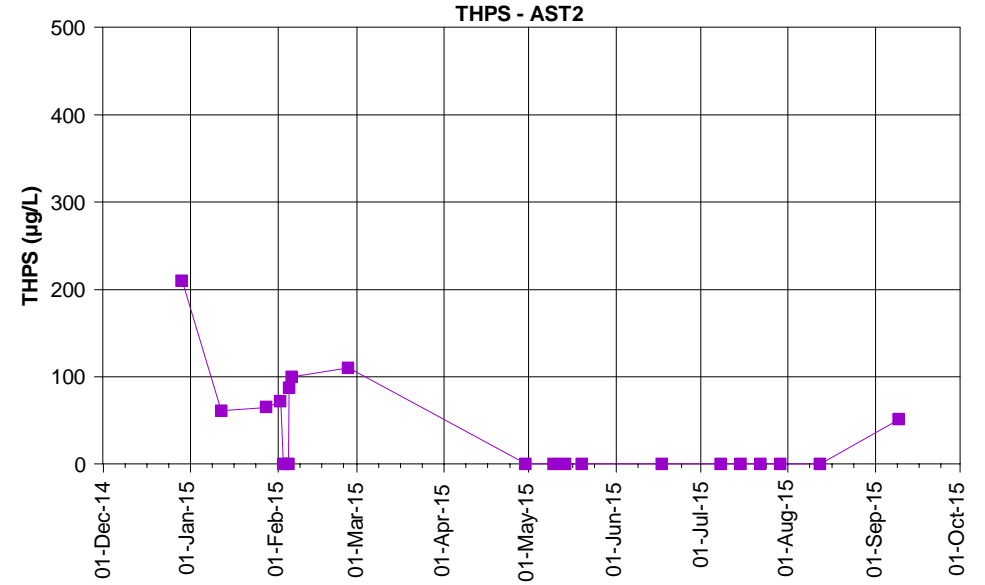
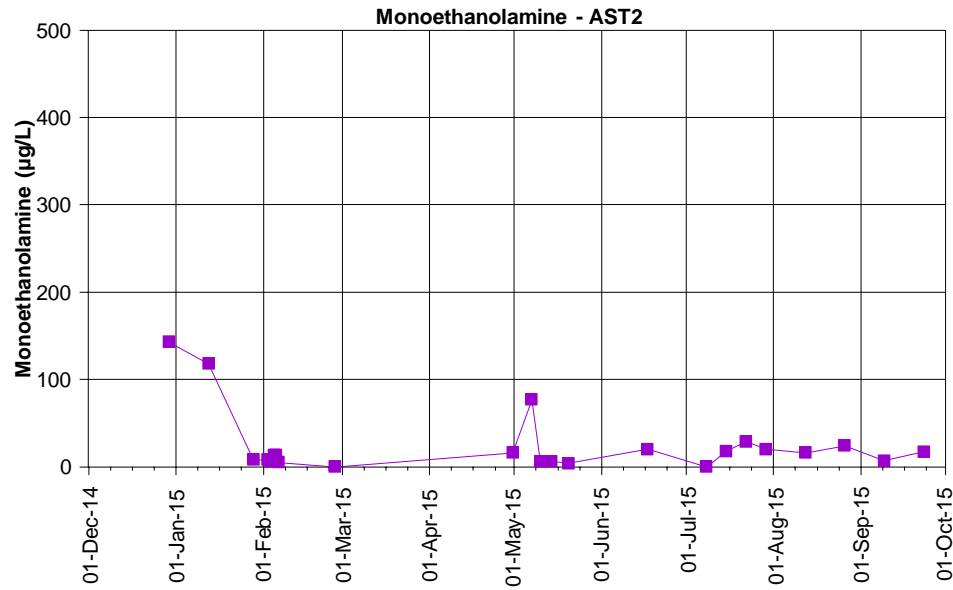


Figure F2.5: Monoethanolamine and THPS concentrations at AST2.

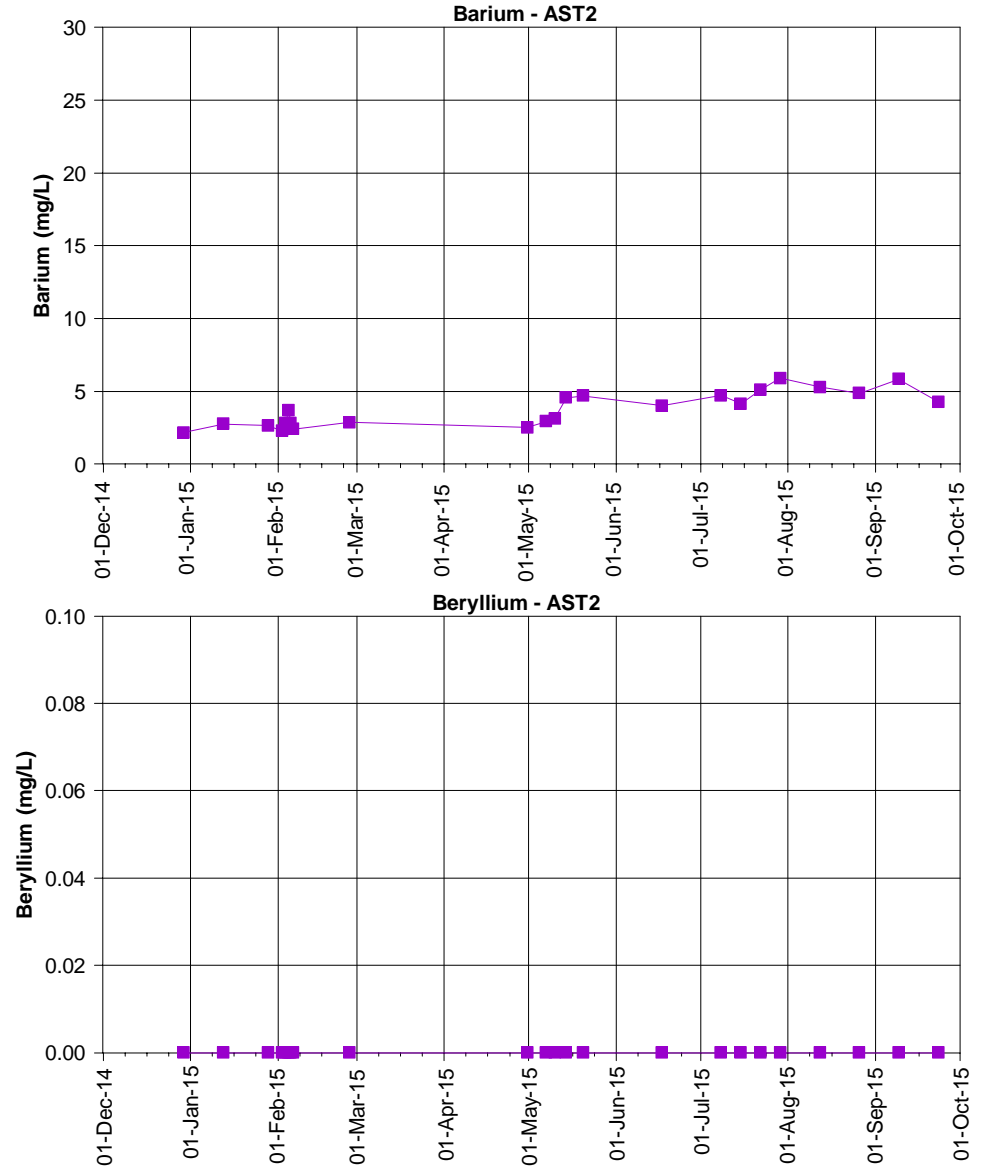
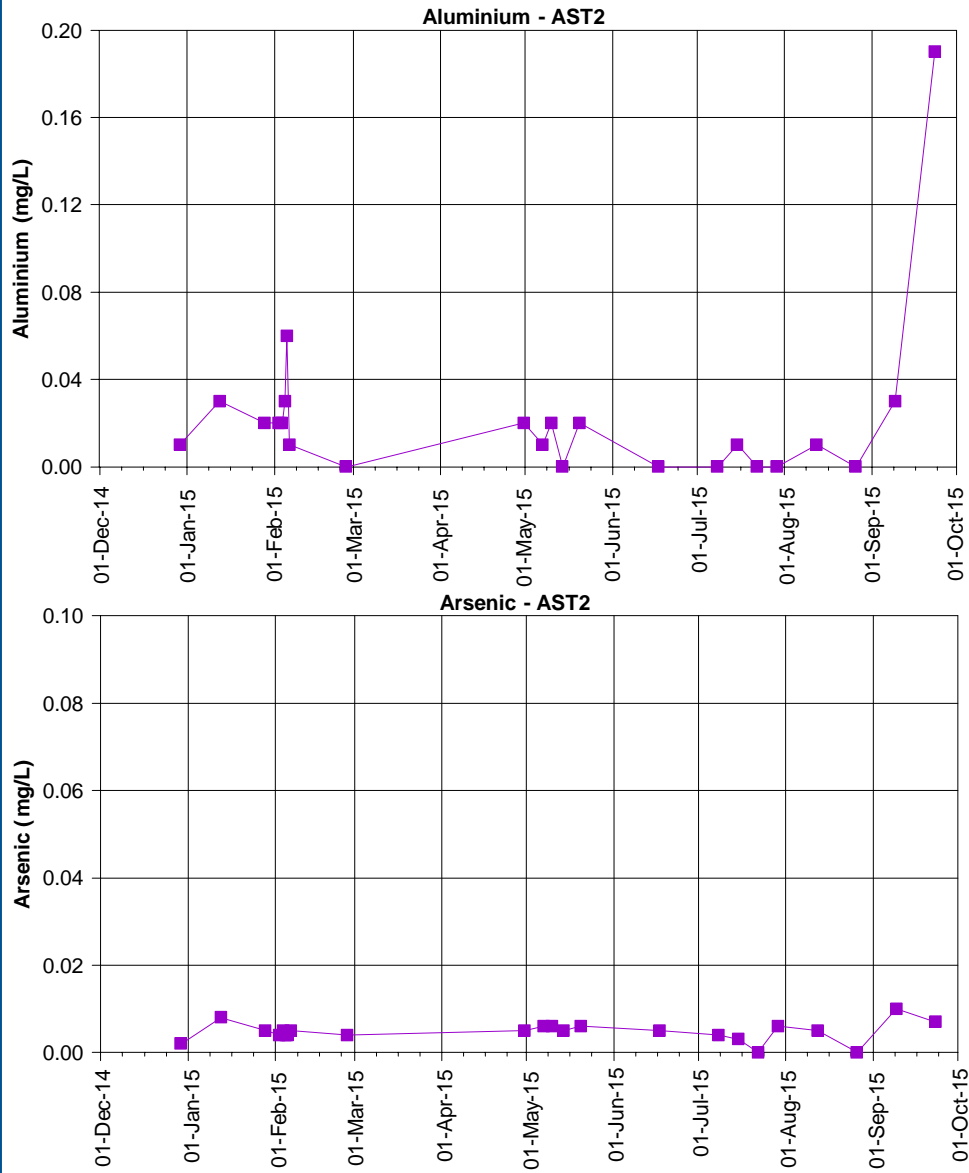


Figure F3.1: Aluminium, arsenic, barium and beryllium concentrations at AST2

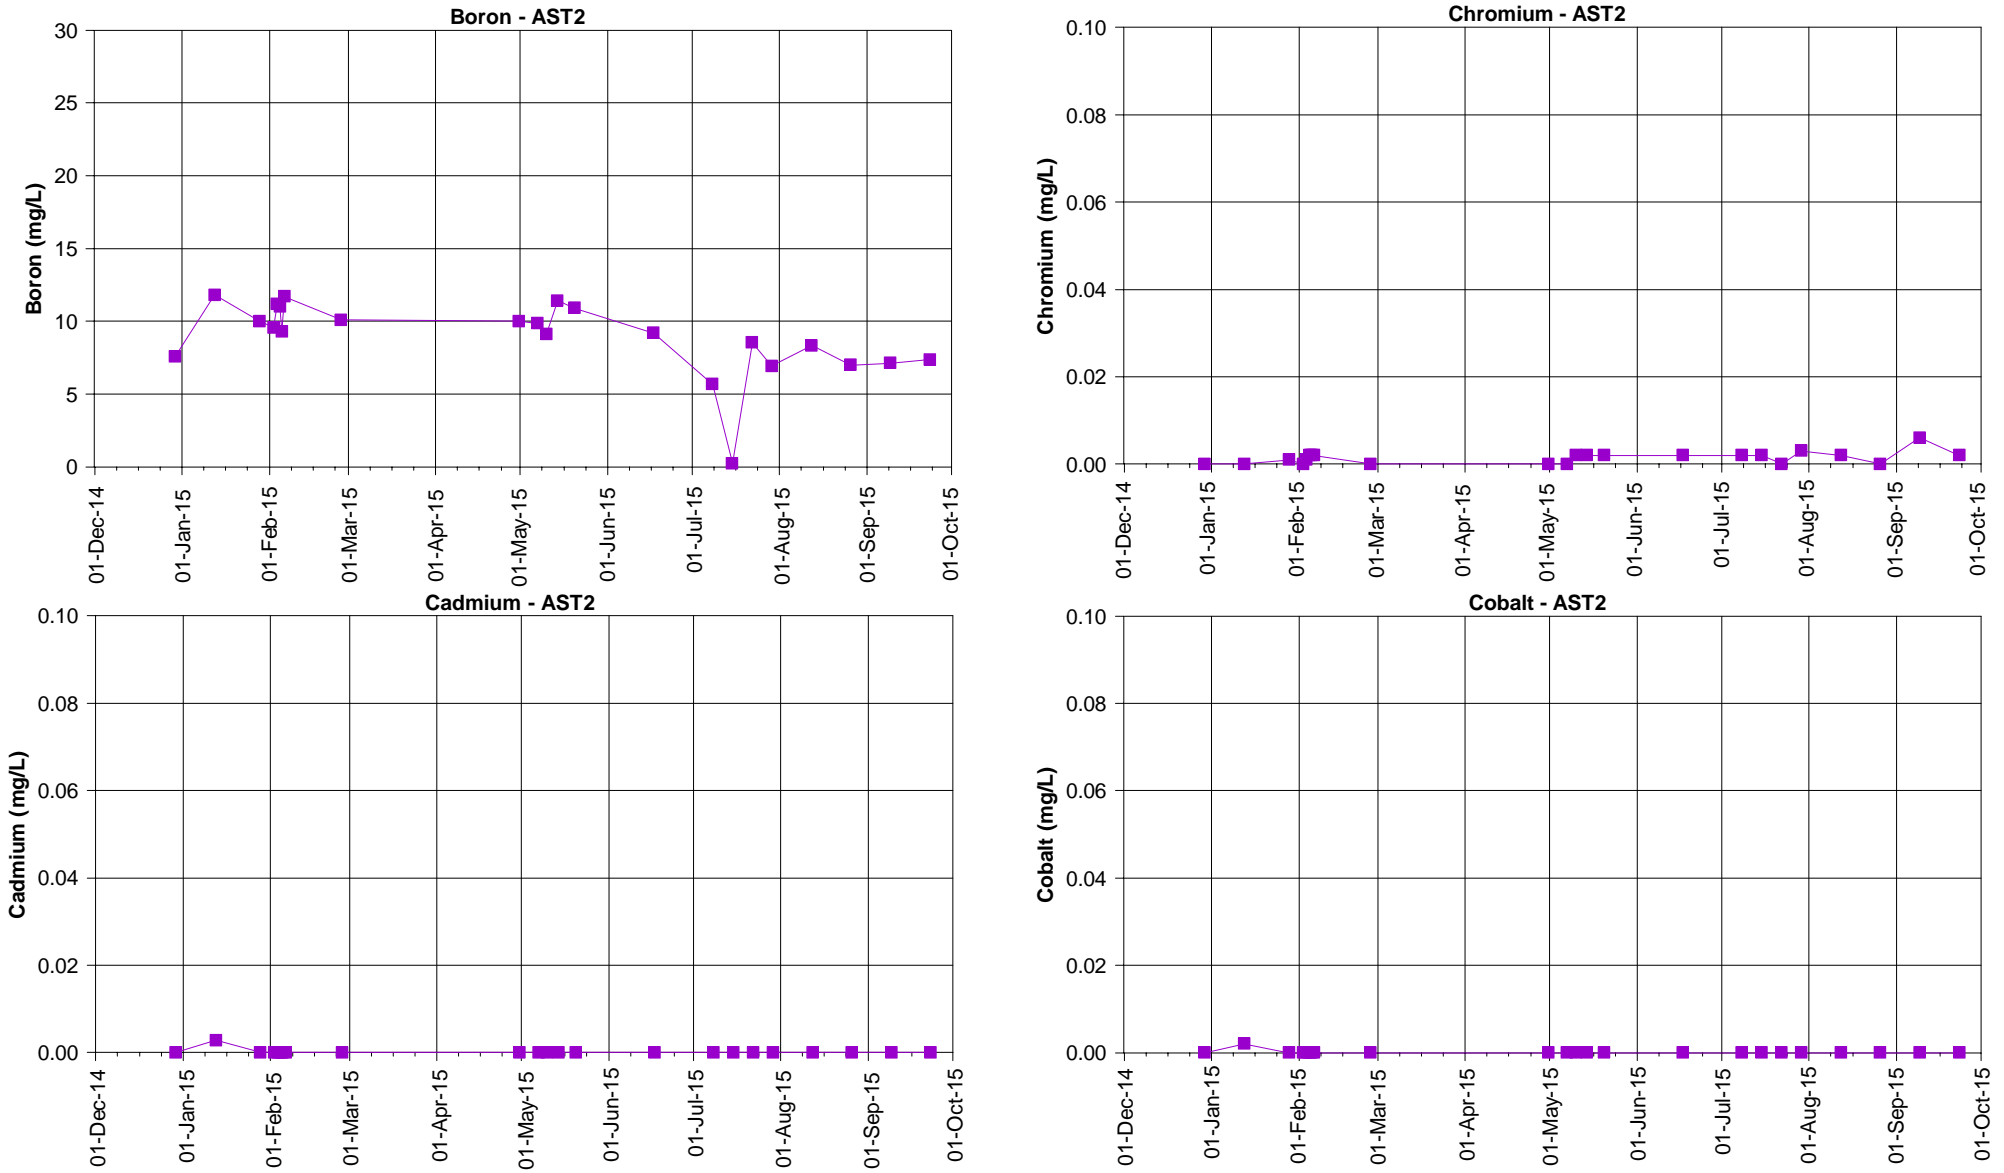


Figure F3.2: Boron, cadmium, chromium and cobalt concentrations at AST2

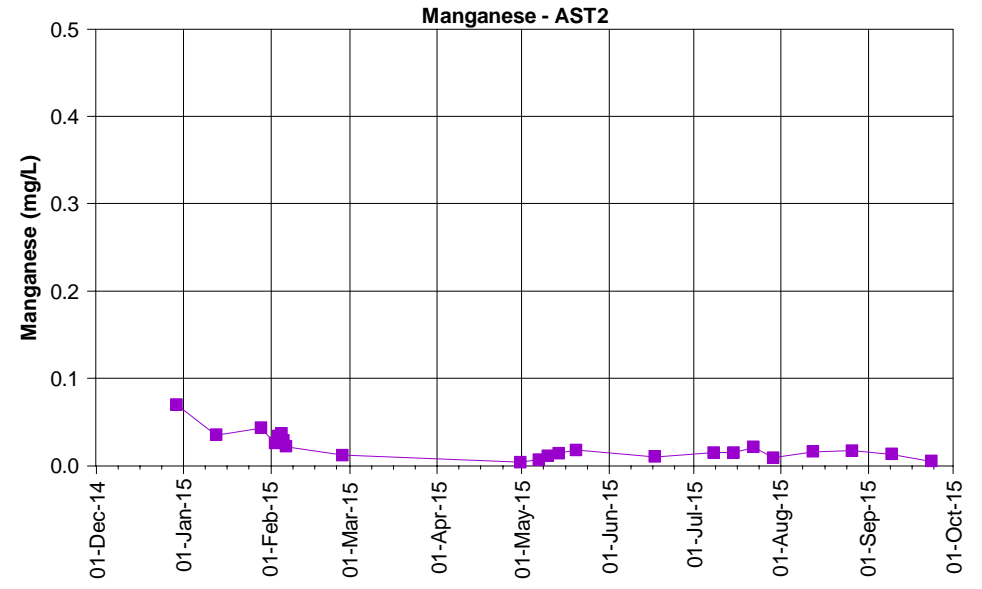
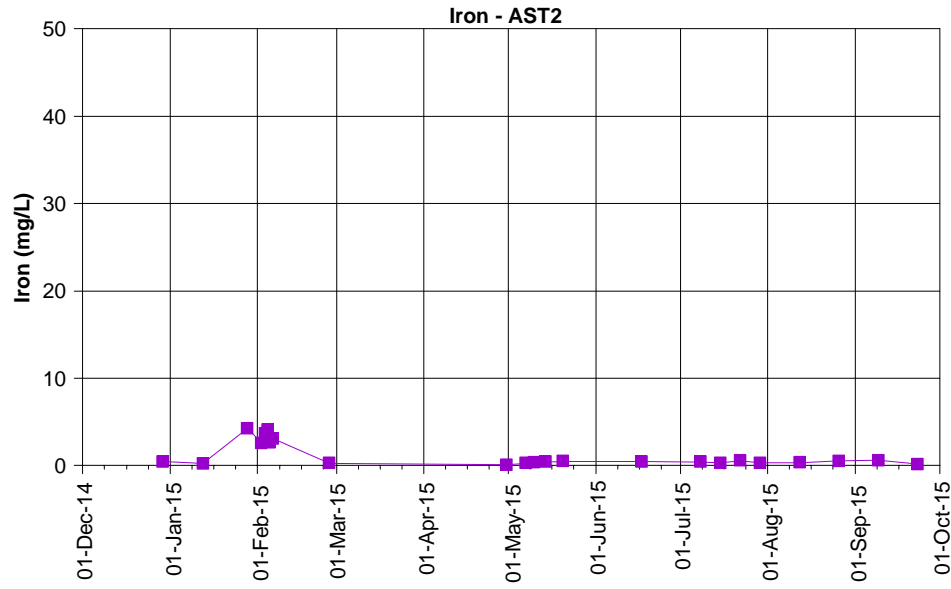
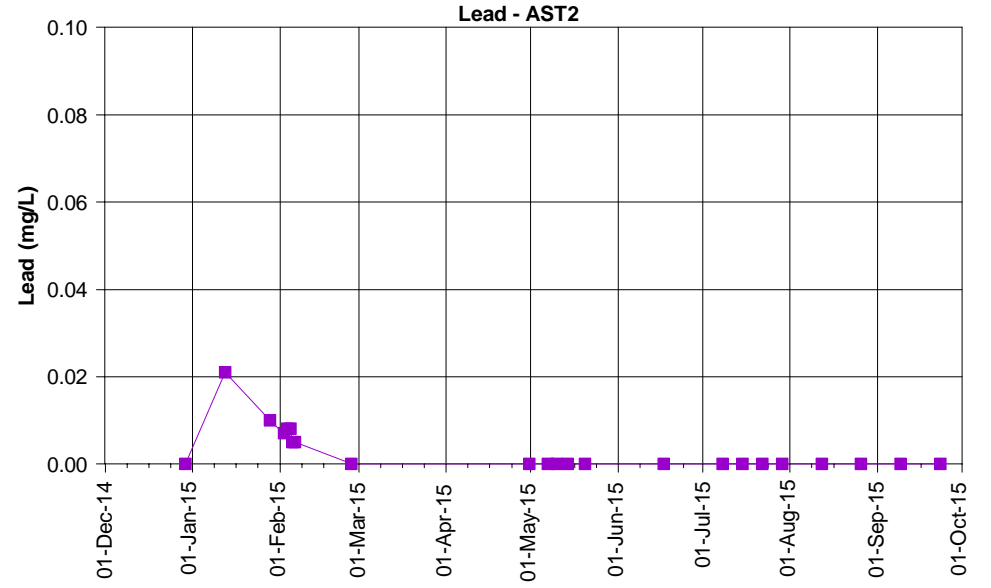
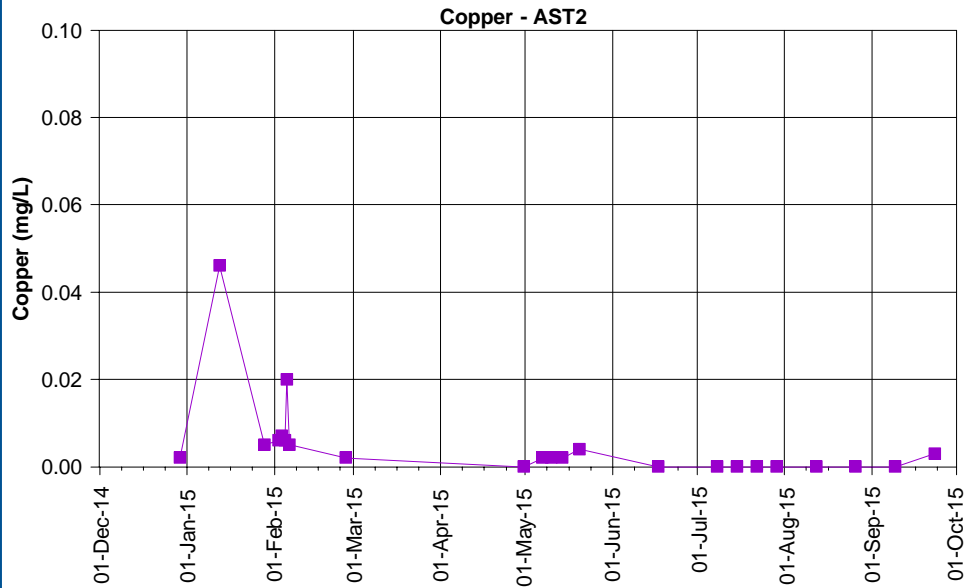


Figure F3.3: Copper, iron, lead and manganese concentrations at AST2

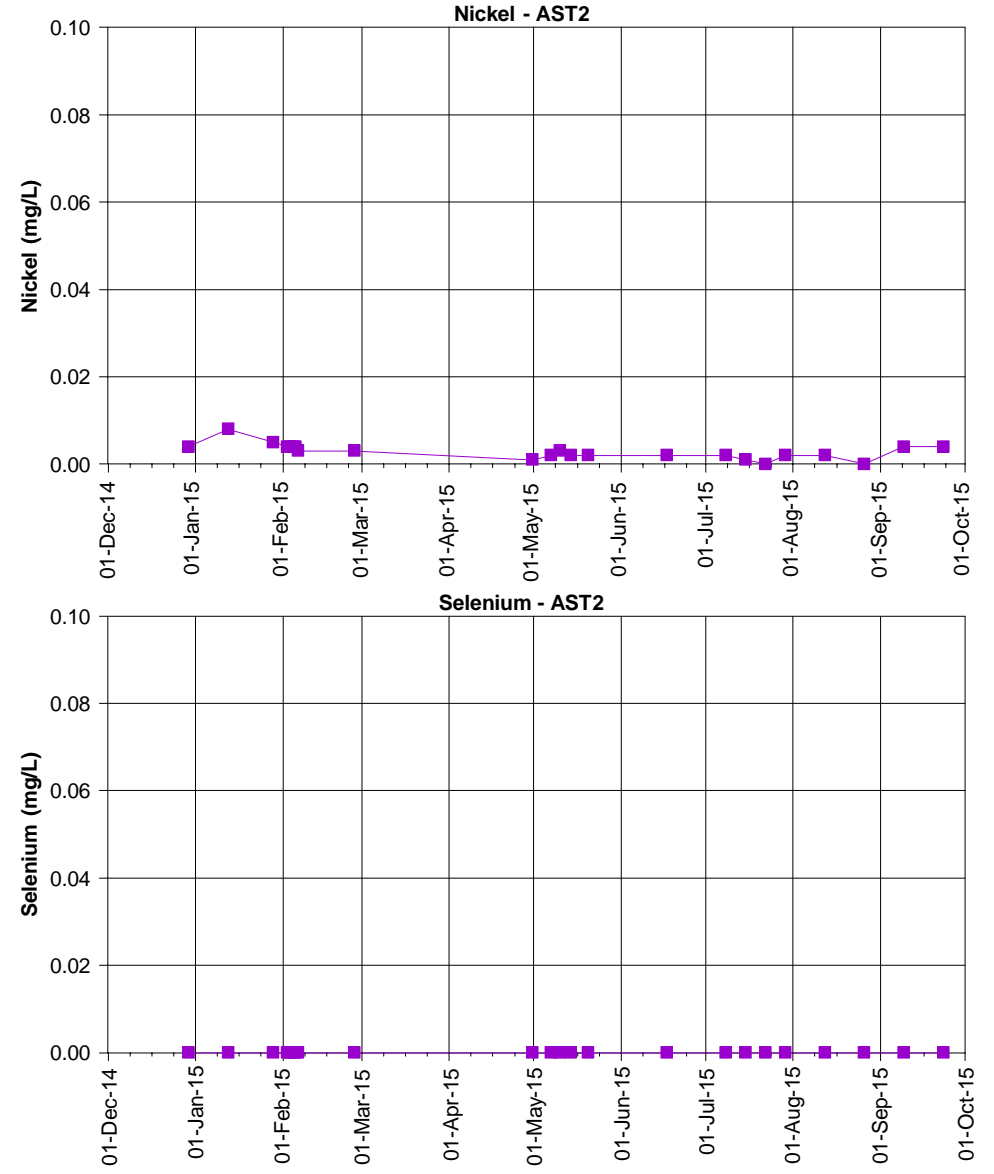
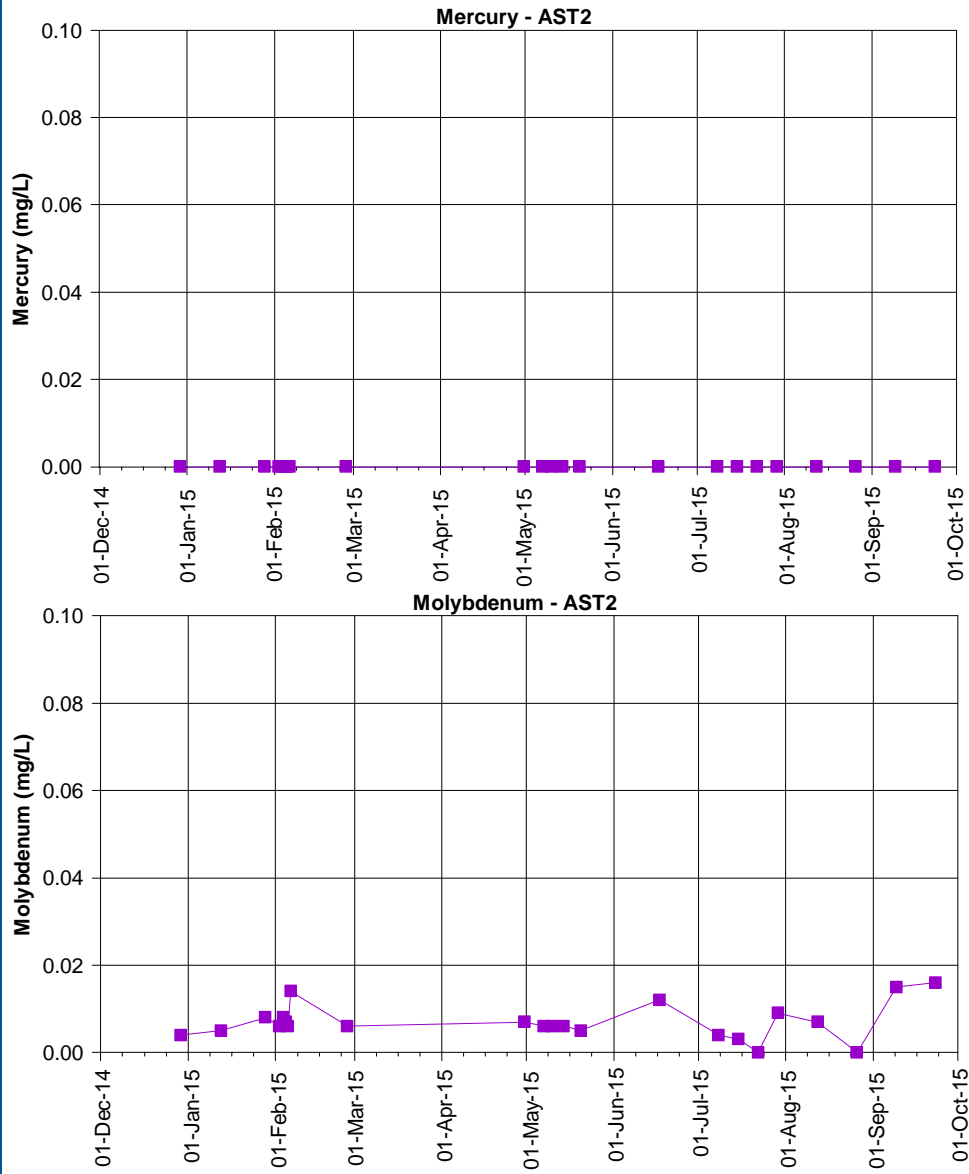


Figure F3.4: Mercury, molybdenum, nickel and selenium concentrations at AST2

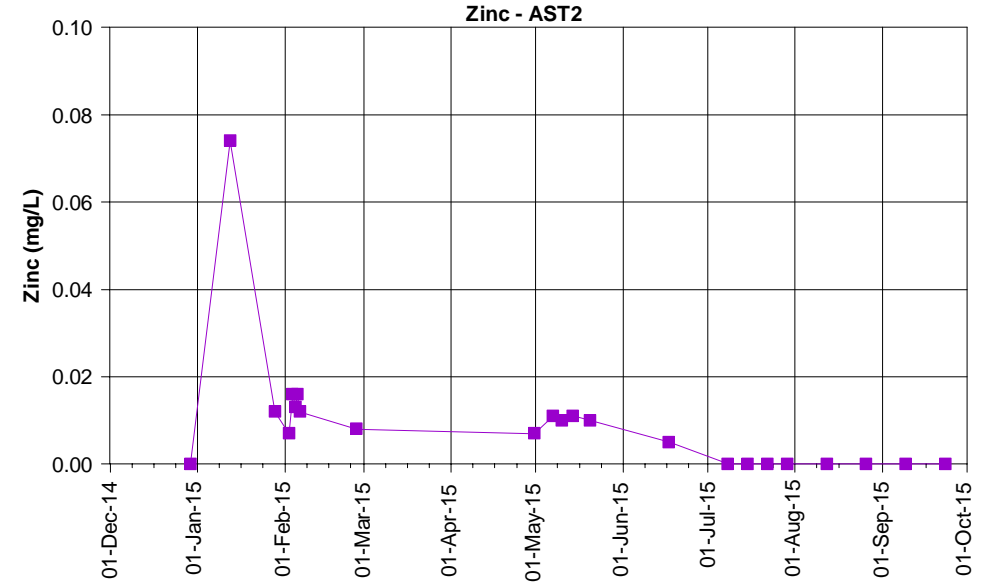
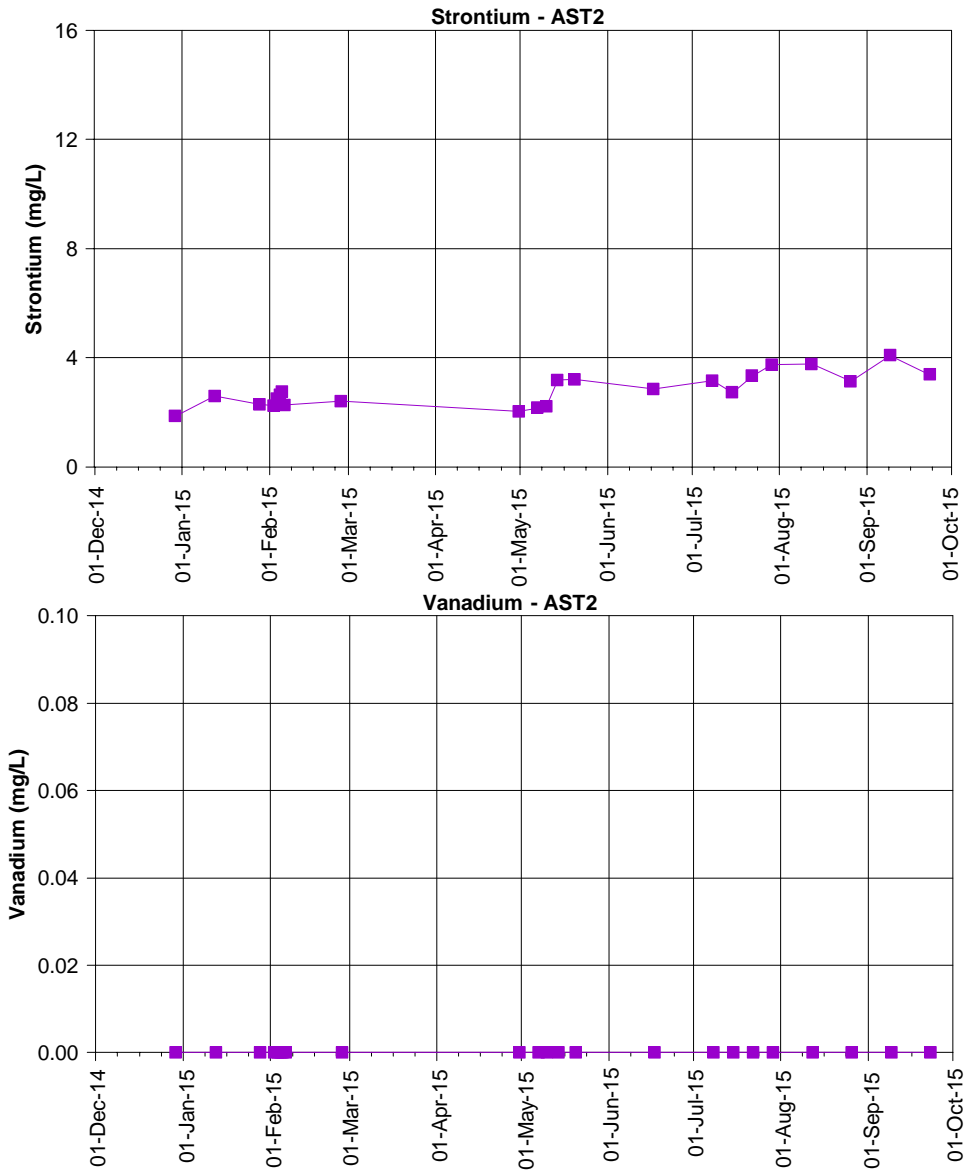


Figure F3.5: Strontium, vanadium and zinc concentrations at AST2

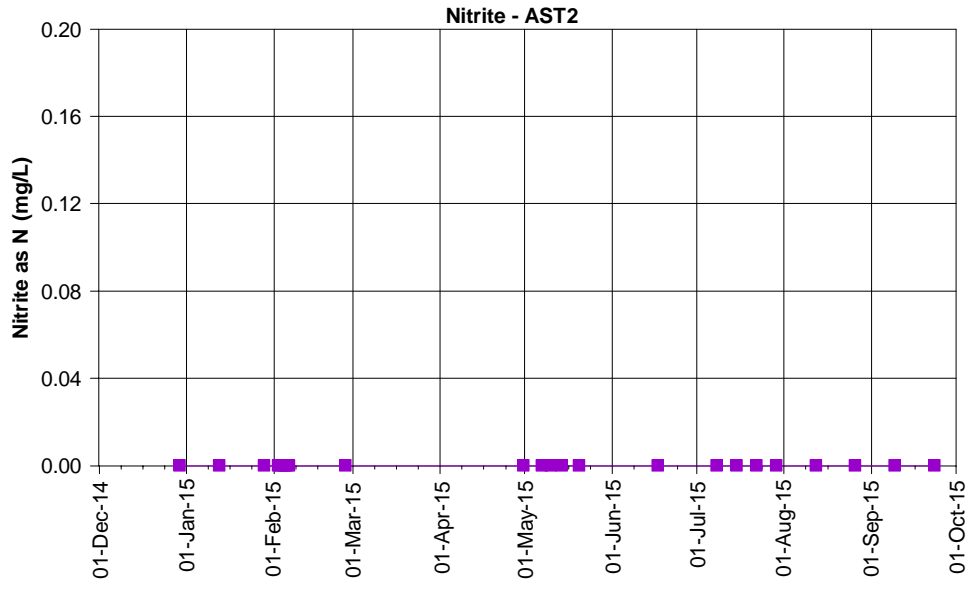
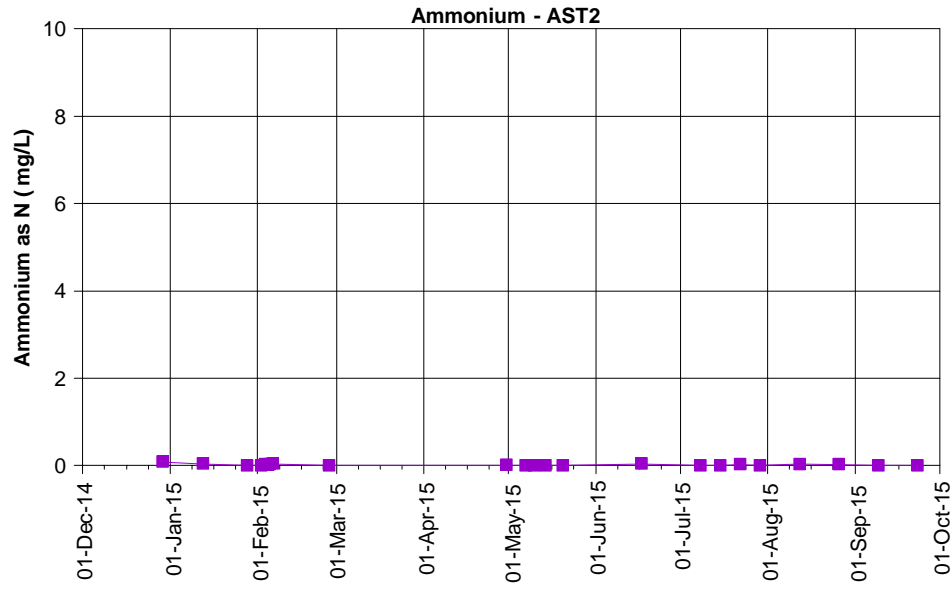
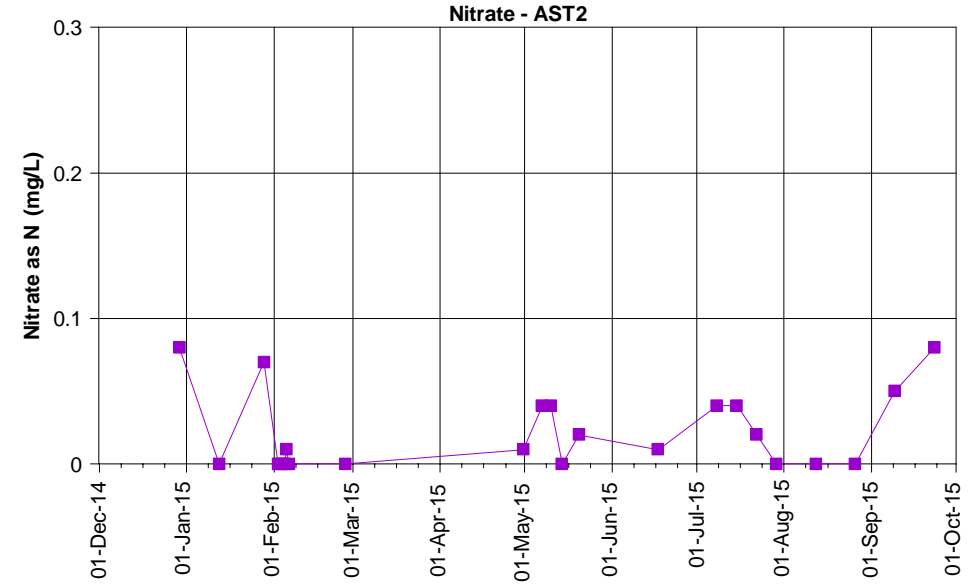
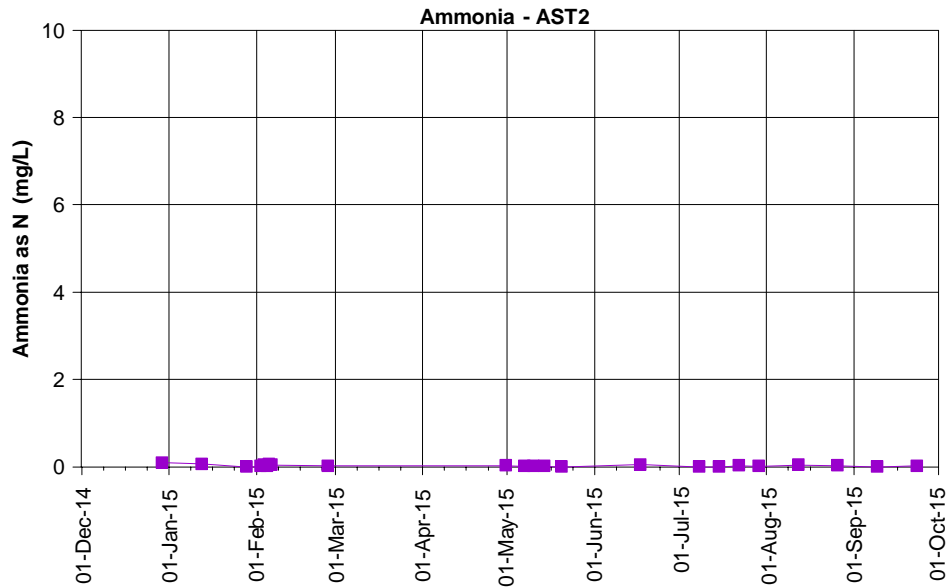


Figure F4.1: Ammonia, ammonium, nitrate and nitrite concentrations at AST2

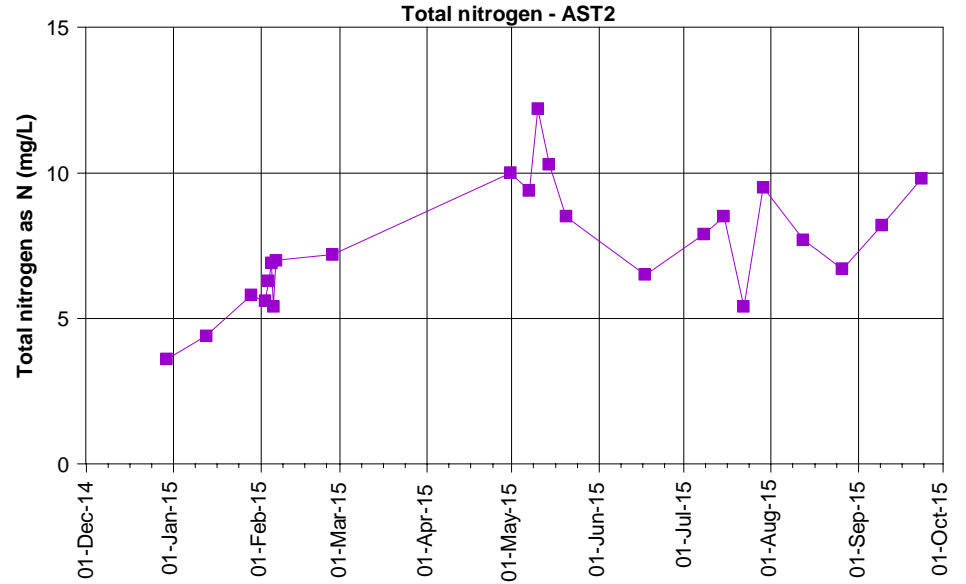
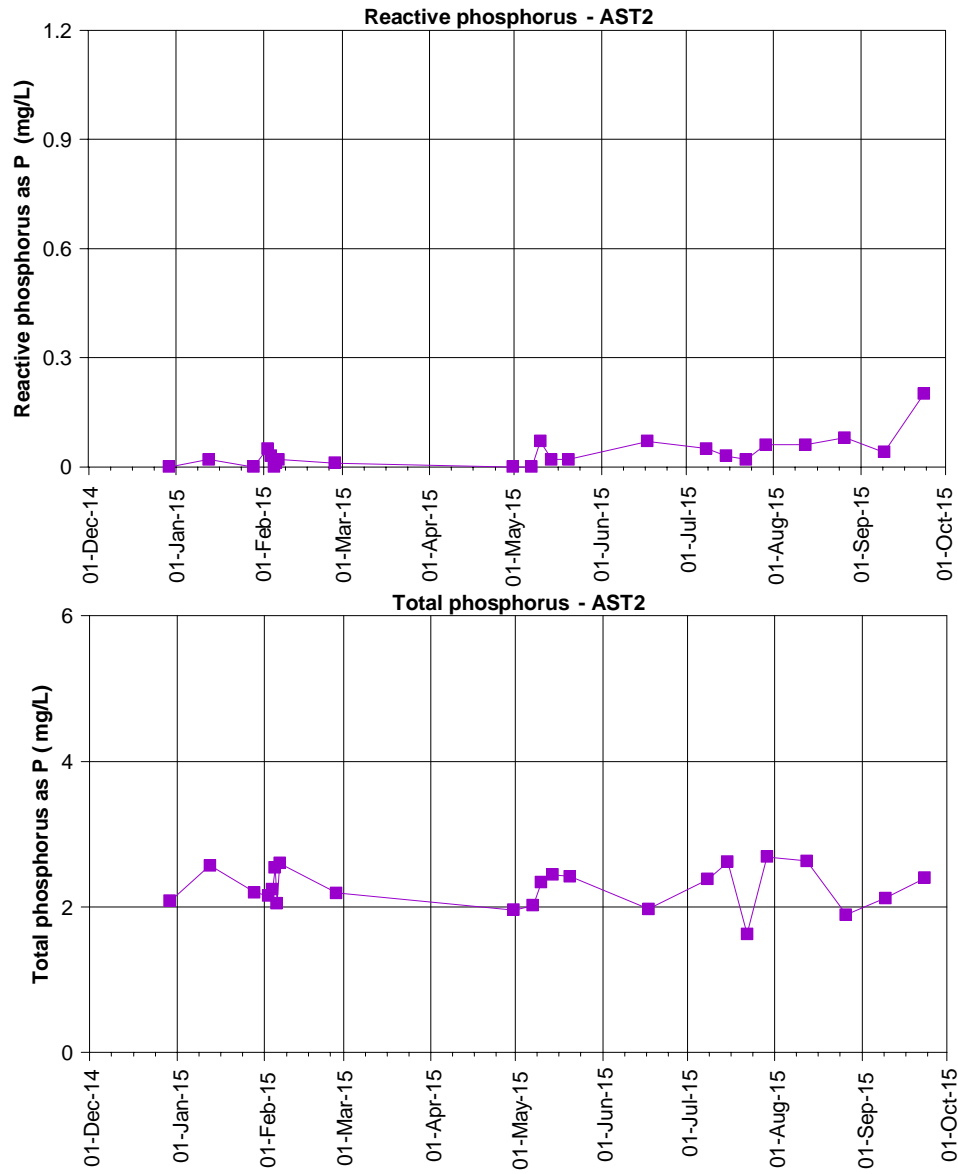


Figure F4.2: Reactive phosphorus, total phosphorus and total nitrogen concentrations at AST2

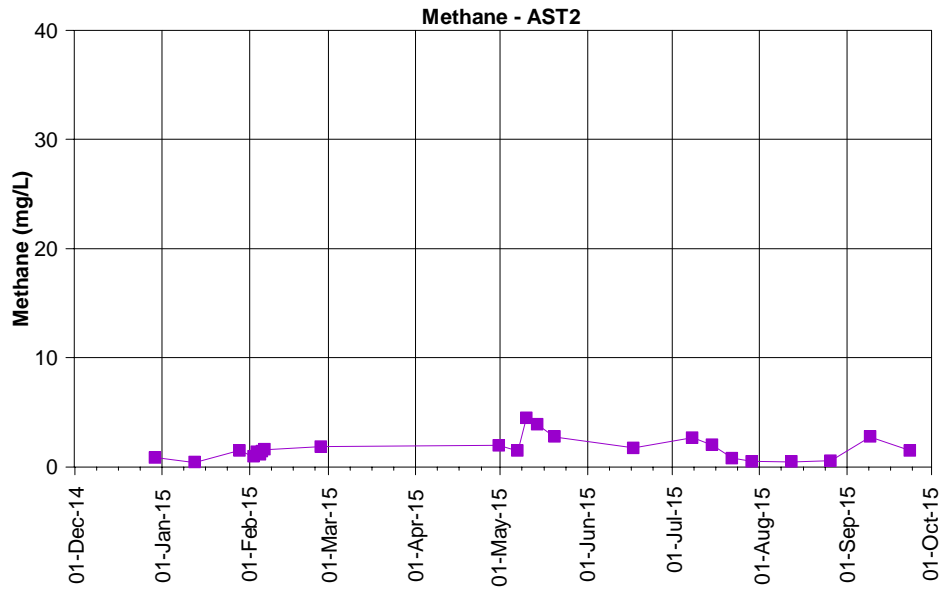


Figure G5.1: Concentration of methane at AST2.

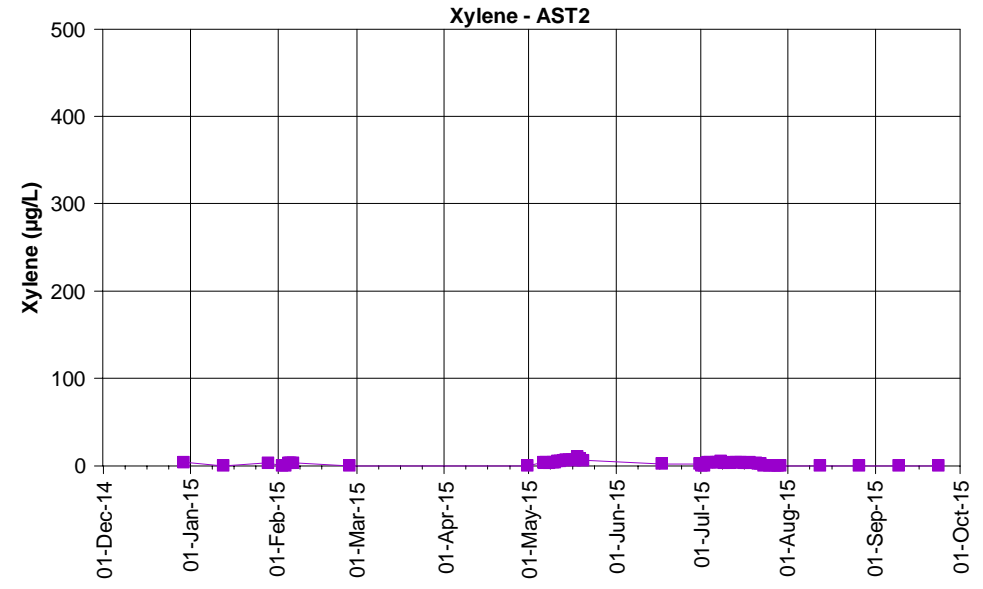
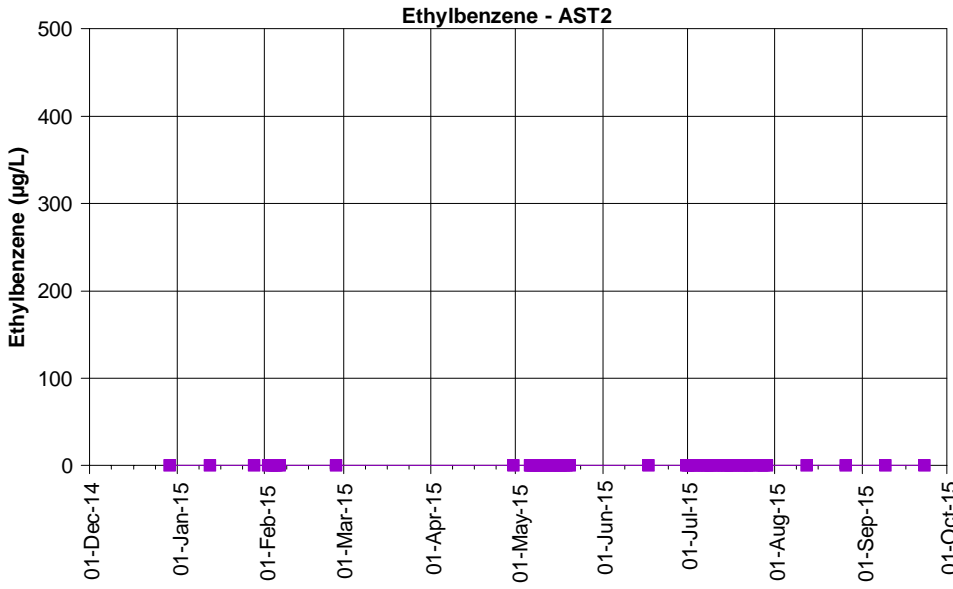
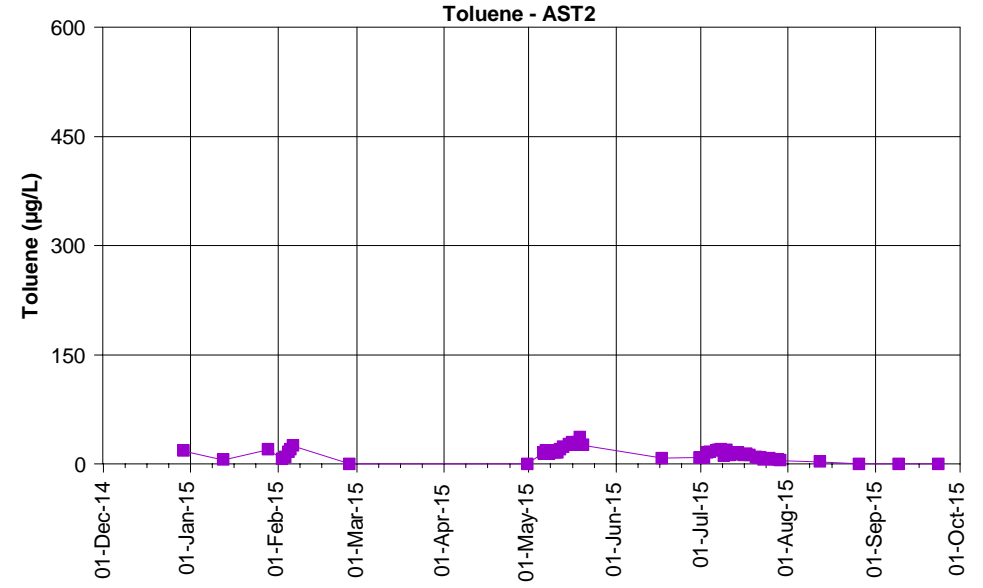
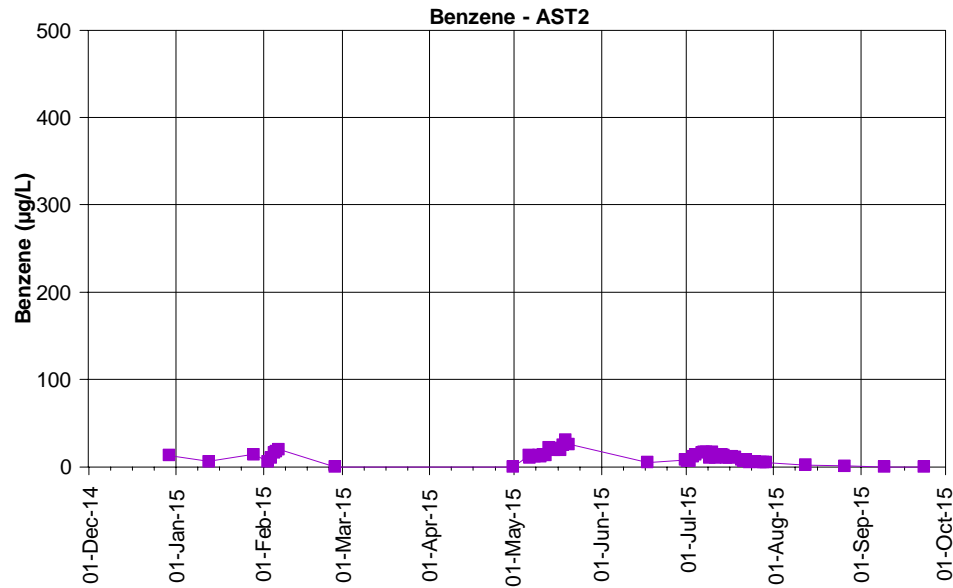


Figure F6.1: Benzene, Toluene Ethylbenzene and Xylene concentrations at AST2

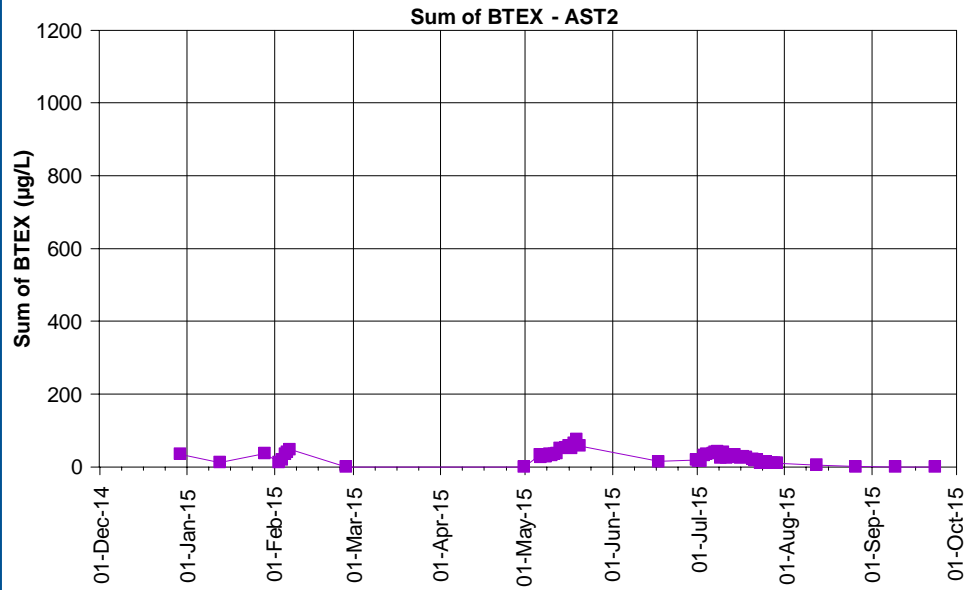


Figure F6.2: Sum of BTEX concentration at AST2.

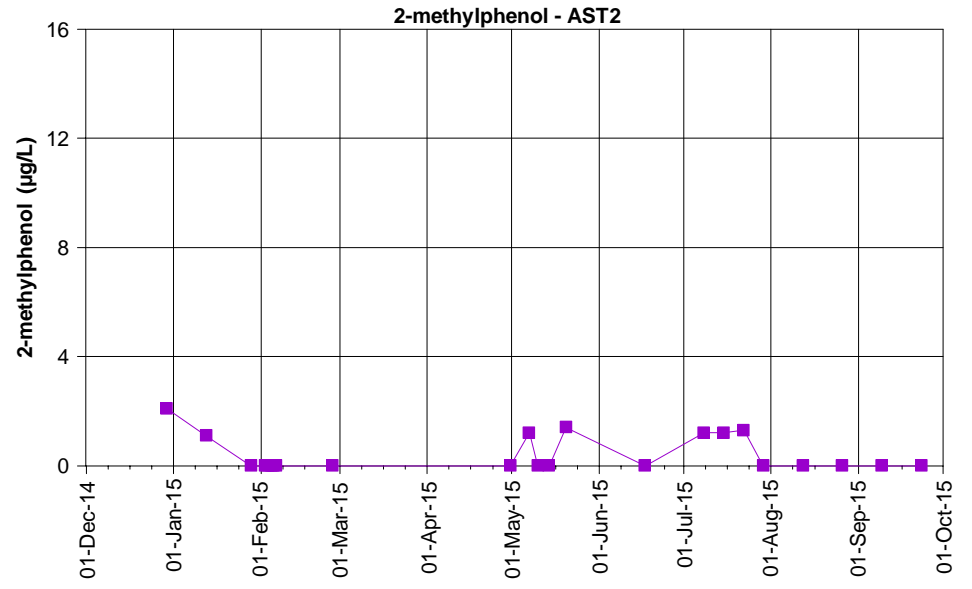
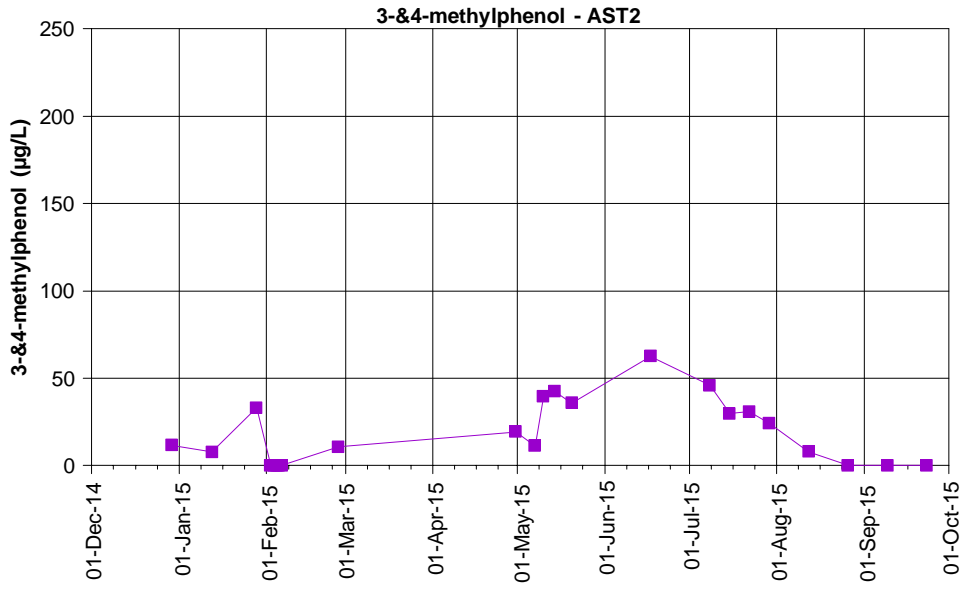
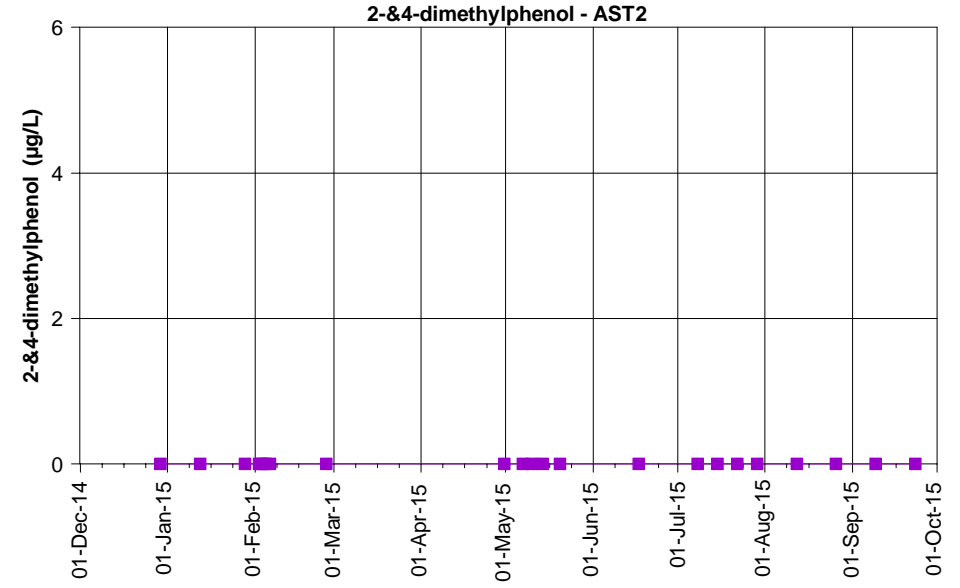
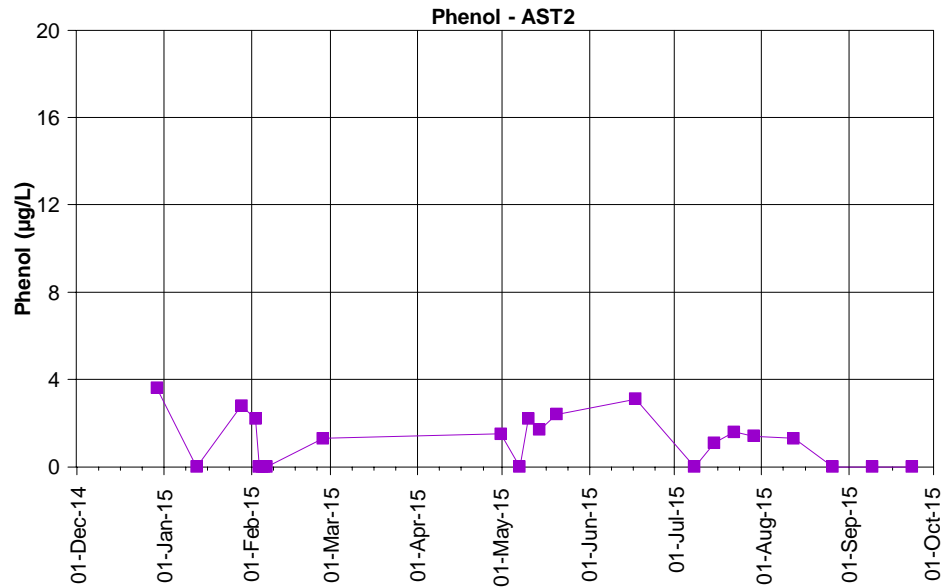


Figure F7.1: Phenol, 3-&4-methylphenol, 2-&4-dimethylphenol and 2-methylphenol concentrations at AST2.

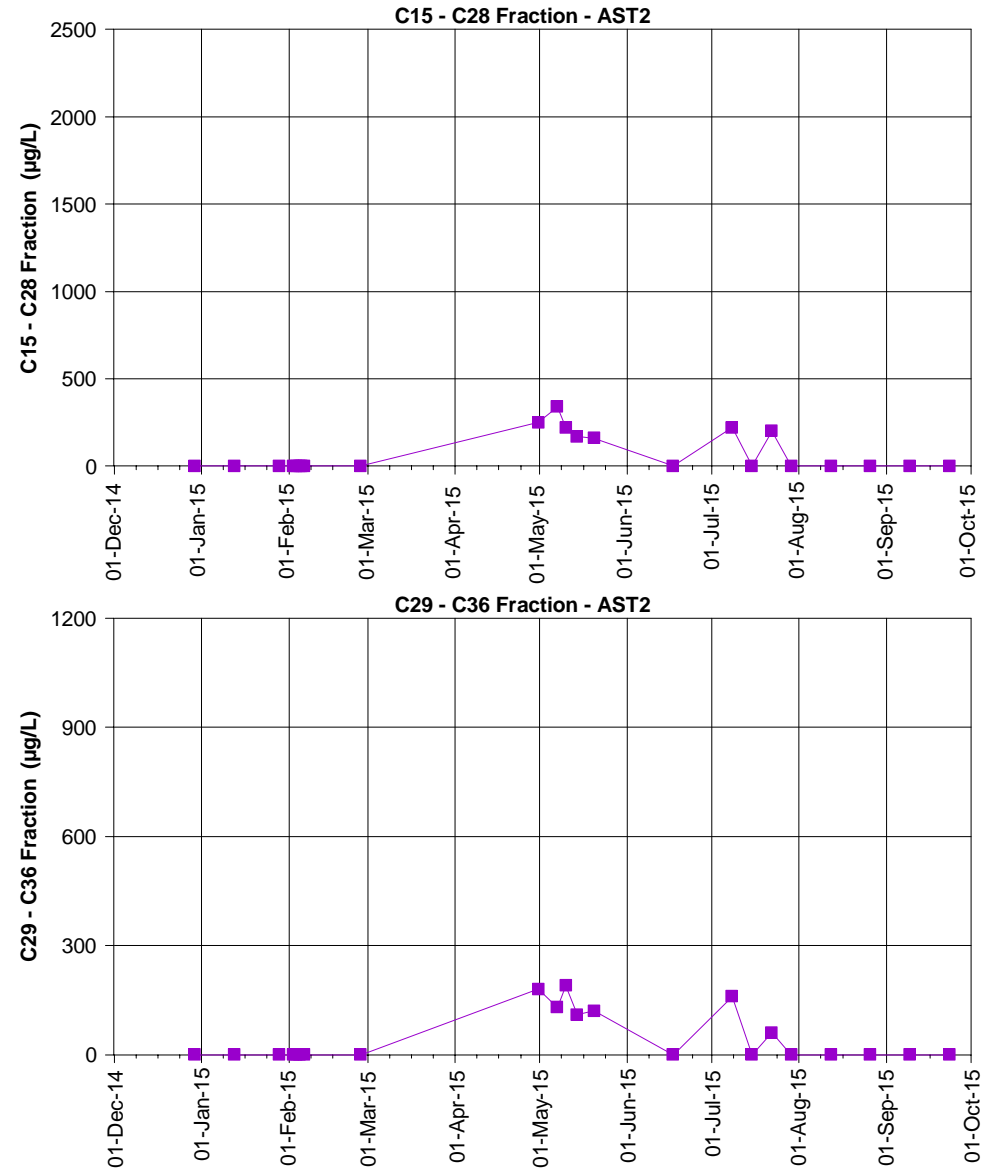
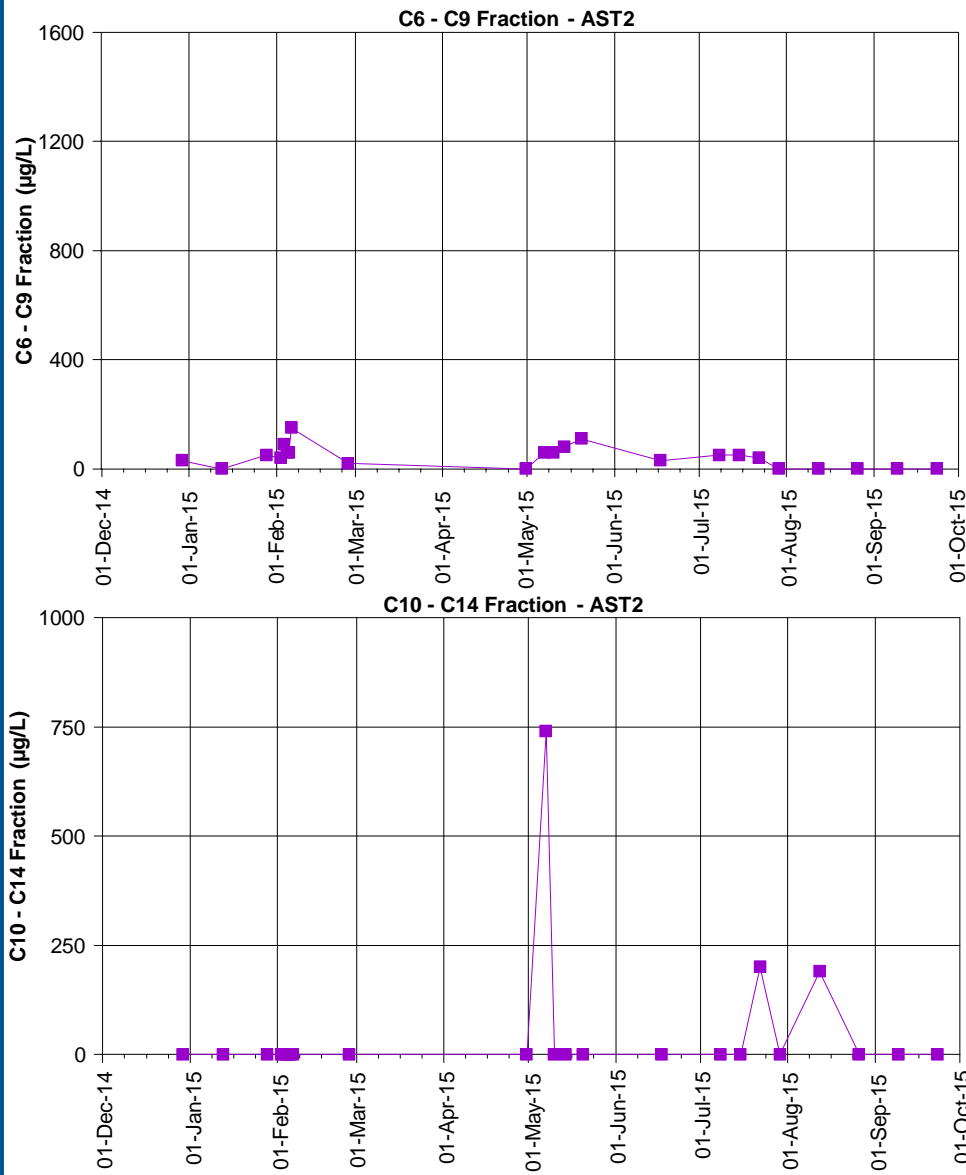


Figure F7.2: C6-C9 fraction, C10-C14 fraction, C15-C28 fraction and C29-C36 fraction concentrations at AST2.

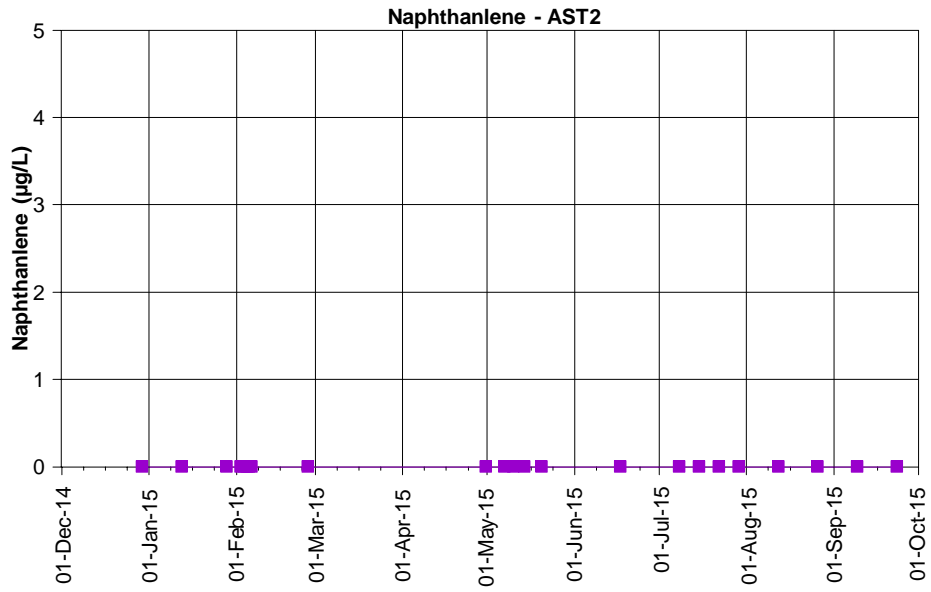


Figure F7.3: Naphthanlene concentration at AST2.

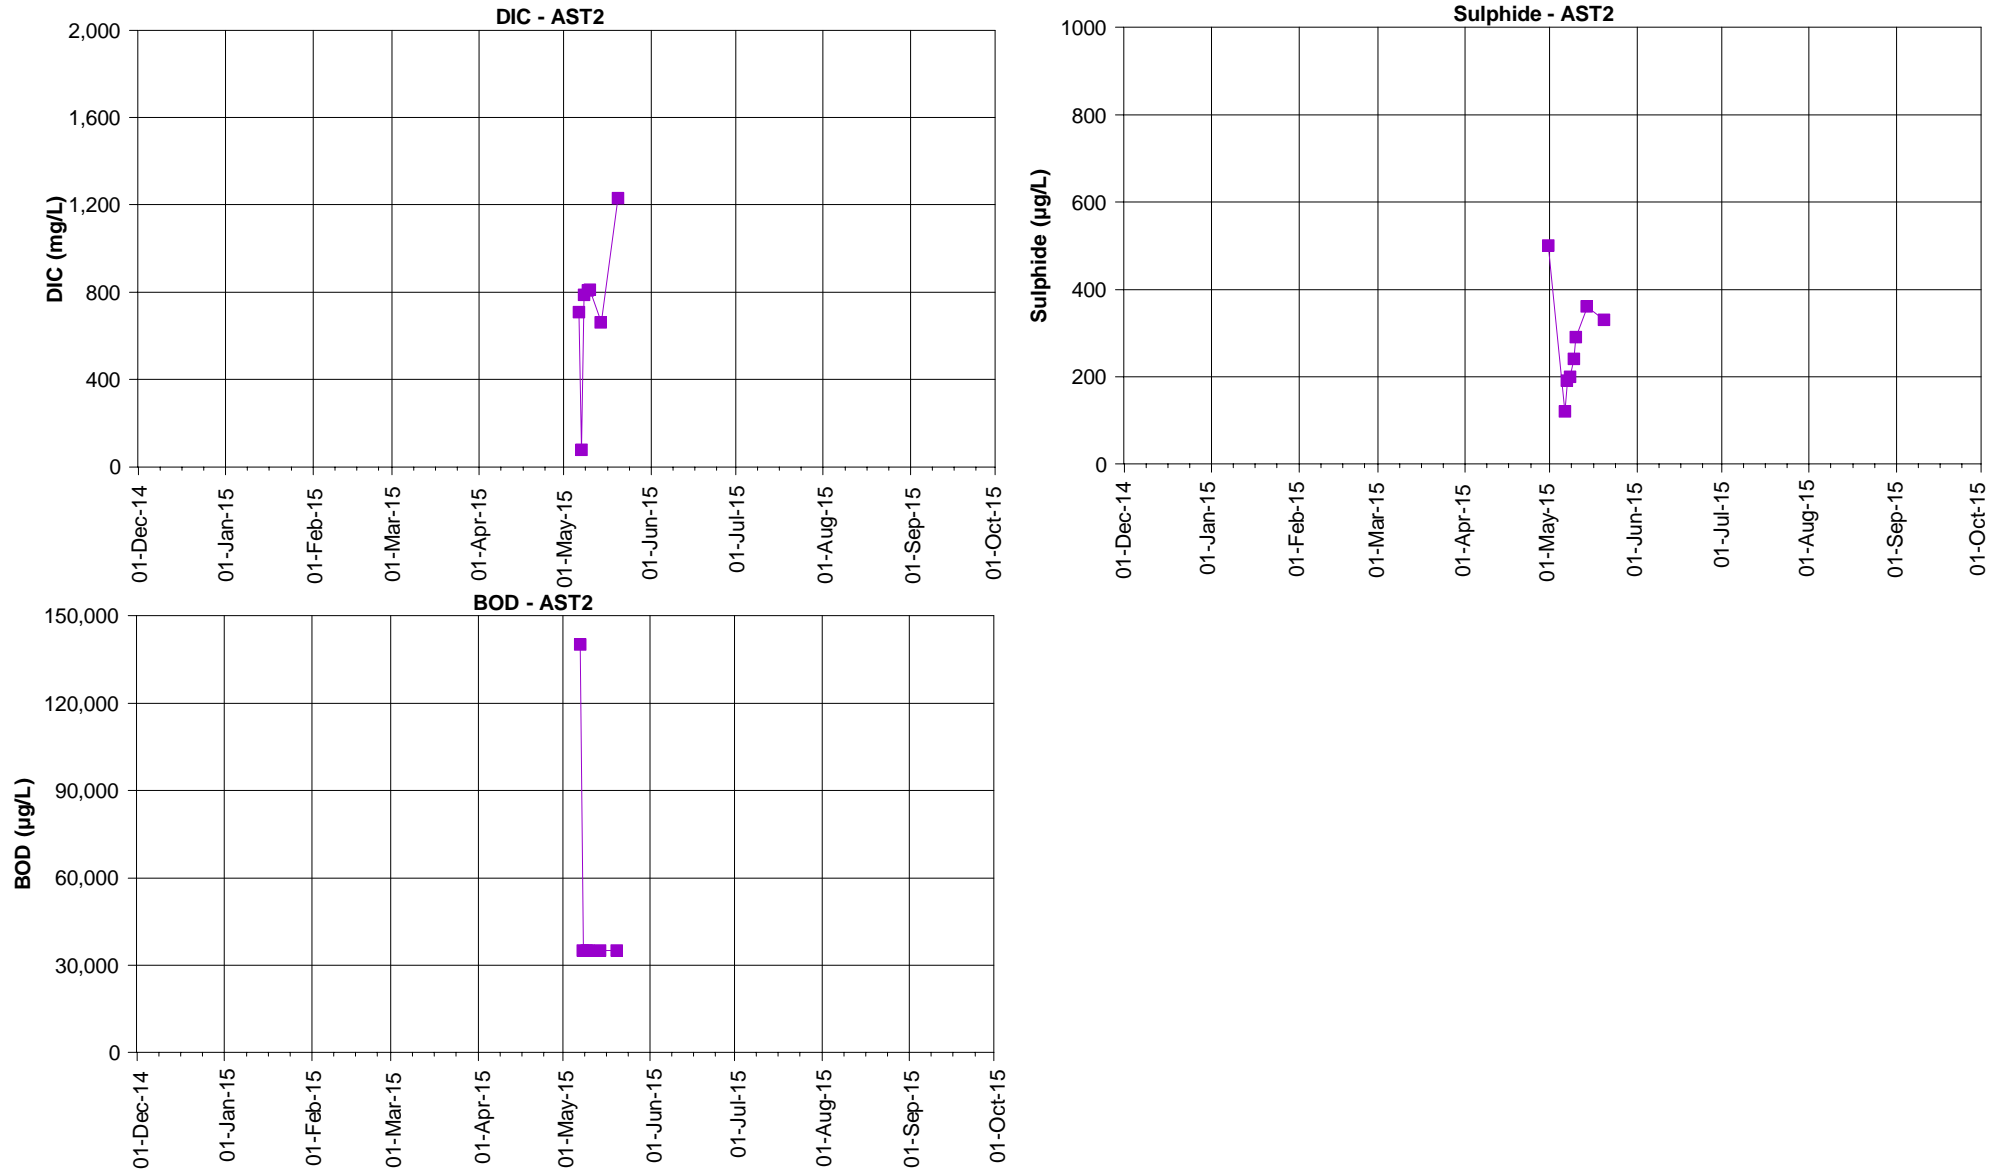


Figure F8.2 Dissolved Inorganic Carbon (DIC), Biochemical Oxygen Demand (BOD) and sulphide concentrations at AST2.

Appendix G

Groundwater and surface water analyte time-series hydrographs



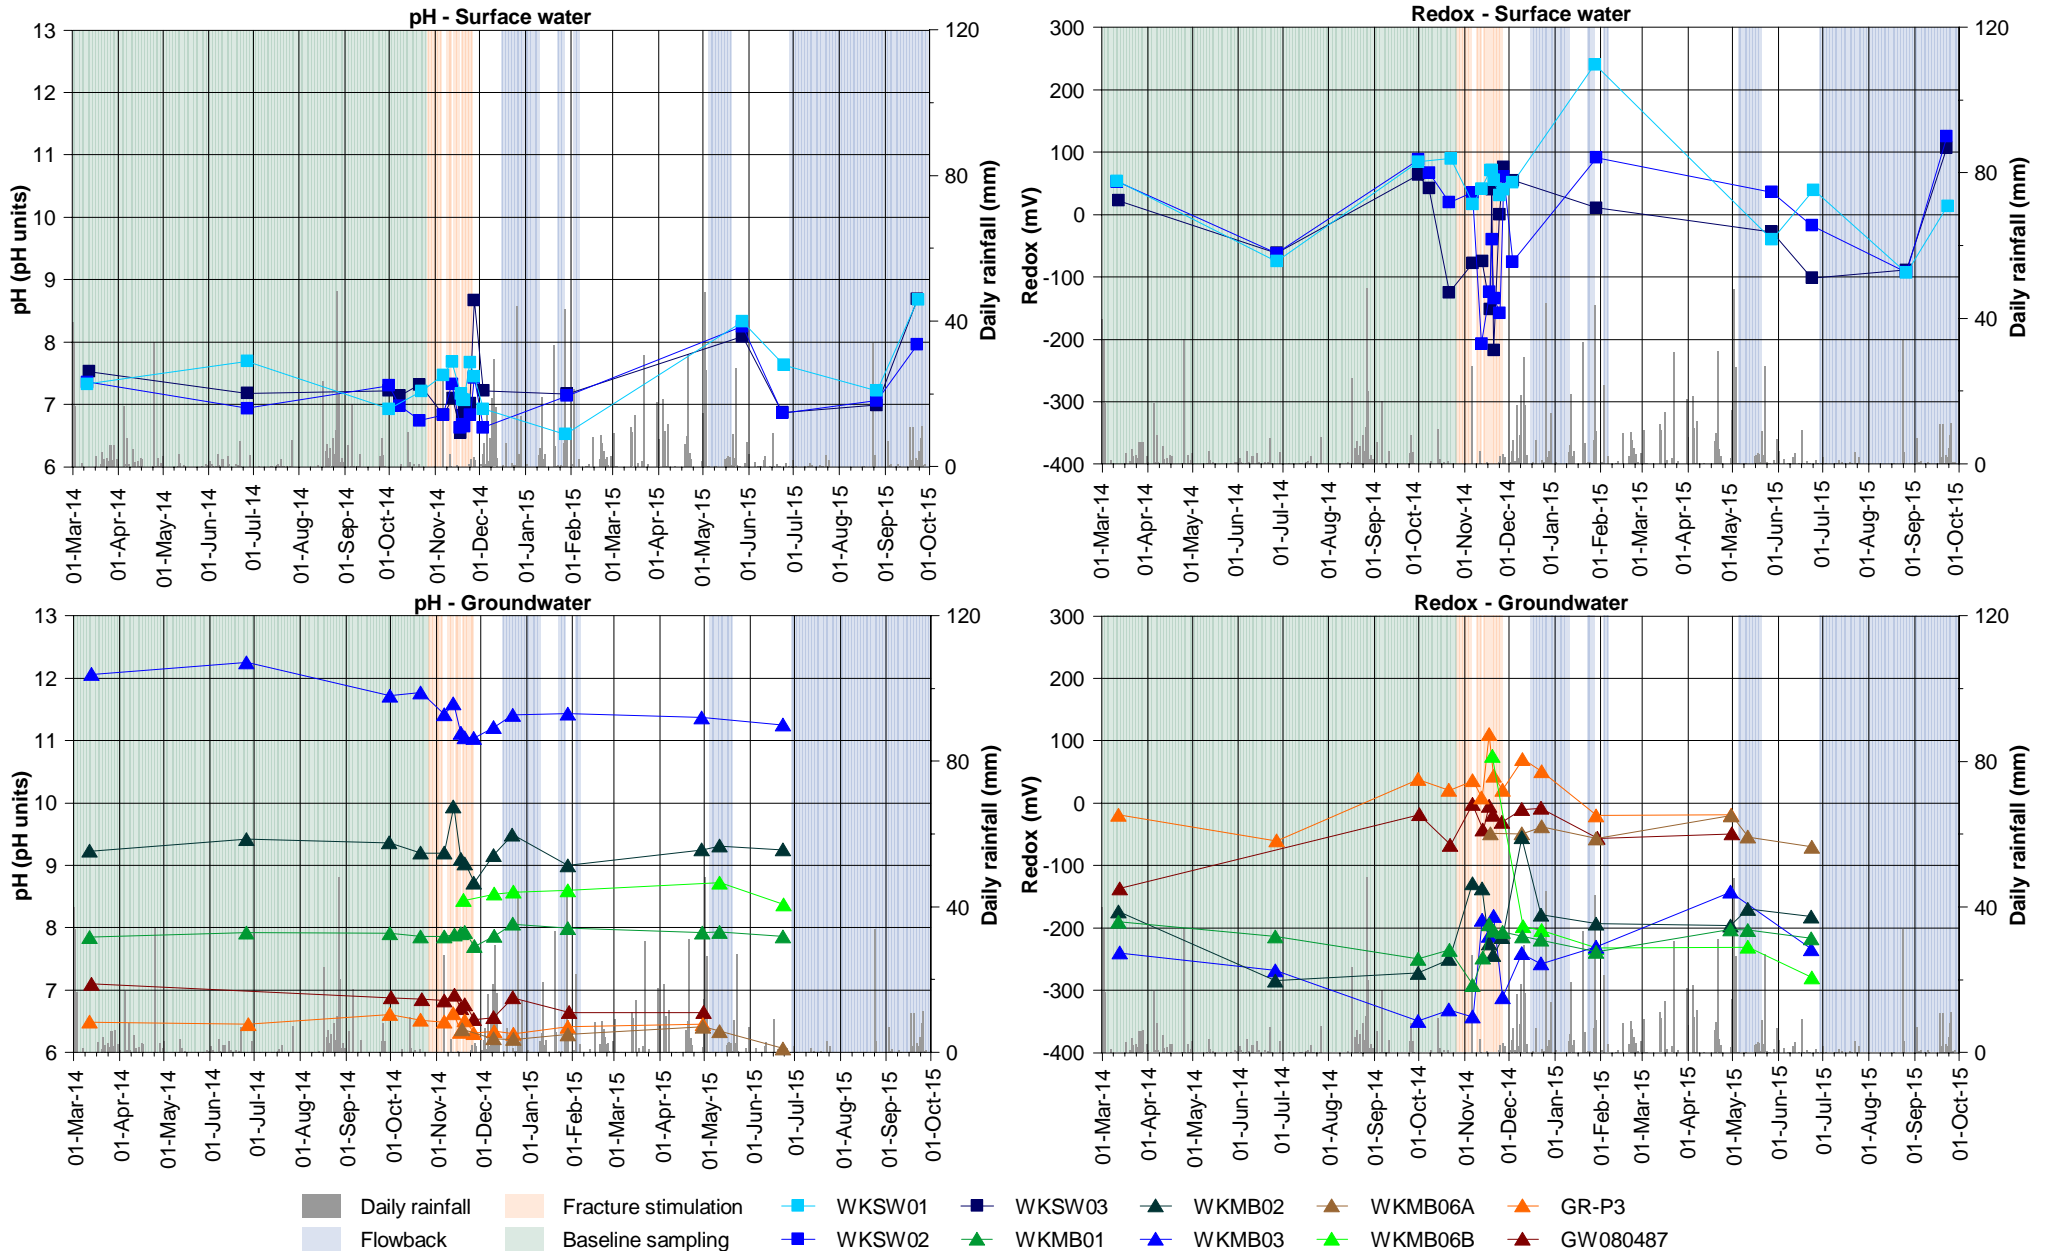


Figure G1.1: Field measurements of pH and redox at Waukivory surface water and groundwater monitoring locations.

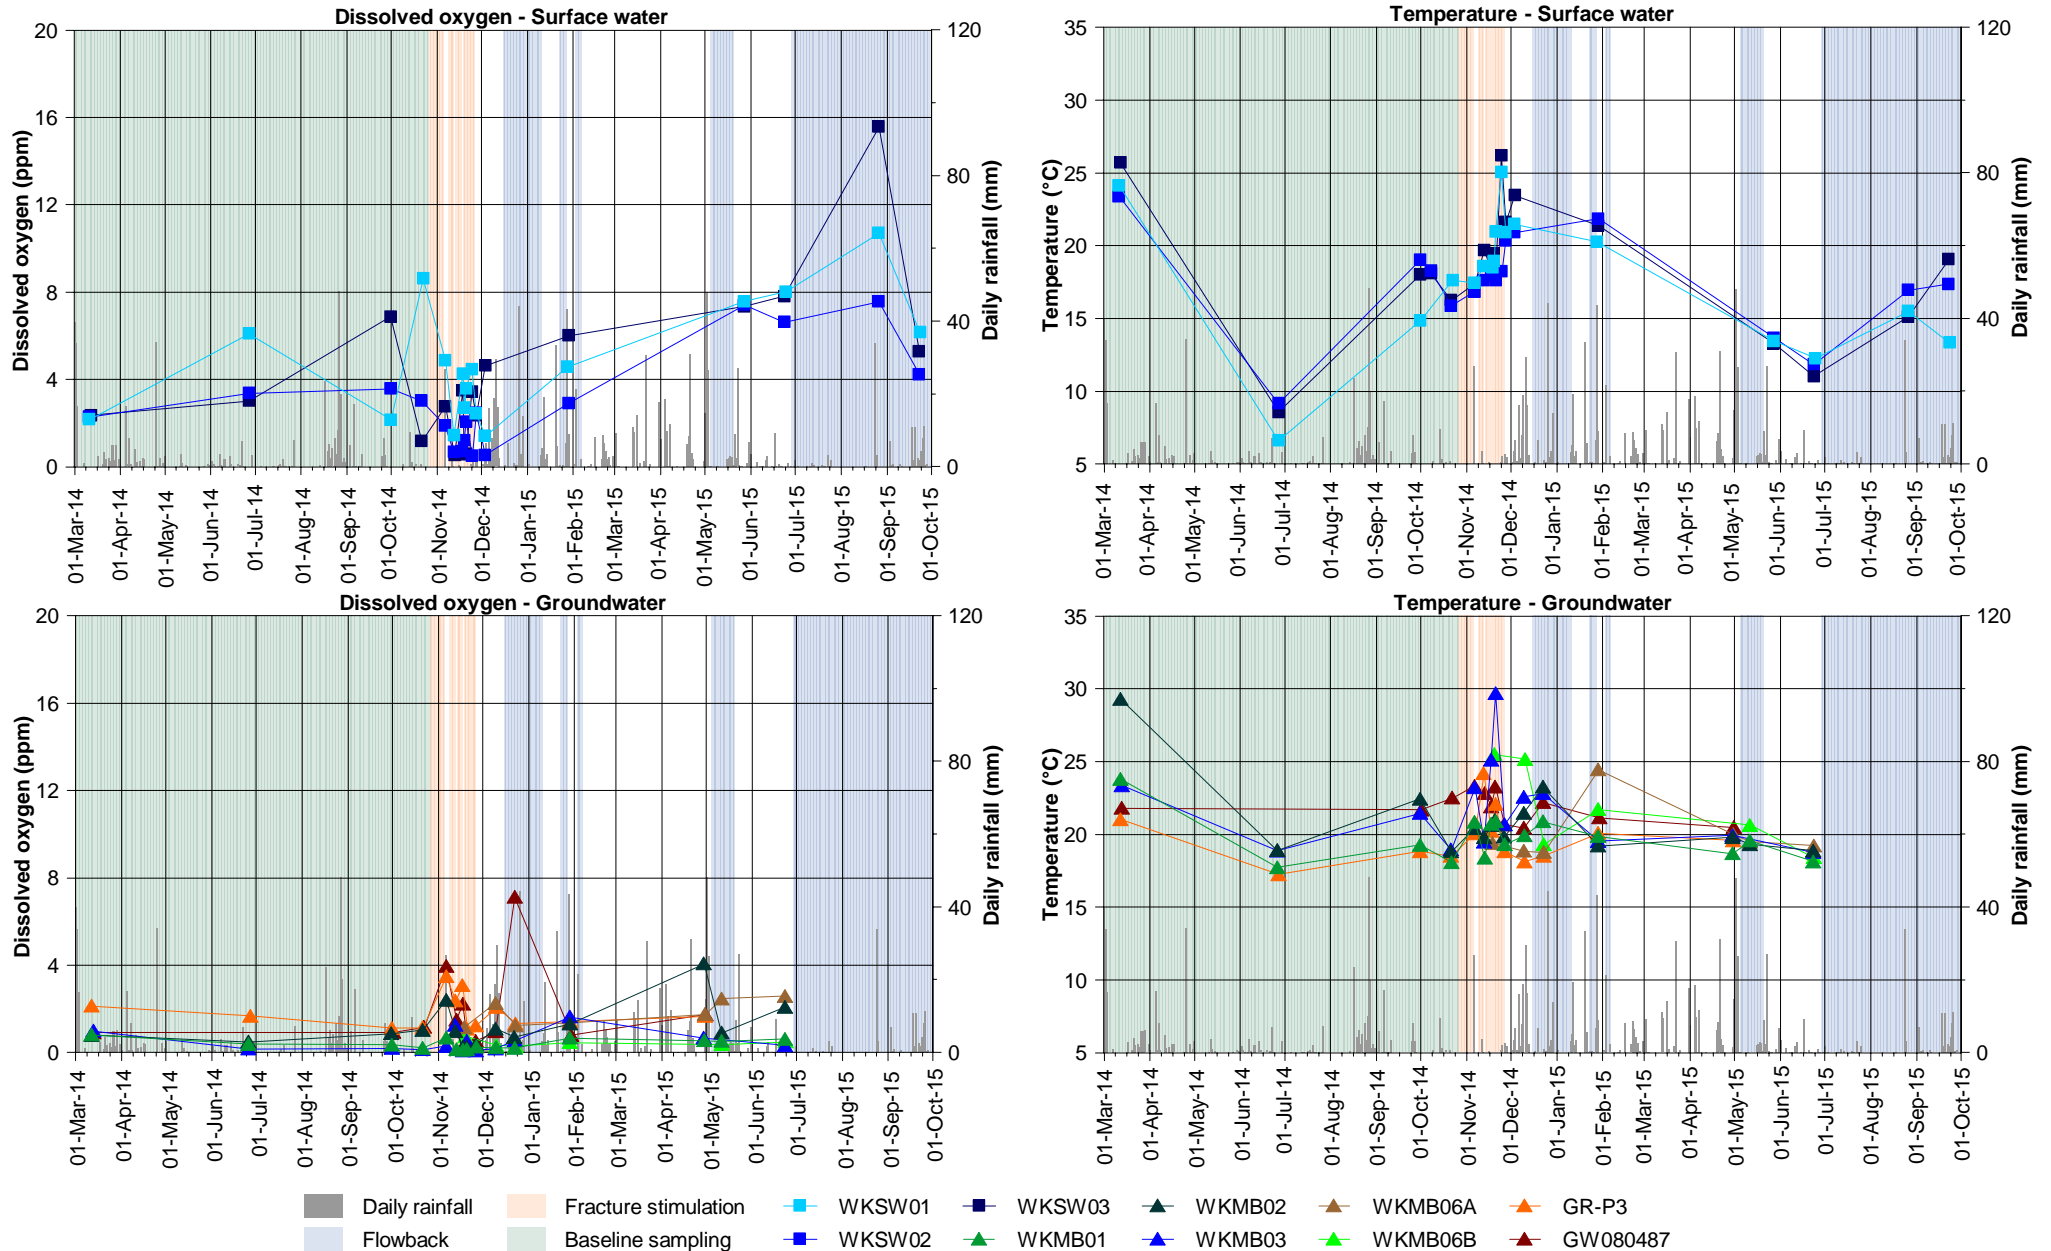


Figure G1.2: Field measurements of dissolved oxygen and temperature at Waukivory surface water and groundwater monitoring locations.

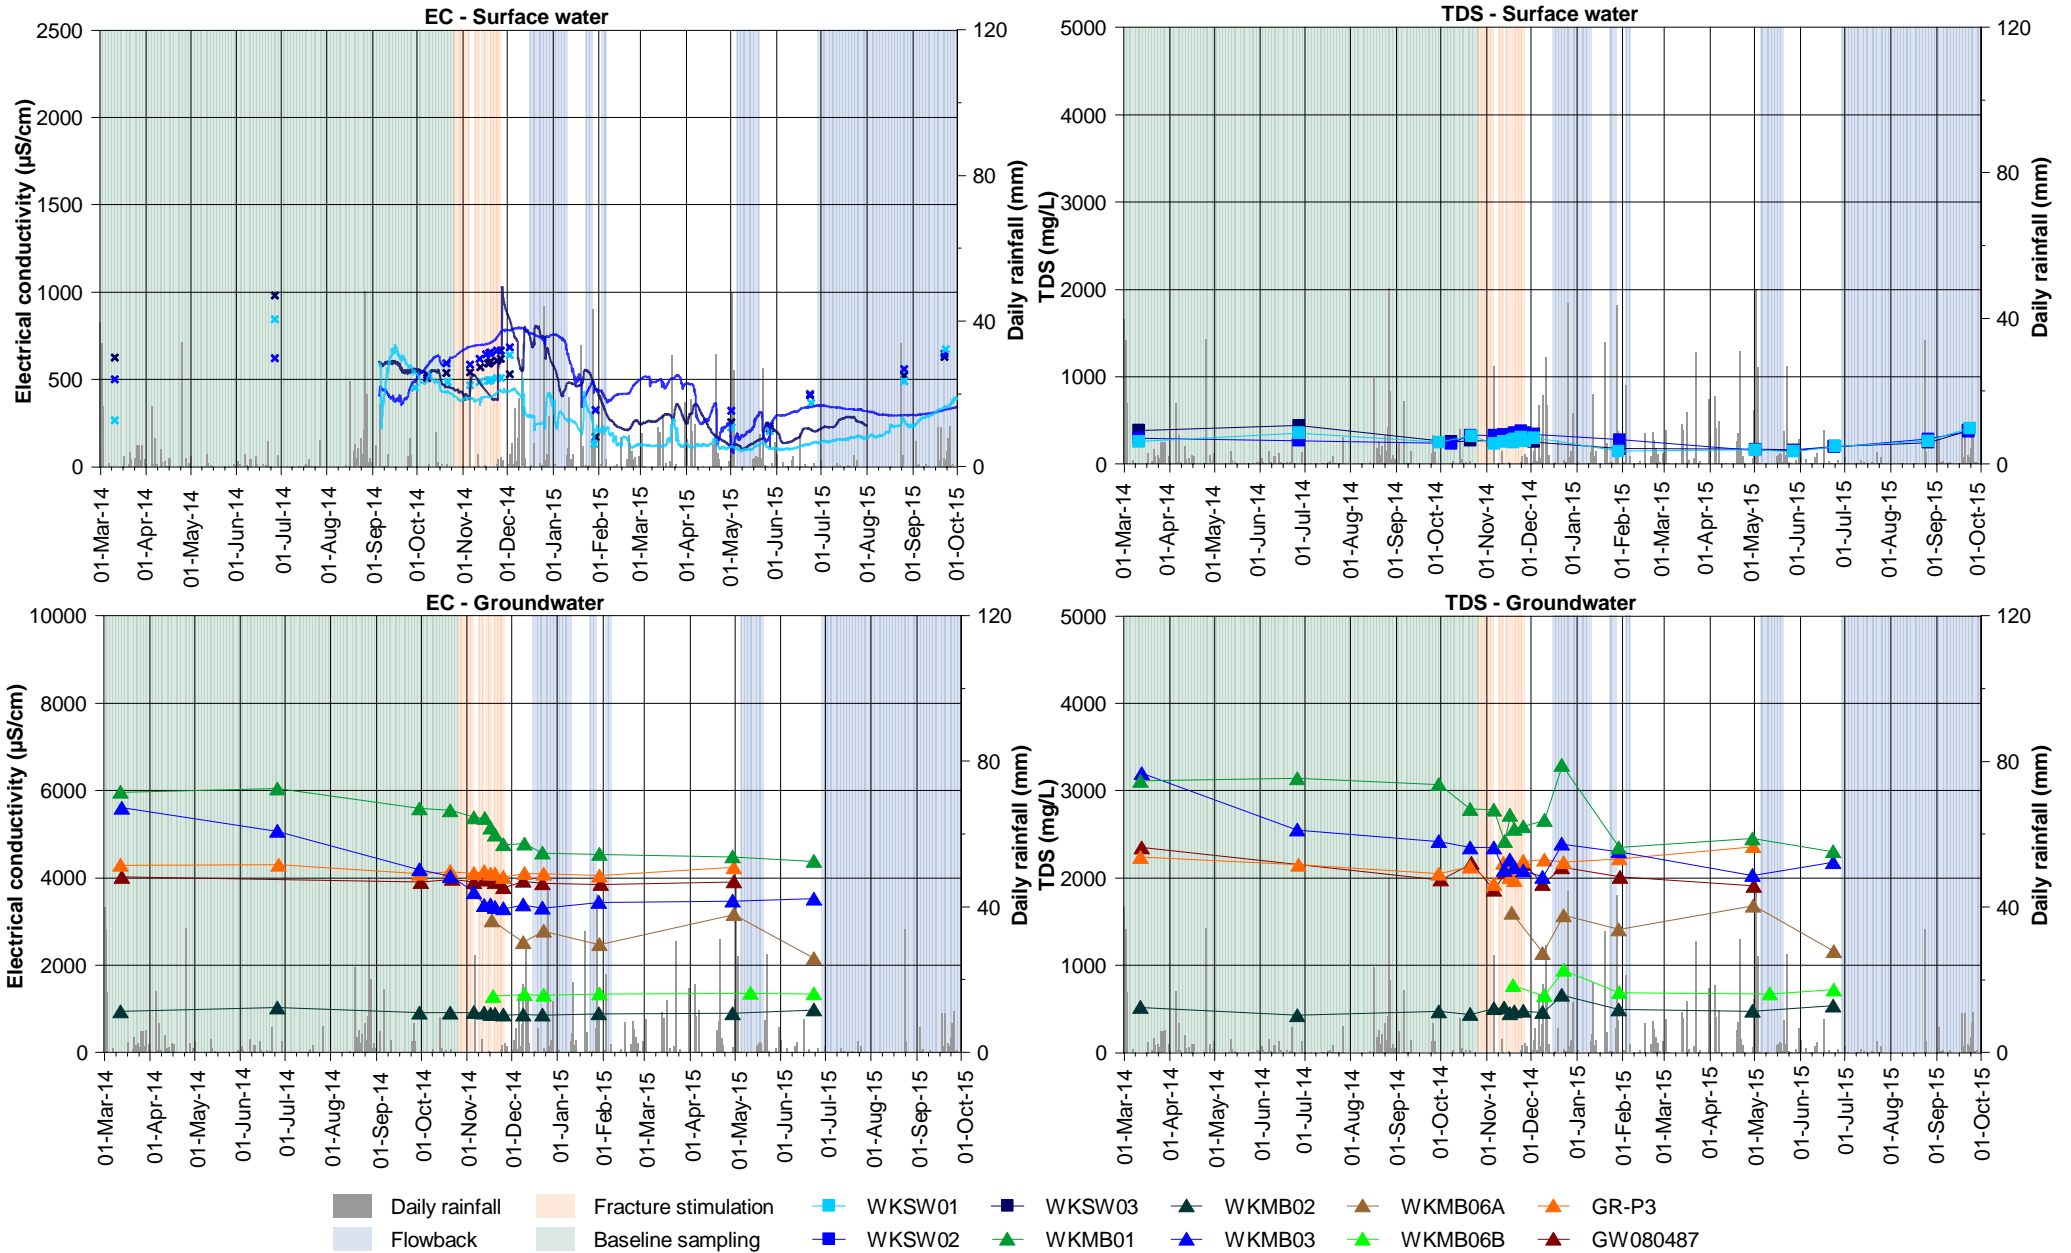


Figure G1.3: Laboratory measurements of EC and TDS at Waukivory surface water and groundwater monitoring locations.

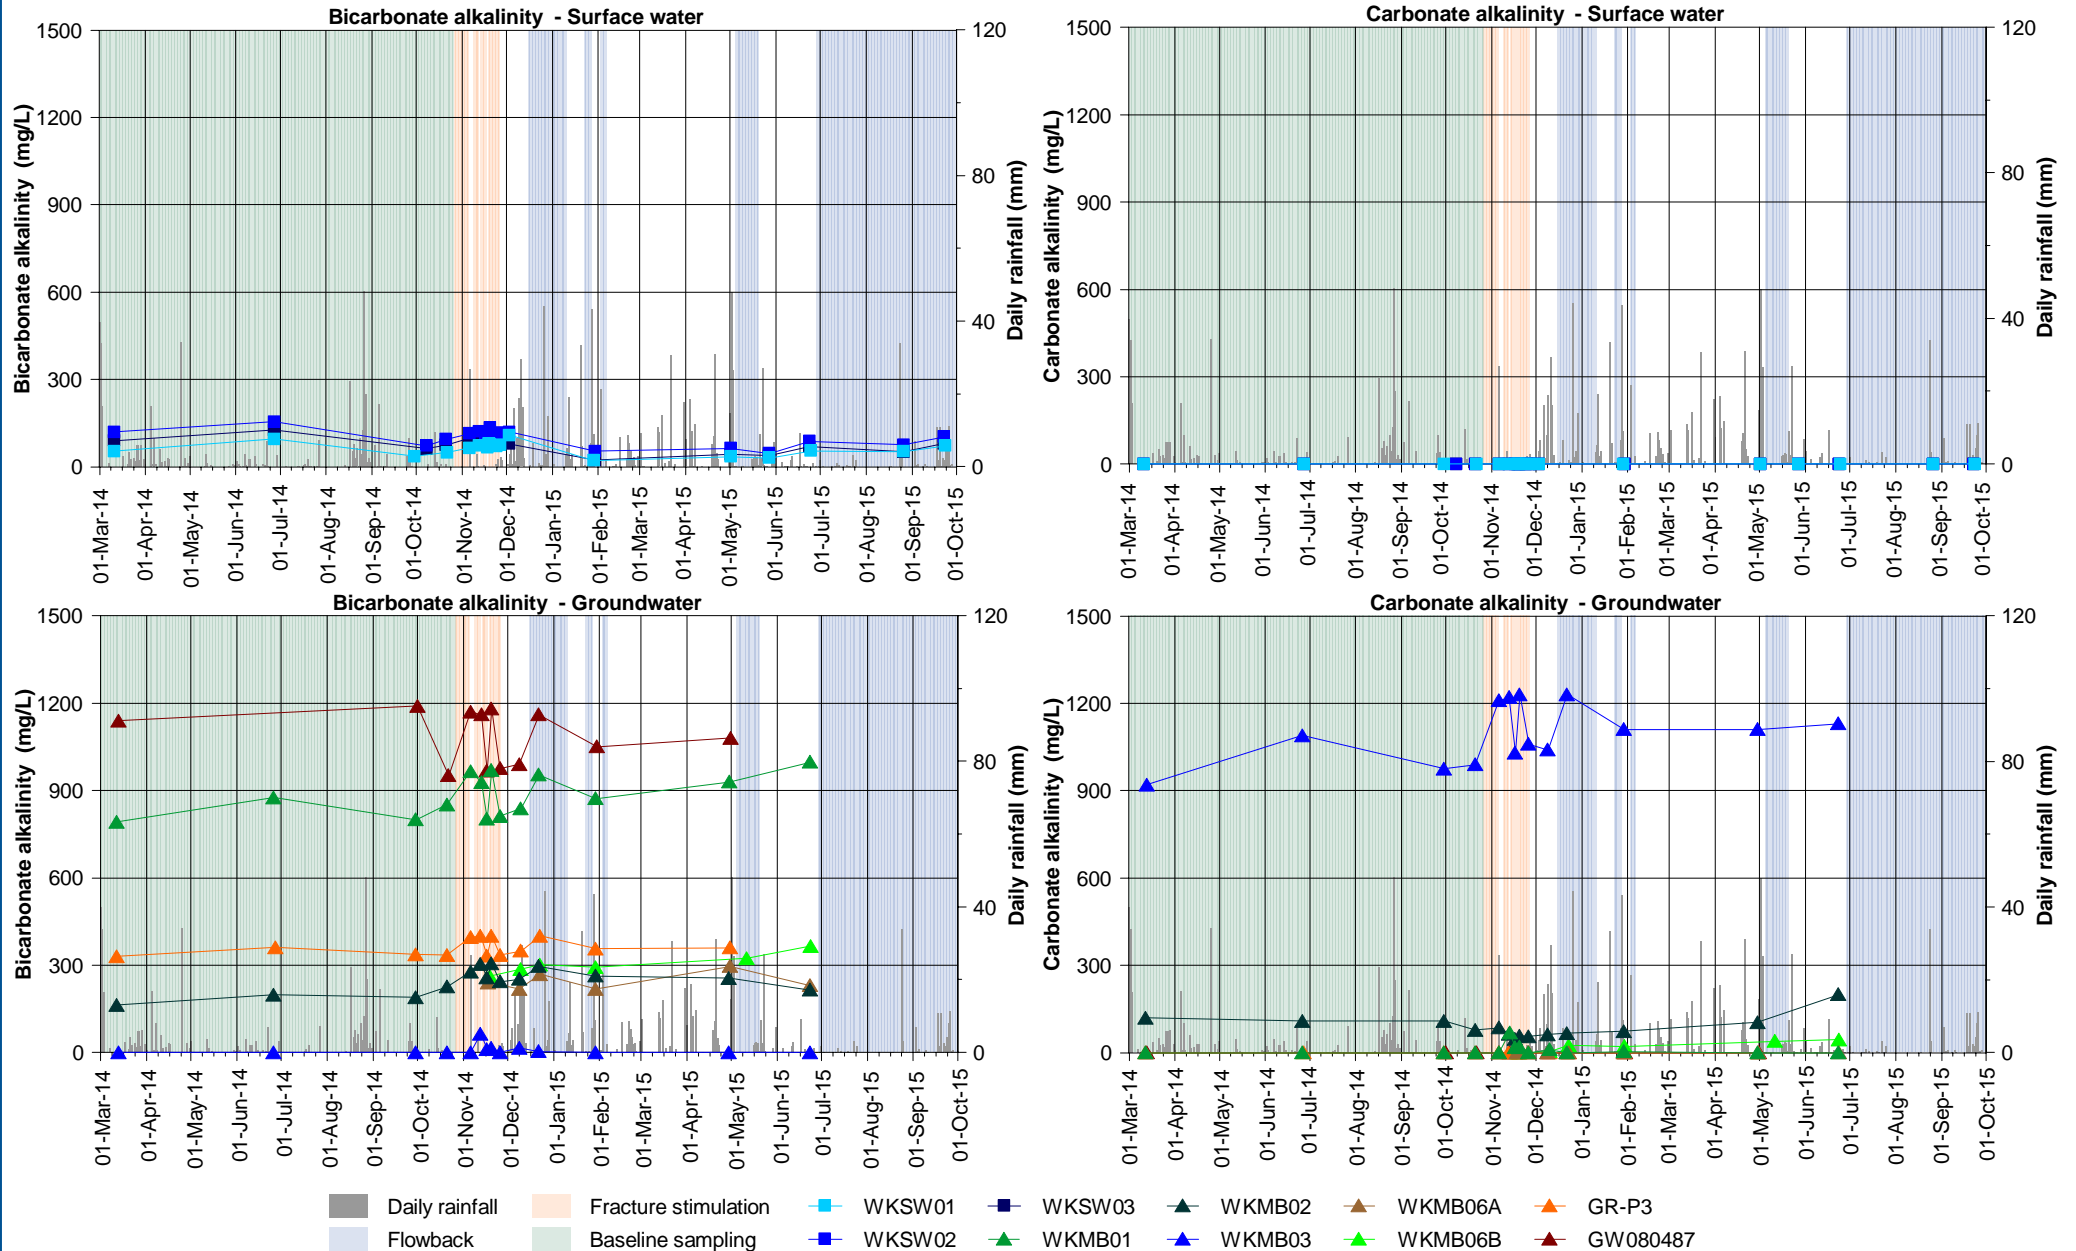


Figure G2.1: Bicarbonate alkalinity and carbonate alkalinity at Waukivory surface water and groundwater monitoring locations.

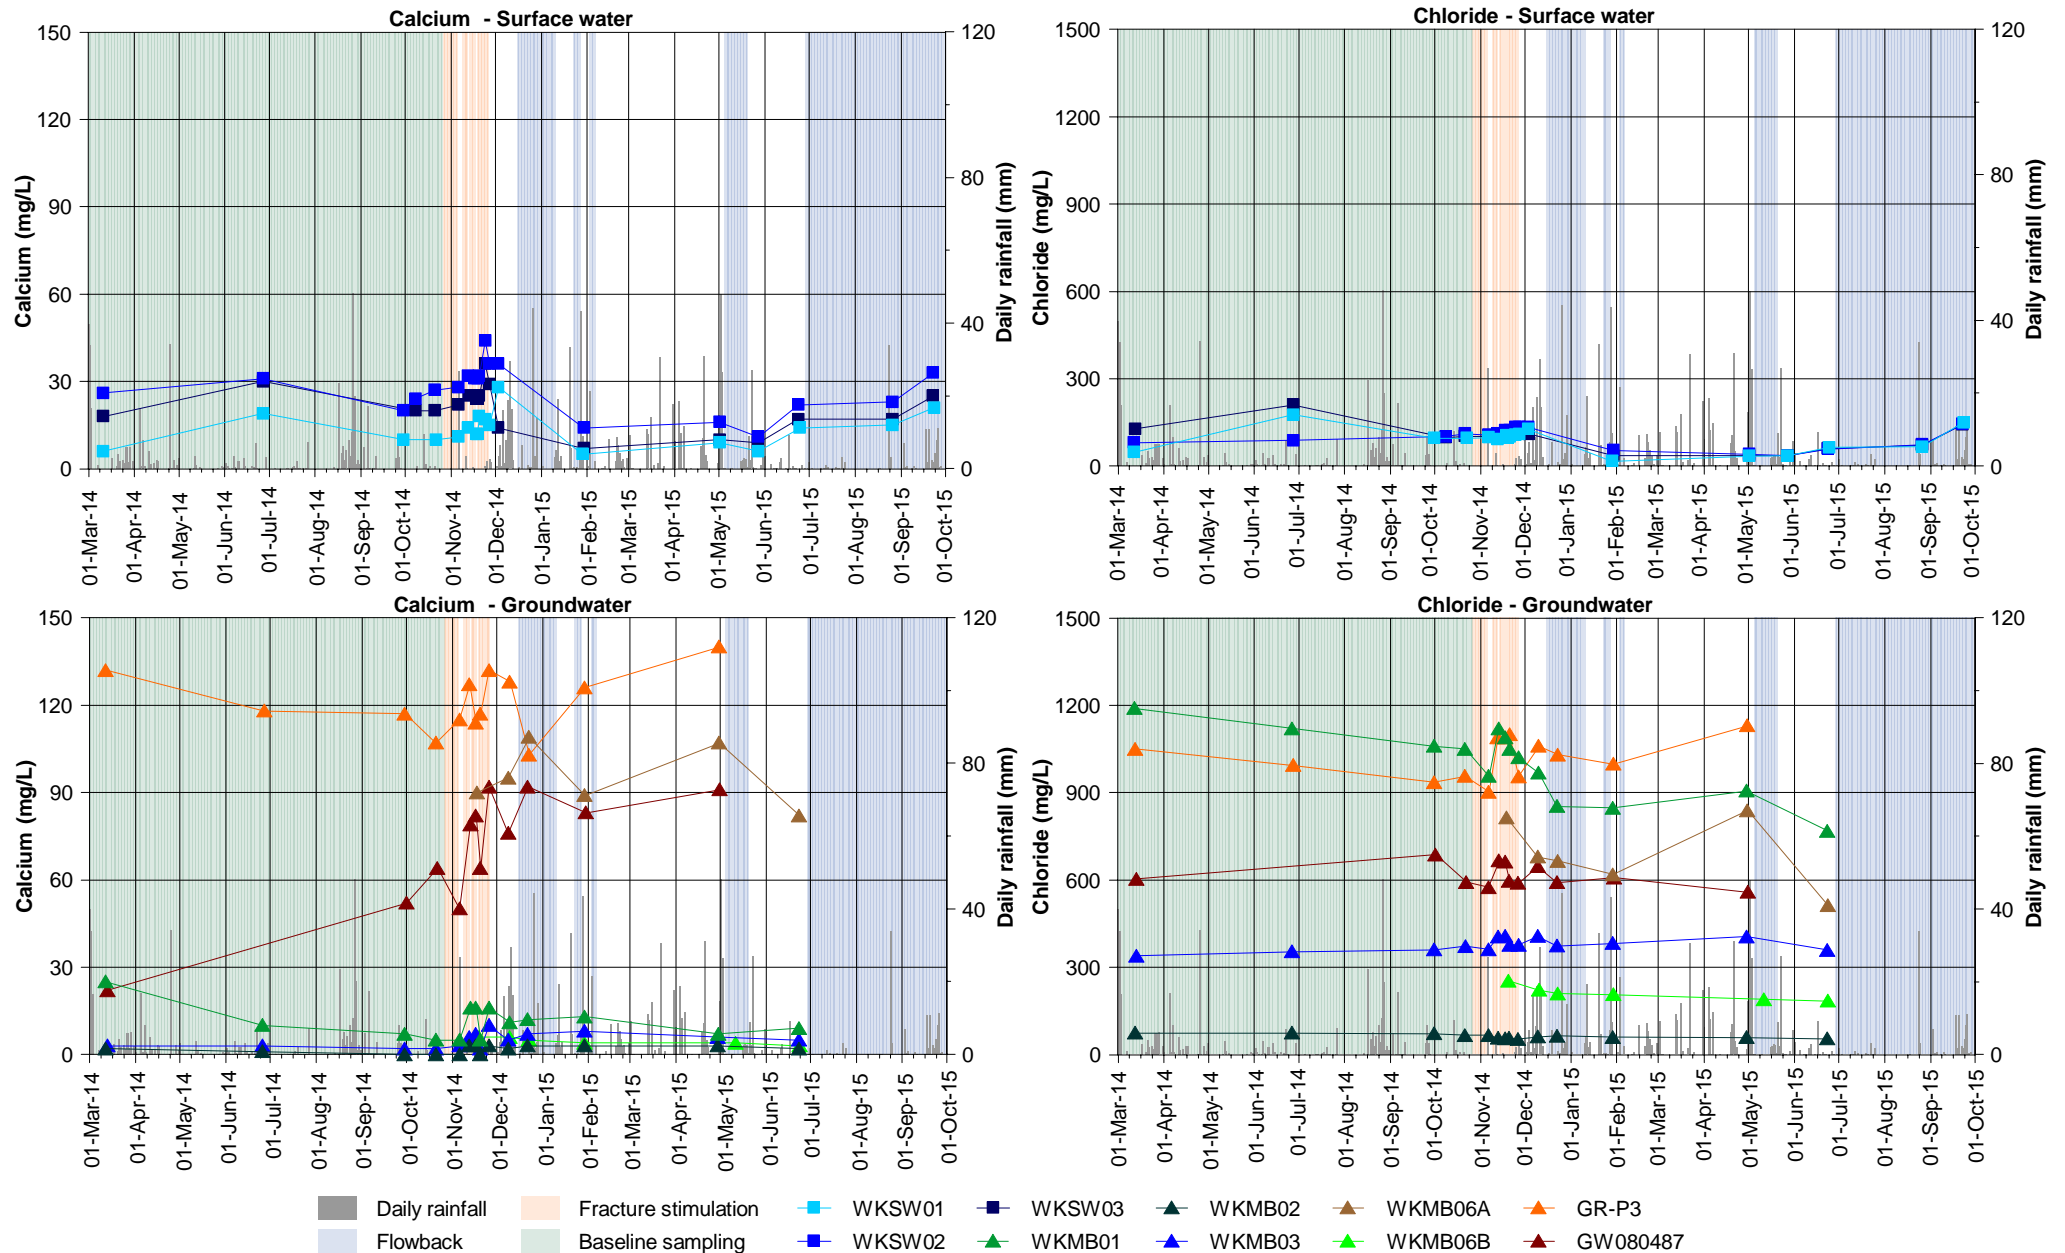


Figure G2.2: Calcium and chloride at Waukivory surface water and groundwater monitoring locations.

Note: Chloride method - ED0045

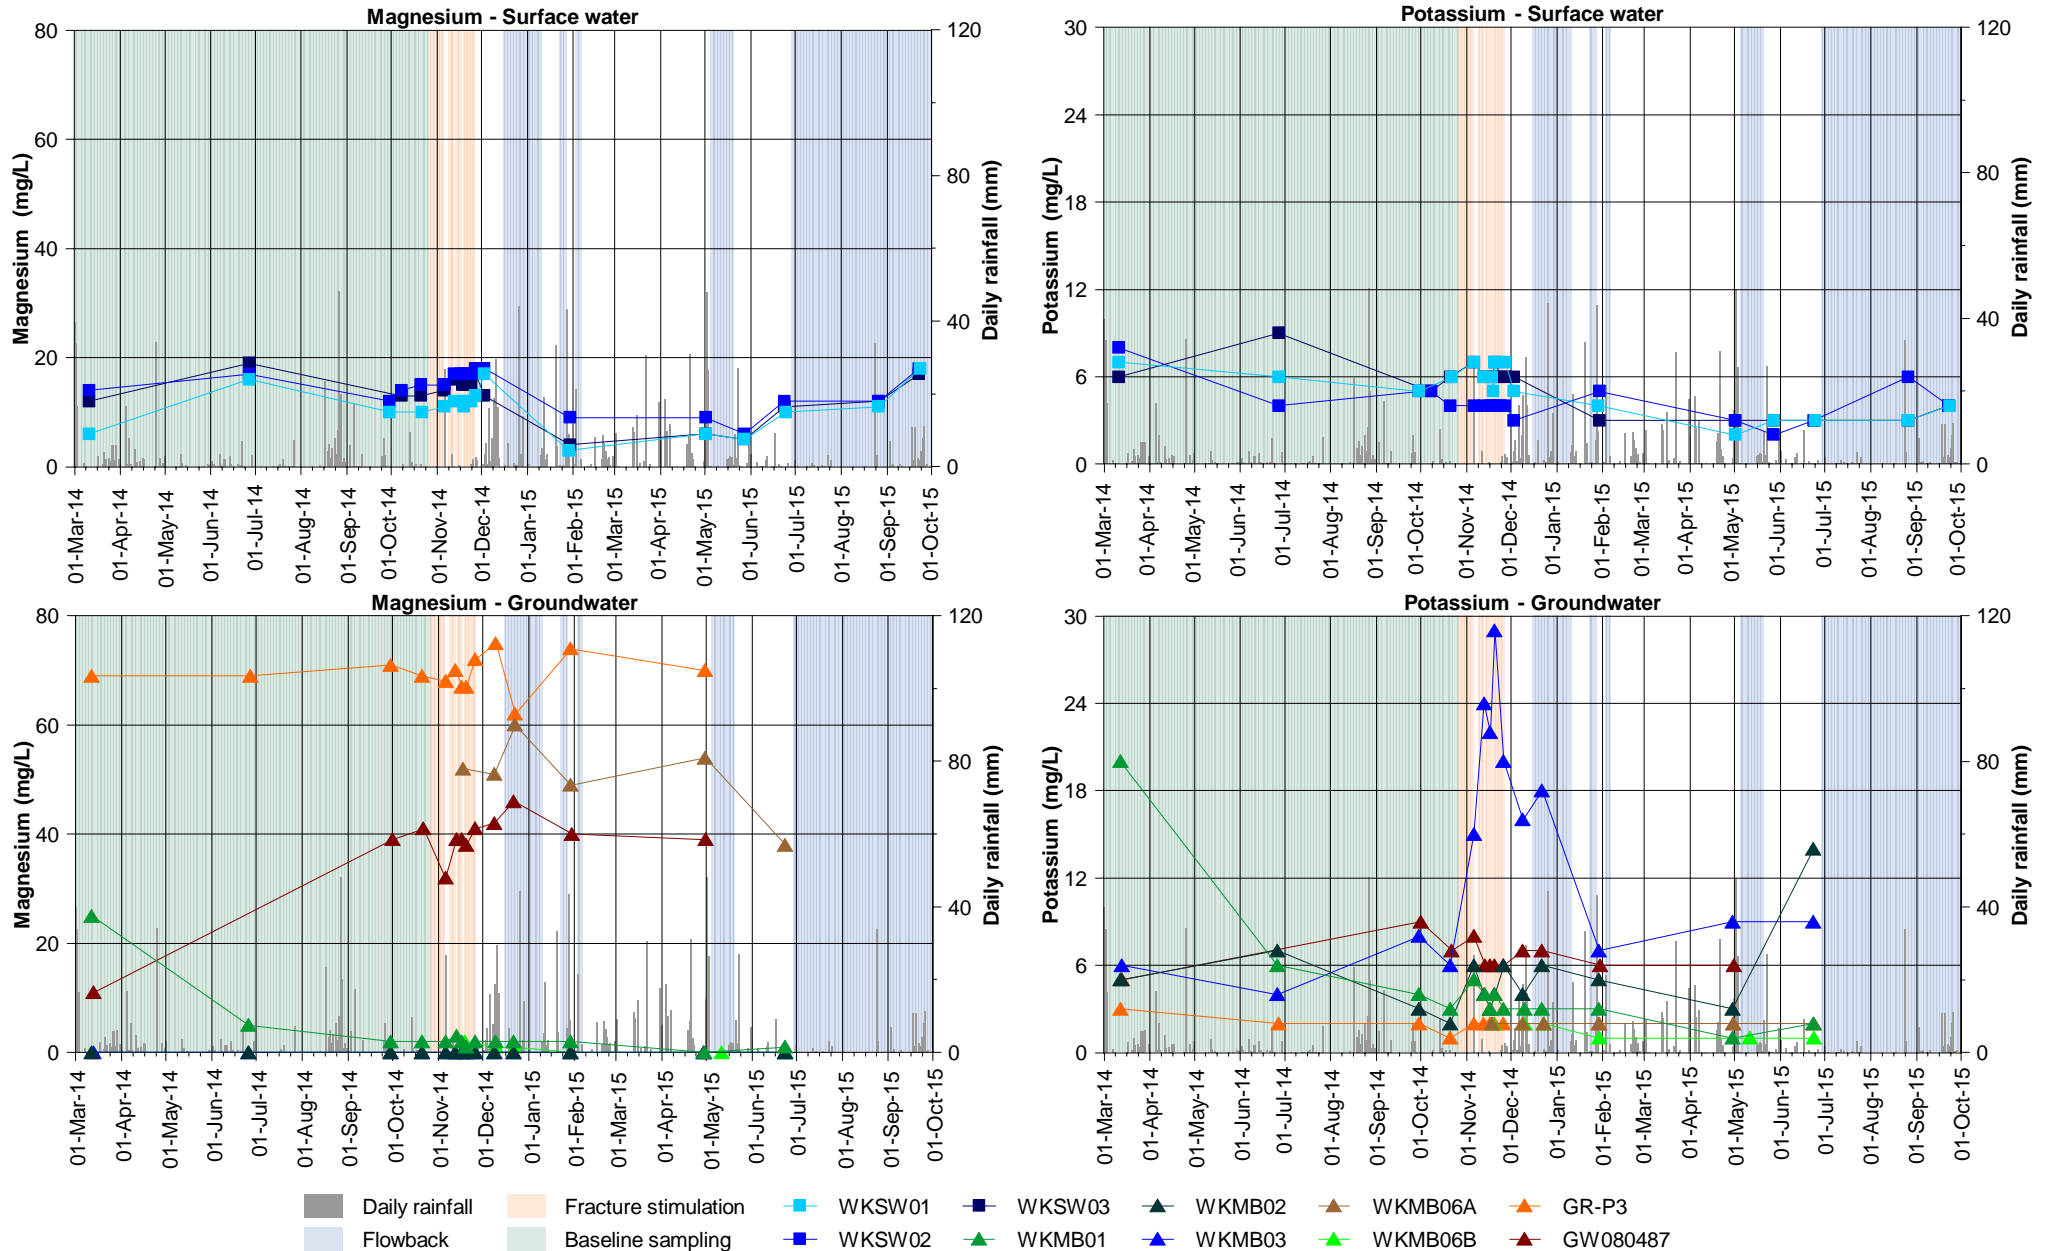


Figure G2.3: Magnesium and potassium at Waukivory surface water and groundwater monitoring locations.


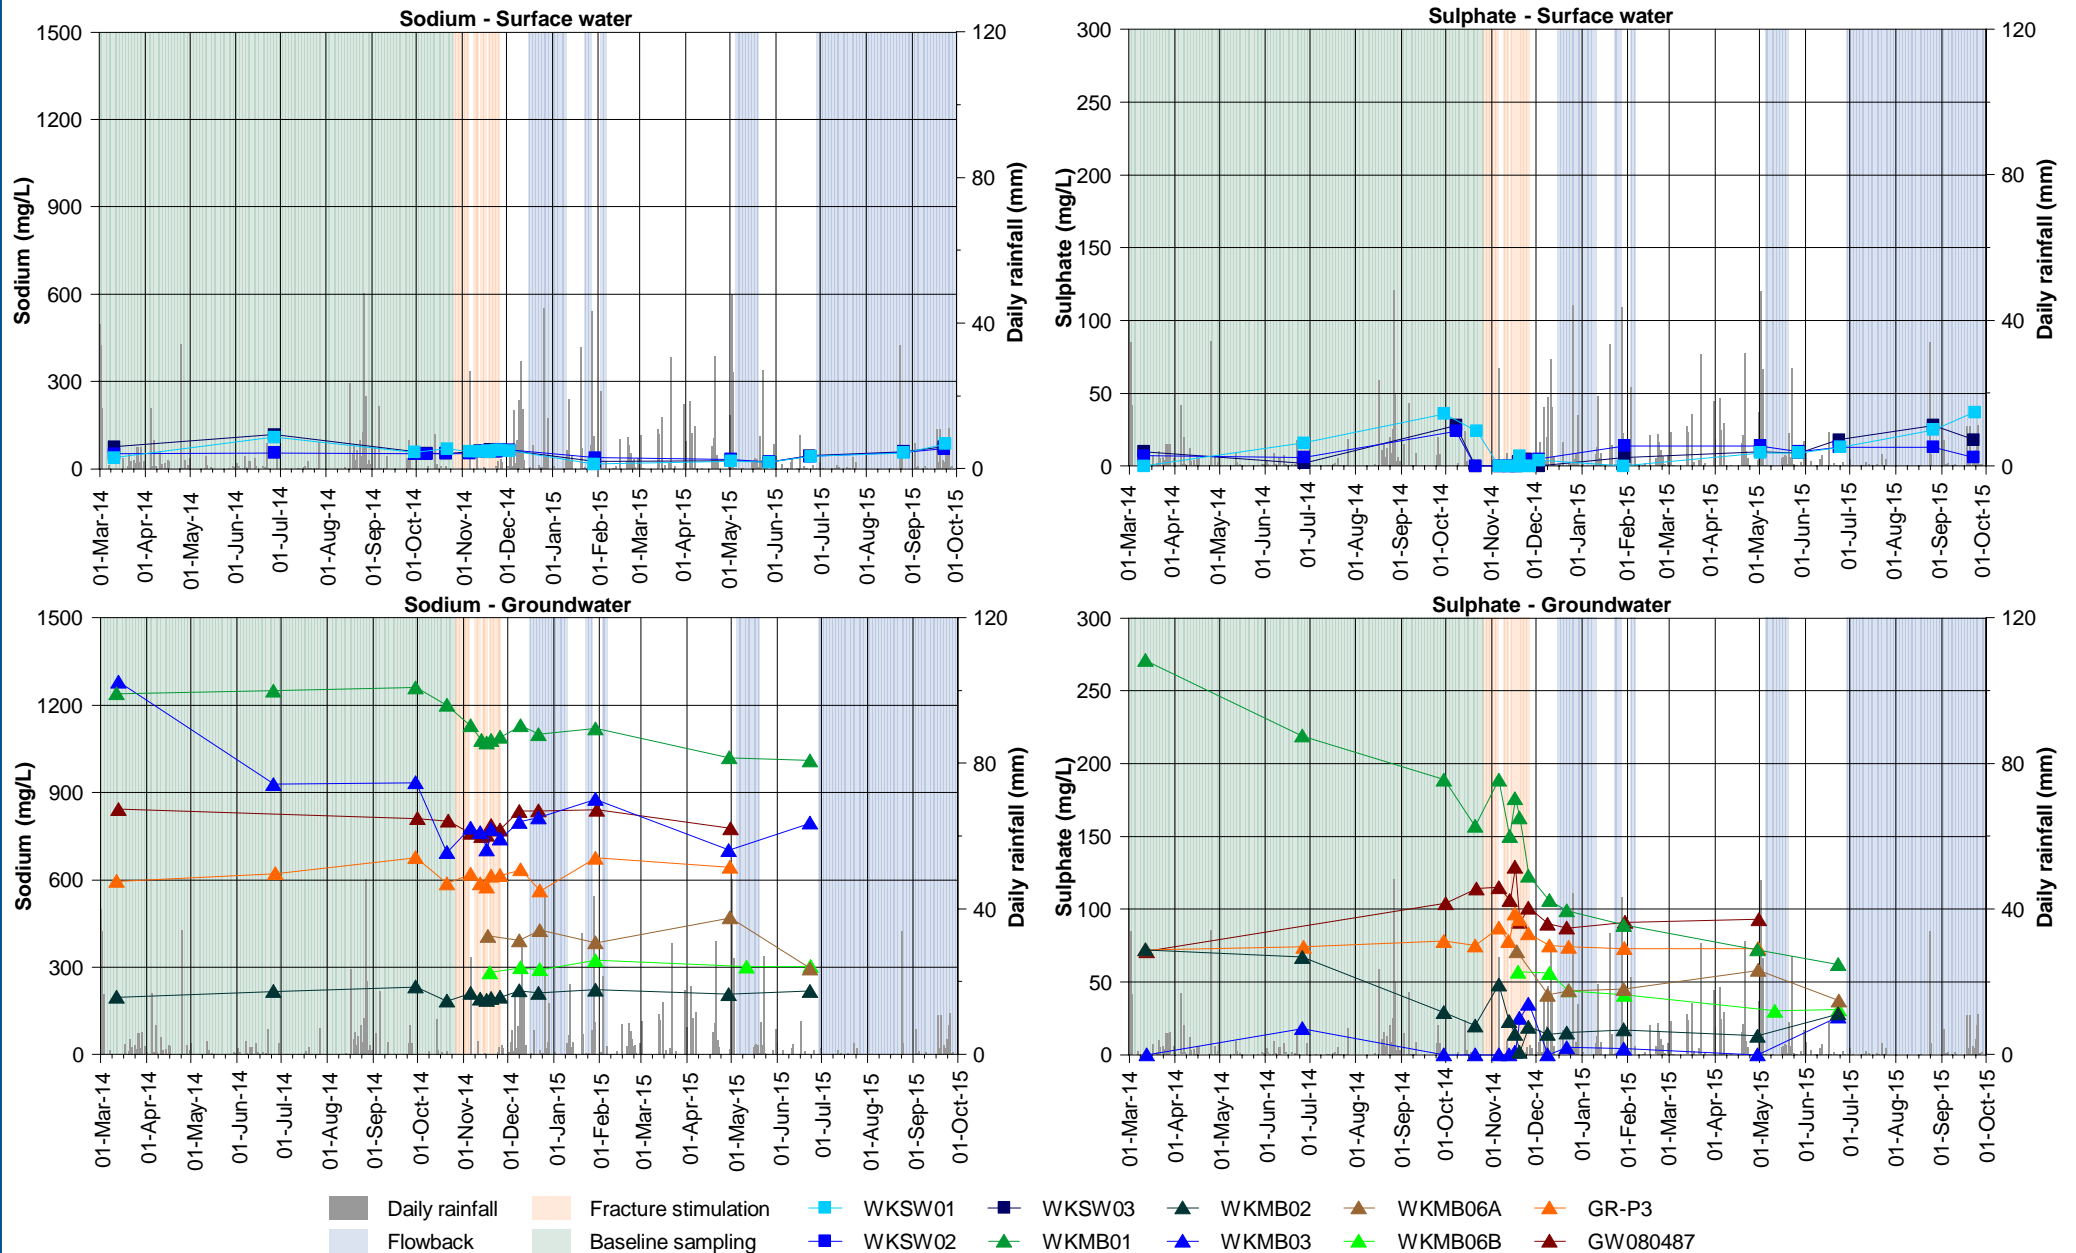


Figure G2.4: Sodium and sulphate at Waukivory surface water and groundwater monitoring locations.

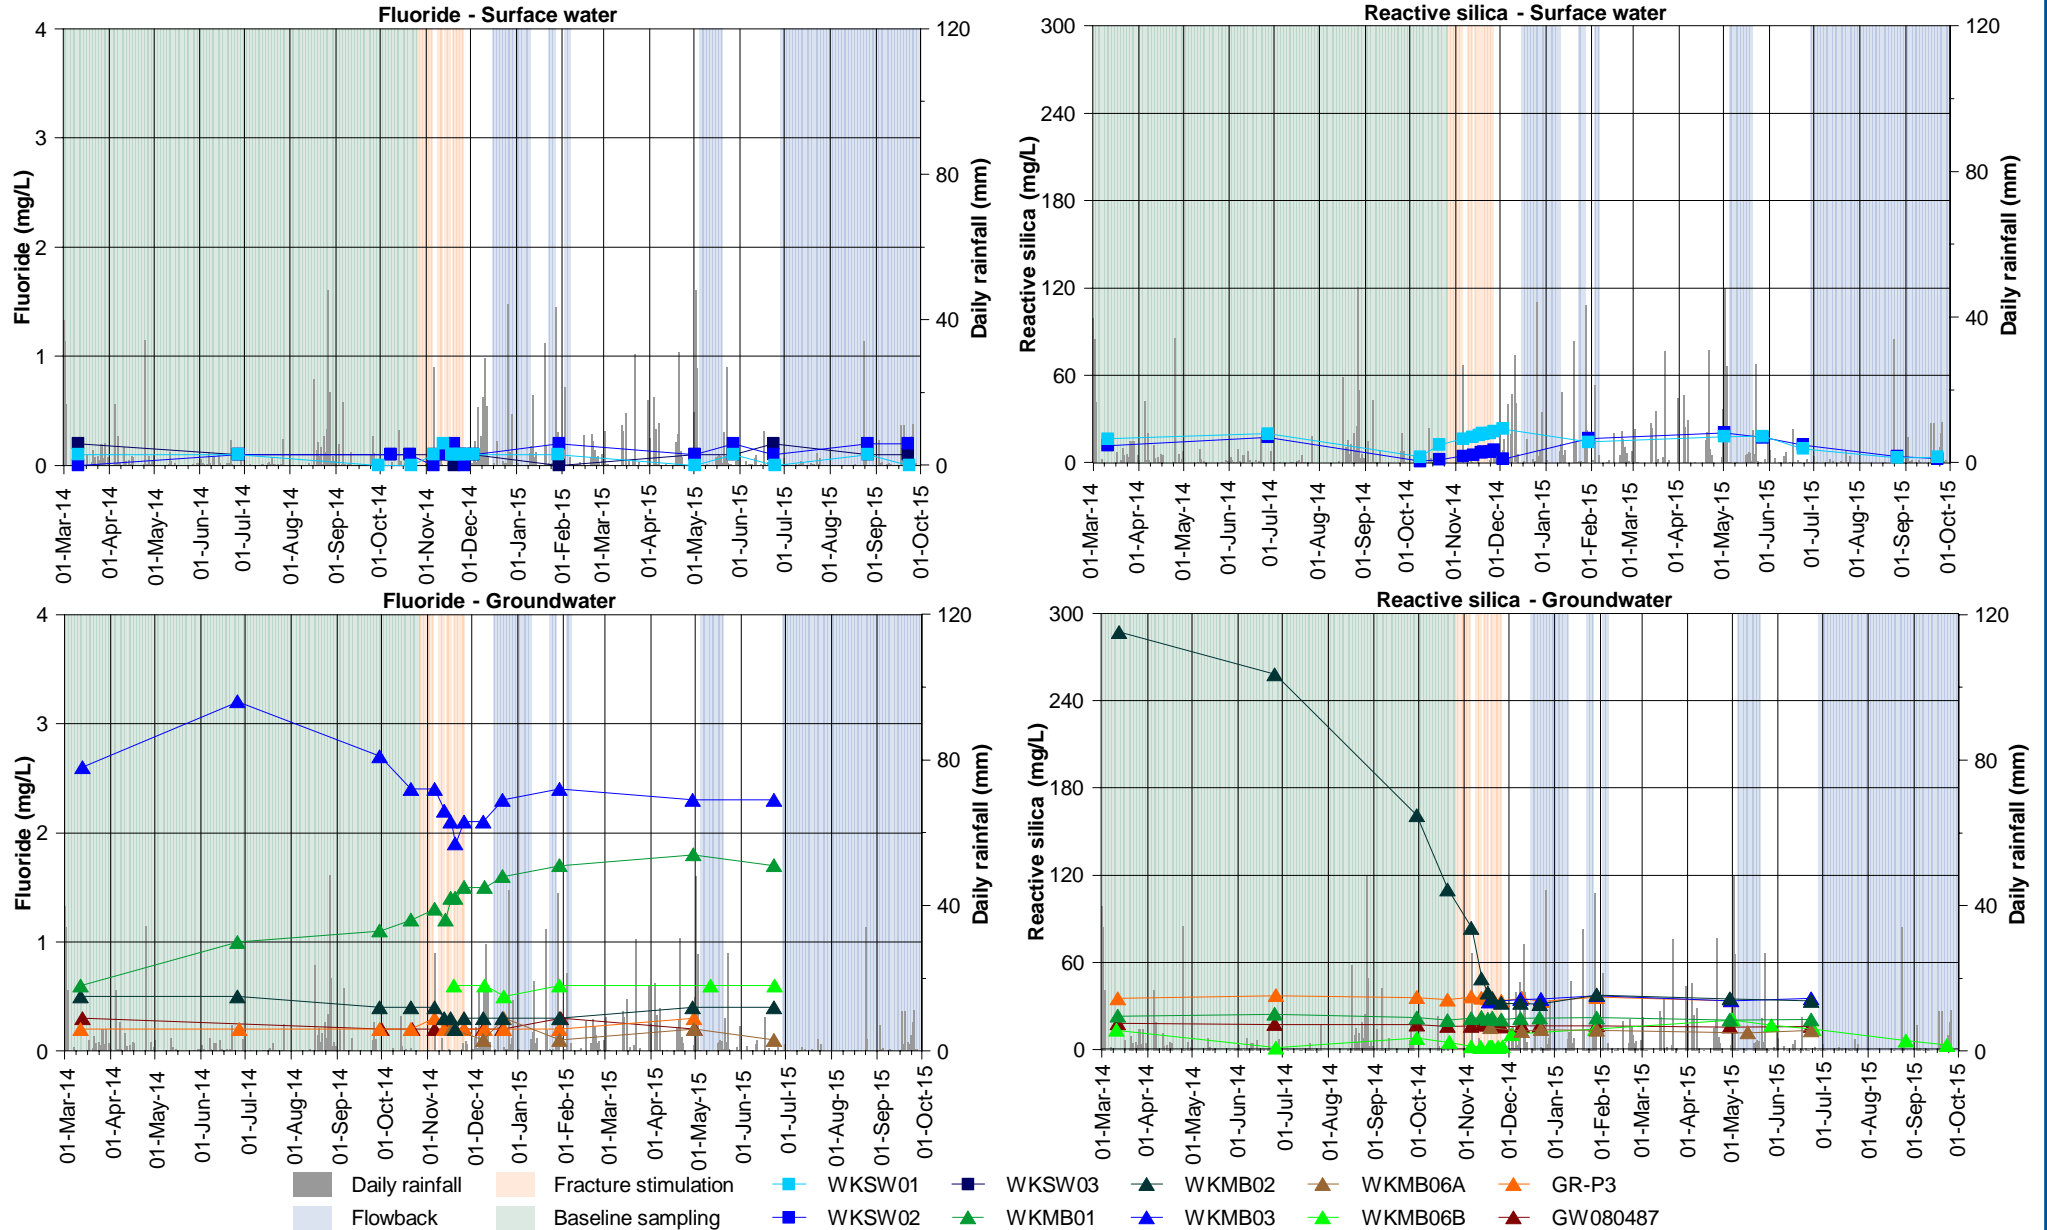

Note. Two groundwater sampling locations (WKMB01, WKMB03) contained dissolved fluoride concentrations greater than 1 mg/L. These concentrations were observed in baseline data and did not vary significantly during the fracture stimulation process. The localised and consistent nature of the fluoride concentrations in WKMB01 and WKMB03 suggest the most likely source is geological. As a result, the EPA intends to take no further action in relation to the issue of fluoride detections (EPA, 2015d).

Figure G2.5: Fluoride and reactive silica at Waukivory surface water and groundwater monitoring locations.

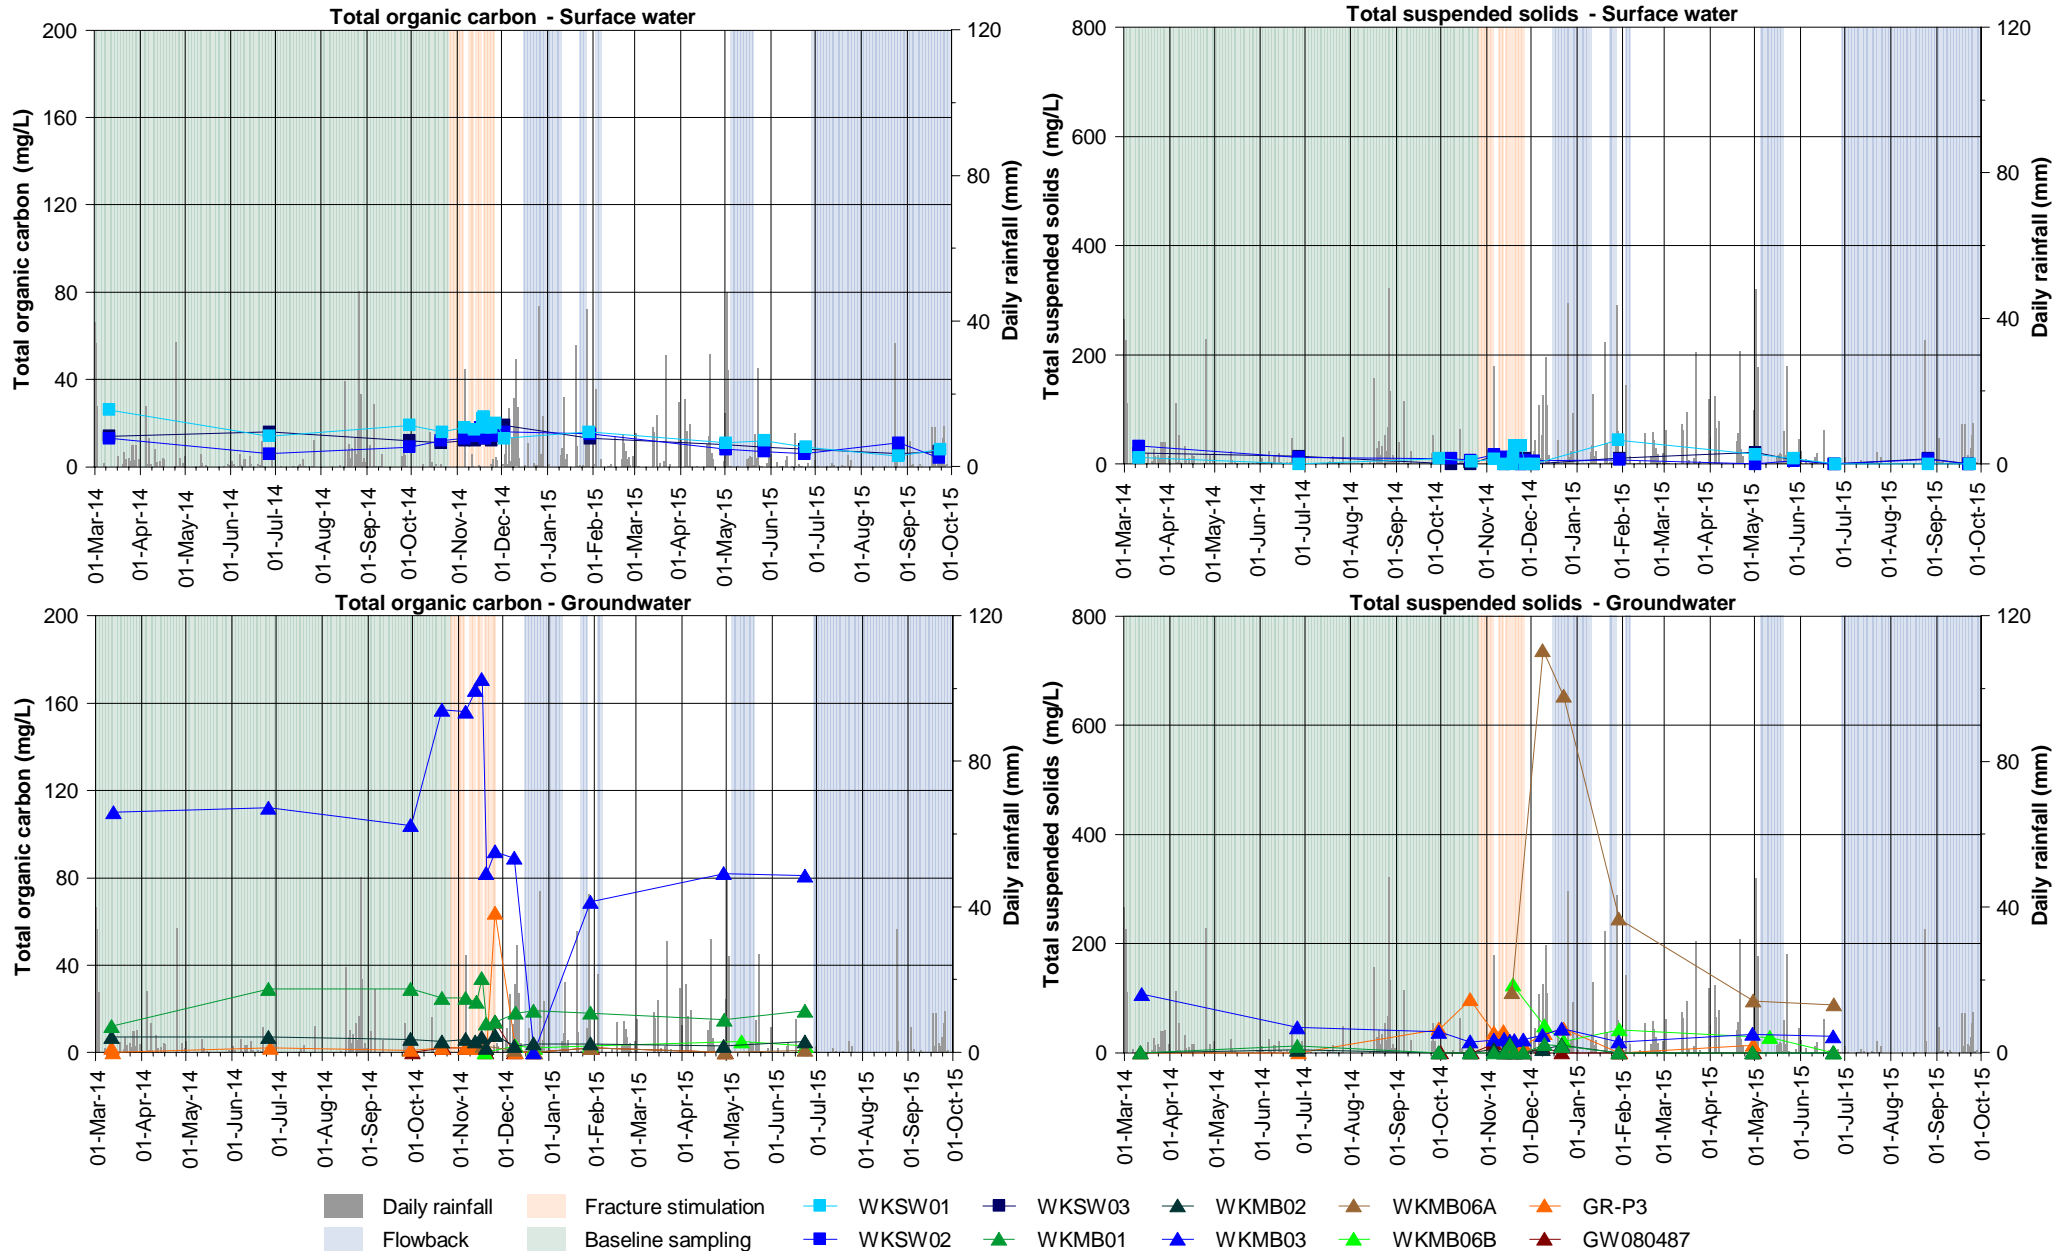


Figure G2.6: Total organic carbon (TOC) and total suspended solids (TSS) at Waukivory surface water and groundwater monitoring locations.

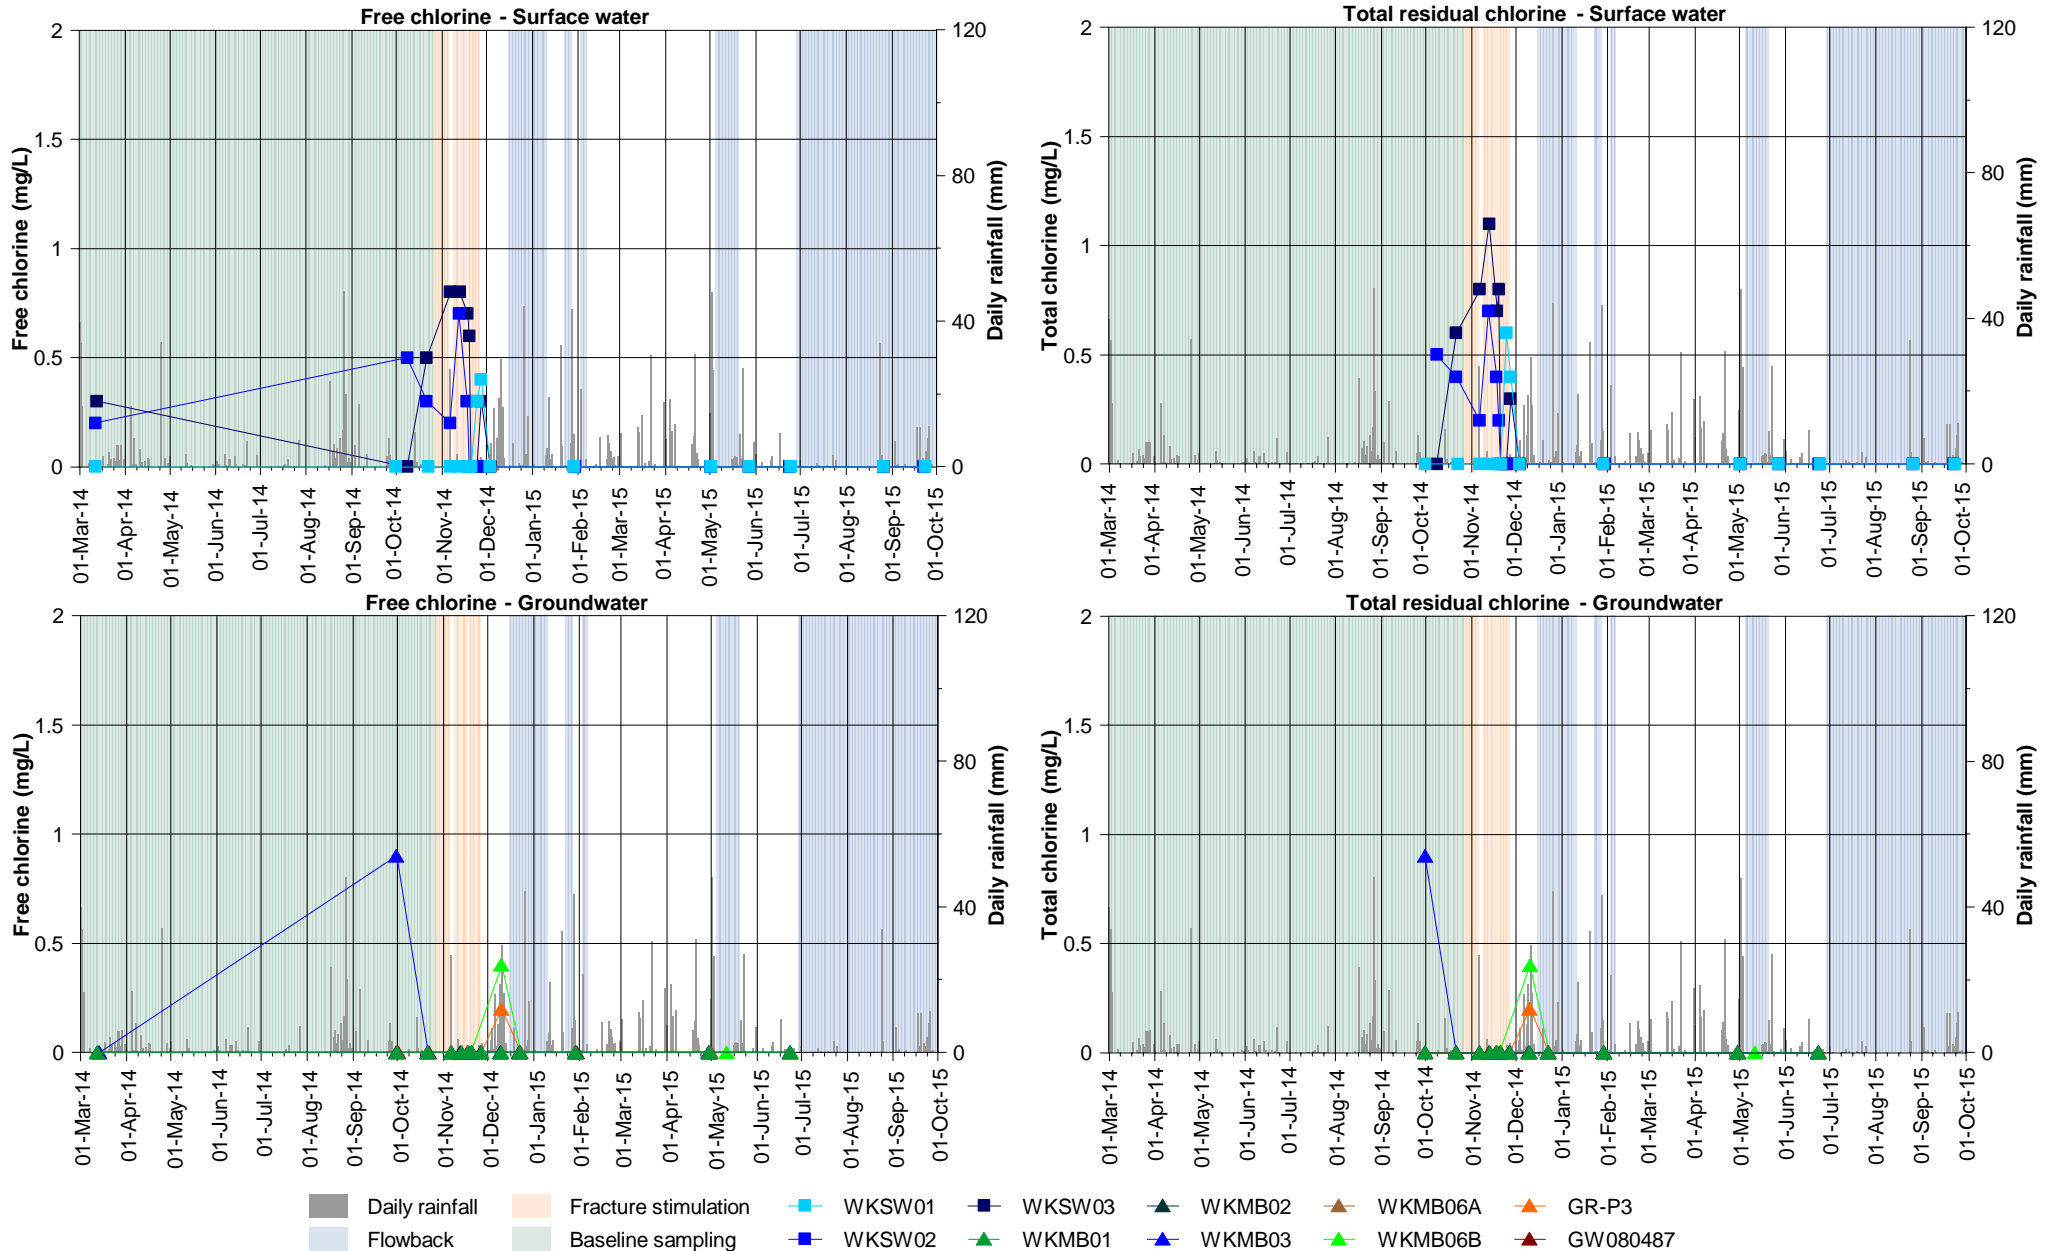


Figure G2.7: Laboratory measurements of free and total chlorine at Waukivory surface water and groundwater monitoring locations.

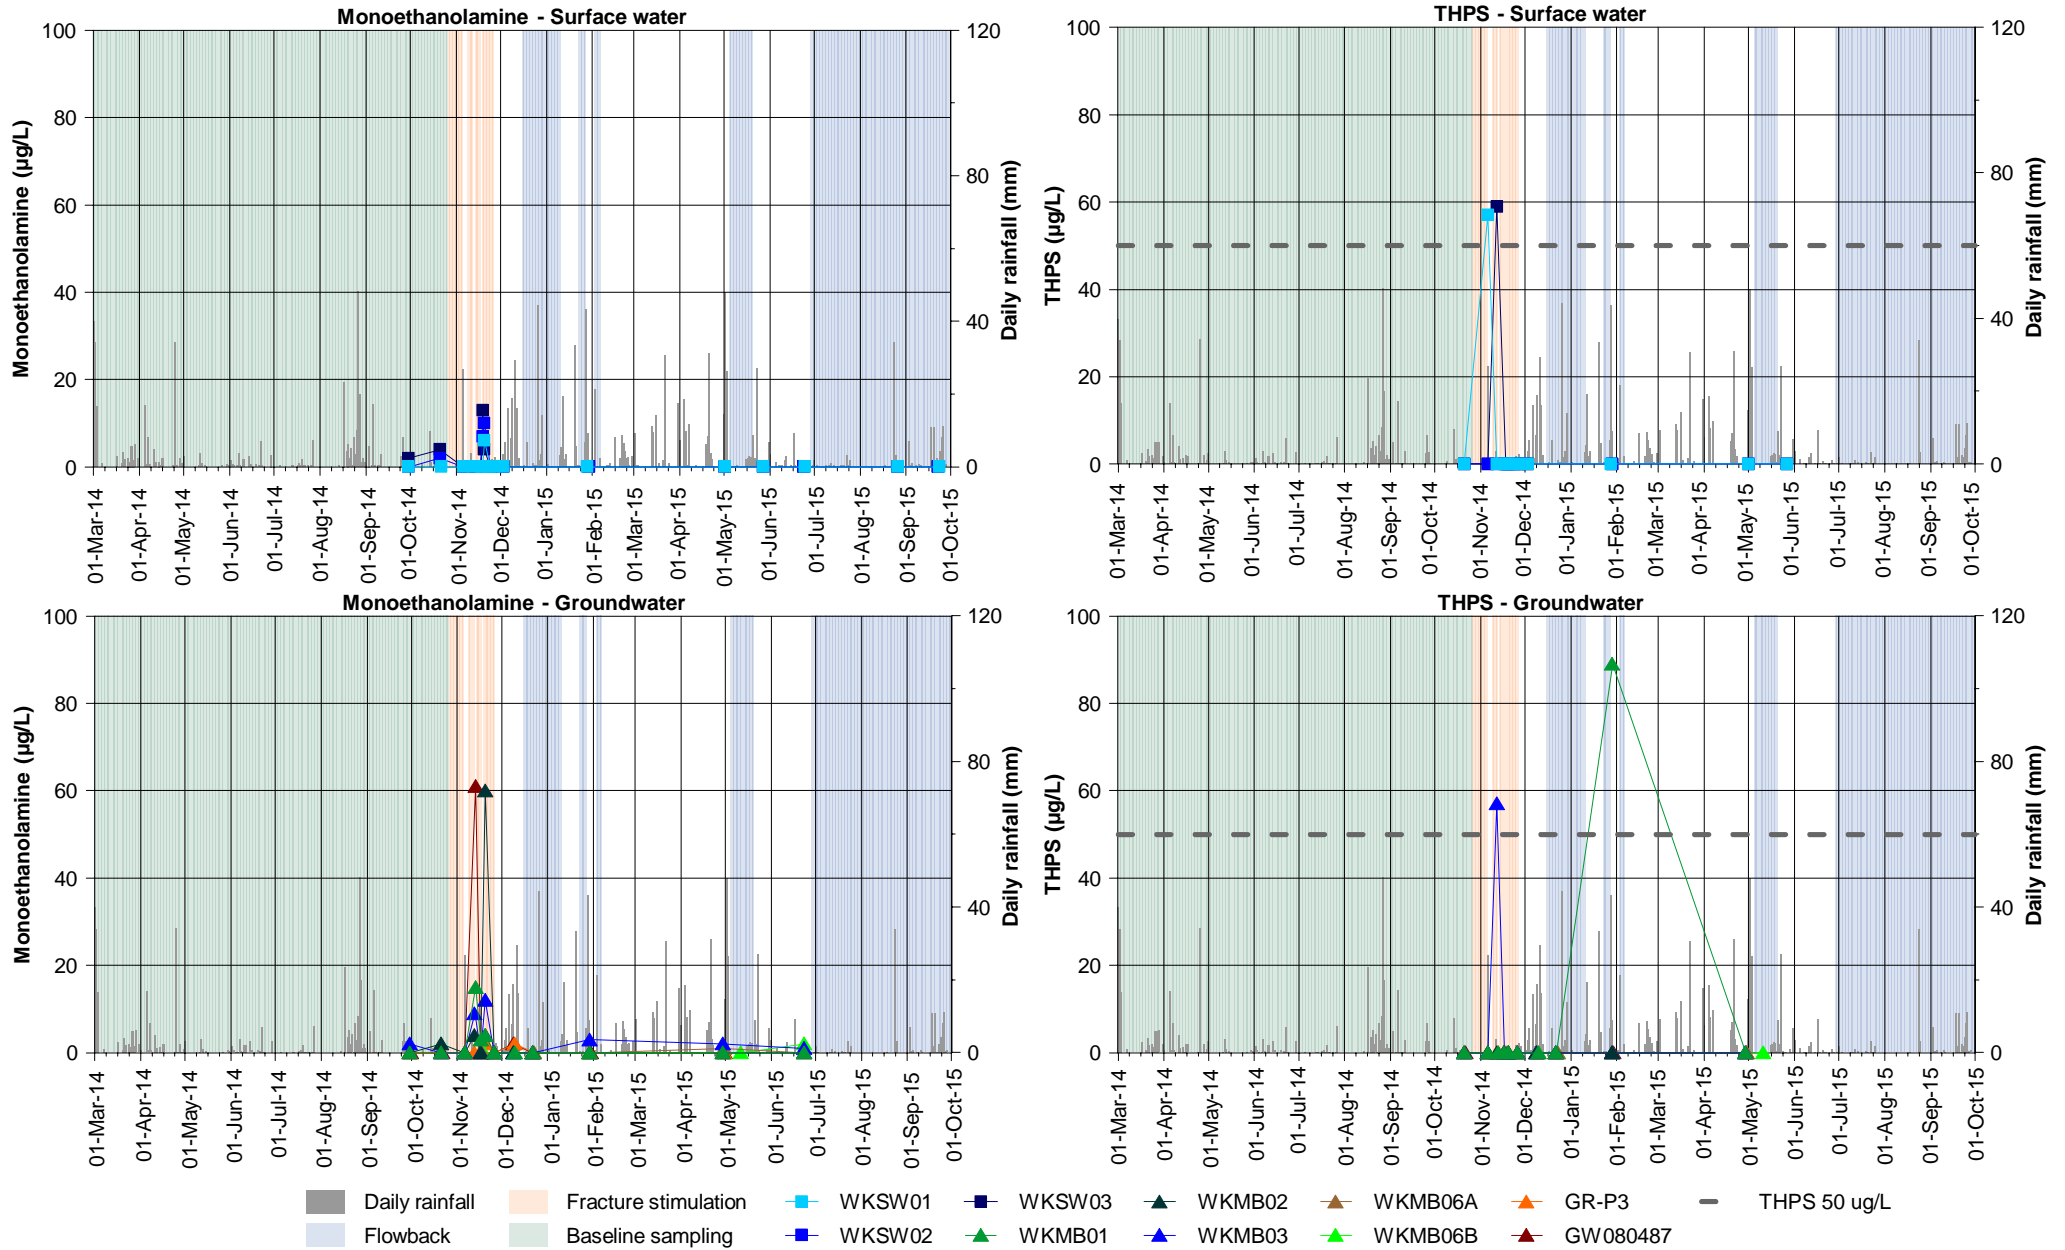


Figure G2.8: Monoethanolamine and THPS at Waukivory surface water and groundwater monitoring locations.

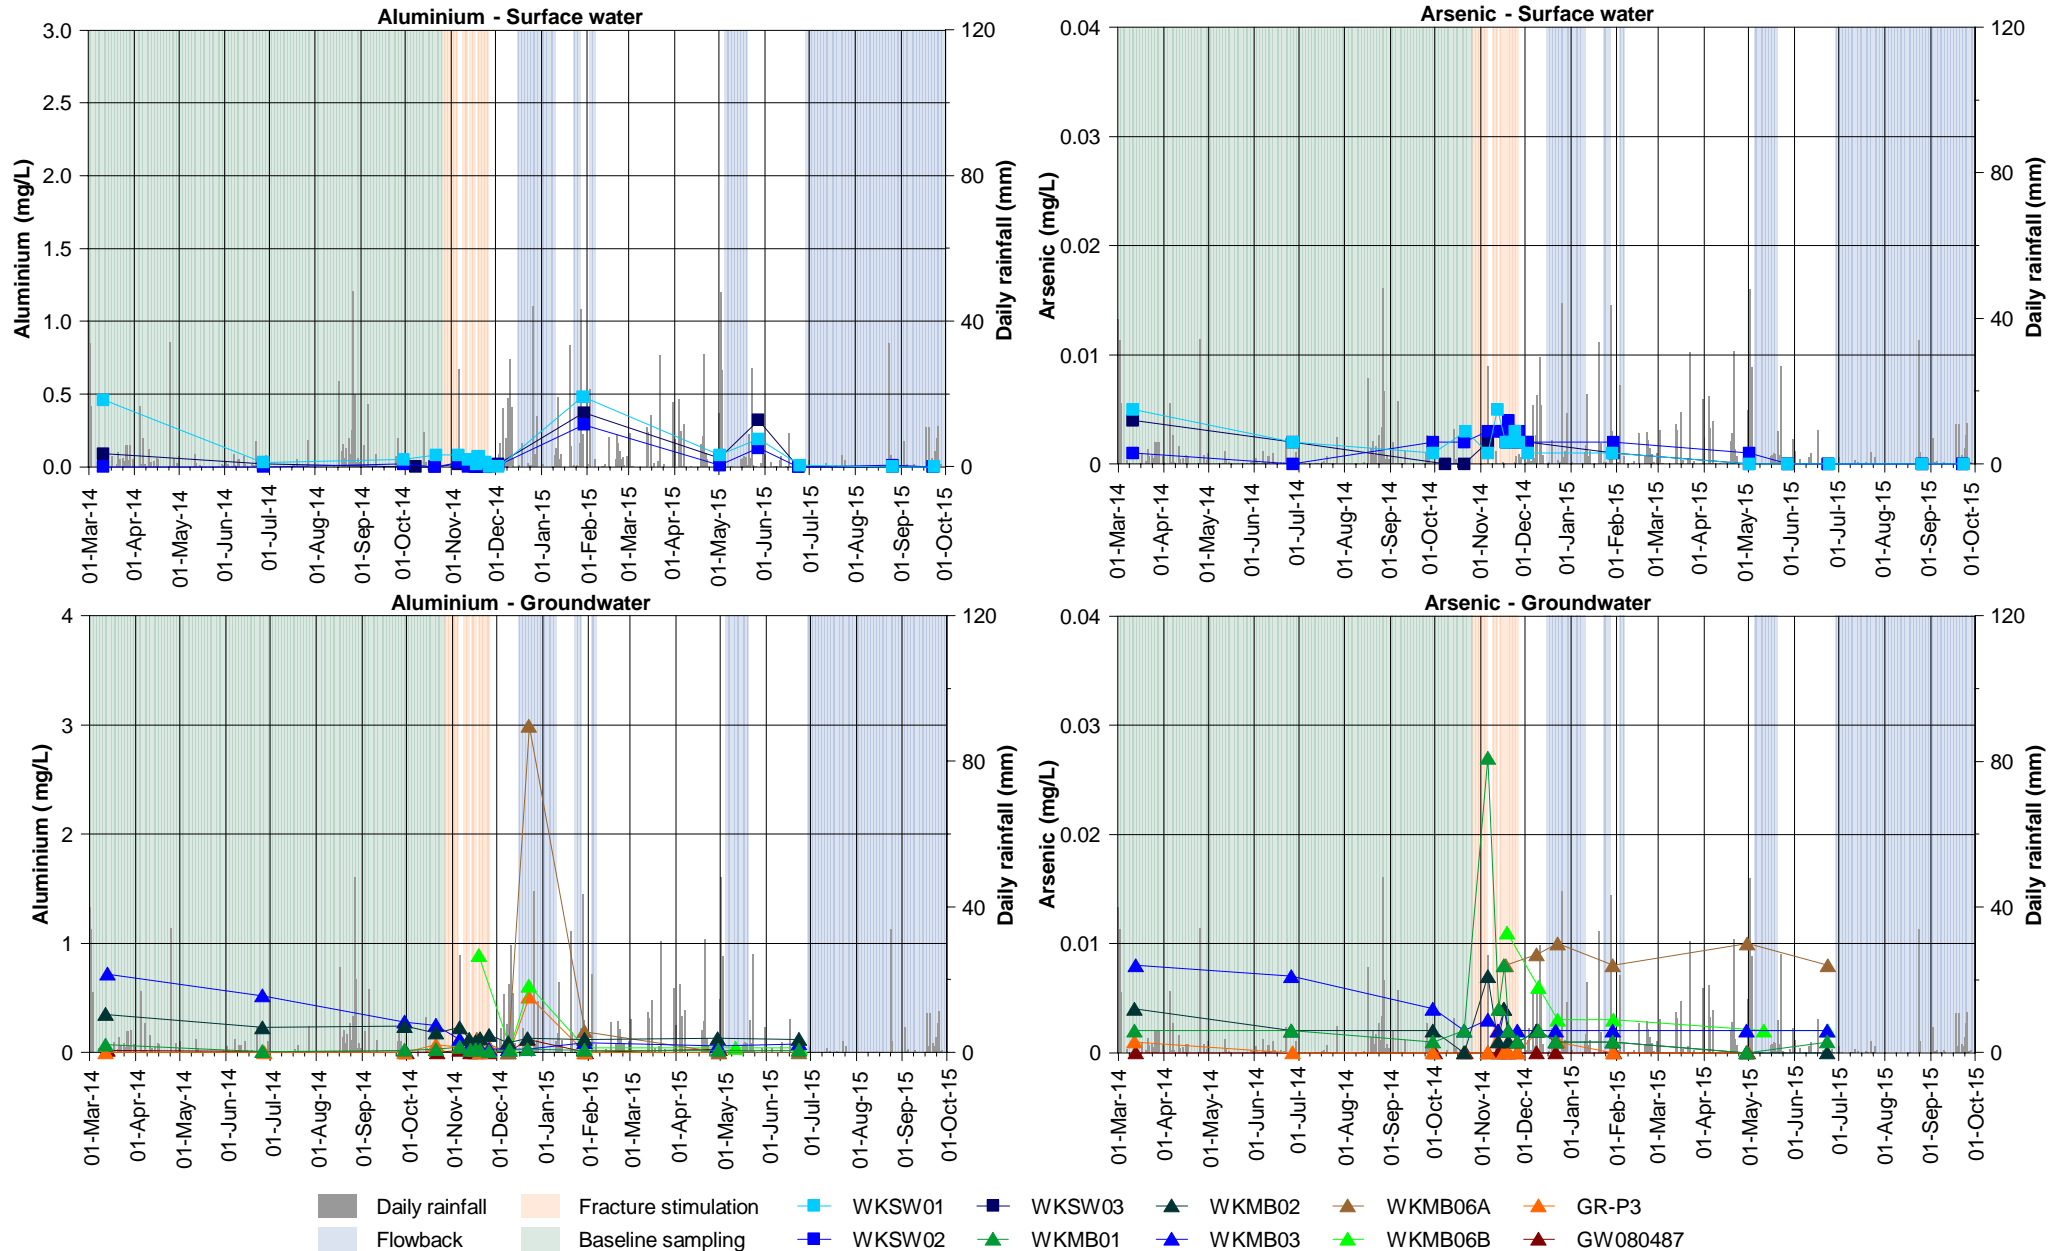


Figure G3.1: Aluminium and arsenic at Waukivory surface water and groundwater monitoring locations.

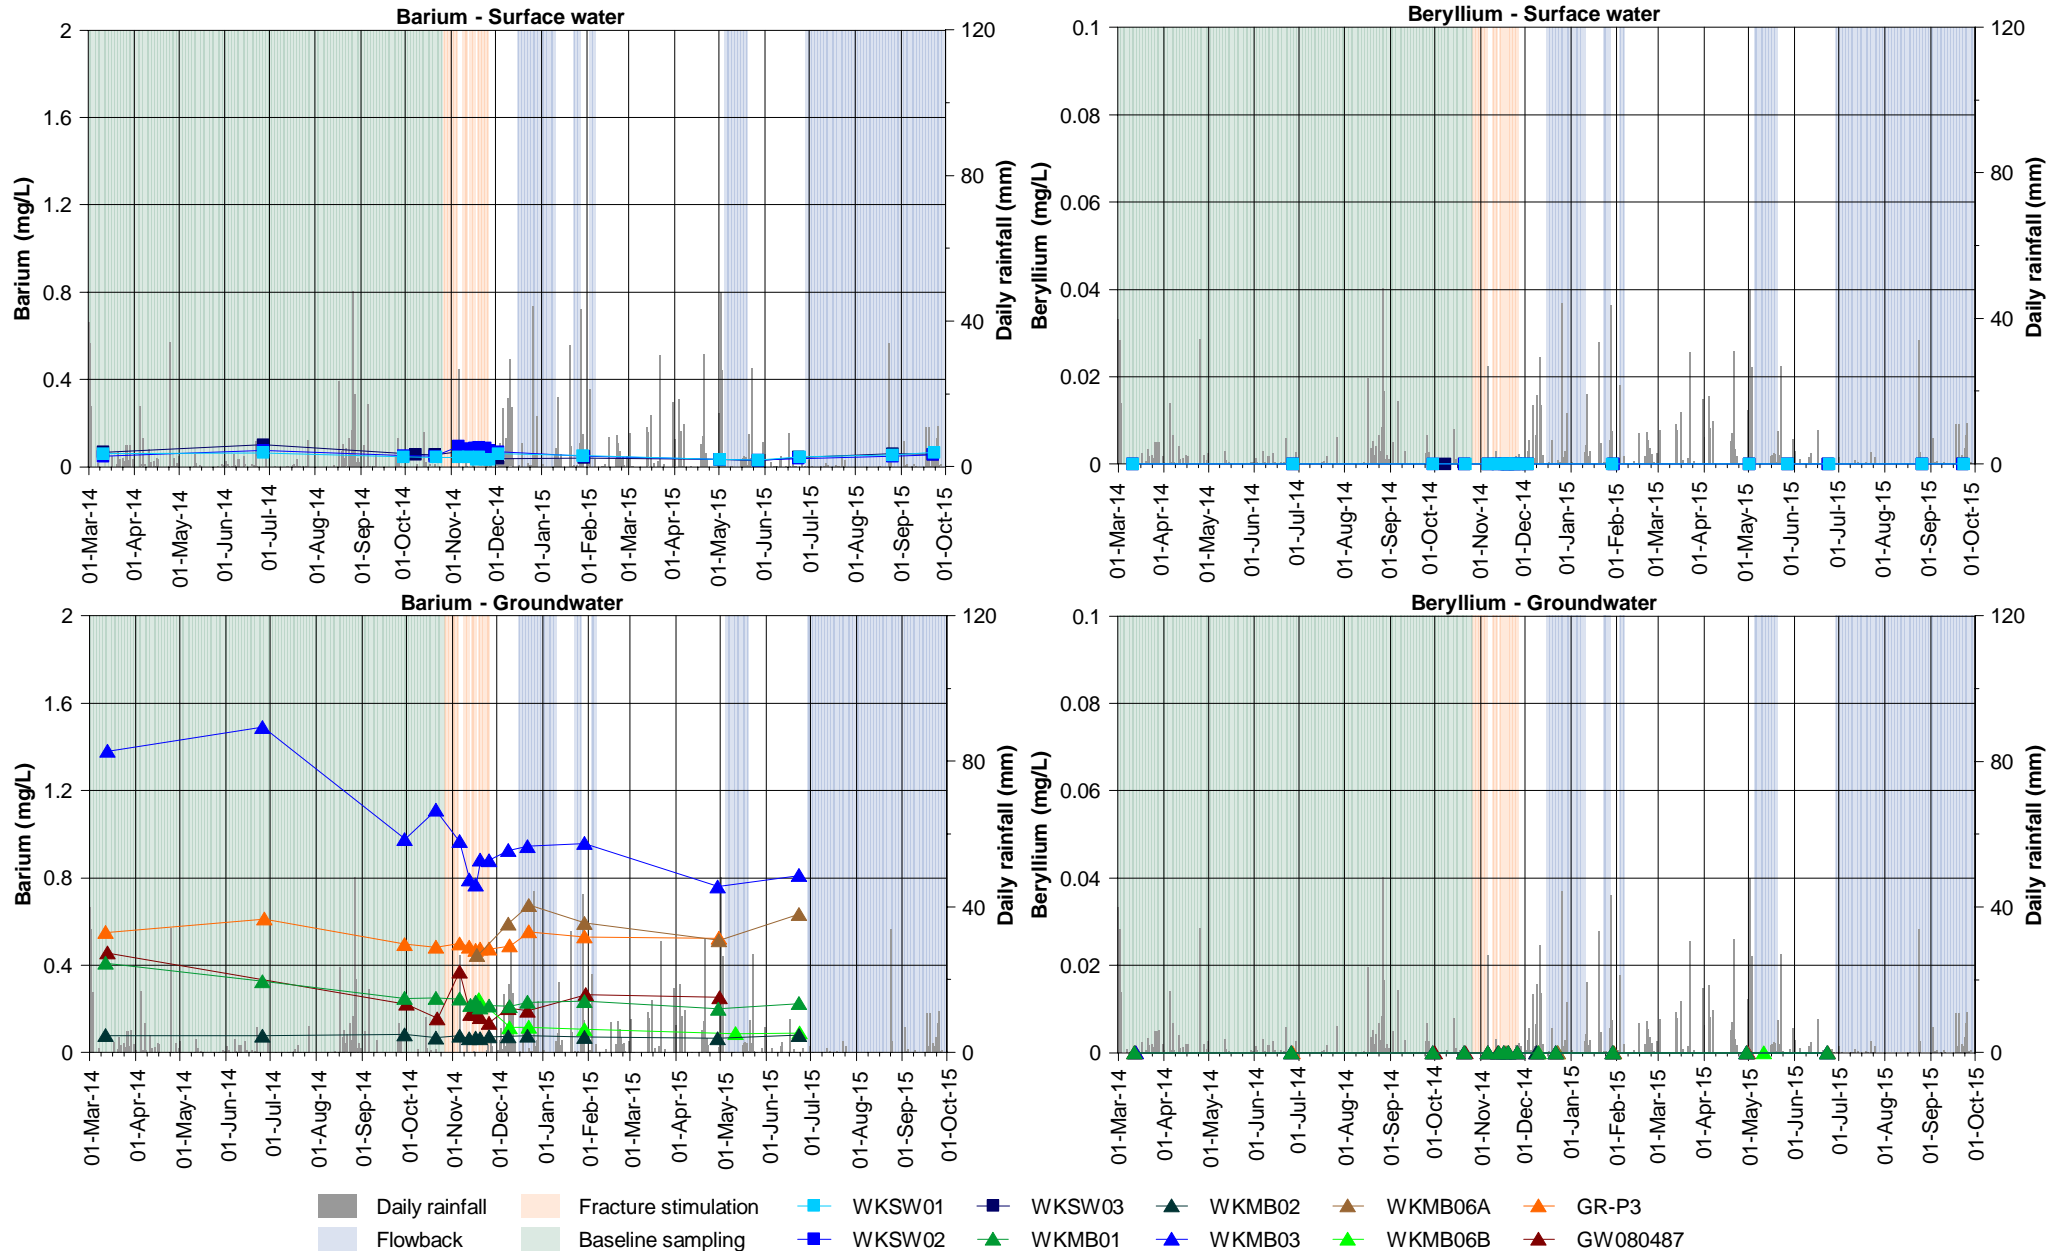


Figure G3.2: Barium and beryllium at Waukivory surface water and groundwater monitoring locations.

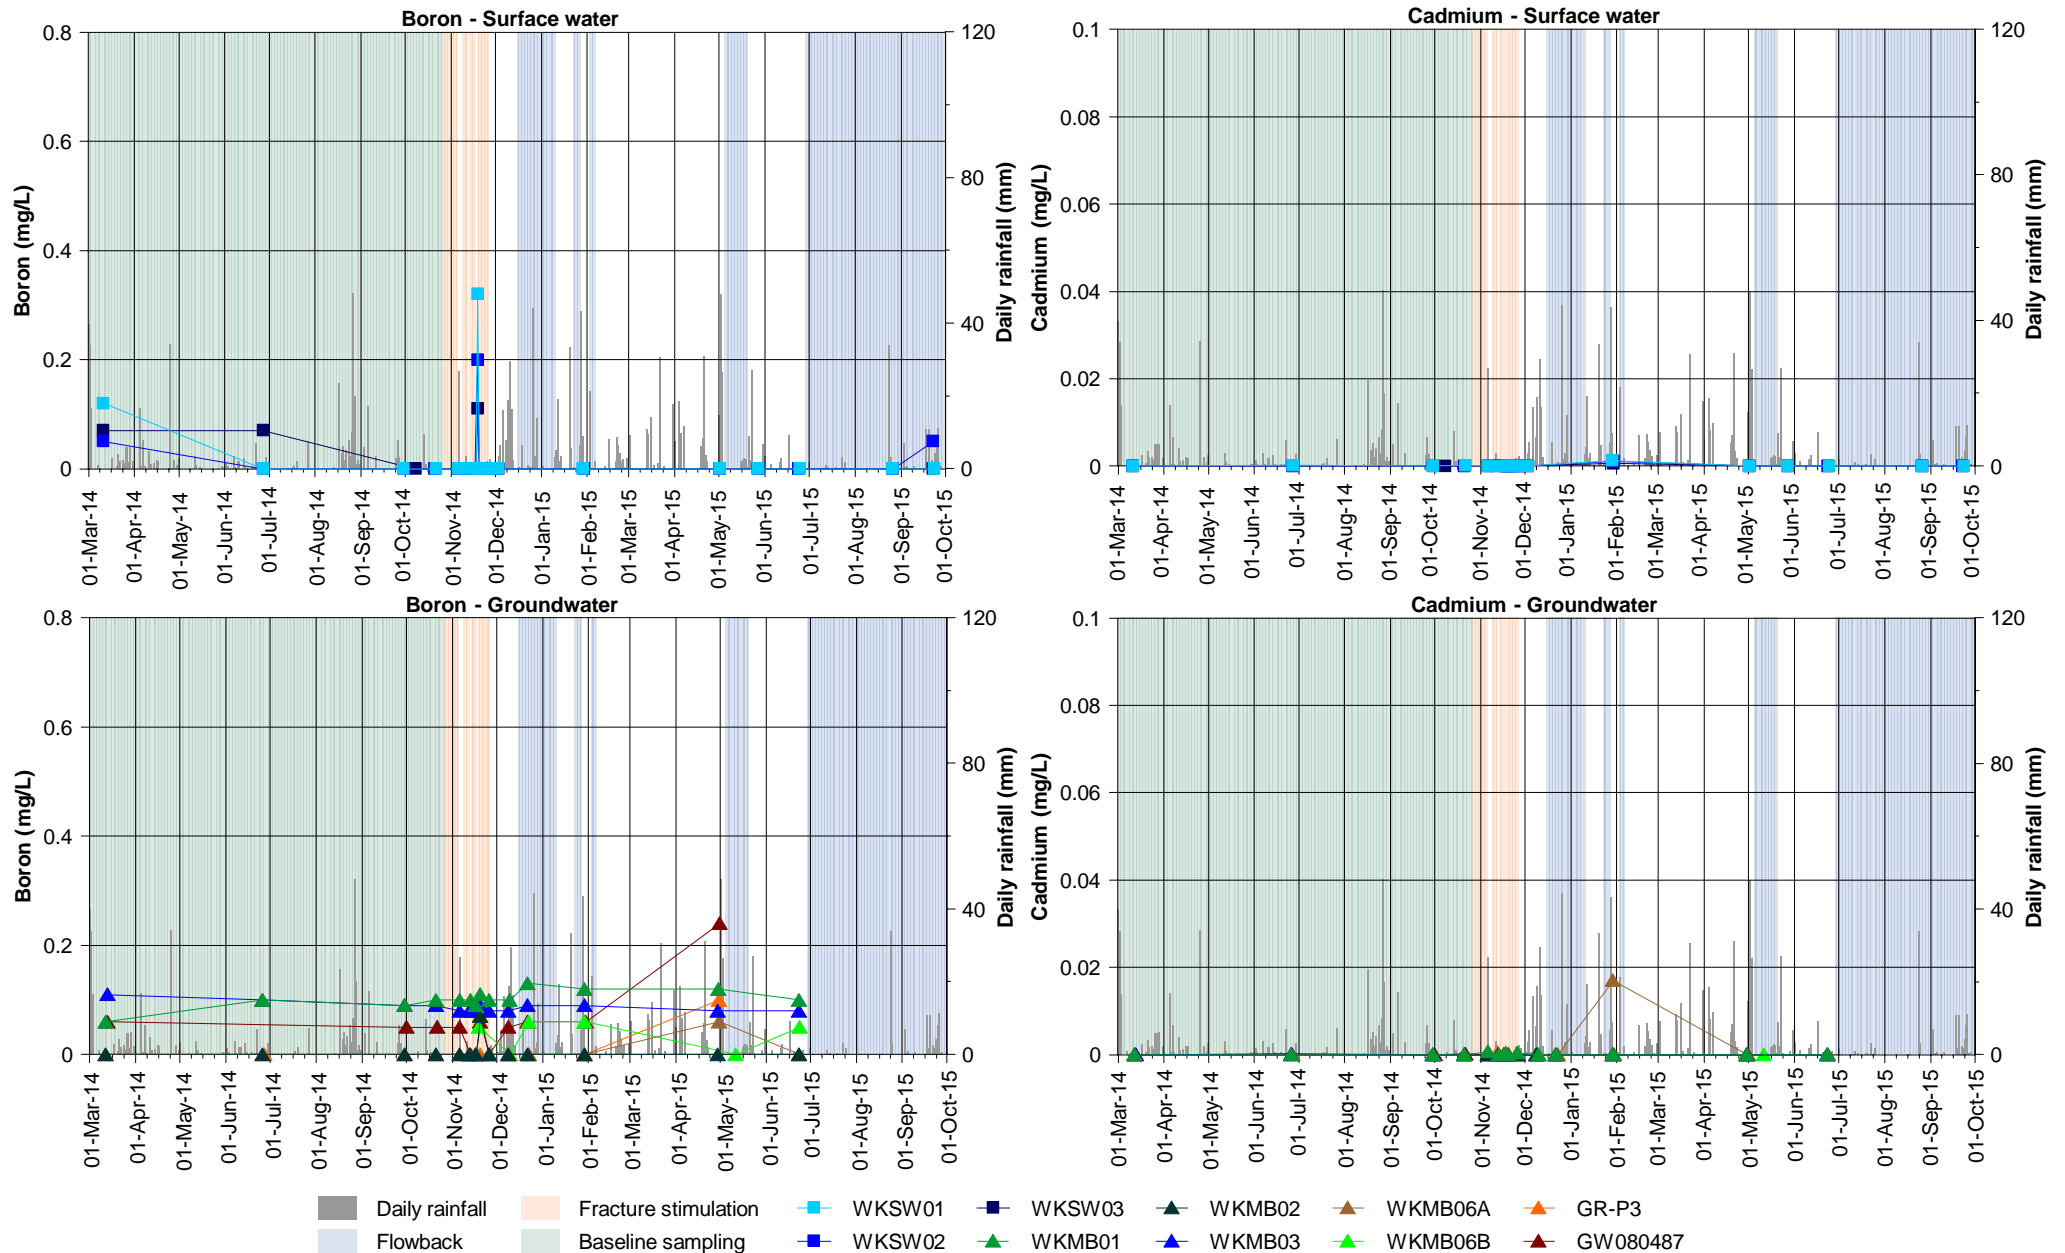


Figure G3.3: Boron and cadmium at Waukivory surface water and groundwater monitoring locations.

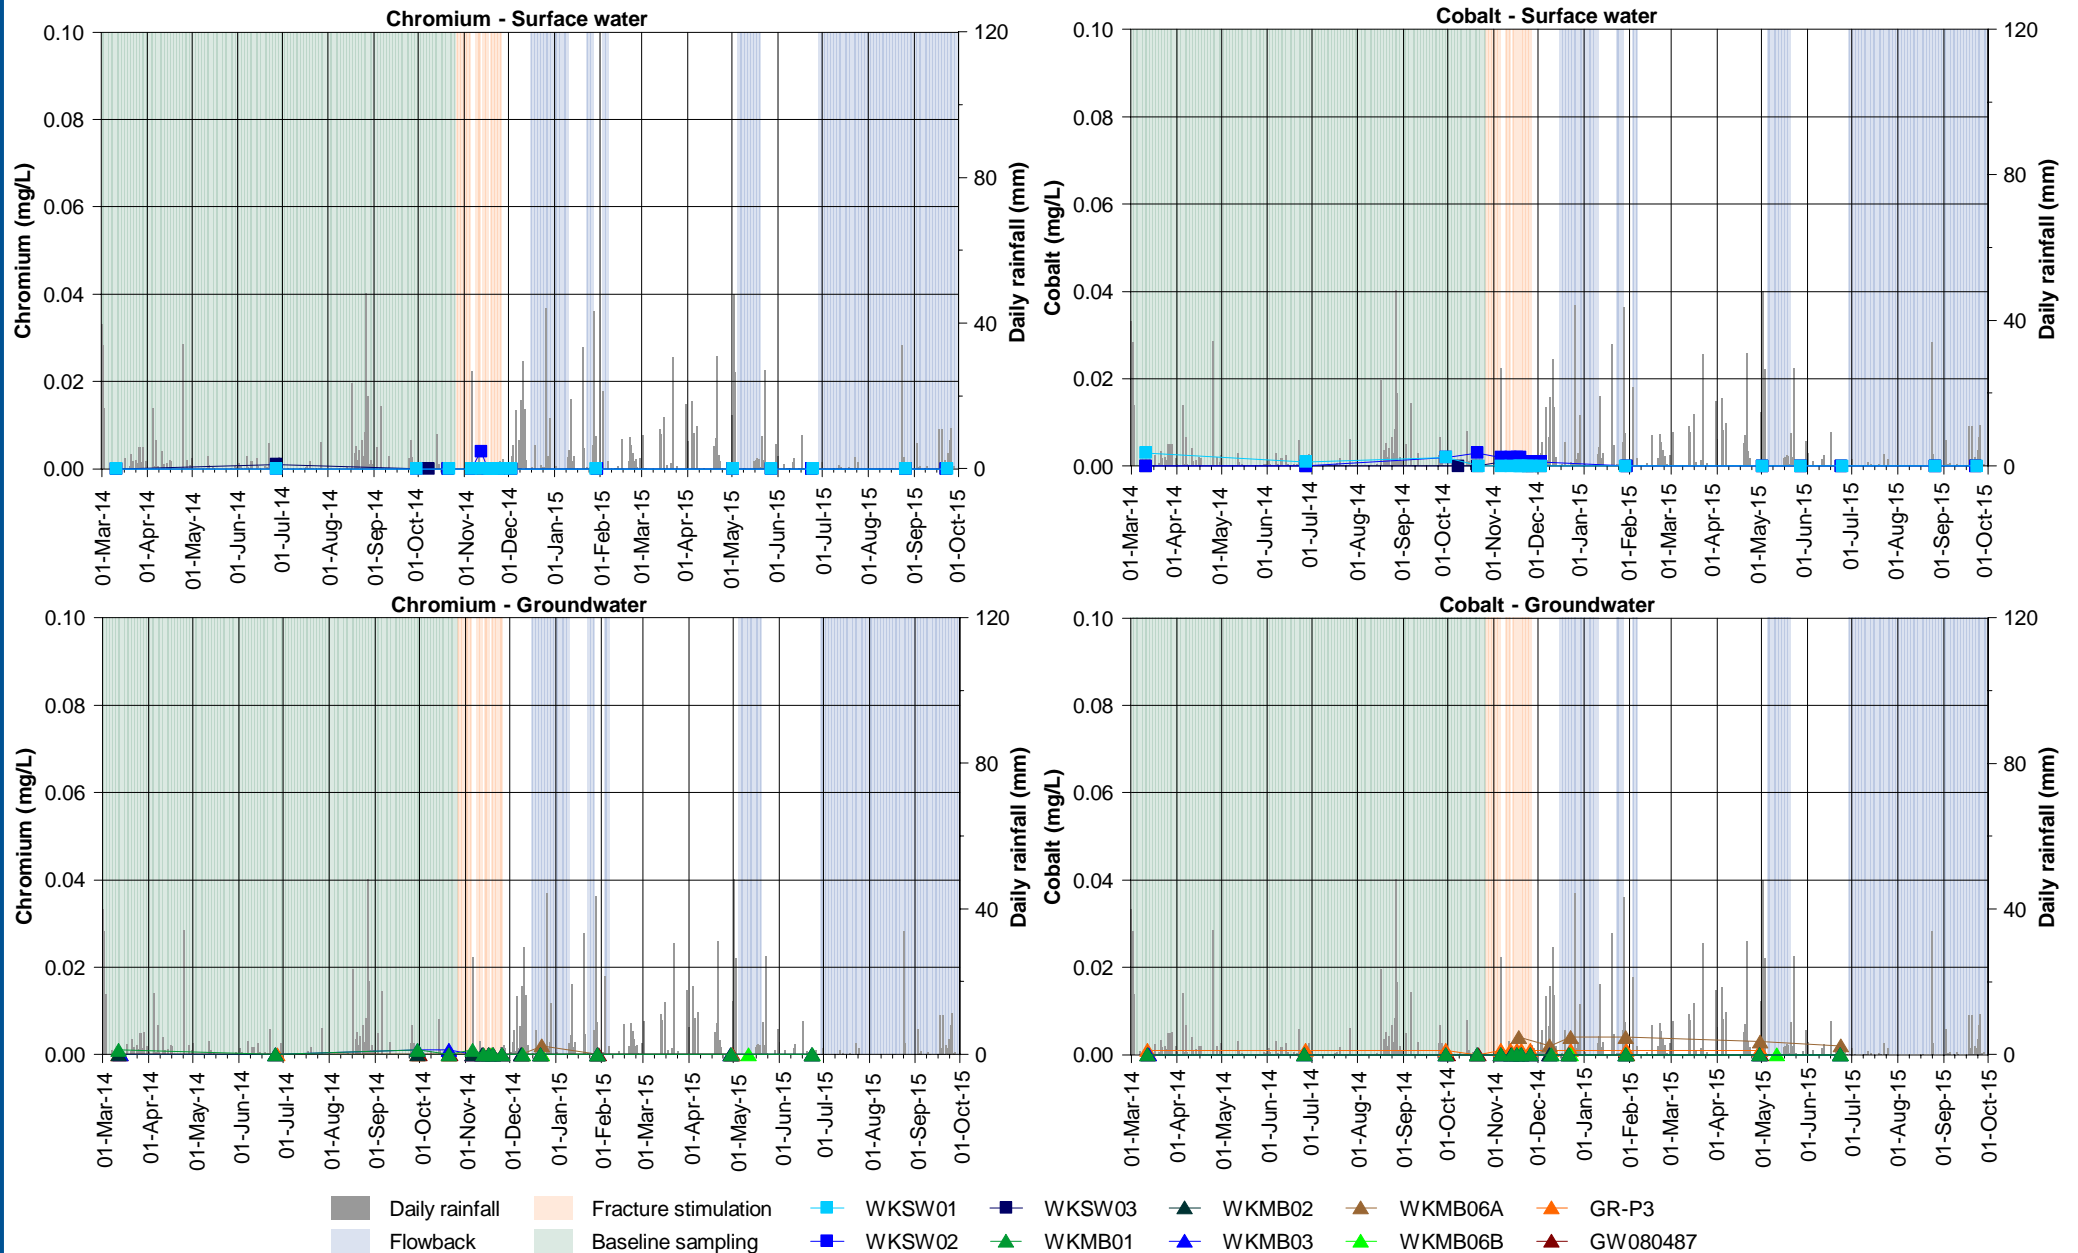


Figure G3.4: Chromium and cobalt at Waukivory surface water and groundwater monitoring locations.

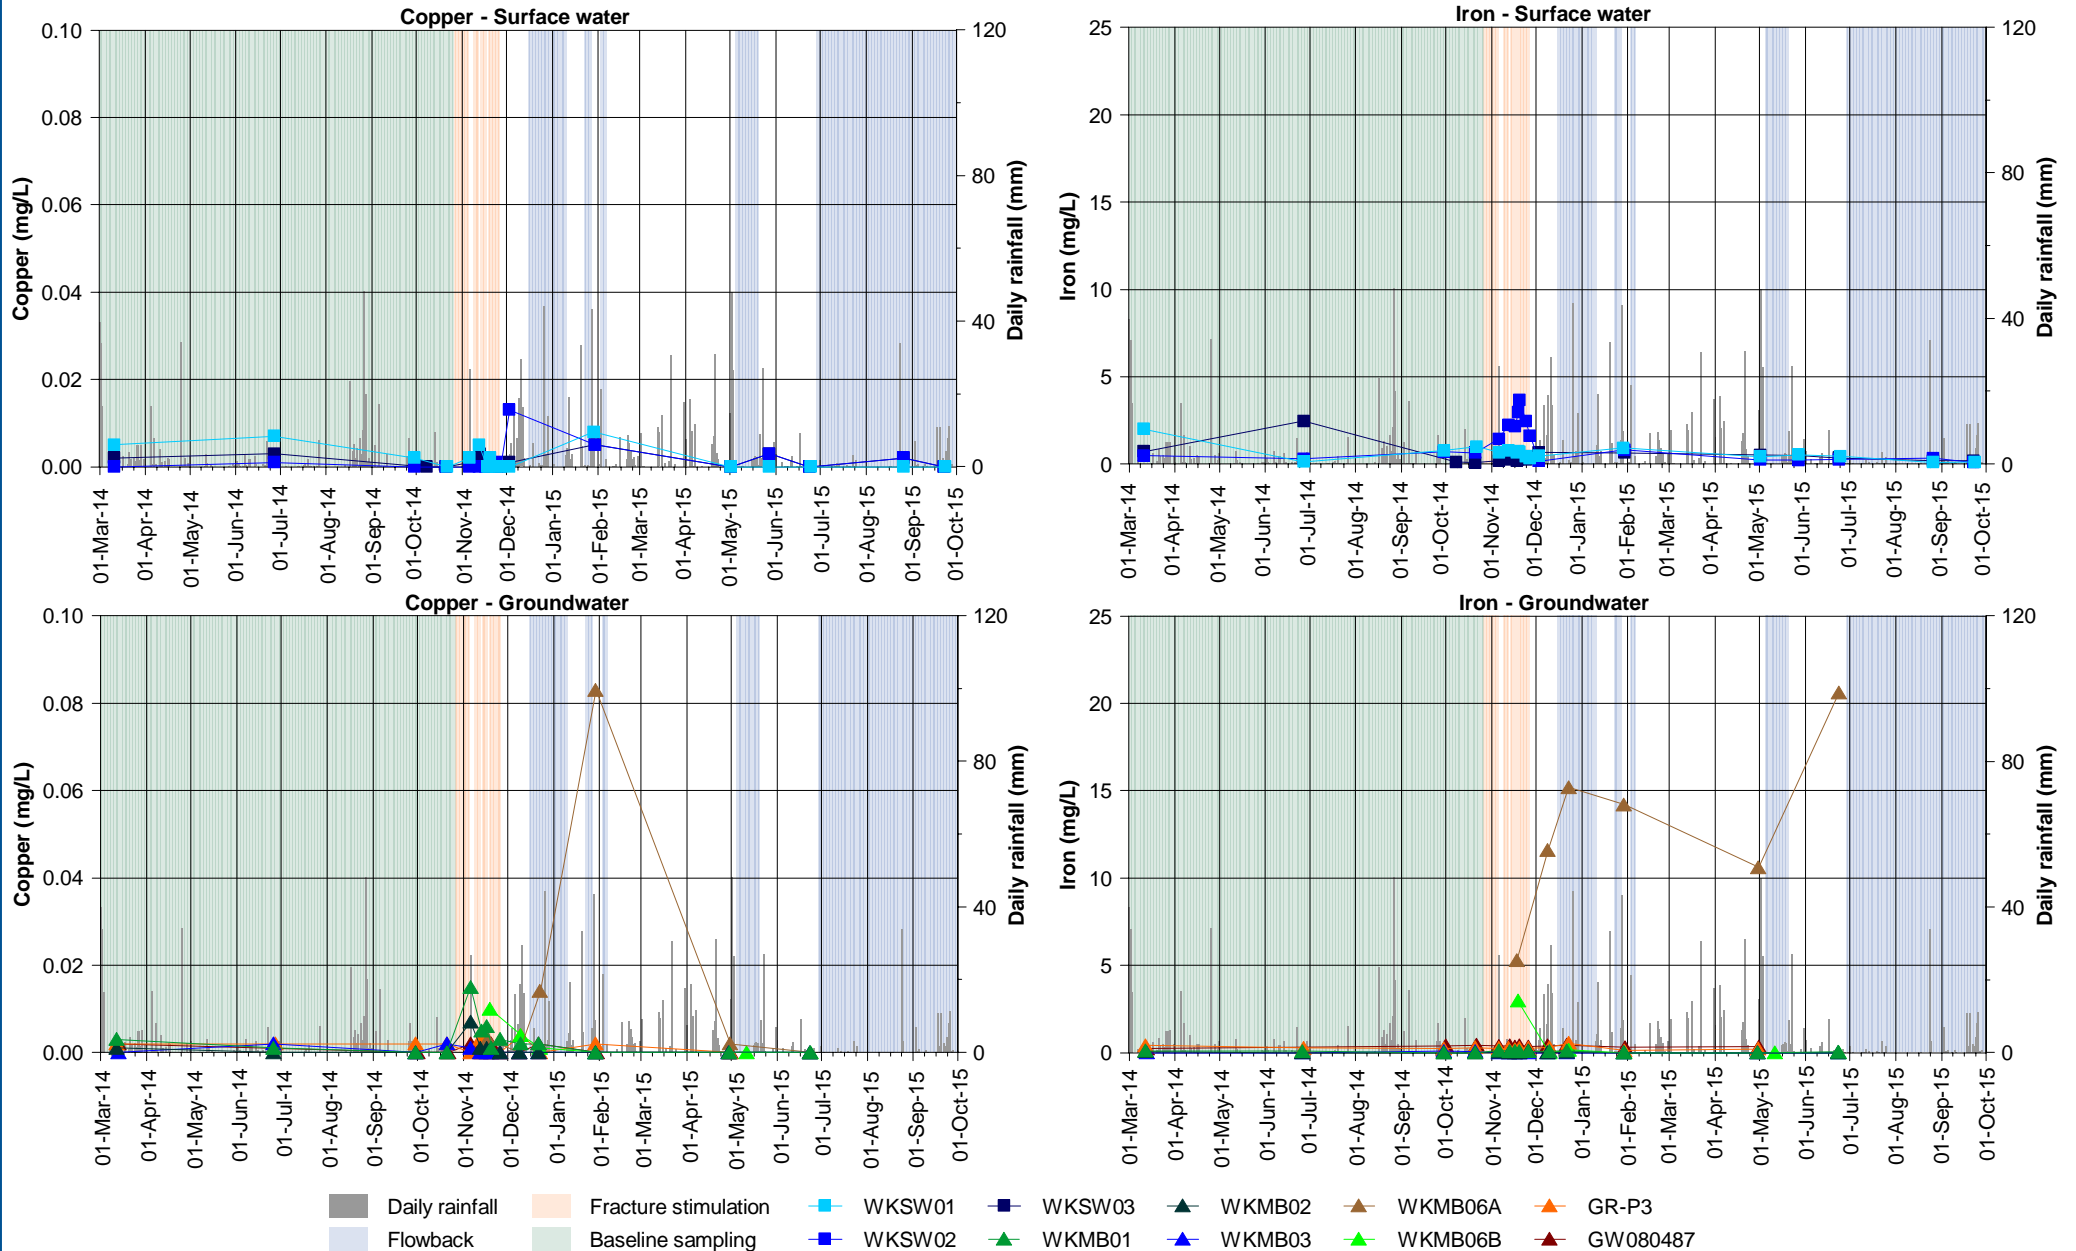


Figure G3.5: Copper and iron at Waukivory surface water and groundwater monitoring locations.

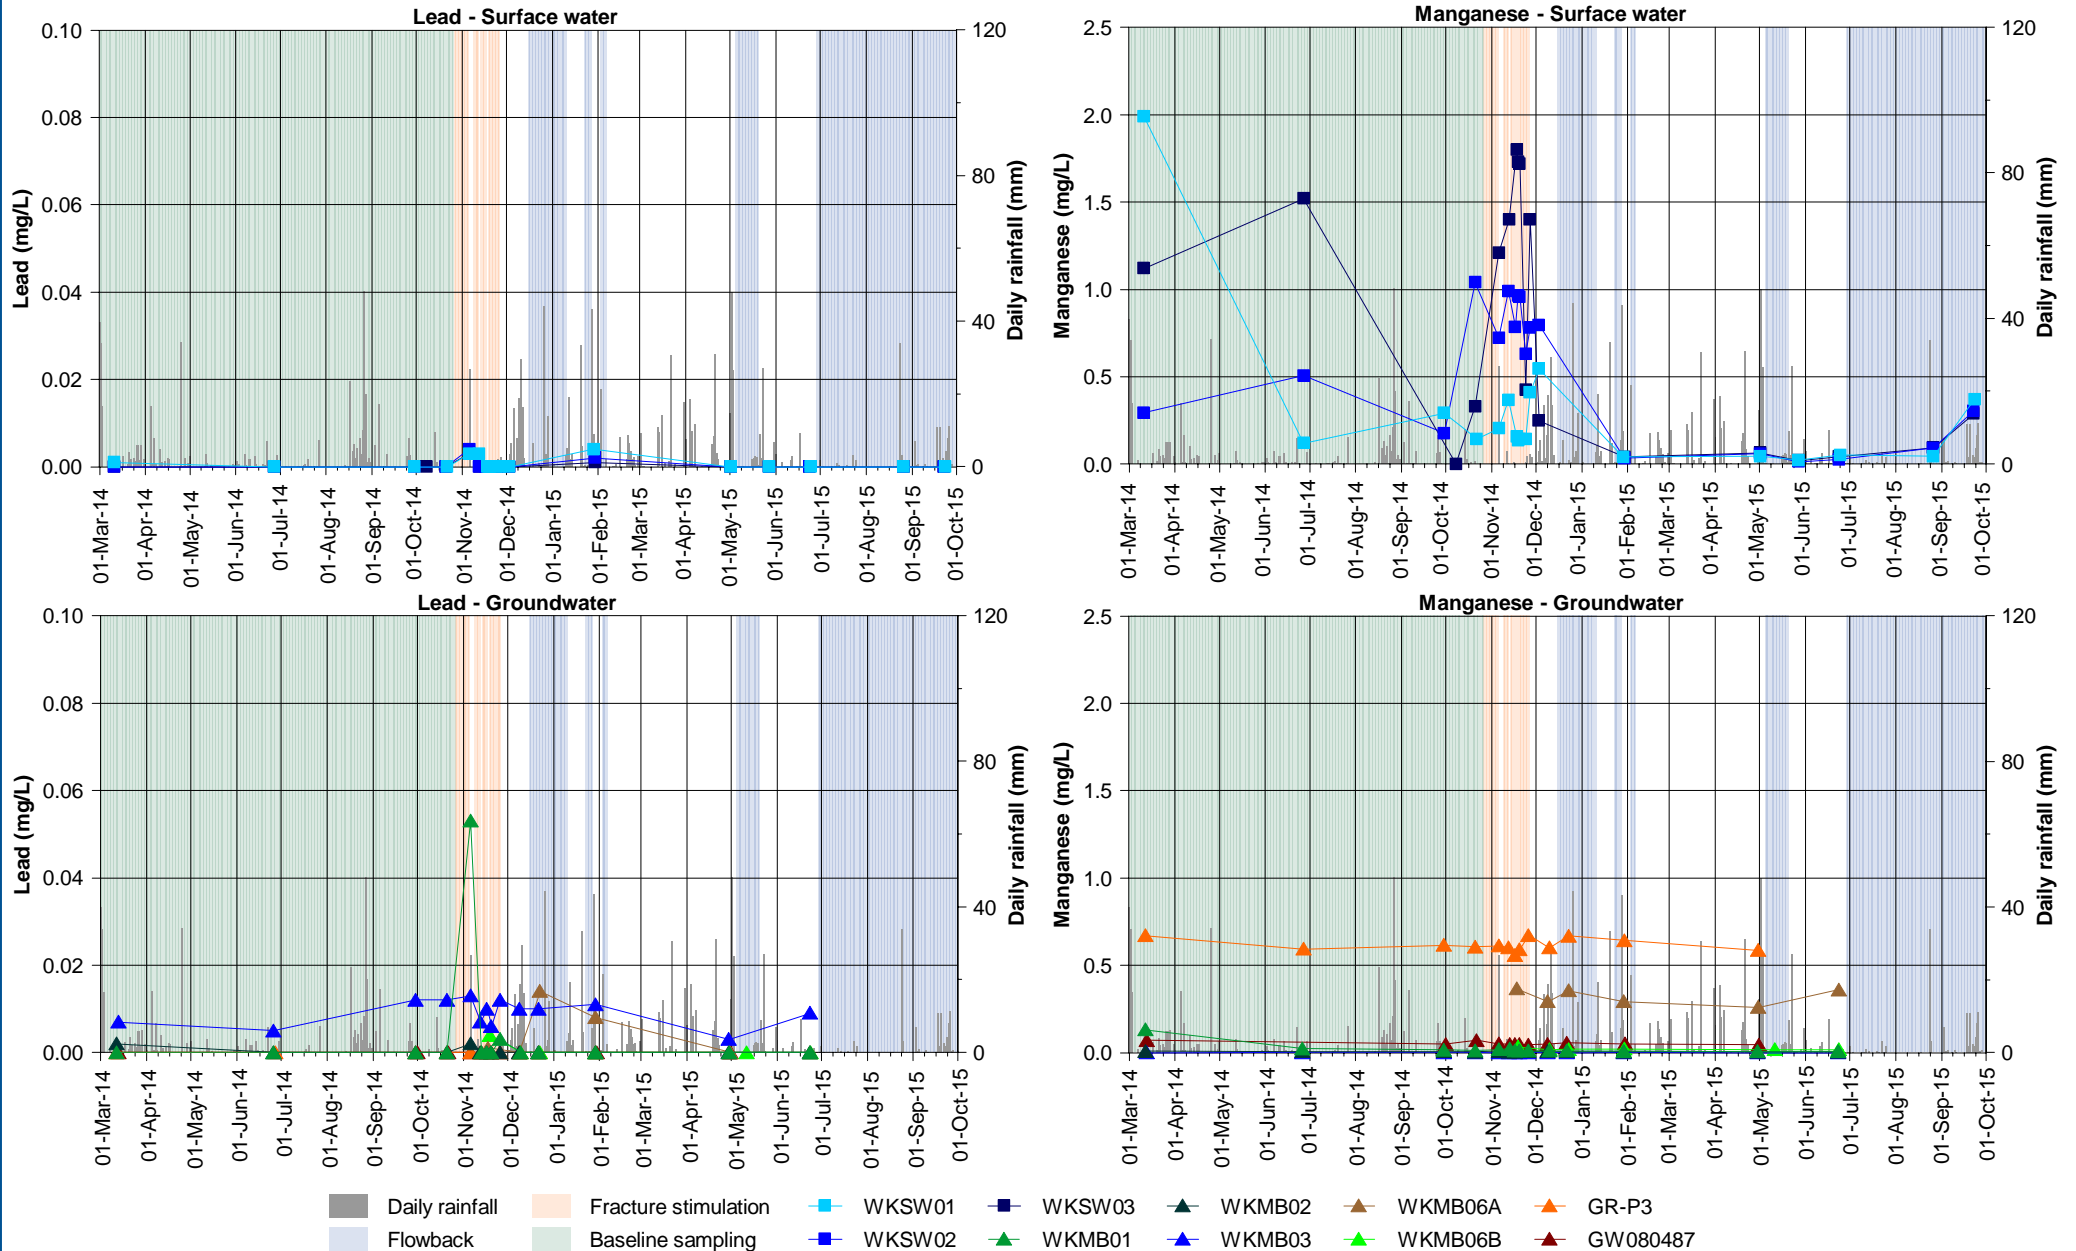


Figure G3.6: Lead and manganese at Waukivory surface water and groundwater monitoring locations.

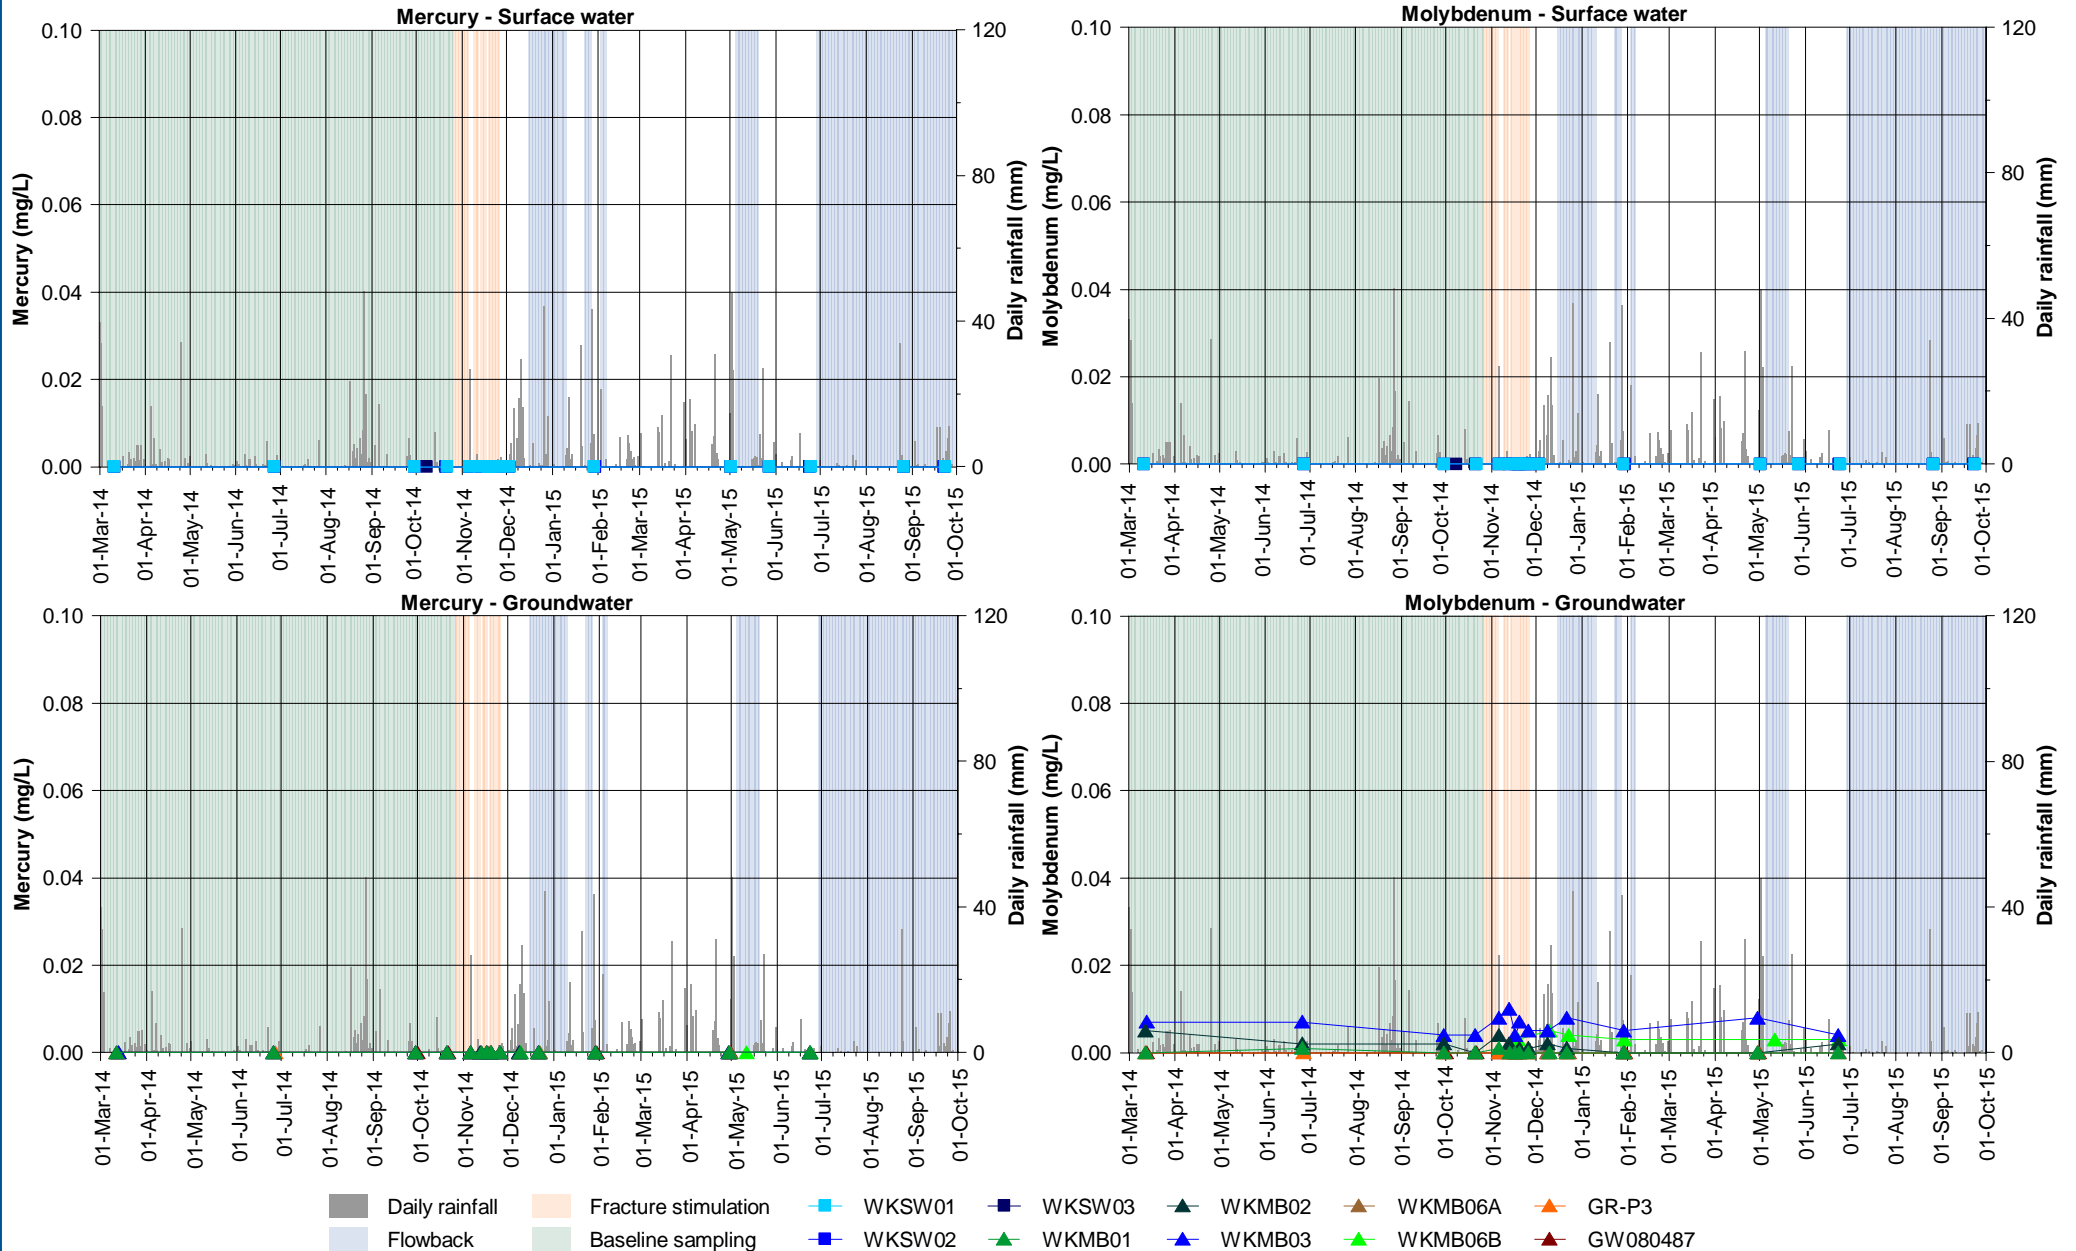


Figure G3.7: Mercury and molybdenum at Waukivory surface water and groundwater monitoring locations.

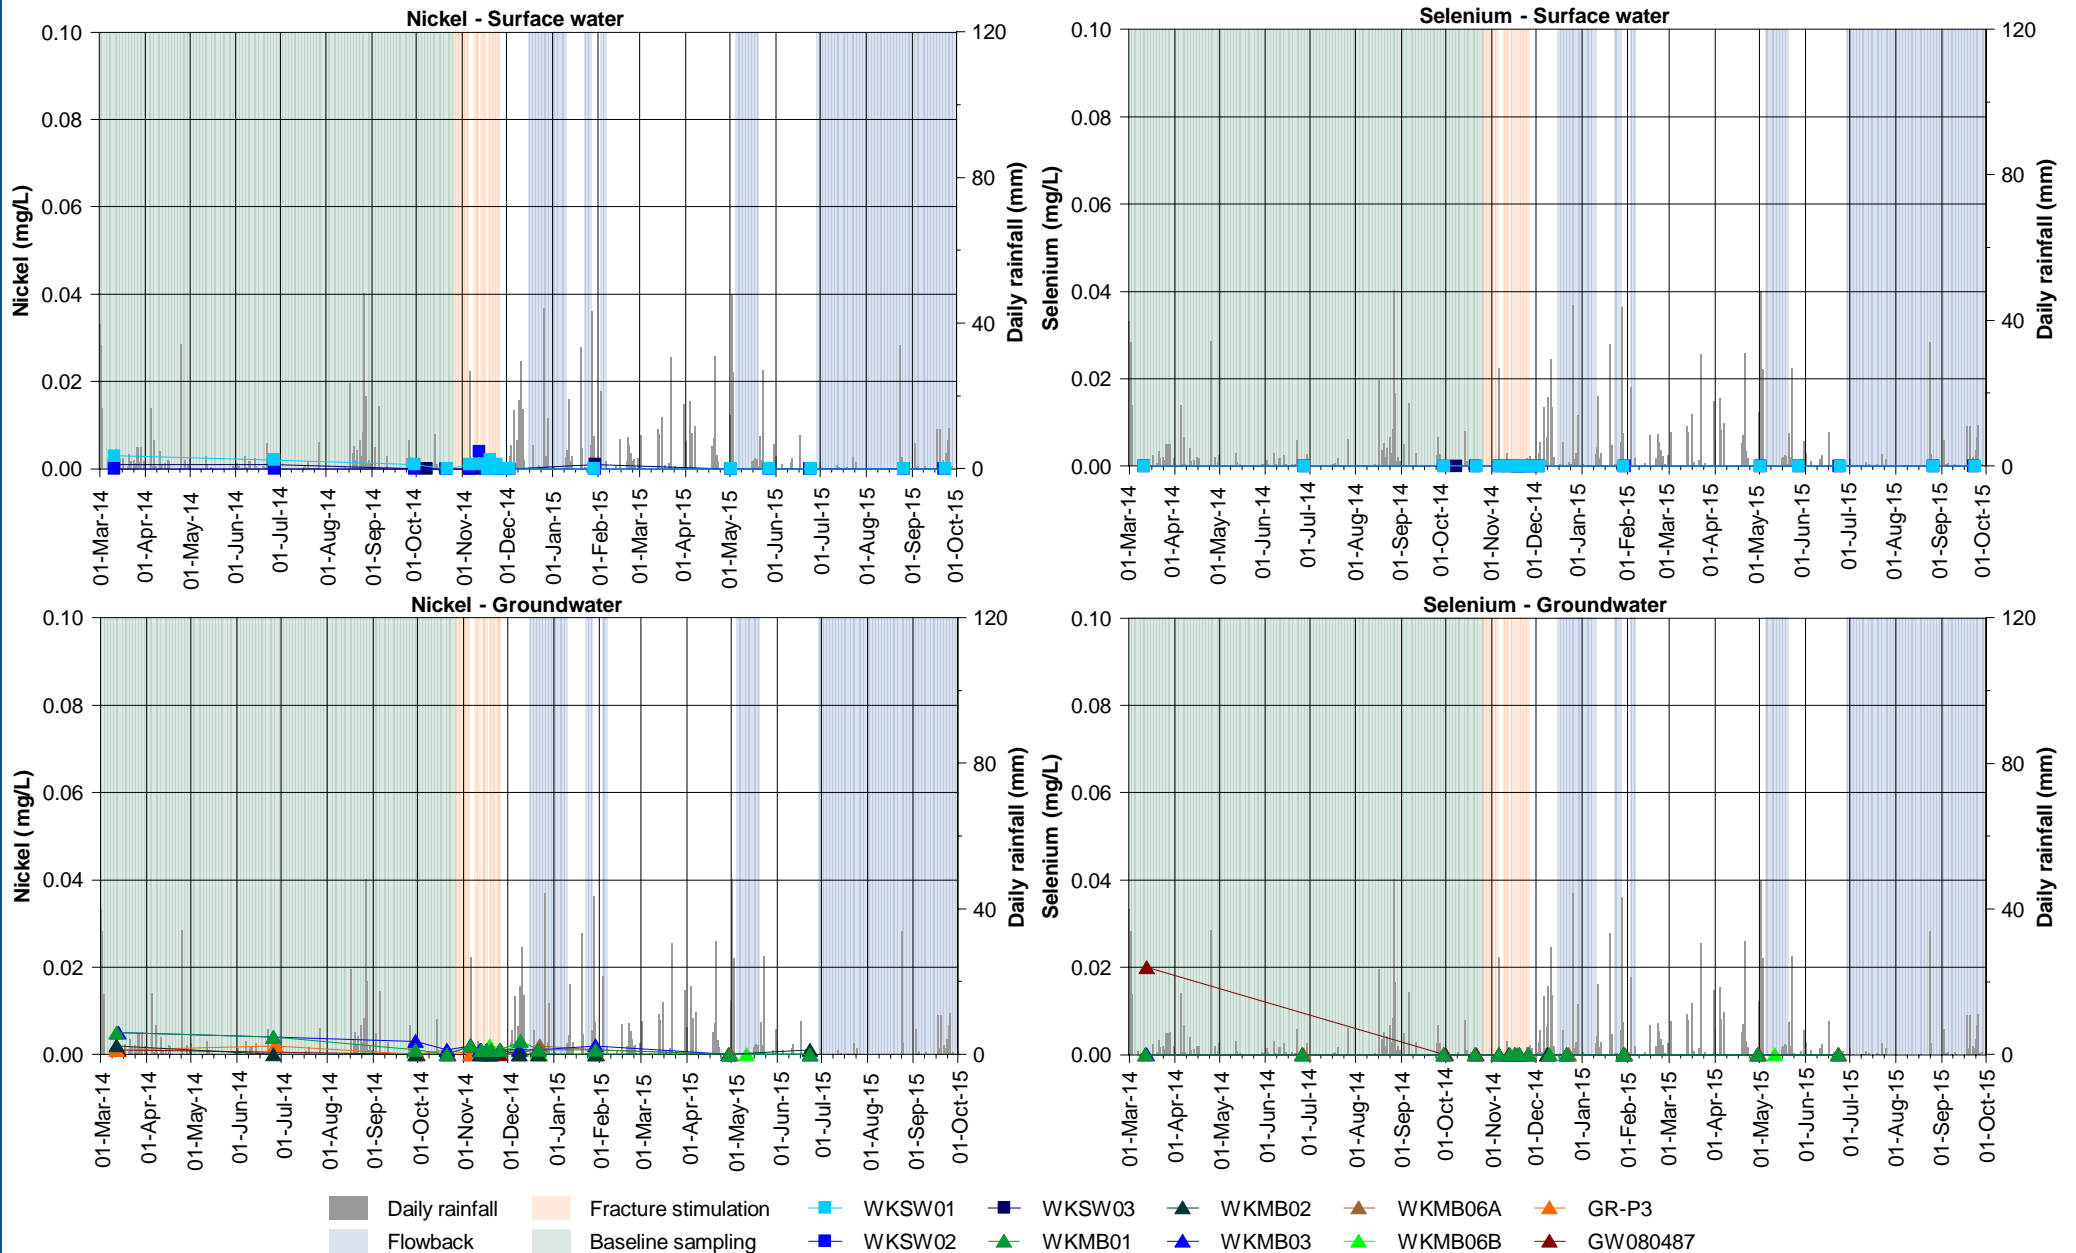


Figure G3.8: Nickel and selenium at Waukivory surface water and groundwater monitoring locations.

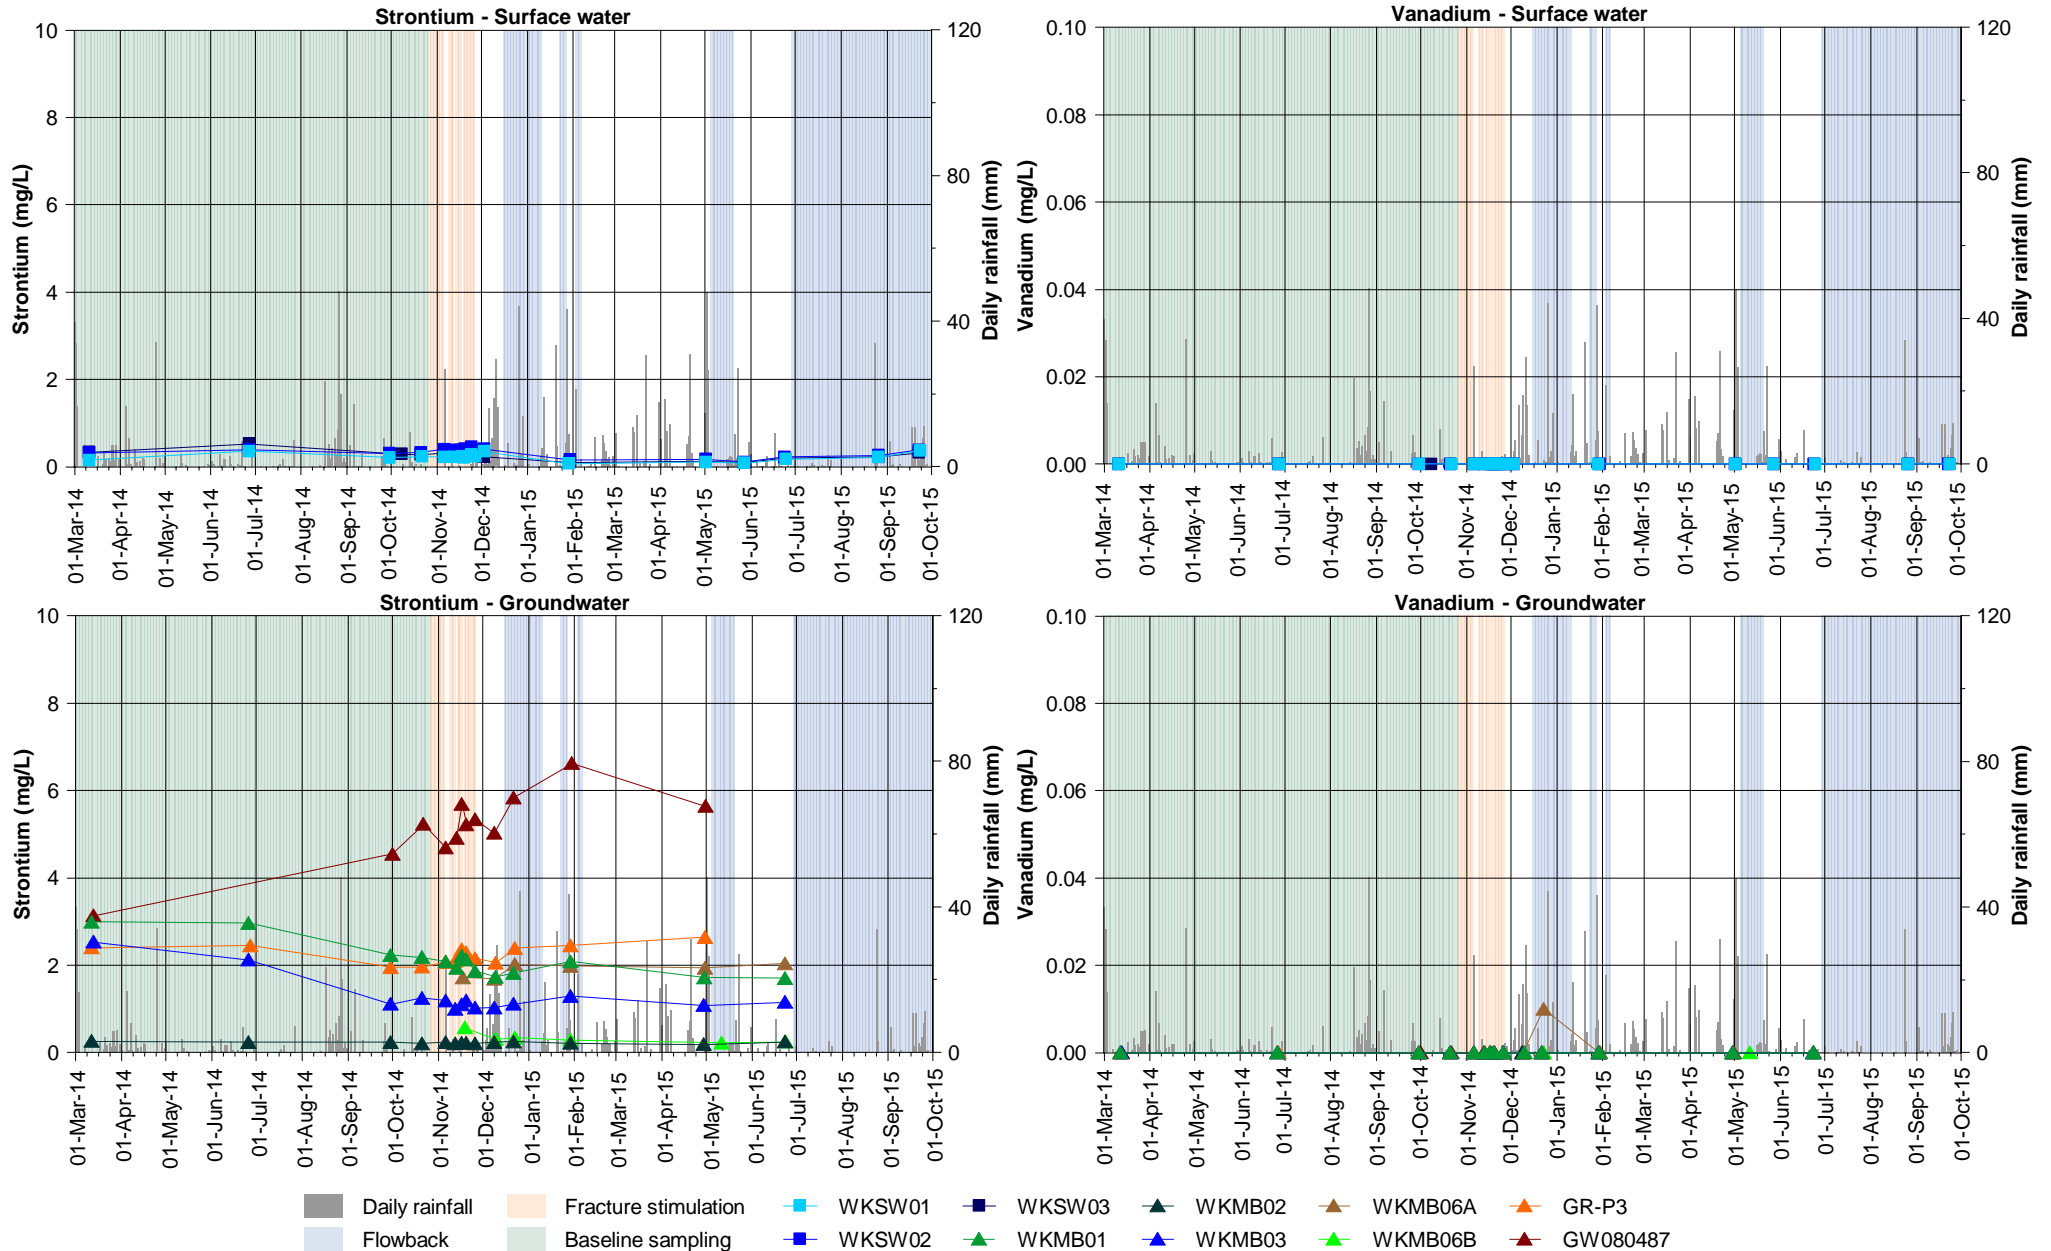


Figure G3.9: Strontium and vanadium at Waukivory surface water and groundwater monitoring locations.

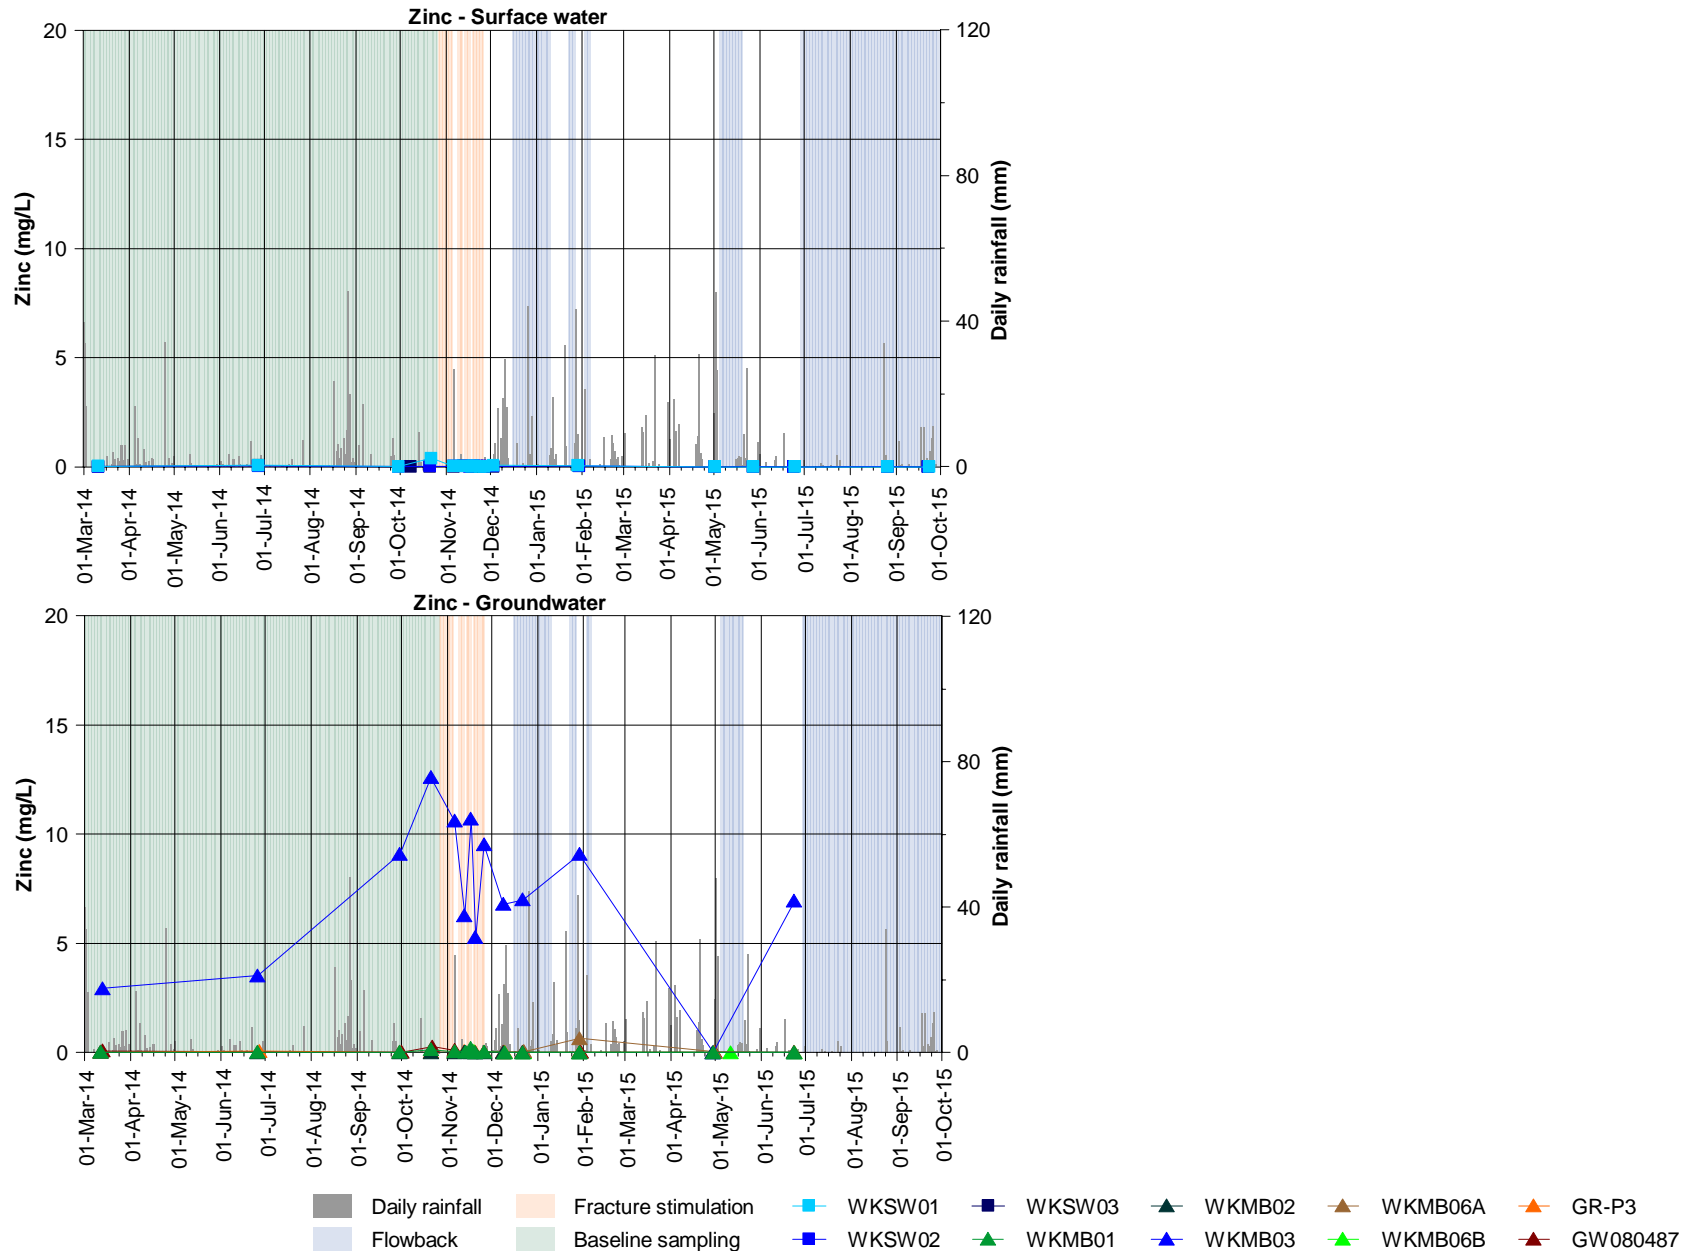


Figure G3.10: Zinc at Waukivory surface water and groundwater monitoring locations.

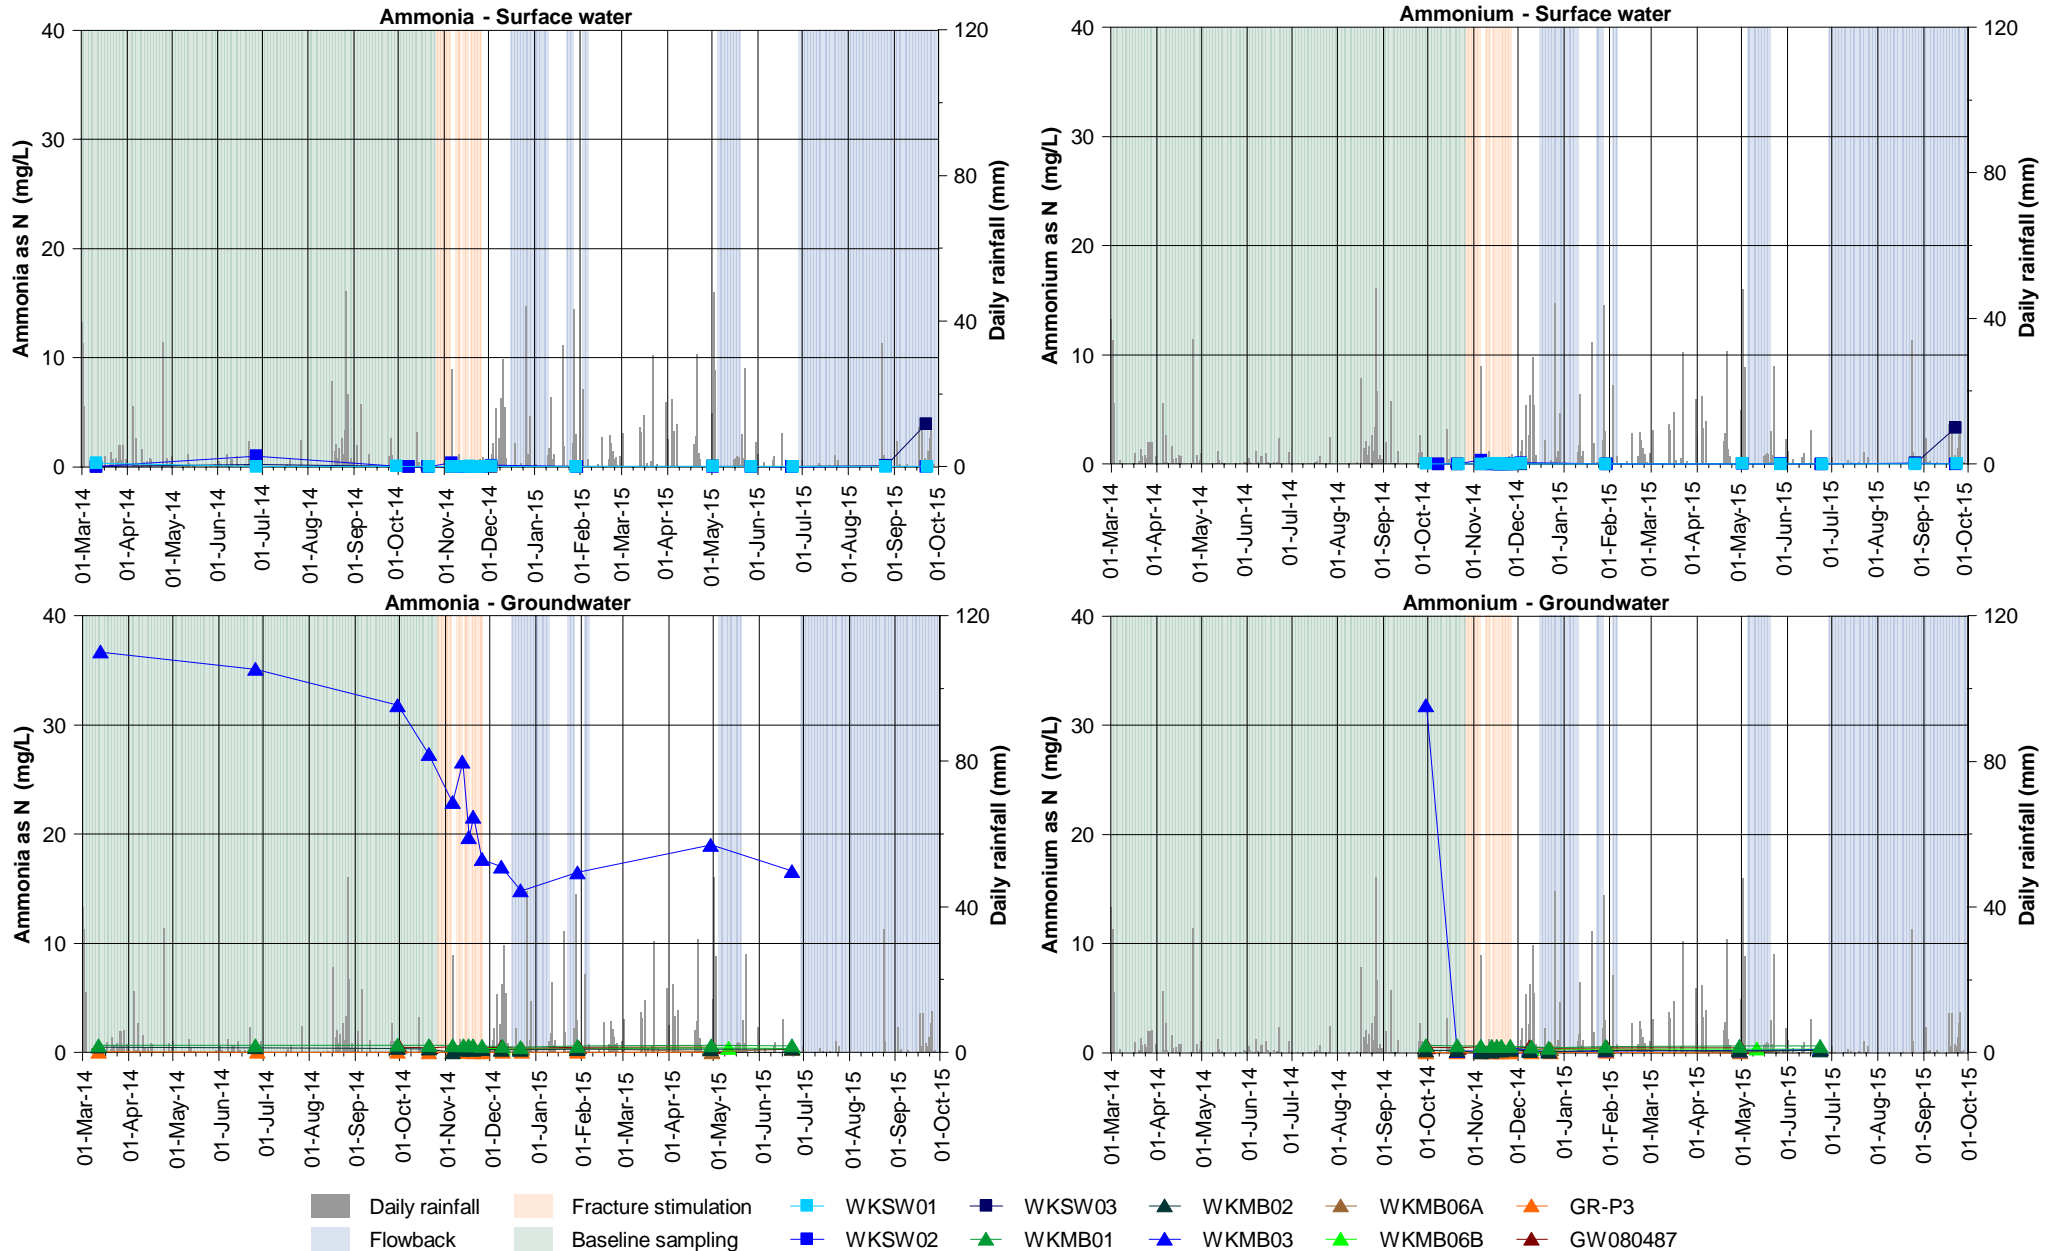


Figure G4.1: Ammonia and ammonium at Waukivory surface water and groundwater monitoring locations.

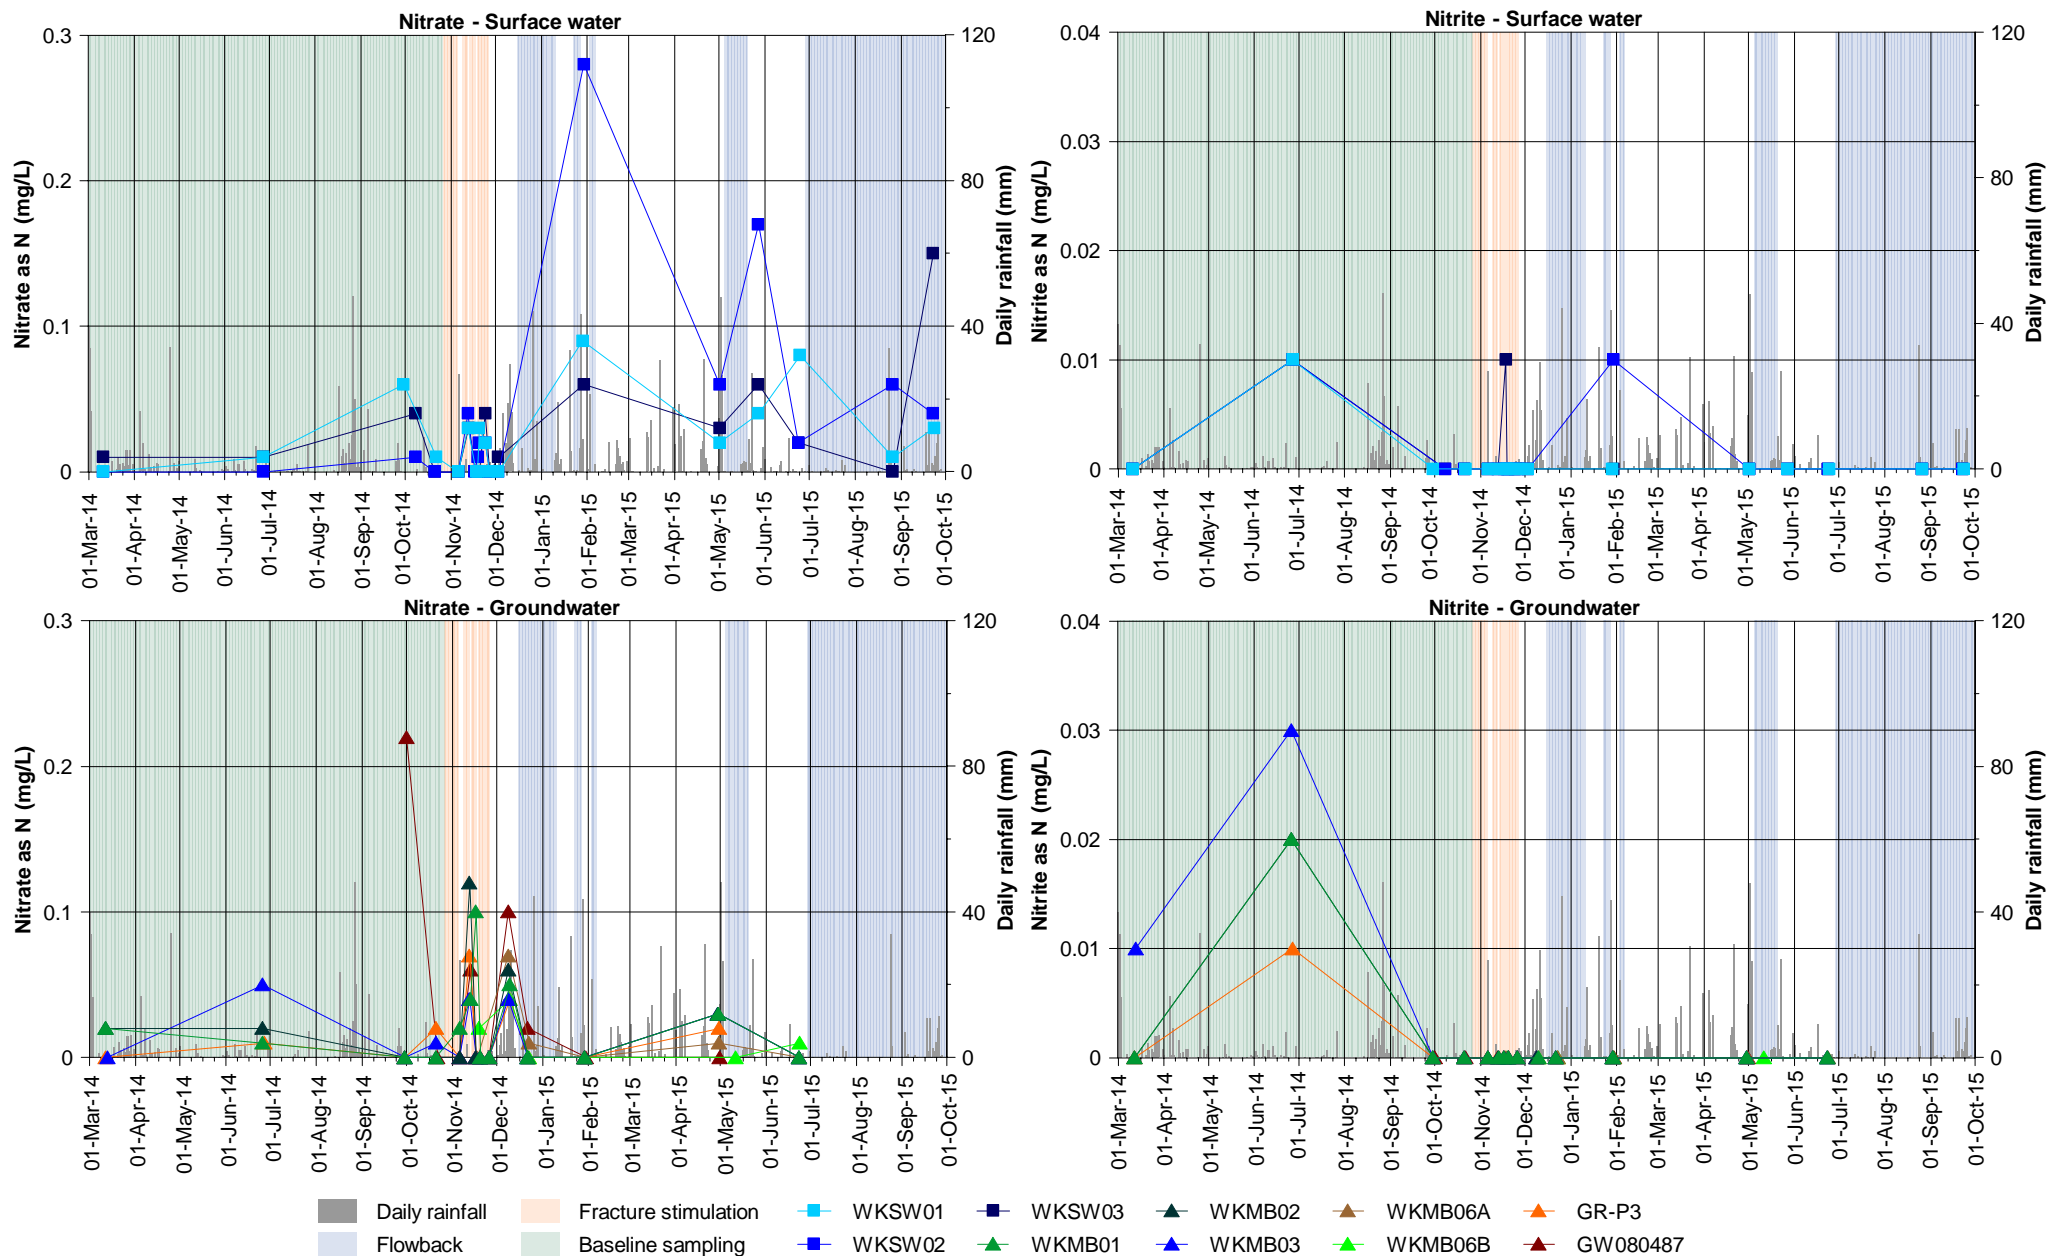


Figure G4.2: Nitrate and nitrite at Waukivory surface water and groundwater monitoring locations.

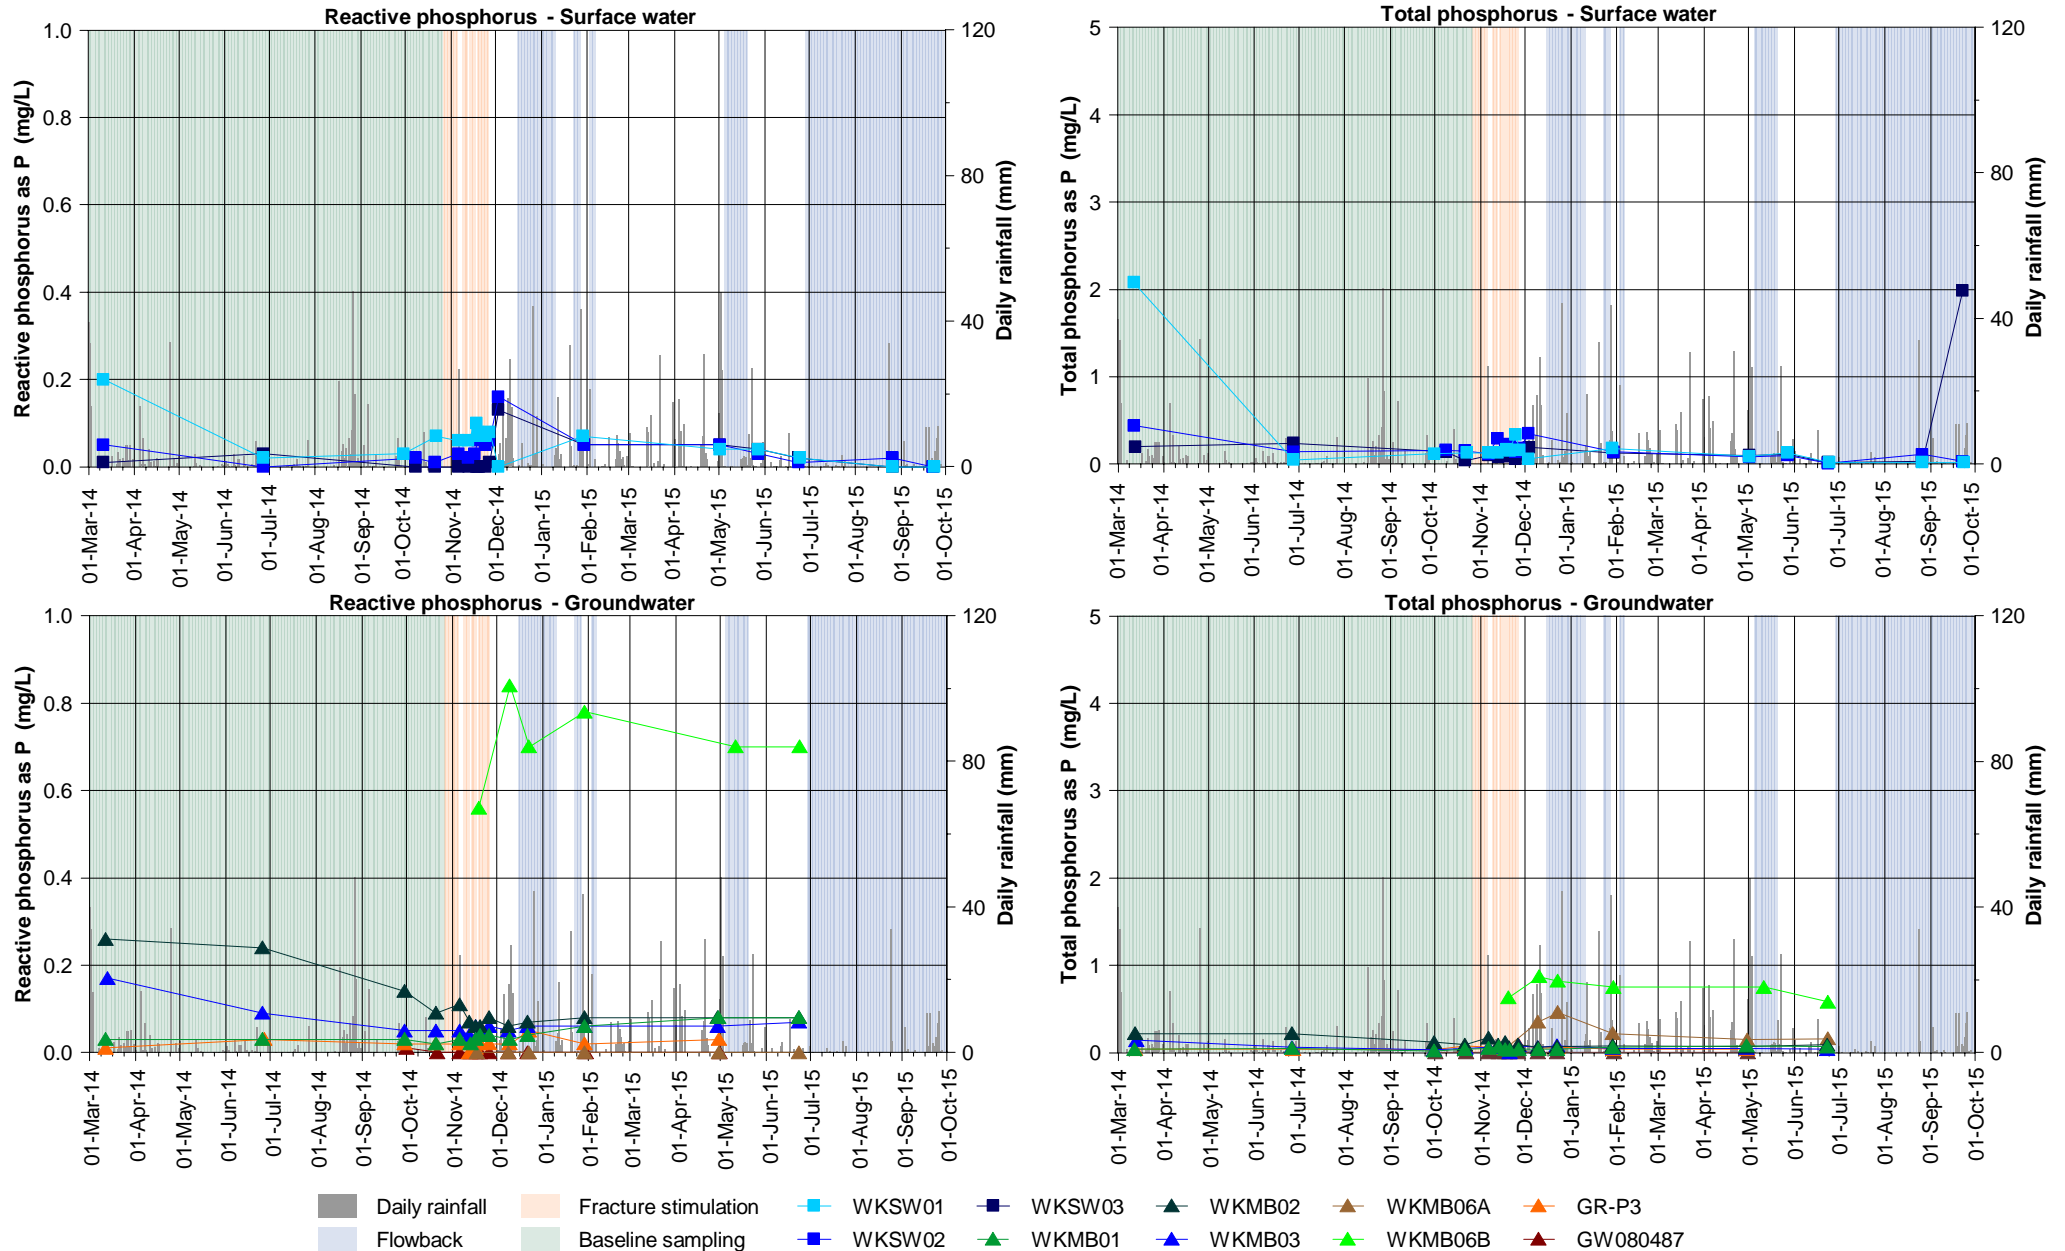


Figure G4.3: Reactive phosphorus and total phosphorus at Waukivory surface water and groundwater monitoring locations.

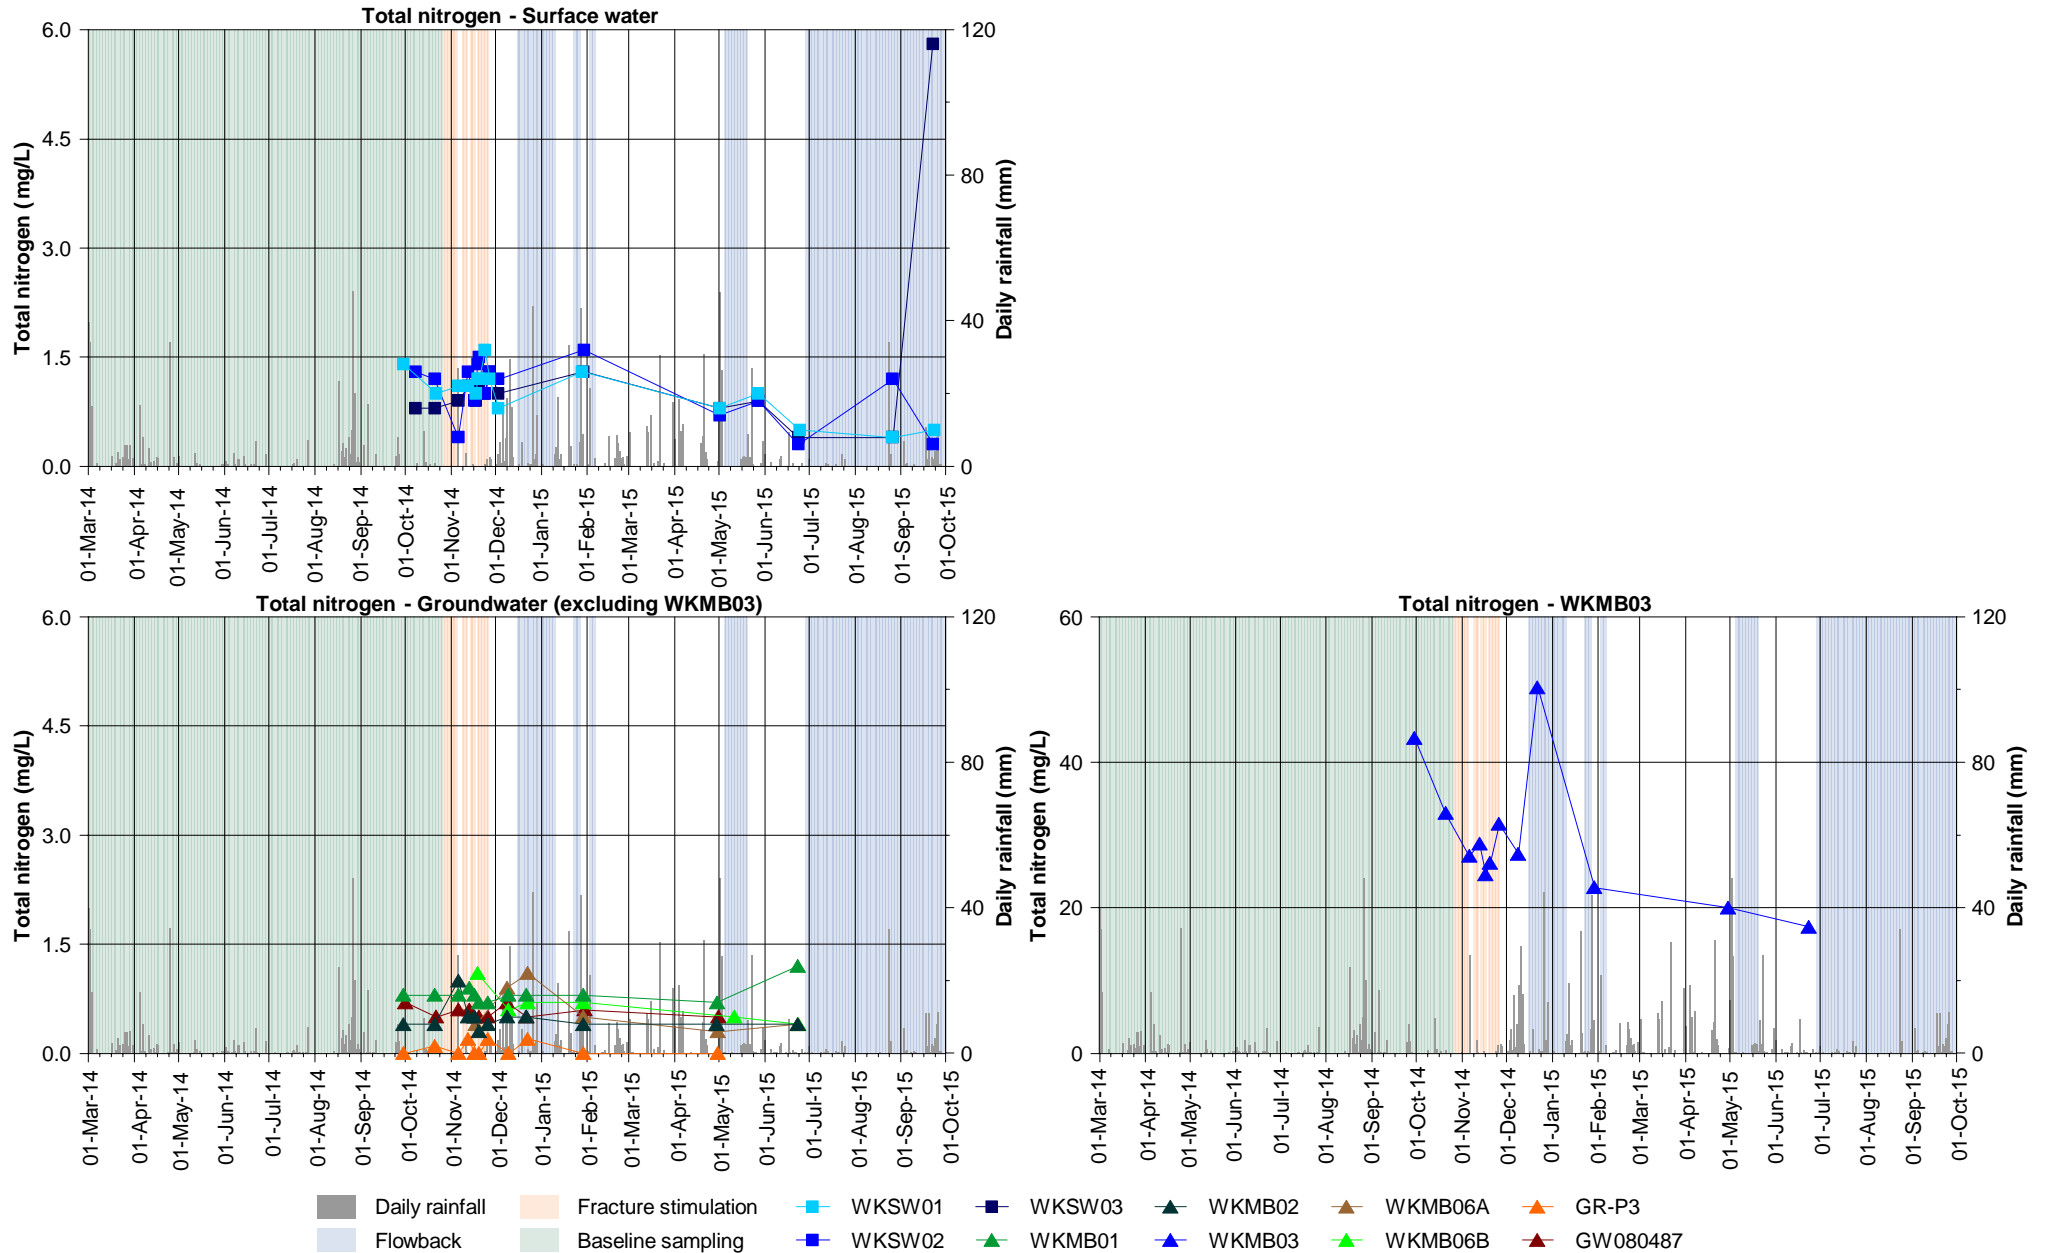


Figure G4.4: Total nitrogen at Waukivory surface water and groundwater monitoring locations.

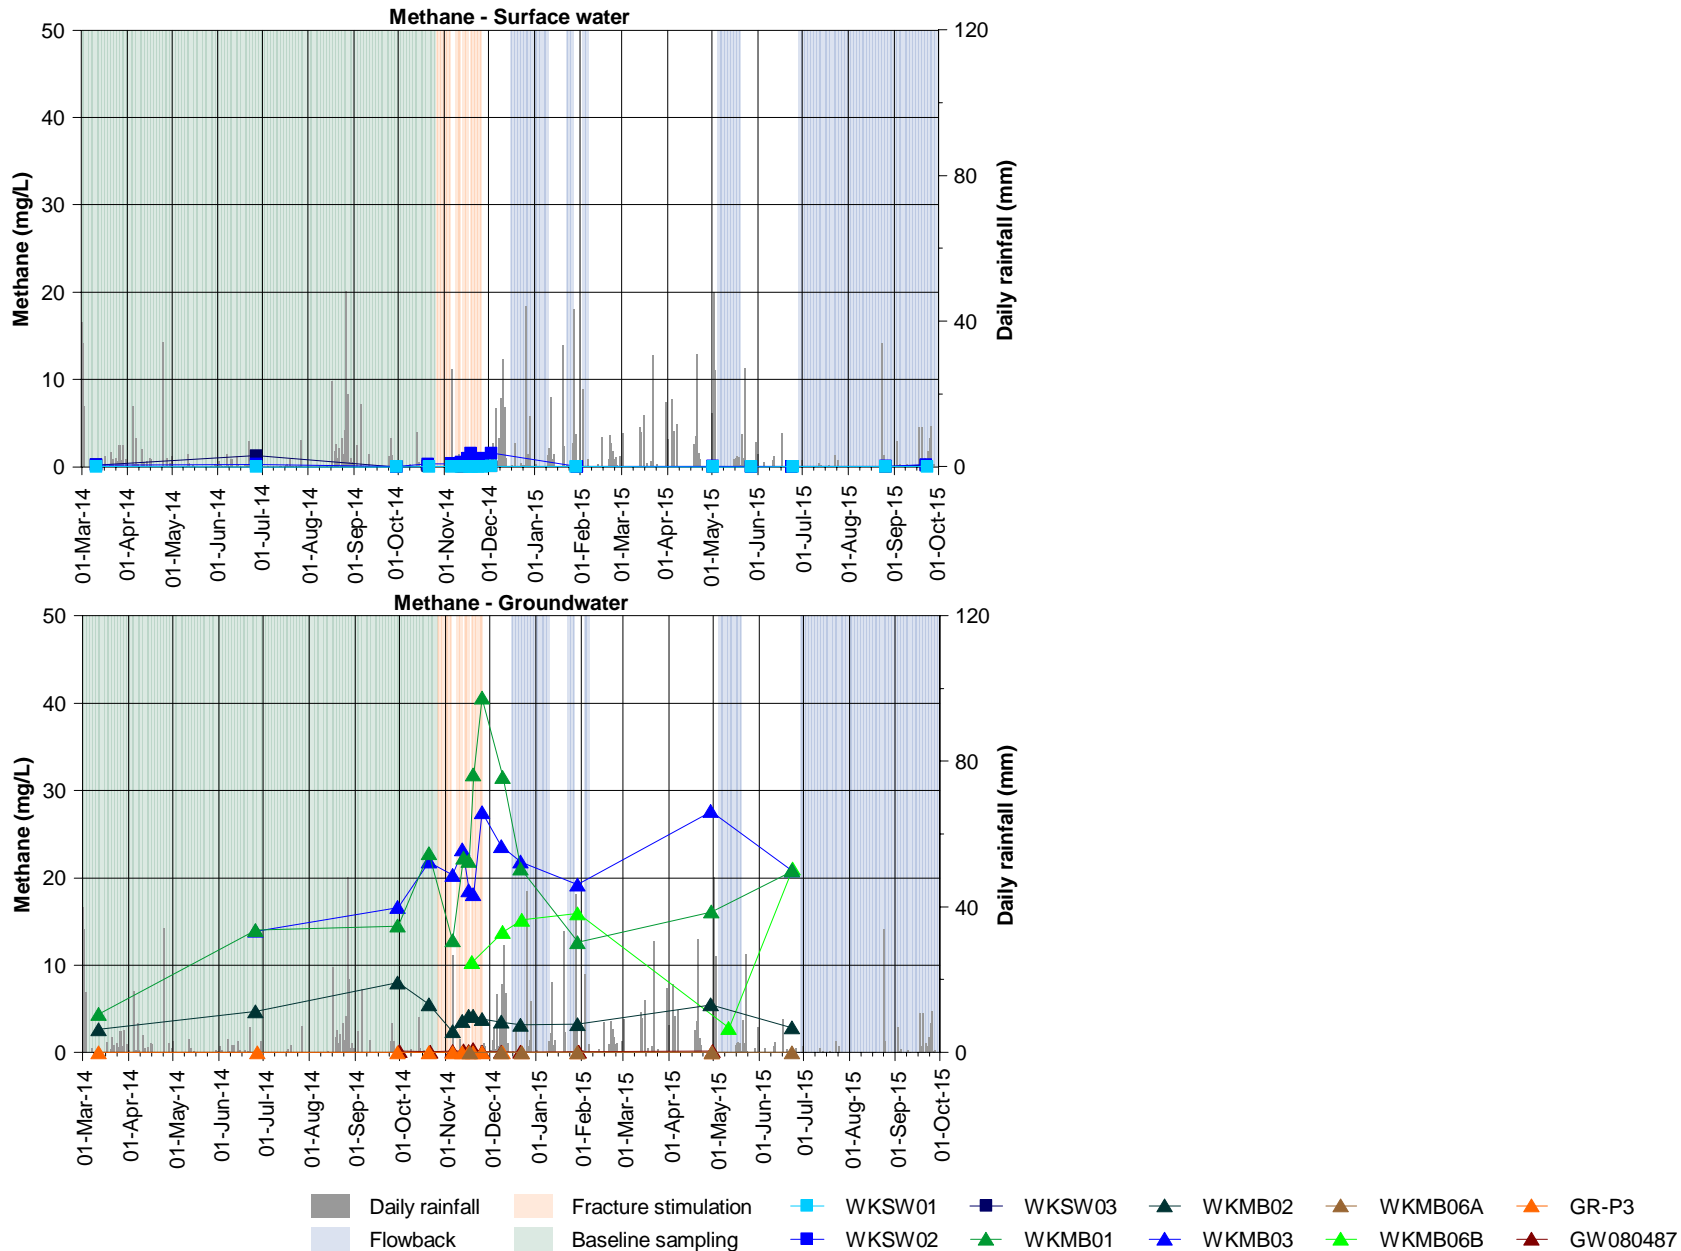


Figure G5.1: Methane at Waukivory surface water and groundwater monitoring locations.

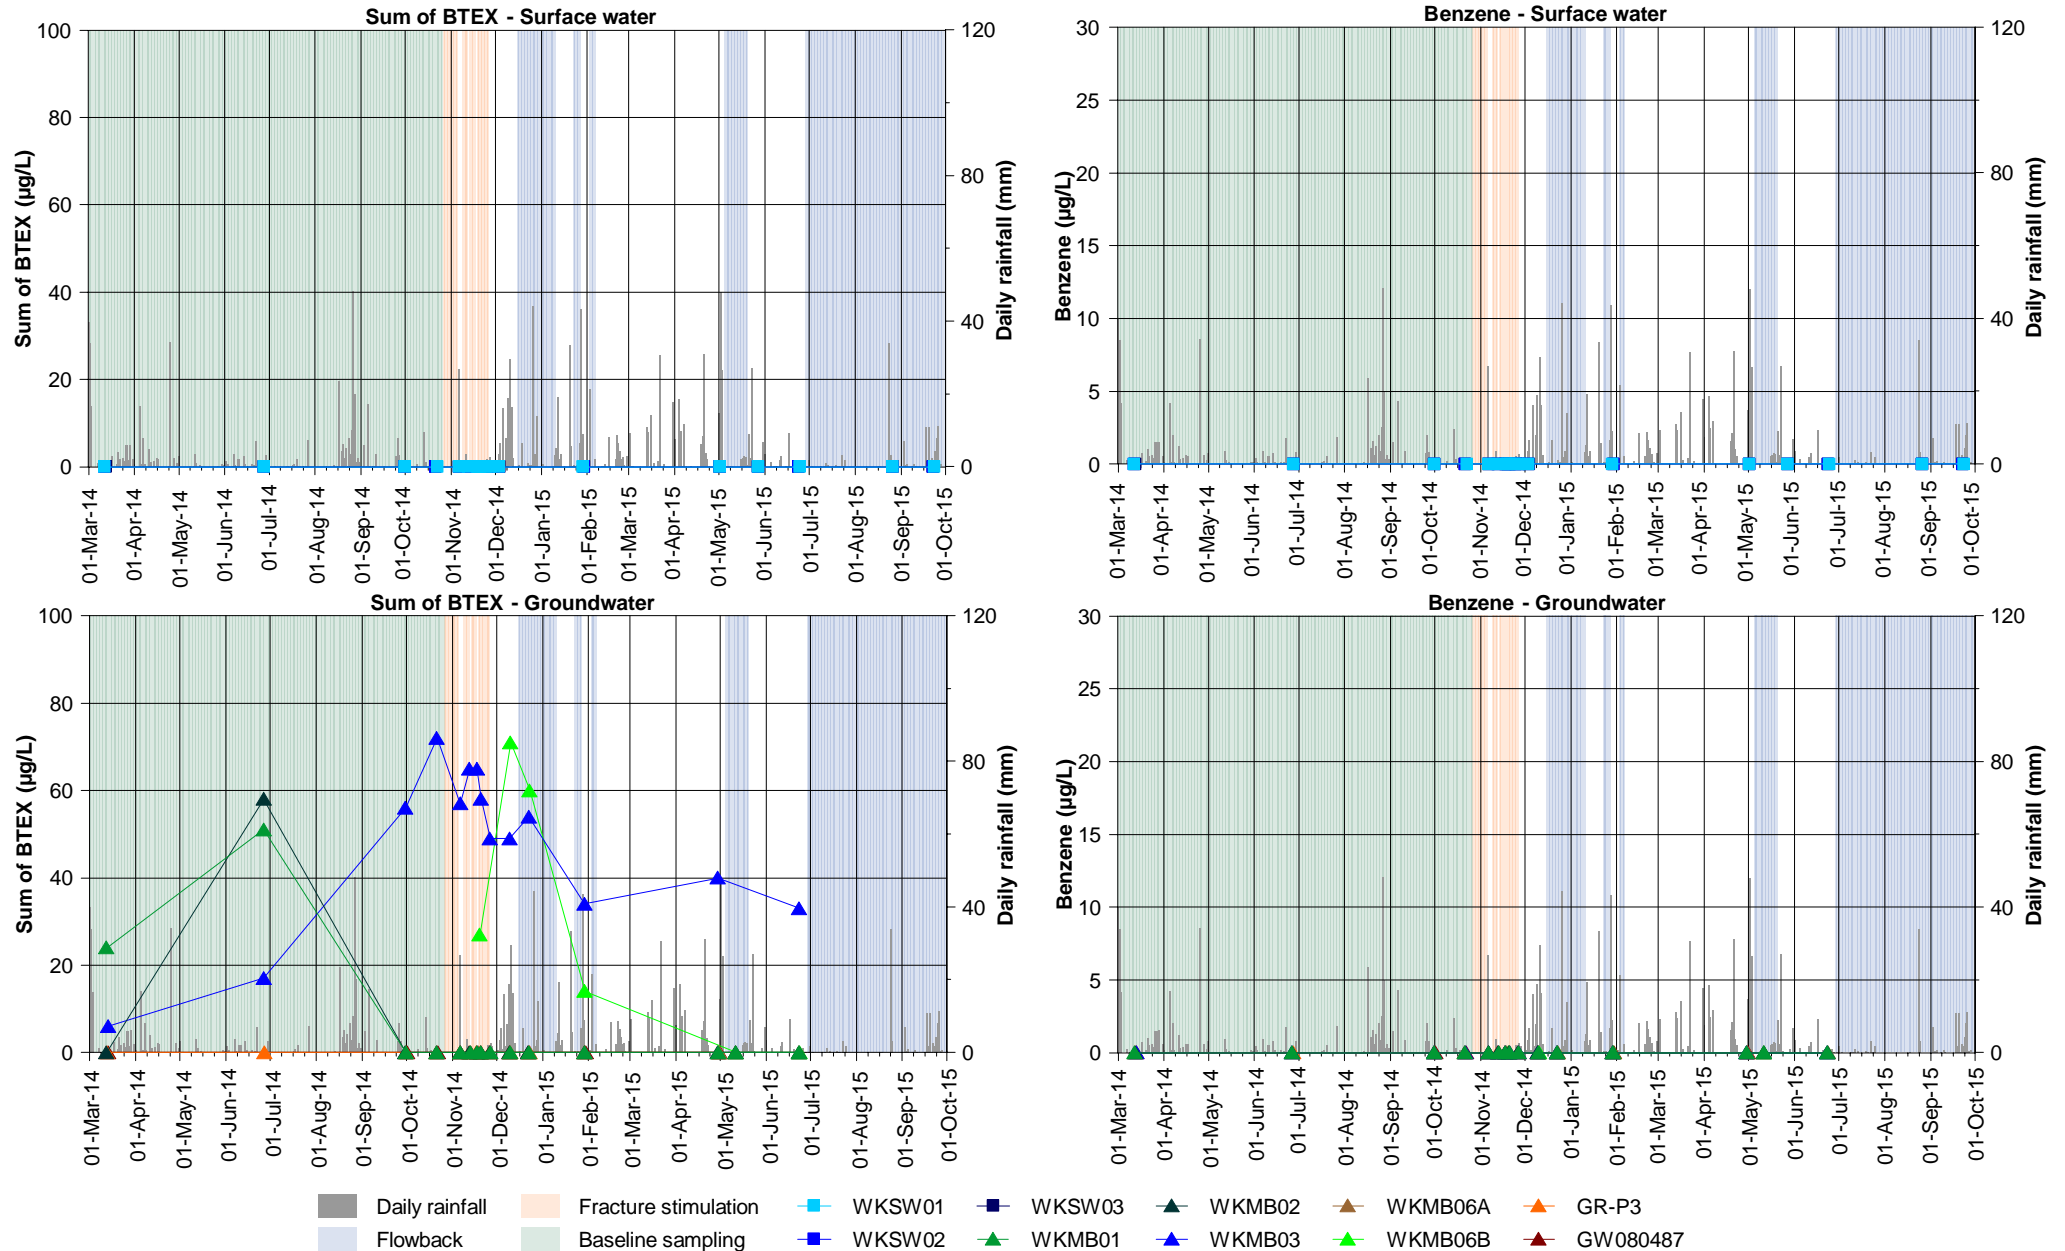


Figure F6.1: Sum of BTEX and benzene at Waukivory surface water and groundwater monitoring locations.

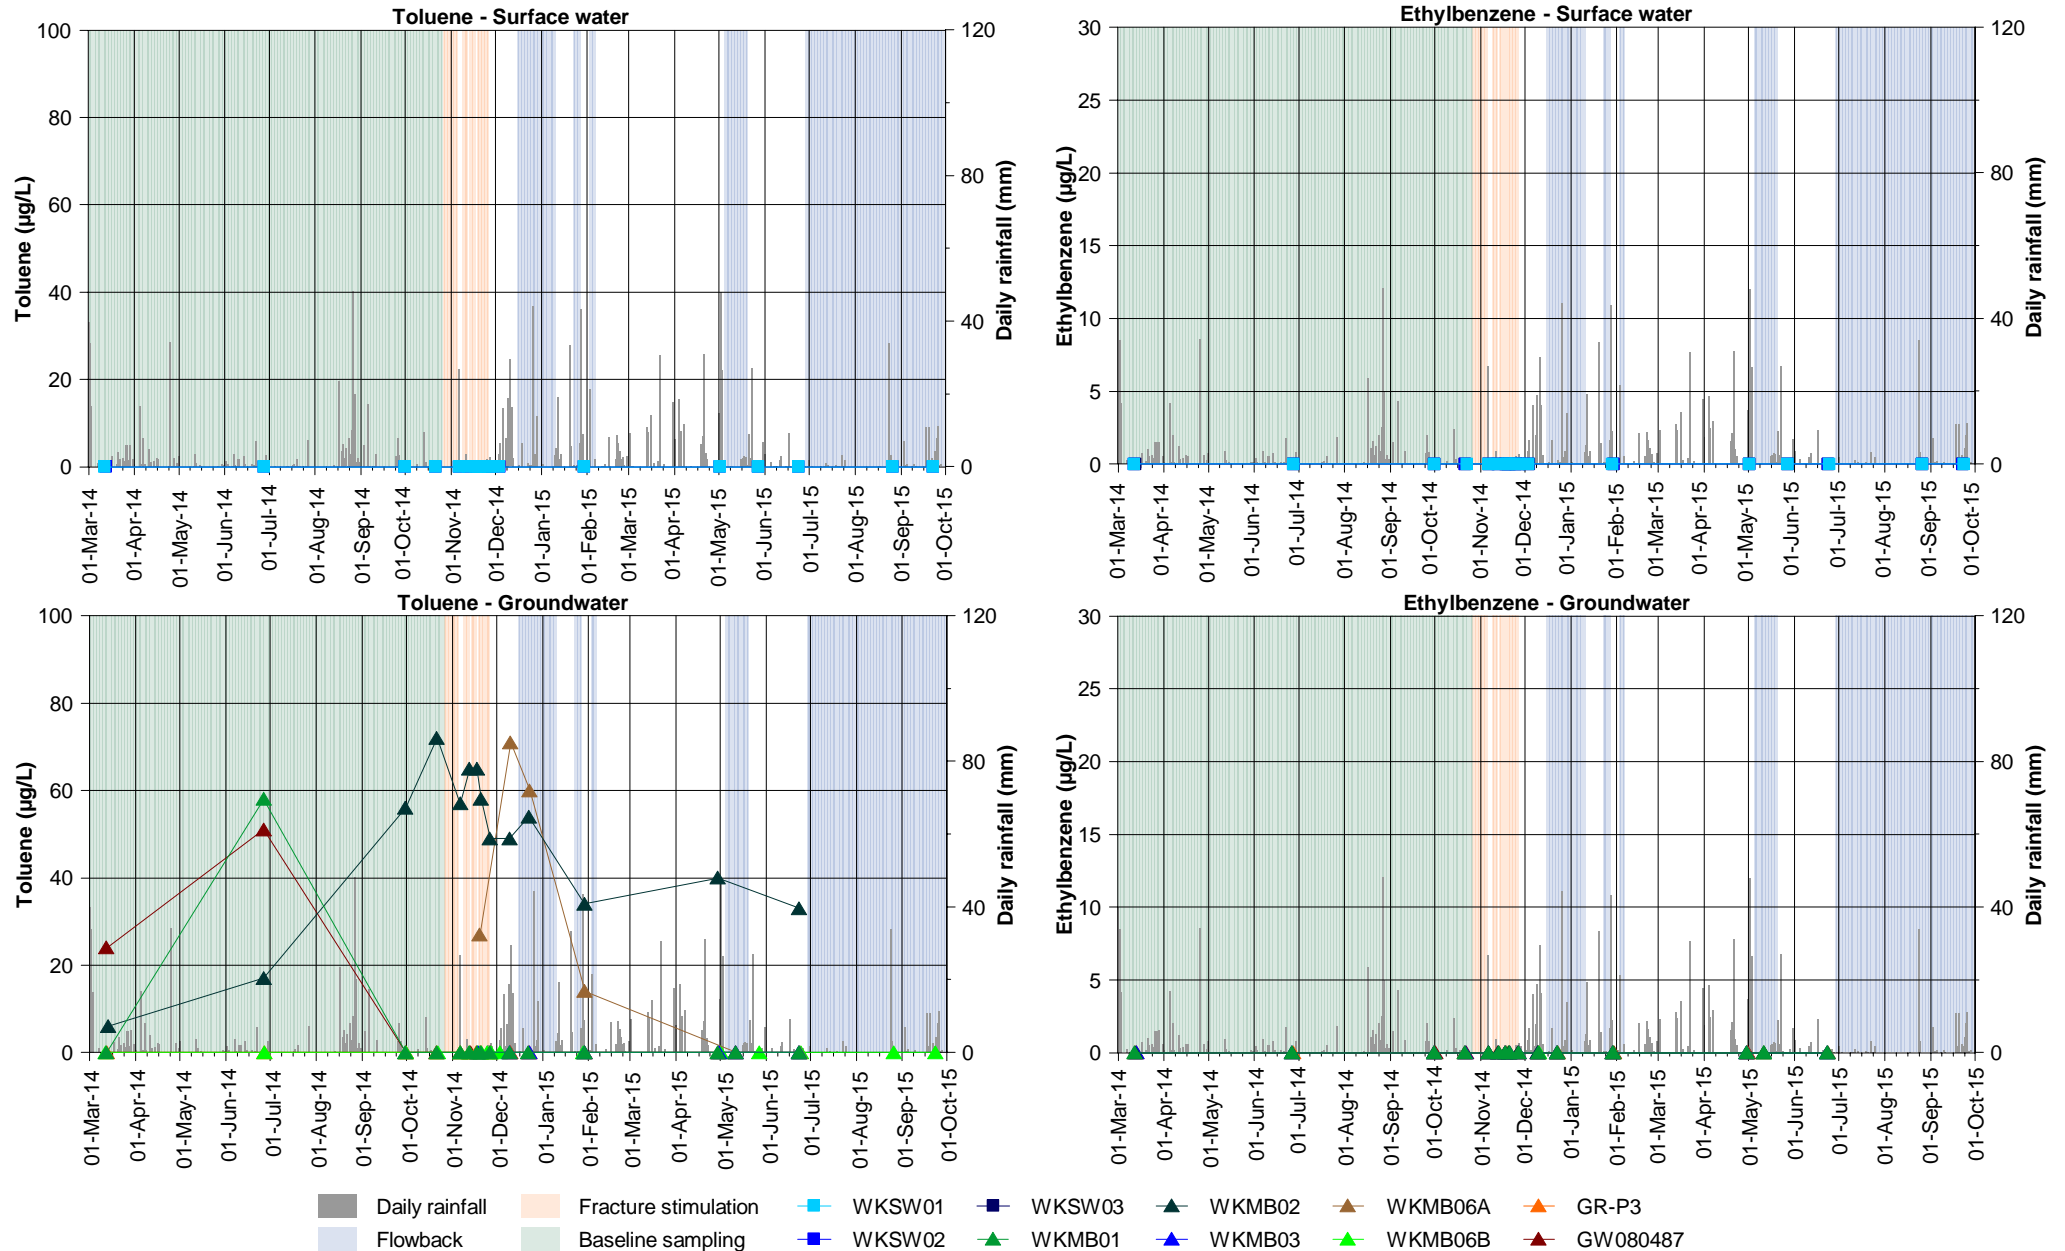


Figure F6.2: Toluene and ethylbenzene at Waukivory surface water and groundwater monitoring locations.

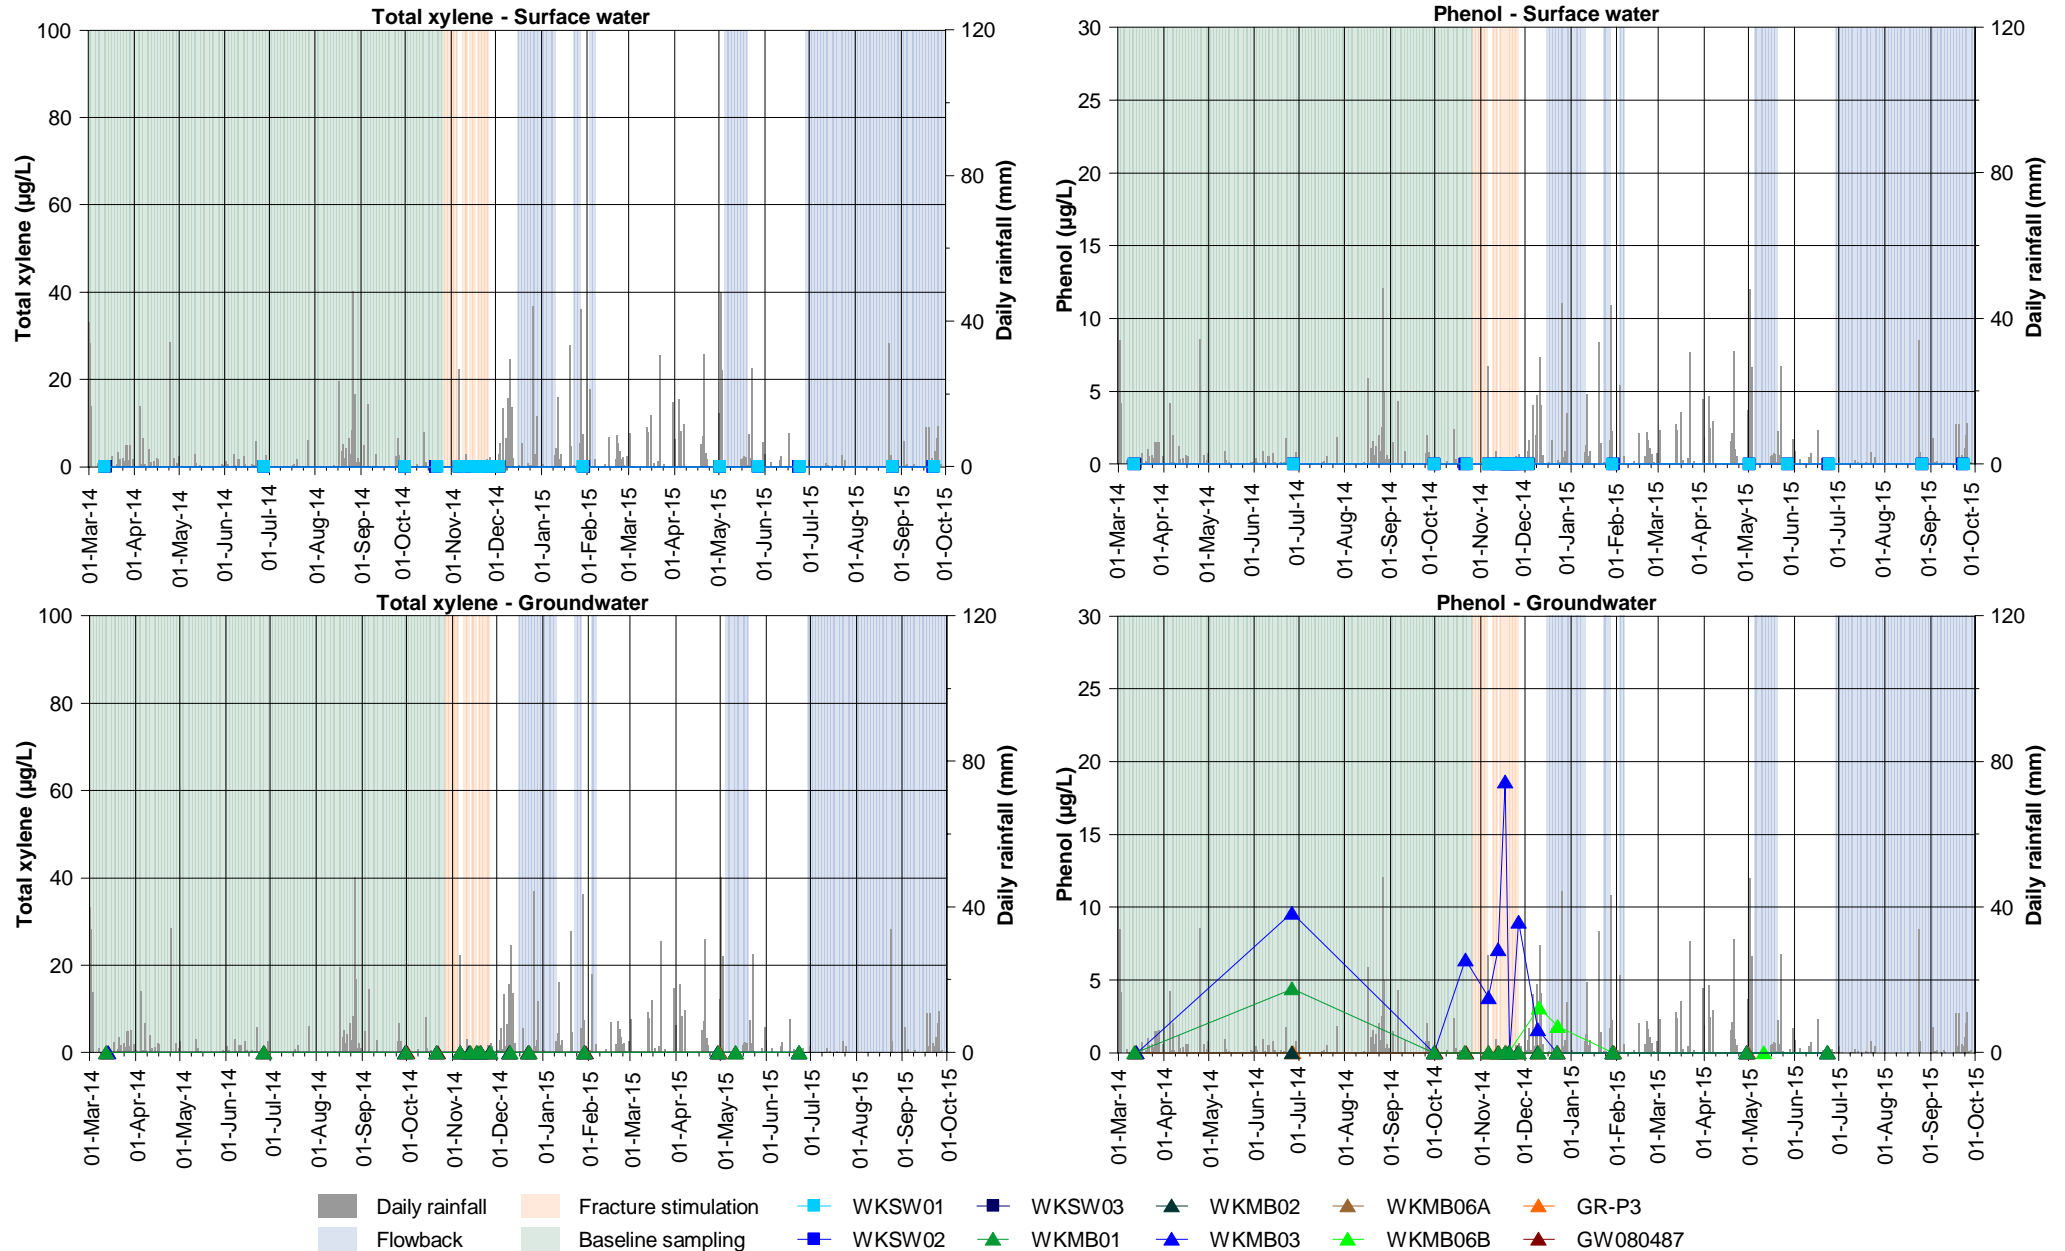


Figure G6.3: Total xylene and phenol at Waukivory surface water and groundwater monitoring locations.

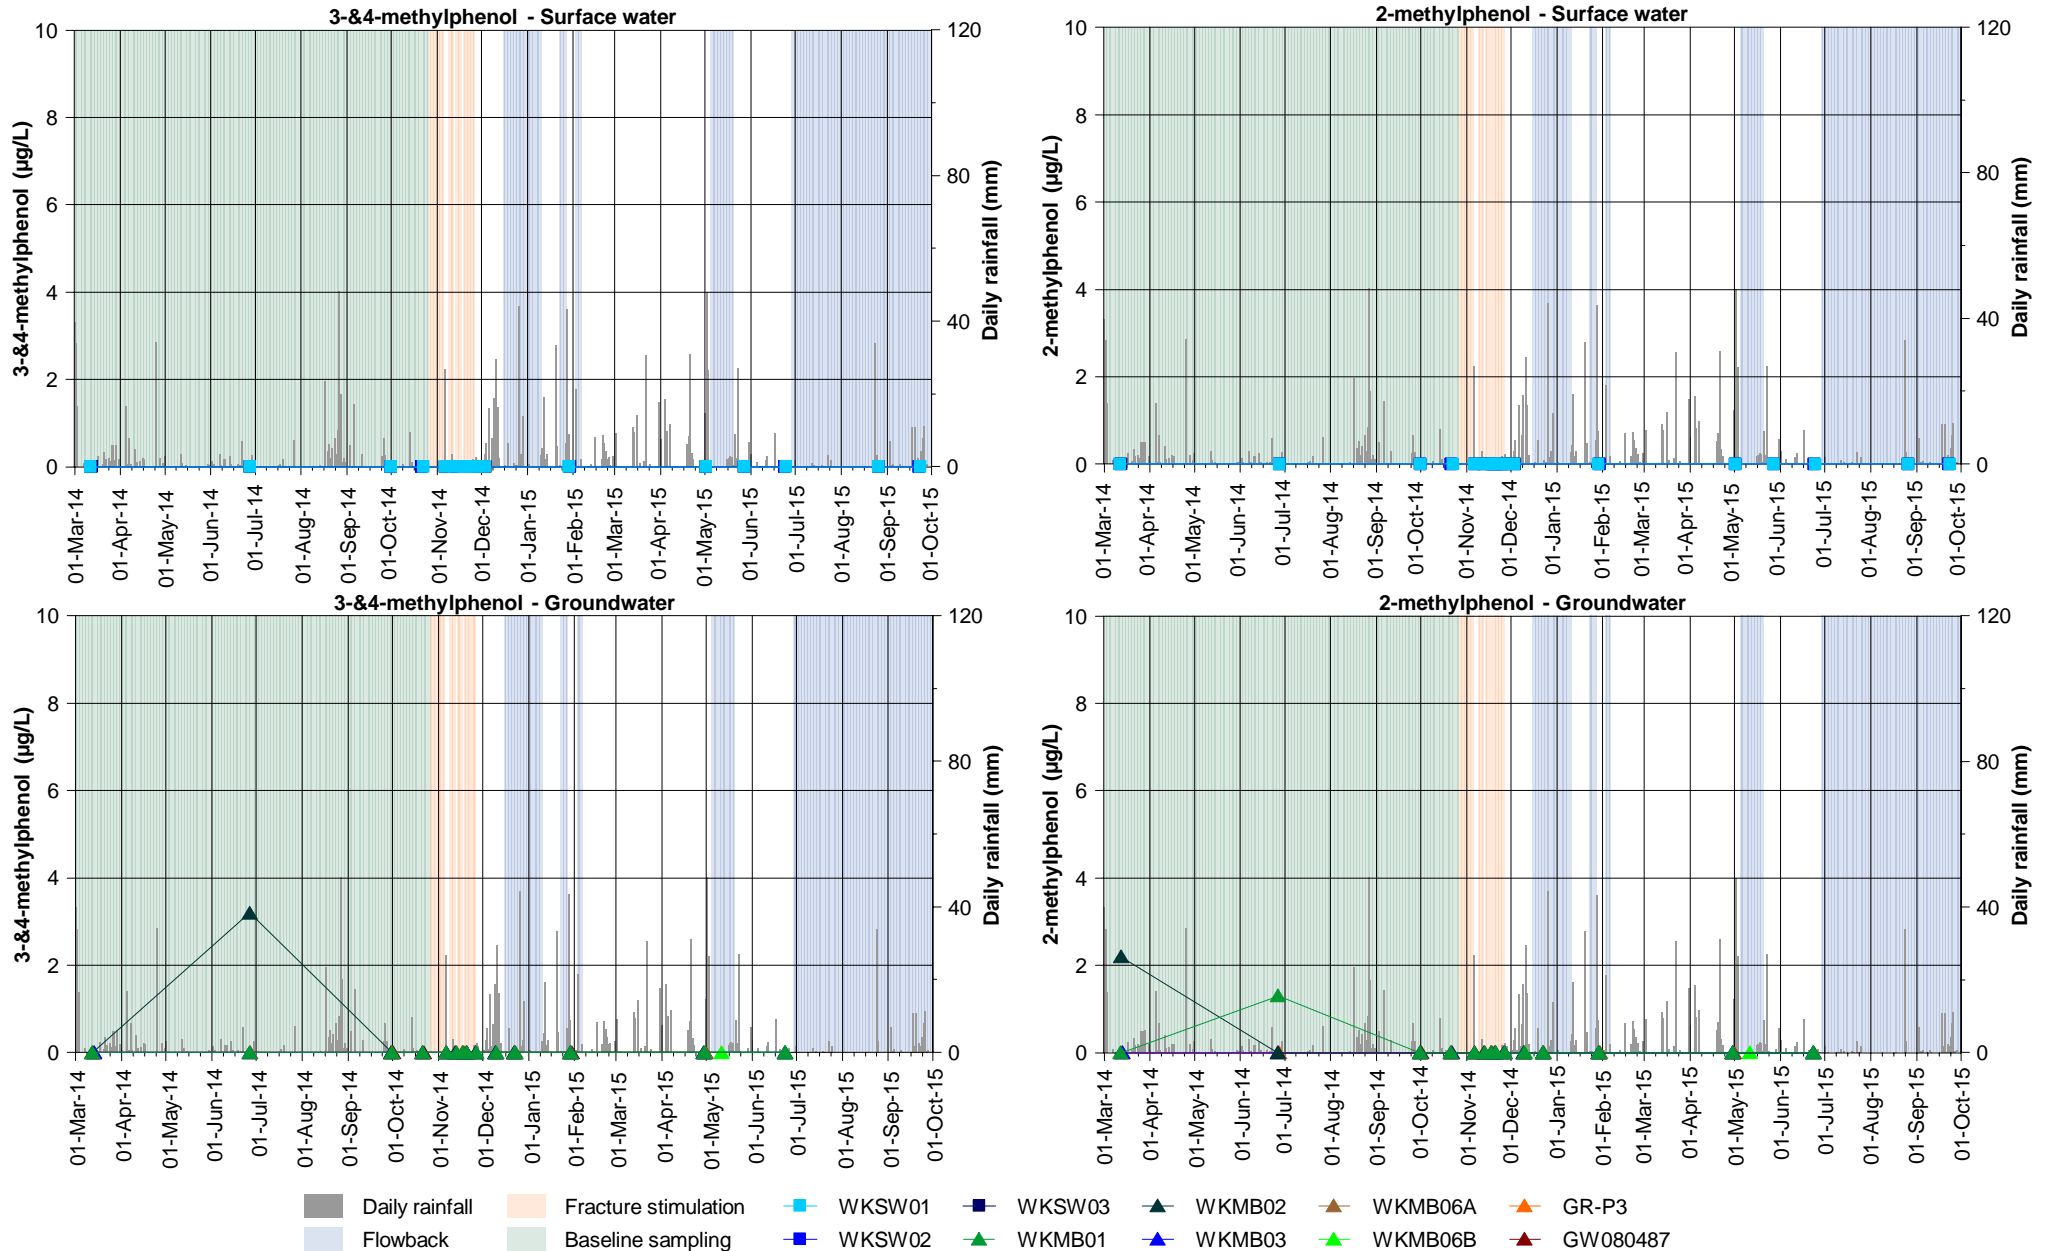


Figure G6.4: 3-&4-methylphenol and 2-methylphenol at Waukivory surface water and groundwater monitoring locations.

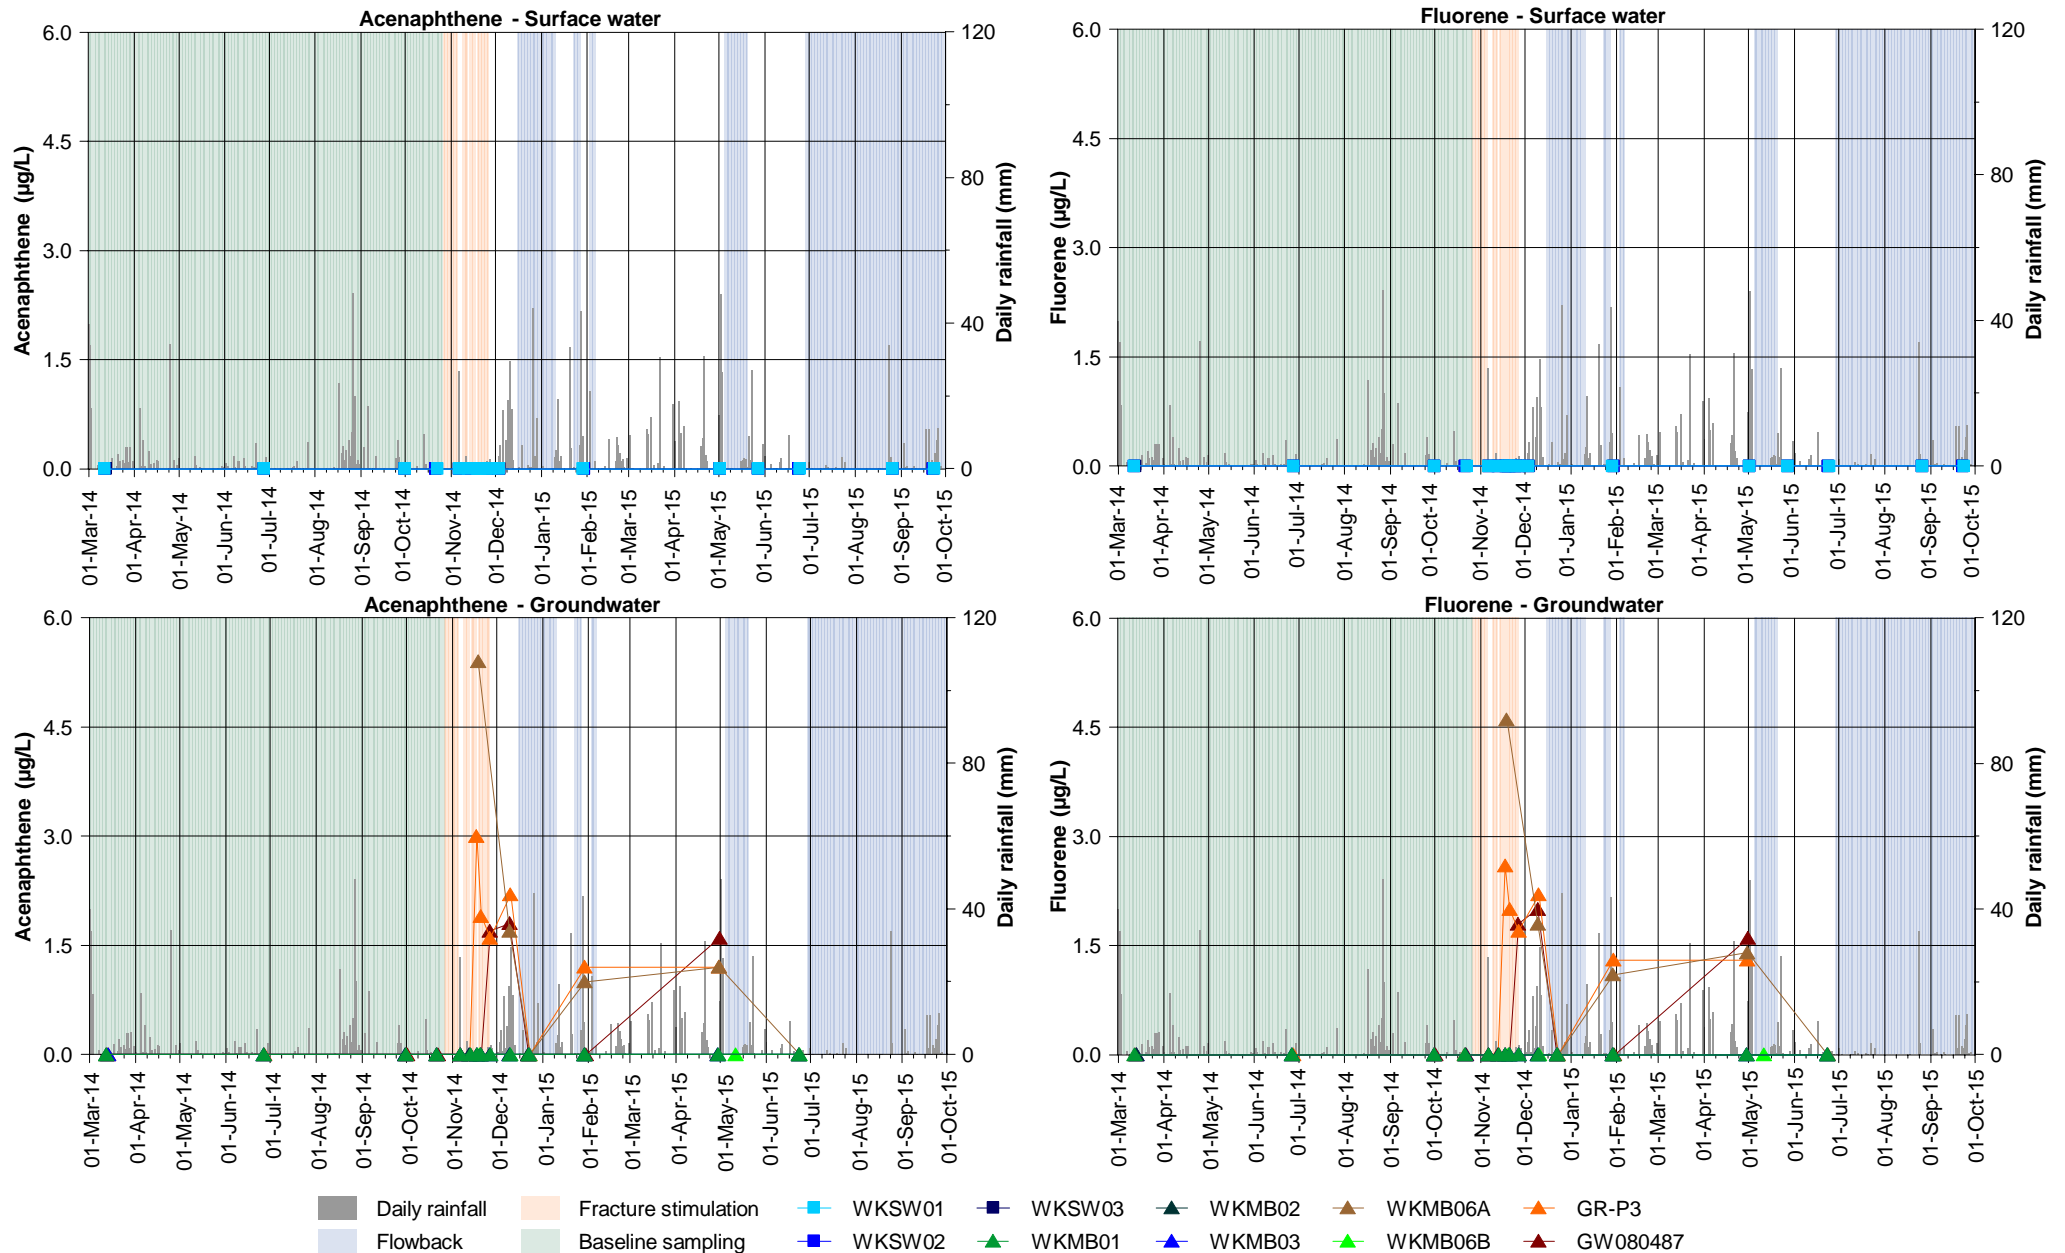


Figure G6.5: Acenaphthene and fluorene at Waukivory surface water and groundwater monitoring locations.

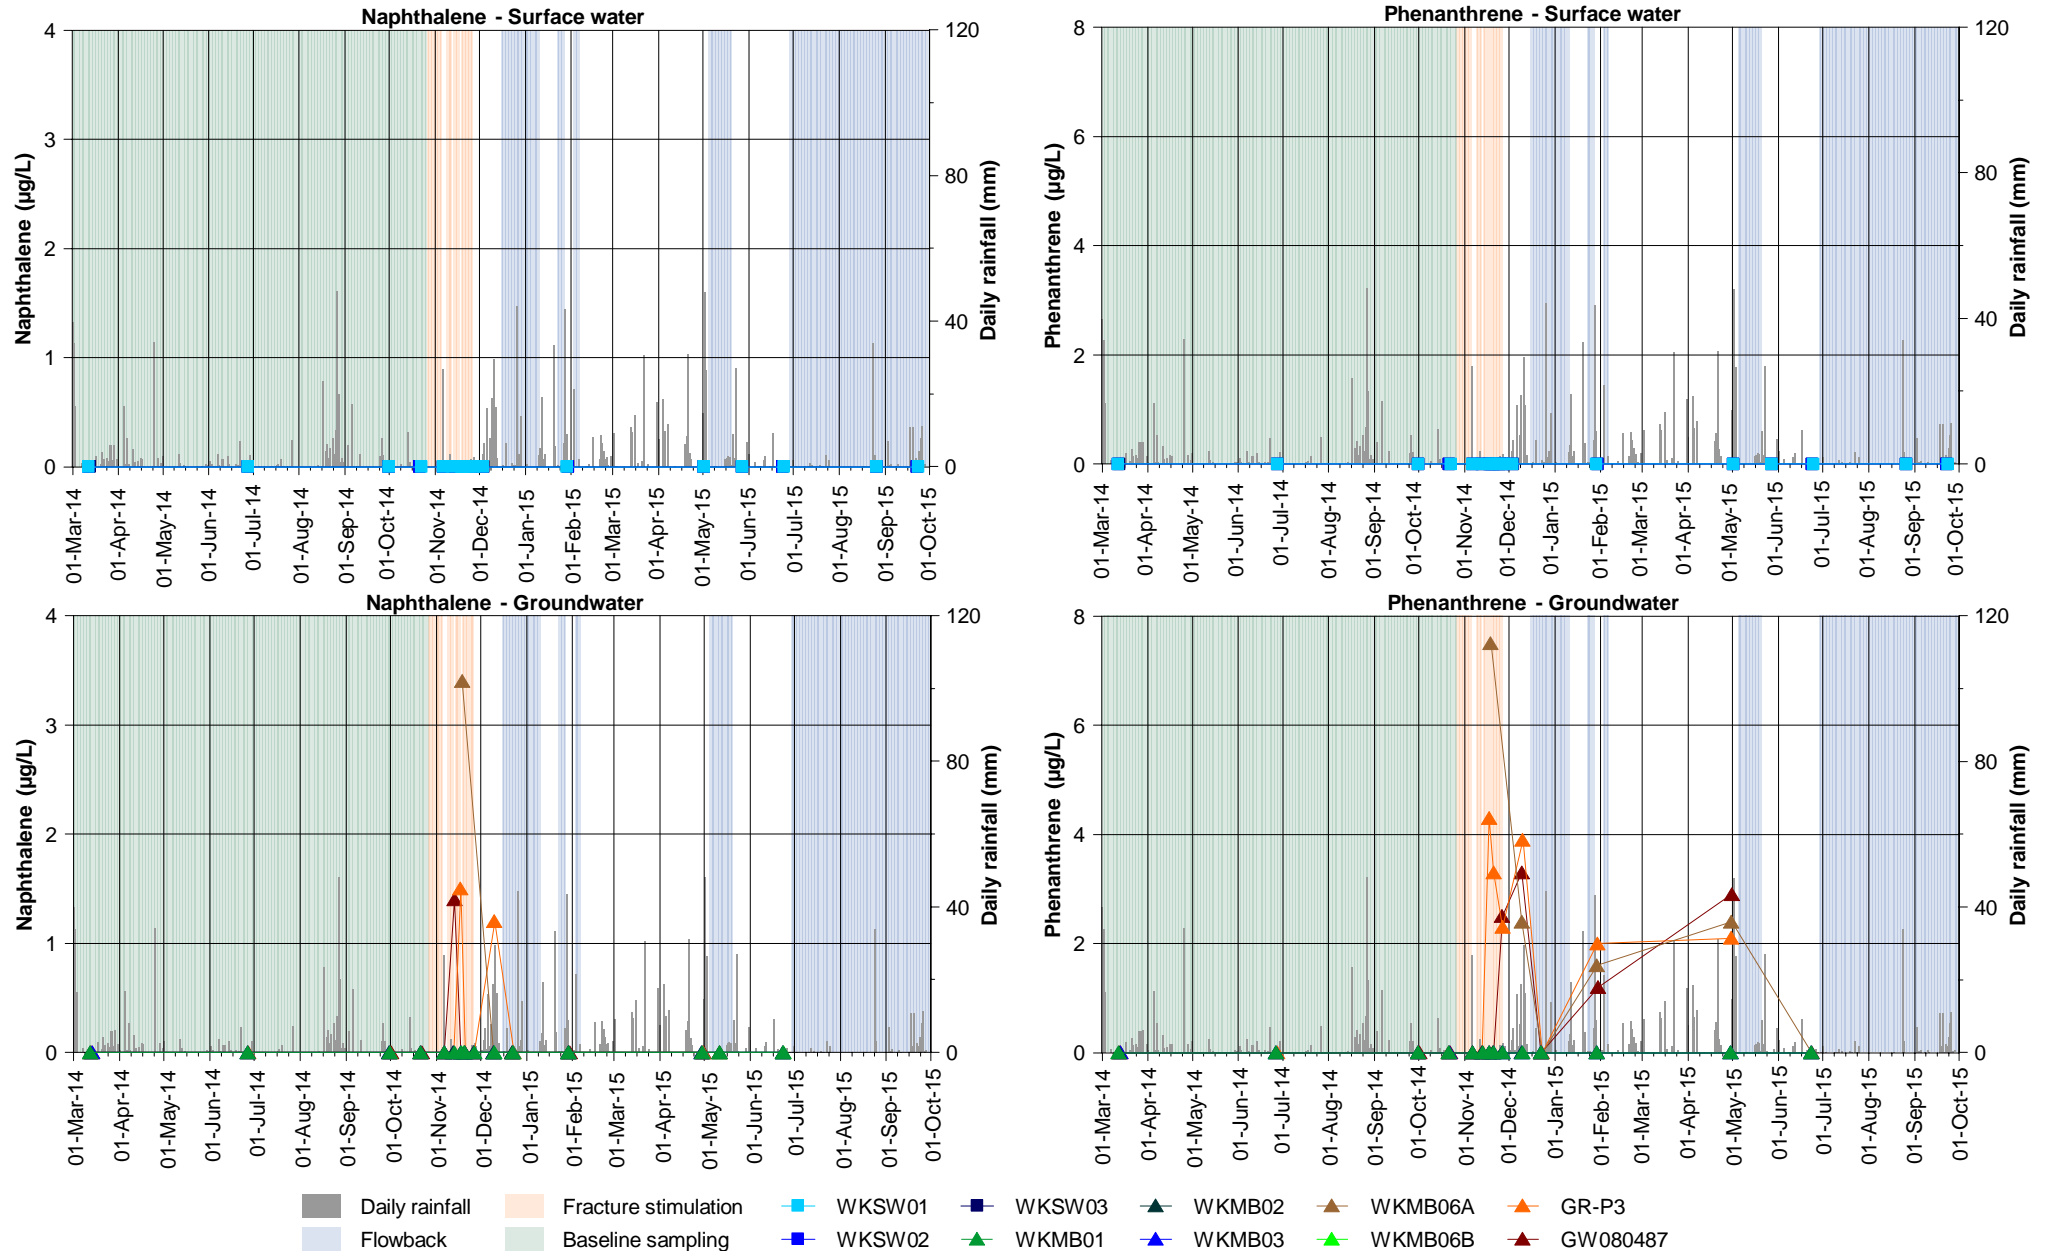


Figure G6.6: Naphthalene and phenanthrene at Waukivory surface water and groundwater monitoring locations.

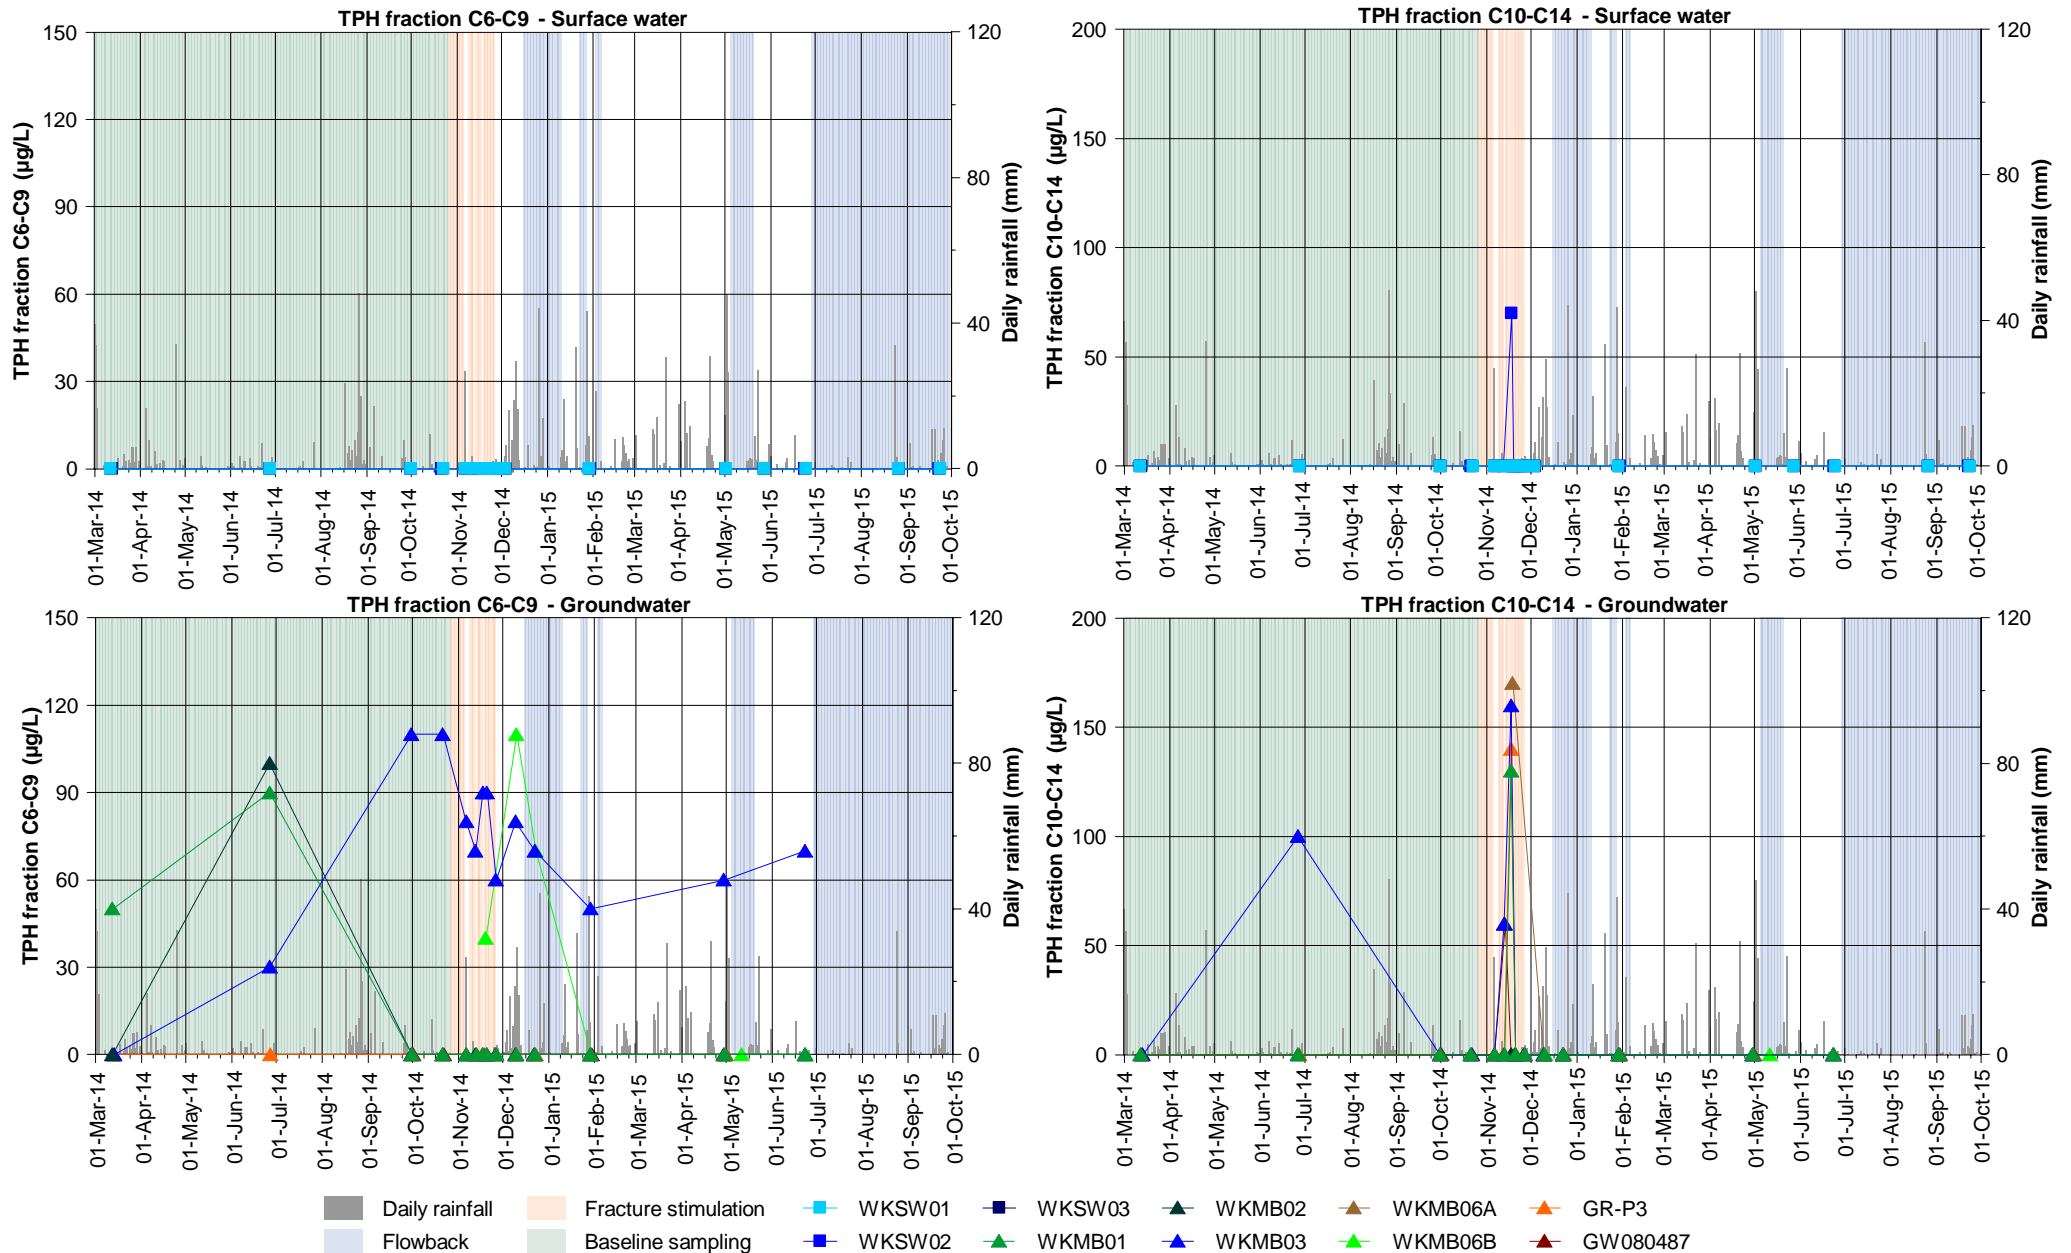


Figure G6.7: TPH fractions C6-C9 and C10-C14 at Waukivory surface water and groundwater monitoring locations.

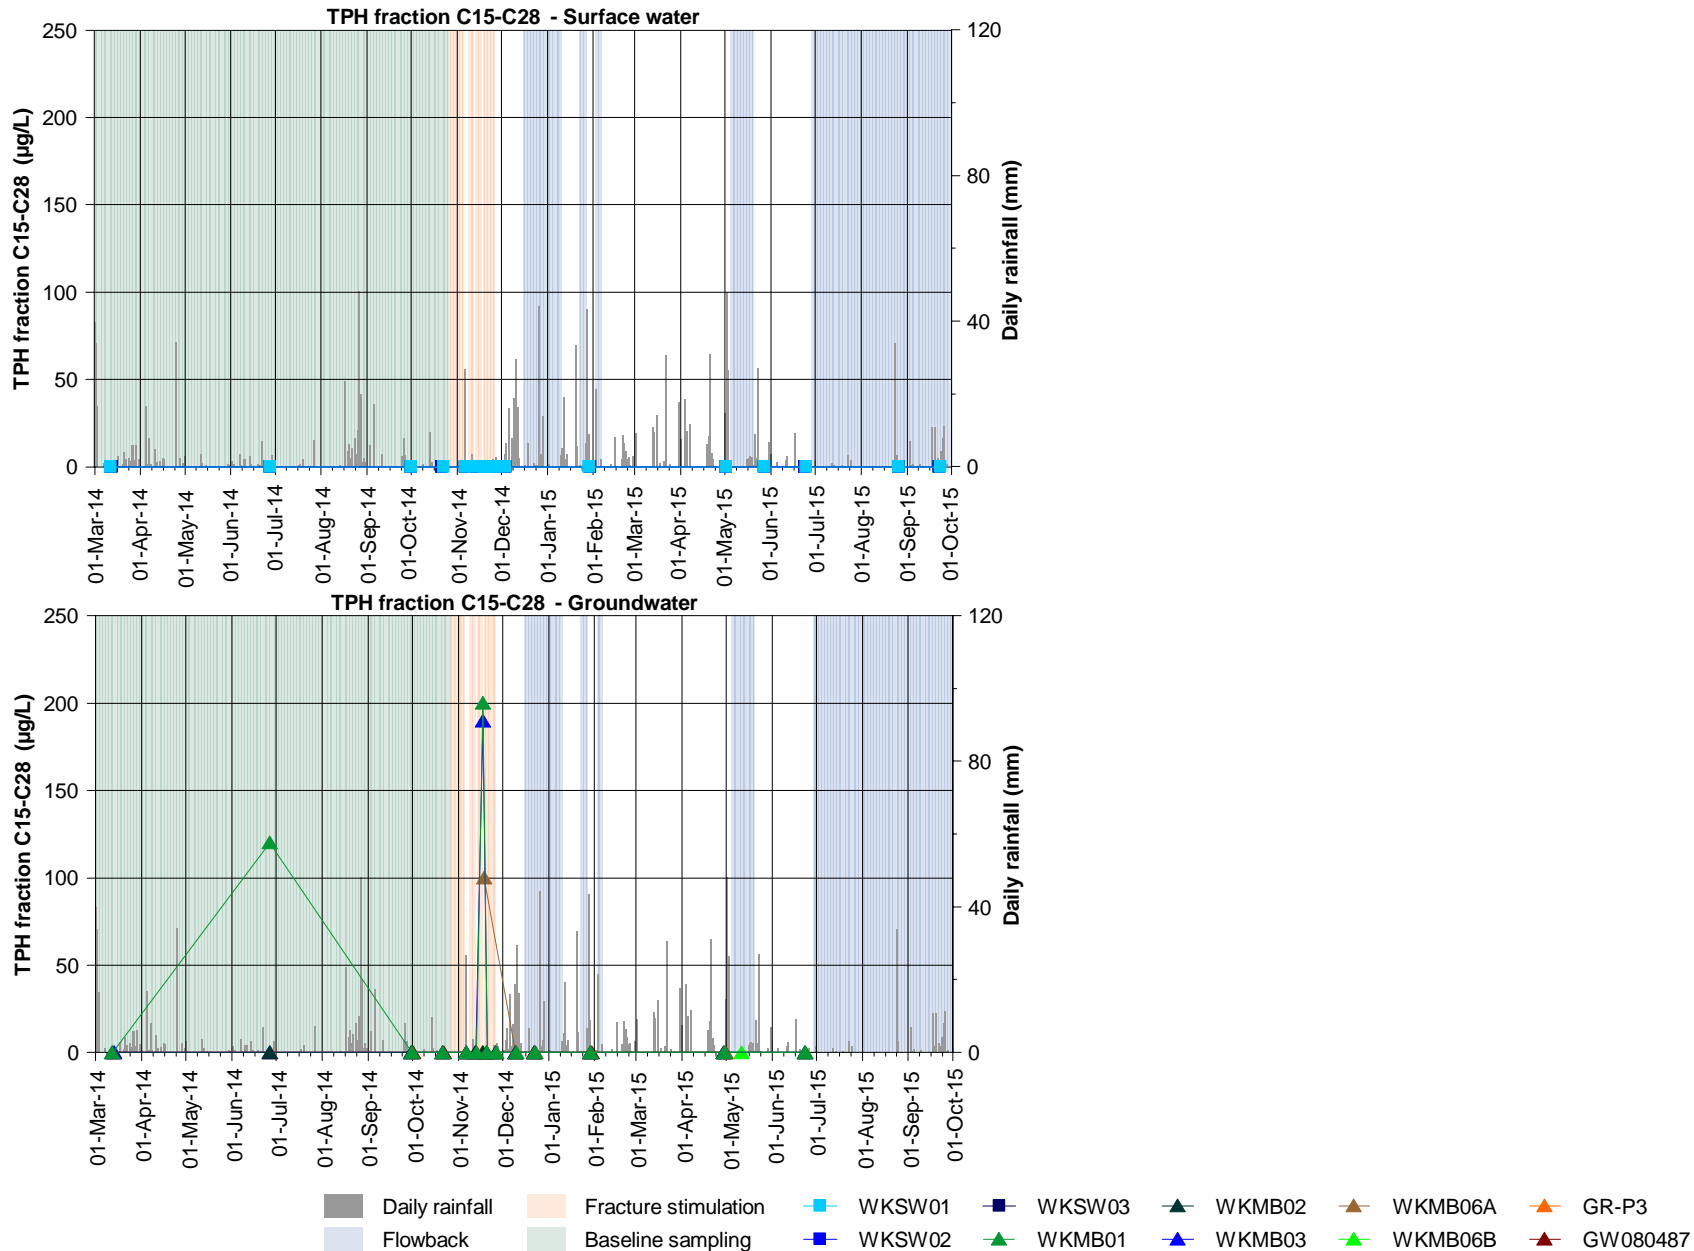


Figure G6.8: TPH fraction C15-C28 at Waukivory surface water and groundwater monitoring locations.

Appendix H

ALS and Envirolab Services laboratory reports



Appendix H

Laboratory results summary table

| Report number | Date samples received | Lab Name |
|---------------|-----------------------|------------|
| ES1525055 | 01-July-2015 | ALS |
| ES1525247 | 02-July-2016 | ALS |
| ES1525354 | 03-July-2016 | ALS |
| ES1525375 | 04-July-2016 | ALS |
| ES1525544 | 07-July-2015 | ALS |
| ES1525652 | 08-July-2015 | ALS |
| ES1525654 | 08-July-2015 | ALS |
| ES1525742 | 09-July-2015 | ALS |
| ES1525865 | 10-July-2015 | ALS |
| ES1525880 | 13-July-2015 | ALS |
| ES1526014 | 14-July-2015 | ALS |
| ES1526117 | 15-July-2015 | ALS |
| ES1526118 | 15-July-2015 | ALS |
| ES1526216 | 16-July-2015 | ALS |
| ES1526322 | 17-July-2015 | ALS |
| ES1526325 | 18-July-2015 | ALS |
| ES1526478 | 21-July-2015 | ALS |
| ES1526602 | 22-July-2015 | ALS |
| ES1526604 | 22-July-2015 | ALS |
| ES1526718 | 23-July-2015 | ALS |
| ES1526833 | 24-July-2015 | ALS |
| ES1526838 | 24-July-2015 | ALS |
| ES1527015 | 28-July-2015 | ALS |
| ES1527133 | 29-July-2015 | ALS |
| ES1527135 | 29-July-2015 | ALS |
| ES1528258 | 13-August-2015 | ALS |
| ES1528259 | 13-August-2015 | ALS |
| ES1529385 | 27-August-2015 | ALS |
| ES1529387 | 27-August-2015 | ALS |
| ES1529589 | 28-August-2015 | ALS |
| ES1530616 | 09-September-2015 | ALS |
| ES1530625 | 09-September-2015 | ALS |
| ES1531965 | 23-September-2015 | ALS |
| ES1532002 | 23-September-2015 | ALS |
| ES1532008 | 23-September-2015 | ALS |
| 130805 | 08-July-2015 | Envirolab* |
| 131168 | 15-July-2015 | Envirolab* |
| 131627 | 23-July-2015 | Envirolab* |
| 131883 | 29-July-2015 | Envirolab* |
| 132658 | 13-August-2015 | Envirolab* |
| 133320 | 27-August-2015 | Envirolab* |
| 134039 | 09-September-2015 | Envirolab* |

*For Envirolab results see Appendix D

CERTIFICATE OF ANALYSIS

| | |
|---|---|
| Work Order : ES1525055 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : CAROLINA SARDELLA Site : ---- Quote number : ---- | Page : 1 of 4 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 01-Jul-2015 12:49 Date Analysis Commenced : 01-Jul-2015 Issue Date : 01-Jul-2015 16:31 No. of samples received : 6 No. of samples analysed : 6 |
|---|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
ø = ALS is not NATA accredited for these tests.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | AST2 | WK11 | WK12 | WK13 | WK14 | | | | |
|--|-------------------|-------------------|-------|---------------|-------------------|---------------|---------------|-------------------|------|-------------------|--|-------------------|--|
| Client sampling date / time | | 01-Jul-2015 07:25 | | | 01-Jul-2015 08:50 | | | 01-Jul-2015 08:00 | | 01-Jul-2015 08:25 | | 01-Jul-2015 08:10 | |
| Compound | CAS Number | LOR | Unit | ES1525055-001 | ES1525055-002 | ES1525055-003 | ES1525055-004 | ES1525055-005 | | | | | |
| | | | | Result | Result | Result | Result | Result | | | | | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7050 | 11200 | 7590 | 7810 | 12200 | | | | | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | | | | | |
| EP080: BTEXN | | | | | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 7 | 254 | 3 | 199 | 159 | | | | | |
| Toluene | 108-88-3 | 2 | µg/L | 9 | 329 | 6 | 234 | 172 | | | | | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 6 | <2 | 5 | 2 | | | | | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 89 | <2 | 72 | 28 | | | | | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 18 | <2 | 14 | 8 | | | | | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | 107 | <2 | 86 | 36 | | | | | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 16 | 696 | 9 | 524 | 369 | | | | | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | | | | | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 93.8 | 93.4 | 95.1 | 96.2 | 93.2 | | | | | |
| Toluene-D8 | 2037-26-5 | 2 | % | 104 | 98.7 | 105 | 111 | 115 | | | | | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 94.5 | 101 | 95.6 | 100 | 101 | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | QA1 | ---- | ---- | ---- | ---- |
|--|-------------------|------------------|-------|---------------|--------|--------|--------|--------|--------|
| Client sampling date / time | | [01-Jul-2015] | | | ---- | ---- | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1525055-006 | ----- | ----- | ----- | ----- | ----- |
| | | | | Result | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7610 | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 3 | ---- | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 6 | ---- | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| [^] Sum of BTEX | ---- | 1 | µg/L | 9 | ---- | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 97.3 | ---- | ---- | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 104 | ---- | ---- | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 95.2 | ---- | ---- | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|-------------------------|---|
| Work Order | : ES1525247 | Page | : 1 of 2 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 02-Jul-2015 12:00 |
| C-O-C number | : ---- | Date Analysis Commenced | : 02-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 02-Jul-2015 16:01 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 5 |
| | | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|---------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Edwandy Fadjar | Organic Coordinator | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | 02-Jul-2015 07:15 | 02-Jul-2015 08:55 | 02-Jul-2015 07:45 | 02-Jul-2015 08:30 | 02-Jul-2015 08:10 |
| Compound | CAS Number | LOR | Unit | ES1525247-001 | ES1525247-002 | ES1525247-003 | ES1525247-004 | ES1525247-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7020 | 11400 | 7690 | 7850 | 11200 |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 7 | 290 | 3 | 215 | 142 |
| Toluene | 108-88-3 | 2 | µg/L | 9 | 351 | 5 | 254 | 180 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 8 | <2 | 6 | 4 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 113 | <2 | 76 | 44 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 24 | <2 | 16 | 11 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | 137 | <2 | 92 | 55 |
| ^ Sum of BTEX | ---- | 1 | µg/L | 16 | 786 | 8 | 567 | 381 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 95.2 | 102 | 97.6 | 103 | 99.8 |
| Toluene-D8 | 2037-26-5 | 2 | % | 103 | 113 | 104 | 111 | 112 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 98.9 | 106 | 100 | 106 | 104 |

CERTIFICATE OF ANALYSIS

| | |
|---|---|
| Work Order : ES1525354 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : CAROLINA SARDELLA Site : ---- Quote number : ---- | Page : 1 of 4 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 03-Jul-2015 12:20 Date Analysis Commenced : 03-Jul-2015 Issue Date : 03-Jul-2015 16:33 No. of samples received : 6 No. of samples analysed : 6 |
|---|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
ø = ALS is not NATA accredited for these tests.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 03-Jul-2015 07:15 | 03-Jul-2015 08:55 | 03-Jul-2015 07:45 | 03-Jul-2015 08:25 | 03-Jul-2015 08:05 | |
| Compound | CAS Number | LOR | Unit | ES1525354-001 | ES1525354-002 | ES1525354-003 | ES1525354-004 | ES1525354-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7120 | ---- | ---- | ---- | ---- | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | 0.1 | <0.1 | 0.1 | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 12 | 345 | 4 | 198 | 163 | |
| Toluene | 108-88-3 | 2 | µg/L | 16 | 435 | 6 | 224 | 186 | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 9 | <2 | 5 | 4 | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 140 | 2 | 74 | 49 | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 27 | <2 | 14 | 11 | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | 167 | 2 | 88 | 60 | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 32 | 956 | 12 | 515 | 413 | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 111 | 112 | 96.7 | 113 | 115 | |
| Toluene-D8 | 2037-26-5 | 2 | % | 117 | 119 | 104 | 124 | 122 | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 117 | 115 | 98.4 | 118 | 115 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | Client sample ID | QA2 | ---- | ---- | ---- | ---- |
|--|-------------------|-----|------------------|---------------|--------|--------|--------|--------|
| Client sampling date / time | | | [03-Jul-2015] | ---- | ---- | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1525354-006 | ----- | ----- | ----- | ----- |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 328 | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 419 | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | 8 | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 131 | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | 26 | ---- | ---- | ---- | ---- |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 157 | ---- | ---- | ---- | ---- |
| [^] Sum of BTEX | ---- | 1 | µg/L | 912 | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 113 | ---- | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 118 | ---- | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 116 | ---- | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|-------------------------|---|
| Work Order | : ES1525375 | Page | : 1 of 2 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 04-Jul-2015 08:00 |
| C-O-C number | : ---- | Date Analysis Commenced | : 06-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 06-Jul-2015 14:27 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 5 |
| | | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

∅ = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | 04-Jul-2015 07:15 | 04-Jul-2015 08:55 | 04-Jul-2015 07:45 | 04-Jul-2015 08:25 | 04-Jul-2015 08:05 |
| Compound | CAS Number | LOR | Unit | ES1525375-001 | ES1525375-002 | ES1525375-003 | ES1525375-004 | ES1525375-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7000 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 14 | 296 | 4 | 176 | 165 |
| Toluene | 108-88-3 | 2 | µg/L | 17 | 378 | 6 | 210 | 177 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 7 | <2 | 4 | 3 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 118 | 2 | 61 | 46 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 22 | <2 | 12 | 10 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | 140 | 2 | 73 | 56 |
| ^ Sum of BTEX | ---- | 1 | µg/L | 35 | 821 | 12 | 463 | 401 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 124 | 121 | 123 | 117 | 116 |
| Toluene-D8 | 2037-26-5 | 2 | % | 119 | 121 | 116 | 124 | 122 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 124 | 120 | 122 | 121 | 120 |

CERTIFICATE OF ANALYSIS

| | |
|--|---|
| Work Order : ES1525544 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : DAVID WATSON Site : ---- Quote number : ---- | Page : 1 of 5 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 07-Jul-2015 12:30 Date Analysis Commenced : 07-Jul-2015 Issue Date : 07-Jul-2015 17:06 No. of samples received : 11 No. of samples analysed : 11 |
|--|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
ø = ALS is not NATA accredited for these tests.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 06-Jul-2015 15:45 | 06-Jul-2015 16:00 | 06-Jul-2015 14:40 | 06-Jul-2015 15:26 | 06-Jul-2015 15:05 | |
| Compound | CAS Number | LOR | Unit | ES1525544-001 | ES1525544-002 | ES1525544-003 | ES1525544-004 | ES1525544-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7430 | ---- | ---- | ---- | ---- | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 16 | 237 | 3 | 127 | 133 | |
| Toluene | 108-88-3 | 2 | µg/L | 18 | 298 | 4 | 146 | 134 | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 5 | <2 | 3 | 3 | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 85 | <2 | 38 | 36 | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 14 | <2 | 7 | 8 | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | 99 | <2 | 45 | 44 | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 38 | 639 | 7 | 321 | 314 | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 117 | 92.0 | 102 | 99.4 | 105 | |
| Toluene-D8 | 2037-26-5 | 2 | % | 114 | 116 | 110 | 115 | 115 | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 110 | 103 | 114 | 104 | 116 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 07-Jul-2015 07:00 | 07-Jul-2015 08:56 | 07-Jul-2015 07:57 | 07-Jul-2015 09:19 | 07-Jul-2015 08:20 | |
| Compound | CAS Number | LOR | Unit | ES1525544-006 | ES1525544-007 | ES1525544-008 | ES1525544-009 | ES1525544-010 | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7490 | ---- | ---- | ---- | ---- | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 17 | 224 | 3 | 114 | 144 | |
| Toluene | 108-88-3 | 2 | µg/L | 19 | 287 | 4 | 136 | 144 | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 5 | <2 | 2 | 3 | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 90 | <2 | 35 | 36 | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 15 | <2 | 7 | 8 | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | 105 | <2 | 42 | 44 | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 40 | 621 | 7 | 294 | 335 | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 115 | 95.0 | 103 | 93.3 | 101 | |
| Toluene-D8 | 2037-26-5 | 2 | % | 114 | 115 | 109 | 111 | 116 | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 110 | 102 | 115 | 103 | 110 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | QA3 | ---- | ---- | ---- | ---- |
|--|-------------------|------------------|-------|---------------|--------|--------|--------|--------|------|
| Client sampling date / time | | | | [07-Jul-2015] | ---- | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1525544-011 | ----- | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 122 | ---- | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 148 | ---- | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | 3 | ---- | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 38 | ---- | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | 7 | ---- | ---- | ---- | ---- | ---- |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 45 | ---- | ---- | ---- | ---- | ---- |
| [^] Sum of BTEX | ---- | 1 | µg/L | 318 | ---- | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 96.0 | ---- | ---- | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 114 | ---- | ---- | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 104 | ---- | ---- | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525652 | Page | : 1 of 16 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 08-Jul-2015 12:45 |
| C-O-C number | : ---- | Date Analysis Commenced | : 08-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 02-Sep-2015 12:52 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 6 |
| | | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Alex Rossi | Organic Chemist | Sydney Organics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EP071: Positive results for samples ES1525652_001, 002 & 004 had been confirmed by re-extraction and re-analysis.
- EG020: LOR's have been raised due to matrix interference (High Total Dissolved Solids)
- EP005 : NPOC analysis was carried out for various samples due to high inorganic carbon content.
- EK055G: LOR raised for Ammonia on sample ID (ES1525652-1) due to sample matrix.
- EG020: 'Bromine/Iodine' quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS.
- It has been noted that Nitrite is greater than NOx for sample ID (ES1525652-5,6) , however this difference is within the limits of experimental variation.
- This report has been amended following the removal of BTEX from all samples and EC from AST2
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a,h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------|--------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 08-Jul-2015 07:00 | 08-Jul-2015 09:25 | 08-Jul-2015 08:00 | 08-Jul-2015 08:58 | 08-Jul-2015 08:33 | |
| Compound | CAS Number | LOR | Unit | ES1525652-001 | ES1525652-002 | ES1525652-003 | ES1525652-004 | ES1525652-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA005P: pH by PC Titrator | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 9.19 | 7.17 | 7.41 | 8.04 | 7.74 | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | 11700 | 7660 | 8220 | 10600 | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5000 | 6510 | 4210 | 5630 | 6840 | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 68 | 8 | 15 | <5 | 7 | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 619 | 747 | 702 | 721 | 1240 | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | <1 | <1 | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 712 | <1 | <1 | <1 | <1 | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 2970 | 5940 | 3400 | 3400 | 4360 | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3680 | 5940 | 3400 | 3400 | 4360 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | <1 | <1 | 12 | <1 | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 621 | 759 | 703 | 723 | 1170 | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 10 | 36 | 24 | 12 | 39 | |
| Magnesium | 7439-95-4 | 1 | mg/L | 3 | 5 | 4 | 2 | 9 | |
| Sodium | 7440-23-5 | 1 | mg/L | 1820 | 3020 | 1840 | 2000 | 2540 | |
| Potassium | 7440-09-7 | 1 | mg/L | 21 | 23 | 14 | 18 | 22 | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.10 | <0.10 | <0.10 | <0.10 | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | 0.004 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Boron | 7440-42-8 | 0.05 | mg/L | 5.66 | <0.05 | 5.03 | 4.29 | 4.69 | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 3.15 | 5.18 | 4.17 | 4.03 | 2.11 | |
| Barium | 7440-39-3 | 0.001 | mg/L | 4.72 | 8.90 | 5.58 | 6.33 | 2.11 | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0010 | <0.0010 | <0.0010 | <0.0010 | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Chromium | 7440-47-3 | 0.001 | mg/L | 0.002 | 0.049 | 0.032 | <0.010 | <0.010 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|---|------------|--------|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 08-Jul-2015 07:00 | 08-Jul-2015 09:25 | 08-Jul-2015 08:00 | 08-Jul-2015 08:58 | 08-Jul-2015 08:33 |
| Compound | CAS Number | LOR | Unit | ES1525652-001 | ES1525652-002 | ES1525652-003 | ES1525652-004 | ES1525652-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.015 | 0.028 | 0.064 | 0.039 | 0.018 | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.004 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Nickel | 7440-02-0 | 0.001 | mg/L | 0.002 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.10 | <0.10 | <0.10 | <0.10 | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.10 | <0.10 | <0.10 | <0.10 | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.050 | <0.050 | <0.050 | <0.050 | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.40 | 3.54 | 5.72 | 4.11 | <0.50 | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 0.8 | <1.0 | <1.0 | <1.0 | <1.0 | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 21.1 | 34.1 | 26.2 | 25.7 | 32.5 | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 1.1 | 1.0 | 1.0 | 2.3 | 1.0 | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.10 | 6.75 | 2.48 | 3.97 | 4.19 | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | ---- | 0.01 | mg/L | <0.10 | 6.72 | 2.47 | 3.87 | 4.17 | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <0.01 | 0.04 | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | 0.04 | <0.01 | <0.01 | 0.01 | <0.01 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.04 | <0.01 | <0.01 | 0.01 | 0.01 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 7.9 | 8.5 | 3.3 | 6.1 | 5.3 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|---|------------|------|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 08-Jul-2015 07:00 | 08-Jul-2015 09:25 | 08-Jul-2015 08:00 | 08-Jul-2015 08:58 | 08-Jul-2015 08:33 | |
| Compound | CAS Number | LOR | Unit | ES1525652-001 | ES1525652-002 | ES1525652-003 | ES1525652-004 | ES1525652-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 7.9 | 8.5 | 3.3 | 6.1 | 5.3 | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 2.38 | 3.12 | 1.54 | 2.95 | 2.00 | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.05 | 0.06 | 0.05 | 0.12 | 0.99 | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 91.0 | 140 | 87.8 | 88.6 | 120 | |
| ^ Total Cations | ---- | 0.01 | meq/L | 80.4 | 134 | 81.9 | 88.2 | 114 | |
| ^ Ionic Balance | ---- | 0.01 | % | 6.24 | 2.22 | 3.50 | 0.26 | 2.78 | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Total Organic Carbon | ---- | 1 | mg/L | 232 | ---- | ---- | ---- | ---- | |
| Nonpurgeable Organic Carbon | ---- | 1 | mg/L | ---- | <1 | 2 | 4 | 594 | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | 10 | 10 | 9 | 11 | 7 | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 2660 | 7630 | 11000 | 14500 | 26500 | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Ethane | 74-84-0 | 10 | µg/L | 119 | 1130 | 21 | 2410 | 3250 | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Propane | 74-98-6 | 10 | µg/L | 18 | 151 | <10 | 332 | 594 | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Butane | 106-97-8 | 10 | µg/L | <10 | 11 | <10 | 29 | 57 | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 08-Jul-2015 07:00 | 08-Jul-2015 09:25 | 08-Jul-2015 08:00 | 08-Jul-2015 08:58 | 08-Jul-2015 08:33 |
| Compound | CAS Number | LOR | Unit | | ES1525652-001 | ES1525652-002 | ES1525652-003 | ES1525652-004 | ES1525652-005 |
| | | | | | Result | Result | Result | Result | Result |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | | <1.0 | 2.1 | <1.0 | <1.0 | <1.0 |
| Acenaphthylene | 208-96-8 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Acenaphthene | 83-32-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Fluorene | 86-73-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Phenanthrene | 85-01-8 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Anthracene | 120-12-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Fluoranthene | 206-44-0 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Pyrene | 129-00-0 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Chrysene | 218-01-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| [^] Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | | <0.5 | 2.1 | <0.5 | <0.5 | <0.5 |
| [^] Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | | 50 | 940 | <20 | 400 | 380 |
| C10 - C14 Fraction | ---- | 50 | µg/L | | <50 | 90 | <50 | 80 | <50 |
| C15 - C28 Fraction | ---- | 100 | µg/L | | 220 | <100 | <100 | <100 | <100 |
| C29 - C36 Fraction | ---- | 50 | µg/L | | 160 | <50 | <50 | <50 | <50 |
| [^] C10 - C36 Fraction (sum) | ---- | 50 | µg/L | | 380 | 90 | <50 | 80 | <50 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | | 50 | 950 | <20 | 410 | 380 |
| [^] C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | | <20 | 290 | <20 | 120 | 100 |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| >C16 - C34 Fraction | ---- | 100 | µg/L | | 330 | <100 | <100 | <100 | <100 |
| >C34 - C40 Fraction | ---- | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| [^] >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | | 330 | <100 | <100 | <100 | <100 |
| [^] >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| EP262: Ethanolamines | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|------------|-----|------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 08-Jul-2015 07:00 | 08-Jul-2015 09:25 | 08-Jul-2015 08:00 | 08-Jul-2015 08:58 | 08-Jul-2015 08:33 | |
| Compound | CAS Number | LOR | Unit | ES1525652-001 | ES1525652-002 | ES1525652-003 | ES1525652-004 | ES1525652-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EP262: Ethanolamines - Continued | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | <1 | <1 | <1 | <1 | <1 | |
| Diethanolamine | 111-42-2 | 1 | µg/L | <1 | <1 | <1 | <1 | <1 | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | <1 | 9 | 2 | <1 | 2 | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 121 | 125 | 117 | 112 | 115 | |
| Toluene-D8 | 2037-26-5 | 5 | % | 124 | 126 | 126 | 116 | 116 | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 110 | 120 | 114 | 105 | 108 | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 24.6 | 25.9 | 19.7 | 20.4 | 23.9 | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 38.8 | 57.2 | 41.8 | 44.1 | 50.4 | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 42.9 | 95.5 | 70.7 | 79.9 | 78.4 | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 71.8 | 78.9 | 53.4 | 63.3 | 66.9 | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 77.6 | 91.3 | 84.1 | 91.5 | 88.2 | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 106 | 116 | 86.5 | 92.7 | 99.0 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | QA4 | ---- | ---- | ---- | ---- |
|--|-------------|------------------|---------|---------------|--------|--------|--------|--------|--------|
| Client sampling date / time | | [08-Jul-2015] | | | ---- | ---- | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1525652-006 | ----- | ----- | ----- | ----- | ----- |
| | | | | Result | Result | Result | Result | Result | Result |
| EA005P: pH by PC Titrator | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 7.51 | ---- | ---- | ---- | ---- | ---- |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 10700 | ---- | ---- | ---- | ---- | ---- |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 6980 | ---- | ---- | ---- | ---- | ---- |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 7 | ---- | ---- | ---- | ---- | ---- |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 1220 | ---- | ---- | ---- | ---- | ---- |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | ---- | ---- | ---- | ---- | ---- |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | ---- | ---- | ---- | ---- | ---- |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 4610 | ---- | ---- | ---- | ---- | ---- |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 4610 | ---- | ---- | ---- | ---- | ---- |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | ---- | ---- | ---- | ---- | ---- |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 1170 | ---- | ---- | ---- | ---- | ---- |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 40 | ---- | ---- | ---- | ---- | ---- |
| Magnesium | 7439-95-4 | 1 | mg/L | 9 | ---- | ---- | ---- | ---- | ---- |
| Sodium | 7440-23-5 | 1 | mg/L | 2560 | ---- | ---- | ---- | ---- | ---- |
| Potassium | 7440-09-7 | 1 | mg/L | 22 | ---- | ---- | ---- | ---- | ---- |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | <0.10 | ---- | ---- | ---- | ---- | ---- |
| Arsenic | 7440-38-2 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | ---- |
| Boron | 7440-42-8 | 0.05 | mg/L | 4.95 | ---- | ---- | ---- | ---- | ---- |
| Strontium | 7440-24-6 | 0.001 | mg/L | 2.34 | ---- | ---- | ---- | ---- | ---- |
| Barium | 7440-39-3 | 0.001 | mg/L | 2.27 | ---- | ---- | ---- | ---- | ---- |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | ---- |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0010 | ---- | ---- | ---- | ---- | ---- |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | ---- |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | ---- |
| Chromium | 7440-47-3 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | ---- |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | QA4 | ---- | ---- | ---- | ---- |
|---|------------|--------|------|------------------|--------|--------|--------|--------|------|
| Client sampling date / time | | | | [08-Jul-2015] | ---- | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1525652-006 | ----- | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.018 | ---- | ---- | ---- | ---- | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | |
| Nickel | 7440-02-0 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.10 | ---- | ---- | ---- | ---- | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.010 | ---- | ---- | ---- | ---- | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.10 | ---- | ---- | ---- | ---- | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.050 | ---- | ---- | ---- | ---- | |
| Iron | 7439-89-6 | 0.05 | mg/L | <0.50 | ---- | ---- | ---- | ---- | |
| Bromine | 7726-95-6 | 0.1 | mg/L | <1.0 | ---- | ---- | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | ---- | ---- | ---- | ---- | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 32.5 | ---- | ---- | ---- | ---- | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | ---- | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 0.9 | ---- | ---- | ---- | ---- | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | 4.37 | ---- | ---- | ---- | ---- | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | ---- | 0.01 | mg/L | 4.35 | ---- | ---- | ---- | ---- | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | 0.03 | ---- | ---- | ---- | ---- | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | <0.01 | ---- | ---- | ---- | ---- | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | ---- | ---- | ---- | ---- | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 5.4 | ---- | ---- | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | Client sample ID | QA4 | ---- | ---- | ---- | ---- |
|---|------------|------|------------------|---------------|--------|--------|--------|--------|
| Client sampling date / time | | | [08-Jul-2015] | ---- | ---- | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1525652-006 | ----- | ----- | ----- | ----- |
| | | | | Result | Result | Result | Result | Result |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 5.4 | ---- | ---- | ---- | ---- |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 2.14 | ---- | ---- | ---- | ---- |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.05 | ---- | ---- | ---- | ---- |
| EN055: Ionic Balance | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 125 | ---- | ---- | ---- | ---- |
| ^ Total Cations | ---- | 0.01 | meq/L | 115 | ---- | ---- | ---- | ---- |
| ^ Ionic Balance | ---- | 0.01 | % | 4.42 | ---- | ---- | ---- | ---- |
| EP005: Total Organic Carbon (TOC) | | | | | | | | |
| Total Organic Carbon | ---- | 1 | mg/L | ---- | ---- | ---- | ---- | ---- |
| Nonpurgeable Organic Carbon | ---- | 1 | mg/L | <1 | ---- | ---- | ---- | ---- |
| EP020: Oil and Grease (O&G) | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | 6 | ---- | ---- | ---- | ---- |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 24400 | ---- | ---- | ---- | ---- |
| Ethene | 74-85-1 | 10 | µg/L | <10 | ---- | ---- | ---- | ---- |
| Ethane | 74-84-0 | 10 | µg/L | 2930 | ---- | ---- | ---- | ---- |
| Propene | 115-07-1 | 10 | µg/L | <10 | ---- | ---- | ---- | ---- |
| Propane | 74-98-6 | 10 | µg/L | 552 | ---- | ---- | ---- | ---- |
| Butene | 25167-67-3 | 10 | µg/L | <10 | ---- | ---- | ---- | ---- |
| Butane | 106-97-8 | 10 | µg/L | 51 | ---- | ---- | ---- | ---- |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- |
| EP074B: Oxygenated Compounds | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | QA4 | ---- | ---- | ---- | ---- |
|---|------------|-----|------|------------------|--------|--------|--------|--------|------|
| Client sampling date / time | | | | [08-Jul-2015] | ---- | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1525652-006 | ----- | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074B: Oxygenated Compounds - Continued | | | | | | | | | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| Chloromethane | 74-87-3 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| Bromomethane | 74-83-9 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| Chloroethane | 75-00-3 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Iodomethane | 74-88-4 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Trichloroethene | 79-01-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Dibromomethane | 74-95-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | QA4 | ---- | ---- | ---- | ---- |
|--|------------|-----|------|------------------|--------|--------|--------|--------|------|
| Client sampling date / time | | | | [08-Jul-2015] | ---- | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1525652-006 | ----- | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Bromobenzene | 108-86-1 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| Bromoform | 75-25-2 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | 2.1 | ---- | ---- | ---- | ---- | |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | 1.7 | ---- | ---- | ---- | ---- | |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | 49.4 | ---- | ---- | ---- | ---- | |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | ---- | ---- | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | QA4 | ---- | ---- | ---- | ---- |
|--|-------------------|-----|------|------------------|--------|--------|--------|--------|------|
| Client sampling date / time | | | | [08-Jul-2015] | ---- | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1525652-006 | ----- | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Fluorene | 86-73-7 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Anthracene | 120-12-7 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | ---- | ---- | ---- | ---- | |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | ---- | ---- | ---- | ---- | |
| [^] Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | ---- | ---- | ---- | ---- | |
| [^] Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | ---- | ---- | ---- | ---- | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | 360 | ---- | ---- | ---- | ---- | |
| C10 - C14 Fraction | ---- | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| C15 - C28 Fraction | ---- | 100 | µg/L | <100 | ---- | ---- | ---- | ---- | |
| C29 - C36 Fraction | ---- | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| [^] C10 - C36 Fraction (sum) | ---- | 50 | µg/L | <50 | ---- | ---- | ---- | ---- | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | 370 | ---- | ---- | ---- | ---- | |
| [^] C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | 100 | ---- | ---- | ---- | ---- | |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | ---- | ---- | ---- | ---- | |
| >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | ---- | ---- | ---- | ---- | |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | ---- | ---- | ---- | ---- | |
| [^] >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | <100 | ---- | ---- | ---- | ---- | |
| [^] >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | <100 | ---- | ---- | ---- | ---- | |
| EP262: Ethanolamines | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | QA4 | ---- | ---- | ---- | ---- |
|--|------------|-----|------|------------------|--------|--------|--------|--------|------|
| Client sampling date / time | | | | [08-Jul-2015] | ---- | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1525652-006 | ----- | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP262: Ethanolamines - Continued | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | <1 | ---- | ---- | ---- | ---- | |
| Diethanolamine | 111-42-2 | 1 | µg/L | <1 | ---- | ---- | ---- | ---- | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | 2 | ---- | ---- | ---- | ---- | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 112 | ---- | ---- | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 5 | % | 117 | ---- | ---- | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 106 | ---- | ---- | ---- | ---- | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 29.6 | ---- | ---- | ---- | ---- | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 53.5 | ---- | ---- | ---- | ---- | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 78.4 | ---- | ---- | ---- | ---- | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 77.2 | ---- | ---- | ---- | ---- | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 91.3 | ---- | ---- | ---- | ---- | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 106 | ---- | ---- | ---- | ---- | |

CERTIFICATE OF ANALYSIS

| | |
|--|---|
| Work Order : ES1525654 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : DAVID WATSON Site : ---- Quote number : ---- | Page : 1 of 4 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 08-Jul-2015 12:45 Date Analysis Commenced : 08-Jul-2015 Issue Date : 08-Jul-2015 16:49 No. of samples received : 6 No. of samples analysed : 6 |
|--|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
ø = ALS is not NATA accredited for these tests.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|------------------|-------|---------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 08-Jul-2015 07:00 | 08-Jul-2015 09:25 | 08-Jul-2015 08:00 | 08-Jul-2015 08:58 | 08-Jul-2015 08:33 |
| Compound | CAS Number | LOR | Unit | ES1525654-001 | ES1525654-002 | ES1525654-003 | ES1525654-004 | ES1525654-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7140 | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 17 | 269 | 3 | 133 | 137 | |
| Toluene | 108-88-3 | 2 | µg/L | 20 | 325 | 4 | 150 | 146 | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 6 | <2 | 3 | 3 | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 5 | 103 | <2 | 42 | 38 | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 18 | <2 | 8 | 8 | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 5 | 121 | <2 | 50 | 46 | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 42 | 721 | 7 | 336 | 332 | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 115 | 112 | 110 | 107 | 111 | |
| Toluene-D8 | 2037-26-5 | 2 | % | 127 | 121 | 124 | 117 | 118 | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 125 | 120 | 115 | 115 | 118 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | QA4 | ---- | ---- | ---- | ---- |
|--|-------------------|-----|-------|------------------|--------|--------|--------|--------|------|
| Client sampling date / time | | | | [08-Jul-2015] | ---- | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1525654-006 | ----- | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 144 | ---- | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 152 | ---- | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | 3 | ---- | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 38 | ---- | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | 8 | ---- | ---- | ---- | ---- | ---- |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 46 | ---- | ---- | ---- | ---- | ---- |
| [^] Sum of BTEX | ---- | 1 | µg/L | 345 | ---- | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 119 | ---- | ---- | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 124 | ---- | ---- | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 122 | ---- | ---- | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|-------------------------|---|
| Work Order | : ES1525742 | Page | : 1 of 2 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 09-Jul-2015 12:20 |
| C-O-C number | : ---- | Date Analysis Commenced | : 09-Jul-2015 |
| Sampler | : ---- | Issue Date | : 09-Jul-2015 16:18 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 5 |
| | | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|---------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Edwandy Fadjar | Organic Coordinator | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

∅ = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | 09-Jul-2015 07:15 | 09-Jul-2015 09:00 | 09-Jul-2015 08:00 | 09-Jul-2015 08:40 | 09-Jul-2015 08:25 |
| Compound | CAS Number | LOR | Unit | ES1525742-001 | ES1525742-002 | ES1525742-003 | ES1525742-004 | ES1525742-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7350 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 10 | 181 | 2 | 94 | 75 |
| Toluene | 108-88-3 | 2 | µg/L | 11 | 269 | 2 | 102 | 89 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 5 | <2 | 2 | 2 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 3 | 80 | <2 | 27 | 24 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 14 | <2 | 6 | 6 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 3 | 94 | <2 | 33 | 30 |
| ^ Sum of BTEX | ---- | 1 | µg/L | 24 | 549 | 4 | 231 | 196 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 77.2 | 98.4 | 78.8 | 82.4 | 78.2 |
| Toluene-D8 | 2037-26-5 | 2 | % | 90.8 | 111 | 94.5 | 94.6 | 93.0 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 83.5 | 99.9 | 83.4 | 84.8 | 83.0 |

CERTIFICATE OF ANALYSIS

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1525865 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 10-Jul-2015 12:10 |
| C-O-C number | : ---- | Date Analysis Commenced | : 10-Jul-2015 |
| Sampler | : ---- | Issue Date | : 10-Jul-2015 18:25 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 6 |
| | | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
ø = ALS is not NATA accredited for these tests.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 10-Jul-2015 07:15 | 10-Jul-2015 08:45 | 10-Jul-2015 07:50 | 10-Jul-2015 08:30 | 10-Jul-2015 08:10 | |
| Compound | CAS Number | LOR | Unit | ES1525865-001 | ES1525865-002 | ES1525865-003 | ES1525865-004 | ES1525865-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7430 | ---- | ---- | ---- | ---- | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 17 | 216 | 2 | 105 | 63 | |
| Toluene | 108-88-3 | 2 | µg/L | 19 | 248 | 3 | 111 | 77 | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 6 | <2 | 2 | 2 | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 94 | <2 | 28 | 26 | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 17 | <2 | 6 | 6 | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | 111 | <2 | 34 | 32 | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 40 | 581 | 5 | 252 | 174 | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 112 | 120 | 102 | 103 | 105 | |
| Toluene-D8 | 2037-26-5 | 2 | % | 126 | 126 | 109 | 109 | 110 | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 119 | 126 | 107 | 106 | 106 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | QA5 | ---- | ---- | ---- | ---- |
|--|-------------------|-------------------|-------|---------------|--------|--------|--------|--------|--------|
| Client sampling date / time | | 10-Jul-2015 00:00 | | | ---- | ---- | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1525865-006 | ----- | ----- | ----- | ----- | ----- |
| | | | | Result | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7600 | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 15 | ---- | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 17 | ---- | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | ---- | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | ---- | ---- | ---- | ---- | ---- |
| [^] Sum of BTEX | ---- | 1 | µg/L | 36 | ---- | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 111 | ---- | ---- | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 110 | ---- | ---- | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 106 | ---- | ---- | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | |
|--|---|
| Work Order : ES1525880 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : ---- Site : ---- Quote number : ---- | Page : 1 of 2 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 13-Jul-2015 11:30 Date Analysis Commenced : 12-Jul-2015 Issue Date : 13-Jul-2015 17:29 No. of samples received : 5 No. of samples analysed : 4 |
|--|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK12 | WK13 | ---- |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|--------|
| Client sampling date / time | | | | 11-Jul-2015 07:15 | 11-Jul-2015 08:50 | 11-Jul-2015 08:20 | 11-Jul-2015 08:00 | ---- |
| Compound | CAS Number | LOR | Unit | ES1525880-001 | ES1525880-002 | ES1525880-003 | ES1525880-004 | ----- |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7660 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | ---- |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 10 | 161 | 2 | 78 | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 12 | 194 | 3 | 90 | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 4 | <2 | <2 | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 3 | 59 | <2 | 23 | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 10 | <2 | 4 | ---- |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 3 | 69 | <2 | 27 | ---- |
| ^ Sum of BTEX | ---- | 1 | µg/L | 25 | 428 | 5 | 195 | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 82.0 | 82.6 | 81.6 | 83.7 | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 103 | 108 | 99.8 | 106 | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 97.7 | 100 | 94.8 | 101 | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526014 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 14-Jul-2015 13:20 |
| C-O-C number | : ---- | Date Analysis Commenced | : 14-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 14-Jul-2015 16:36 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 8 |
| | | No. of samples analysed | : 8 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
ø = ALS is not NATA accredited for these tests.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | AST2 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 13-Jul-2015 14:16 | 13-Jul-2015 15:52 | 13-Jul-2015 15:02 | 13-Jul-2015 14:32 | 14-Jul-2015 07:00 | |
| Compound | CAS Number | LOR | Unit | ES1526014-001 | ES1526014-002 | ES1526014-003 | ES1526014-004 | ES1526014-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7600 | ---- | ---- | ---- | 7720 | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 14 | 165 | 3 | 90 | 13 | |
| Toluene | 108-88-3 | 2 | µg/L | 16 | 192 | 4 | 91 | 16 | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 4 | <2 | <2 | <2 | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 63 | <2 | 23 | 4 | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 11 | <2 | 4 | <2 | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | 74 | <2 | 27 | 4 | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 34 | 435 | 7 | 208 | 33 | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 104 | 118 | 103 | 112 | 109 | |
| Toluene-D8 | 2037-26-5 | 2 | % | 110 | 122 | 108 | 114 | 116 | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 105 | 127 | 103 | 120 | 111 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WK11 | WK13 | QA6 | ---- | ---- |
|--|-------------------|-----|-------|-------------------|-------------------|---------------|--------|--------|------|
| Client sampling date / time | | | | 14-Jul-2015 08:45 | 14-Jul-2015 08:10 | [13-Jul-2015] | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1526014-006 | ES1526014-007 | ES1526014-008 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 152 | 86 | 171 | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 175 | 85 | 194 | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | 3 | <2 | 3 | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 58 | 21 | 63 | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | 10 | 4 | 10 | ---- | ---- | ---- |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 68 | 25 | 73 | ---- | ---- | ---- |
| [^] Sum of BTEX | ---- | 1 | µg/L | 398 | 196 | 441 | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 97.0 | 107 | 120 | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 100 | 106 | 118 | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 104 | 108 | 123 | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | |
|--|---|
| Work Order : ES1526117 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523A Order number : ---- C-O-C number : ---- Sampler : DAVID WATSON Site : ---- Quote number : ---- | Page : 1 of 2 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 15-Jul-2015 12:50 Date Analysis Commenced : 15-Jul-2015 Issue Date : 15-Jul-2015 16:43 No. of samples received : 5 No. of samples analysed : 5 |
|--|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK13 | WK14 | QA7 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | 15-Jul-2015 07:15 | 15-Jul-2015 09:30 | 15-Jul-2015 08:35 | 15-Jul-2015 09:00 | 15-Jul-2015 08:35 |
| Compound | CAS Number | LOR | Unit | ES1526117-001 | ES1526117-002 | ES1526117-003 | ES1526117-004 | ES1526117-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7490 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 10 | 103 | 73 | 42 | 62 |
| Toluene | 108-88-3 | 2 | µg/L | 13 | 114 | 69 | 49 | 57 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 2 | <2 | <2 | <2 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 40 | 18 | 19 | 14 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 7 | 3 | 4 | 3 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | 47 | 21 | 23 | 17 |
| ^ Sum of BTEX | ---- | 1 | µg/L | 27 | 266 | 163 | 114 | 136 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 89.8 | 107 | 119 | 109 | 102 |
| Toluene-D8 | 2037-26-5 | 2 | % | 103 | 92.7 | 99.2 | 94.0 | 88.6 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 96.9 | 89.1 | 94.6 | 89.8 | 84.0 |



CERTIFICATE OF ANALYSIS

Table with 4 columns: Field Name, Value, Field Name, Value. Includes Work Order (ES1526118), Amendment (1), Client (PARSONS BRINCKERHOFF AUST P/L), Laboratory (Environmental Division Sydney), and various contact and project details.

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
• Analytical Results



NATA Accredited Laboratory 825
Accredited for compliance with ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

Table with 3 columns: Signatories, Position, Accreditation Category. Lists names like Alex Rossi, Ankit Joshi, Ashesh Patel, Celine Conceicao, Pabi Subba and their respective roles and accreditation categories.



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS.
- EK059G-EK058G: LOR raised for NOx- Nitrate on sample ID (ES1526118-2) due to sample matrix.
- EP005 : NPOC analysis was carried out for various samples due to high inorganic carbon content.
- ED041G: LOR raised for Sulfate analysis on a few samples due to matrix interferences.
- EK057G:LOR raised for Nitrite analysis on sample ID(WK11) due to sample matrix.
- This report has been amended following the removal of BTEX from all samples and EC for AST2
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a,h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA7 |
|--|-------------|--------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|-----|
| Client sampling date / time | | | | 15-Jul-2015 07:15 | 15-Jul-2015 09:30 | 15-Jul-2015 08:35 | 15-Jul-2015 09:00 | 15-Jul-2015 08:35 | |
| Compound | CAS Number | LOR | Unit | ES1526118-001 | ES1526118-002 | ES1526118-003 | ES1526118-004 | ES1526118-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA005P: pH by PC Titrator | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 9.16 | 7.75 | 8.37 | 7.96 | 8.37 | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | 11600 | 8020 | 10400 | 8010 | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5200 | 6490 | 4300 | 6520 | 4940 | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 52 | 33 | <5 | 11 | 5 | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 611 | 754 | 666 | 1230 | 666 | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | <1 | <1 | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 617 | <1 | 47 | <1 | 47 | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 3110 | 6180 | 3780 | 4540 | 3780 | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3730 | 6180 | 3820 | 4540 | 3820 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <10 | <10 | <10 | <10 | <10 | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 483 | 587 | 532 | 886 | 528 | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 21 | 27 | 11 | 21 | 11 | |
| Magnesium | 7439-95-4 | 1 | mg/L | 3 | 3 | 2 | 7 | 2 | |
| Sodium | 7440-23-5 | 1 | mg/L | 1560 | 1700 | 1790 | 2090 | 1720 | |
| Potassium | 7440-09-7 | 1 | mg/L | 12 | 9 | 10 | 12 | 10 | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | 0.01 | <0.01 | <0.01 | <0.01 | <0.01 | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | 0.003 | 0.004 | 0.006 | 0.008 | 0.006 | |
| Boron | 7440-42-8 | 0.05 | mg/L | 0.24 | 3.35 | 2.35 | 2.87 | 2.21 | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 2.72 | 3.64 | 2.26 | 3.41 | 2.09 | |
| Barium | 7440-39-3 | 0.001 | mg/L | 4.14 | 5.56 | 2.48 | 3.59 | 2.27 | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Chromium | 7440-47-3 | 0.001 | mg/L | 0.002 | <0.001 | <0.001 | <0.001 | <0.001 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA7 |
|---|------------|--------|------|-------------------|-------------------|-------------------|-------------------|-------------------|-----|
| Client sampling date / time | | | | 15-Jul-2015 07:15 | 15-Jul-2015 09:30 | 15-Jul-2015 08:35 | 15-Jul-2015 09:00 | 15-Jul-2015 08:35 | |
| Compound | CAS Number | LOR | Unit | ES1526118-001 | ES1526118-002 | ES1526118-003 | ES1526118-004 | ES1526118-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.005 | 0.003 | 0.002 | 0.003 | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.015 | 0.008 | 0.002 | 0.008 | 0.002 | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.003 | 0.003 | 0.006 | 0.004 | 0.004 | |
| Nickel | 7440-02-0 | 0.001 | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | 0.001 | 0.003 | 0.002 | 0.001 | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | <0.005 | <0.005 | <0.005 | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.28 | <0.05 | <0.05 | <0.05 | <0.05 | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 0.5 | 0.6 | 1.4 | 0.6 | 1.3 | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 21.6 | 35.2 | 24.1 | 30.2 | 26.4 | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 1.2 | 1.3 | 2.6 | 1.1 | 2.6 | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.01 | 5.90 | 3.99 | 4.82 | 4.02 | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | ---- | 0.01 | mg/L | <0.01 | 5.87 | 3.65 | 4.77 | 3.86 | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.05 | <0.01 | 0.02 | <0.01 | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | 0.04 | <0.05 | 0.04 | 0.03 | 0.05 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.04 | <0.05 | 0.04 | 0.05 | 0.05 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 8.5 | 8.6 | 5.8 | 5.7 | 5.7 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA7 |
|---|------------|------|------|-------------------|-------------------|-------------------|-------------------|-------------------|-----|
| Client sampling date / time | | | | 15-Jul-2015 07:15 | 15-Jul-2015 09:30 | 15-Jul-2015 08:35 | 15-Jul-2015 09:00 | 15-Jul-2015 08:35 | |
| Compound | CAS Number | LOR | Unit | ES1526118-001 | ES1526118-002 | ES1526118-003 | ES1526118-004 | ES1526118-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 8.5 | 8.6 | 5.8 | 5.8 | 5.8 | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 2.62 | 3.15 | 2.60 | 2.07 | 2.65 | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.03 | 0.09 | 0.16 | 0.17 | 0.14 | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Nonpurgeable Organic Carbon | ---- | 1 | mg/L | 206 | 477 | 152 | 66 | 149 | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | <5 | 11 | <5 | <5 | <5 | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 1980 | 19300 | 32900 | 14300 | 35900 | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Ethane | 74-84-0 | 10 | µg/L | 88 | 2440 | 3780 | 1570 | 4010 | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Propane | 74-98-6 | 10 | µg/L | 14 | 346 | 582 | 286 | 658 | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Butane | 106-97-8 | 10 | µg/L | <10 | 28 | 39 | 28 | 39 | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | 80 | <50 | 80 | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA7 |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 15-Jul-2015 07:15 | 15-Jul-2015 09:30 | 15-Jul-2015 08:35 | 15-Jul-2015 09:00 | 15-Jul-2015 08:35 |
| Compound | CAS Number | LOR | Unit | | ES1526118-001 | ES1526118-002 | ES1526118-003 | ES1526118-004 | ES1526118-005 |
| | | | | | Result | Result | Result | Result | Result |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Chloromethane | 74-87-3 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Vinyl chloride | 75-01-4 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Bromomethane | 74-83-9 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Chloroethane | 75-00-3 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Iodomethane | 74-88-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Trichloroethene | 79-01-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Dibromomethane | 74-95-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Pentachloroethane | 76-01-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA7 |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 15-Jul-2015 07:15 | 15-Jul-2015 09:30 | 15-Jul-2015 08:35 | 15-Jul-2015 09:00 | 15-Jul-2015 08:35 |
| Compound | CAS Number | LOR | Unit | ES1526118-001 | ES1526118-002 | ES1526118-003 | ES1526118-004 | ES1526118-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons - Continued | | | | | | | | | |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benz(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(g.h.i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| ^ Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | 1.3 | <0.5 | <0.5 | <0.5 | <0.5 |
| ^ Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | 50 | 480 | 250 | 230 | 270 | |
| C10 - C14 Fraction | ---- | 50 | µg/L | <50 | 50 | 80 | 120 | 80 | |
| C15 - C28 Fraction | ---- | 100 | µg/L | <100 | 2030 | <100 | 220 | <100 | |
| C29 - C36 Fraction | ---- | 50 | µg/L | <50 | 1140 | <50 | 120 | <50 | |
| ^ C10 - C36 Fraction (sum) | ---- | 50 | µg/L | <50 | 3220 | 80 | 460 | 80 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | 50 | 490 | 250 | 230 | 270 | |
| ^ C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | 20 | 160 | 80 | 90 | 90 | |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | <100 | 110 | <100 | |
| >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | 2700 | <100 | 300 | <100 | |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | 590 | <100 | <100 | <100 | |
| ^ >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | <100 | 3290 | <100 | 410 | <100 | |
| ^ >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | <100 | <100 | <100 | 110 | <100 | |
| EP262: Ethanolamines | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | 18 | 34 | 42 | 50 | 34 | |
| Diethanolamine | 111-42-2 | 1 | µg/L | 2 | <1 | <1 | <1 | <1 | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | 4 | 2 | 5 | 5 | 4 | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 119 | 116 | 115 | 116 | 118 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA7 |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 15-Jul-2015 07:15 | 15-Jul-2015 09:30 | 15-Jul-2015 08:35 | 15-Jul-2015 09:00 | 15-Jul-2015 08:35 |
| Compound | CAS Number | LOR | Unit | ES1526118-001 | ES1526118-002 | ES1526118-003 | ES1526118-004 | ES1526118-005 | |
| | | | | Result | Result | Result | Result | Result | Result |
| EP074S: VOC Surrogates - Continued | | | | | | | | | |
| Toluene-D8 | 2037-26-5 | 5 | % | 122 | 122 | 121 | 120 | 123 | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 106 | 109 | 108 | 108 | 110 | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 20.4 | 27.9 | 40.3 | 26.9 | 34.4 | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 34.4 | 53.2 | 49.9 | 48.8 | 45.7 | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 32.6 | 59.6 | 50.7 | 56.3 | 42.8 | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 61.1 | 74.9 | 69.4 | 71.3 | 68.6 | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 57.5 | 73.0 | 76.0 | 75.1 | 69.0 | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 55.9 | 69.2 | 71.9 | 72.4 | 64.0 | |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526216 | Page | : 1 of 2 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 16-Jul-2015 12:30 |
| C-O-C number | : ---- | Date Analysis Commenced | : 16-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 16-Jul-2015 17:35 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 5 |
| | | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

∅ = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | 16-Jul-2015 07:15 | 16-Jul-2015 08:50 | 16-Jul-2015 08:30 | 16-Jul-2015 07:55 | 16-Jul-2015 08:15 |
| Compound | CAS Number | LOR | Unit | ES1526216-001 | ES1526216-002 | ES1526216-003 | ES1526216-004 | ES1526216-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7780 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 10 | 104 | 2 | 64 | 113 |
| Toluene | 108-88-3 | 2 | µg/L | 12 | 121 | 3 | 60 | 90 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | 2 | <2 | <2 | <2 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 3 | 36 | <2 | 13 | 15 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 8 | <2 | 3 | 4 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 3 | 44 | <2 | 16 | 19 |
| ^ Sum of BTEX | ---- | 1 | µg/L | 25 | 271 | 5 | 140 | 222 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 102 | 106 | 96.5 | 104 | 100 |
| Toluene-D8 | 2037-26-5 | 2 | % | 111 | 116 | 118 | 116 | 114 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 102 | 104 | 104 | 106 | 103 |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526322 | Page | : 1 of 2 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 17-Jul-2015 12:20 |
| C-O-C number | : ---- | Date Analysis Commenced | : 17-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 17-Jul-2015 16:06 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 5 |
| | | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: WATER
 (Matrix: WATER)

Client sample ID

| | | | | AST2 | WK11 | WK12 | WK13 | QA8 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|---------------|
| Client sampling date / time | | | | 17-Jul-2015 07:15 | 17-Jul-2015 08:55 | 17-Jul-2015 08:15 | 17-Jul-2015 08:30 | [17-Jul-2015] |
| Compound | CAS Number | LOR | Unit | ES1526322-001 | ES1526322-002 | ES1526322-003 | ES1526322-004 | ES1526322-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7430 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 12 | 91 | 2 | 67 | 2 |
| Toluene | 108-88-3 | 2 | µg/L | 14 | 95 | 2 | 61 | 2 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | <2 | <2 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 3 | 32 | <2 | 14 | <2 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 5 | <2 | 3 | <2 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 3 | 37 | <2 | 17 | <2 |
| ^ Sum of BTEX | ---- | 1 | µg/L | 29 | 223 | 4 | 145 | 4 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 111 | 120 | 105 | 115 | 121 |
| Toluene-D8 | 2037-26-5 | 2 | % | 113 | 117 | 106 | 117 | 121 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 114 | 122 | 105 | 122 | 122 |

CERTIFICATE OF ANALYSIS

| | |
|---|---|
| Work Order : ES1526325 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : CAROLINA SARDELLA Site : ---- Quote number : ---- | Page : 1 of 2 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 18-Jul-2015 12:35 Date Analysis Commenced : 20-Jul-2015 Issue Date : 20-Jul-2015 14:11 No. of samples received : 3 No. of samples analysed : 3 |
|---|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | AST2 | WK13 | WK14 | ---- | ---- |
|--|-------------------|------------------|-------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 18-Jul-2015 07:00 | 18-Jul-2015 07:45 | 18-Jul-2015 08:05 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1526325-001 | ES1526325-002 | ES1526325-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7910 | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 11 | 65 | 94 | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 12 | 58 | 102 | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 4 | 14 | 20 | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 3 | 5 | ---- | ---- | ---- |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 4 | 17 | 25 | ---- | ---- | ---- |
| ^ Sum of BTEX | ---- | 1 | µg/L | 27 | 140 | 221 | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 118 | 114 | 109 | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 106 | 109 | 106 | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 122 | 118 | 114 | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526478 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 21-Jul-2015 11:50 |
| C-O-C number | : ---- | Date Analysis Commenced | : 21-Jul-2015 |
| Sampler | : PAUL WATSON | Issue Date | : 21-Jul-2015 16:49 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 6 |
| | | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | QA9 | AST2 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|---------------|-------------------|------|
| Client sampling date / time | | | | 20-Jul-2015 13:55 | 20-Jul-2015 15:00 | 20-Jul-2015 14:25 | [20-Jul-2015] | 21-Jul-2015 07:10 | |
| Compound | CAS Number | LOR | Unit | ES1526478-001 | ES1526478-002 | ES1526478-003 | ES1526478-004 | ES1526478-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7650 | ---- | ---- | ---- | 7770 | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 8 | 53 | 1 | 54 | 7 | |
| Toluene | 108-88-3 | 2 | µg/L | 10 | 60 | <2 | 59 | 9 | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | <2 | <2 | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 3 | 18 | <2 | 17 | 2 | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 3 | <2 | 3 | <2 | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 3 | 21 | <2 | 20 | 2 | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 21 | 134 | 1 | 133 | 18 | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 100 | 83.2 | 83.2 | 80.6 | 82.9 | |
| Toluene-D8 | 2037-26-5 | 2 | % | 111 | 91.7 | 91.8 | 89.7 | 86.6 | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 108 | 80.6 | 82.3 | 80.7 | 81.0 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | WK12 | ---- | ---- | ---- | ---- |
|--|-------------------|-------------------|-------|---------------|--------|--------|--------|--------|--------|
| Client sampling date / time | | 21-Jul-2015 08:15 | | | ---- | ---- | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1526478-006 | ----- | ----- | ----- | ----- | ----- |
| | | | | Result | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 1 | ---- | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| [^] Sum of BTEX | ---- | 1 | µg/L | 1 | ---- | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 84.6 | ---- | ---- | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 92.0 | ---- | ---- | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 81.7 | ---- | ---- | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | |
|---|---|
| Work Order : ES1526602 Amendment : 1 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : DAVID WATSON, S DAYKIN Site : ---- Quote number : ---- | Page : 1 of 9 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 22-Jul-2015 11:55 Date Analysis Commenced : 22-Jul-2015 Issue Date : 04-Sep-2015 11:29 No. of samples received : 2 No. of samples analysed : 2 |
|---|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Alex Rossi | Organic Chemist | Sydney Organics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS.
- EG020: LOR's have been raised due to matrix interference (High Total Dissolved Solids)
- ED041G: LOR raised for Sulfate analysis on a few samples due to matrix interferences.
- This report has been amended following the removal of BTEX from all samples and EC form AST2.
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a.h)anthracene (1.0), Benzo(g.h.i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | AST2 | WK14 | ---- | ---- | ---- | |
|--|-------------|-------------------|---------|---------------|-------------------|--------|--------|--------|------|------|
| Client sampling date / time | | 22-Jul-2015 07:10 | | | 22-Jul-2015 08:05 | | | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1526602-001 | ES1526602-002 | ----- | ----- | ----- | | |
| | | | | Result | Result | Result | Result | Result | | |
| EA005P: pH by PC Titrator | | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 8.97 | 7.70 | ---- | ---- | ---- | | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | 11700 | ---- | ---- | ---- | | |
| EA015: Total Dissolved Solids | | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5240 | 7190 | ---- | ---- | ---- | | |
| EA025: Suspended Solids | | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 48 | 10 | ---- | ---- | ---- | | |
| ED009: Anions | | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 668 | 1850 | ---- | ---- | ---- | | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | ---- | ---- | ---- | | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 600 | <1 | ---- | ---- | ---- | | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 3320 | 4200 | ---- | ---- | ---- | | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3920 | 4200 | ---- | ---- | ---- | | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <10 | <10 | ---- | ---- | ---- | | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 508 | 1280 | ---- | ---- | ---- | | |
| ED093F: Dissolved Major Cations | | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 24 | 46 | ---- | ---- | ---- | | |
| Magnesium | 7439-95-4 | 1 | mg/L | <10 | 10 | ---- | ---- | ---- | | |
| Sodium | 7440-23-5 | 1 | mg/L | 2110 | 2800 | ---- | ---- | ---- | | |
| Potassium | 7440-09-7 | 1 | mg/L | 15 | 16 | ---- | ---- | ---- | | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | <0.10 | <0.10 | ---- | ---- | ---- | | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | | |
| Boron | 7440-42-8 | 0.05 | mg/L | 8.52 | 4.18 | ---- | ---- | ---- | | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 3.33 | 4.96 | ---- | ---- | ---- | | |
| Barium | 7440-39-3 | 0.001 | mg/L | 5.11 | 6.53 | ---- | ---- | ---- | | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0010 | <0.0010 | ---- | ---- | ---- | | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | | |
| Chromium | 7440-47-3 | 0.001 | mg/L | <0.010 | 0.050 | ---- | ---- | ---- | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK14 | ---- | ---- | ---- |
|---|------------|--------|------|-------------------|-------------------|--------|--------|--------|------|
| Client sampling date / time | | | | 22-Jul-2015 07:10 | 22-Jul-2015 08:05 | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1526602-001 | ES1526602-002 | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.021 | 0.048 | ---- | ---- | ---- | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | |
| Nickel | 7440-02-0 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.10 | <0.10 | ---- | ---- | ---- | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.010 | <0.010 | ---- | ---- | ---- | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.10 | <0.10 | ---- | ---- | ---- | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.050 | <0.050 | ---- | ---- | ---- | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.55 | 5.04 | ---- | ---- | ---- | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 3.3 | 4.2 | ---- | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | ---- | ---- | ---- | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 22.7 | 39.2 | ---- | ---- | ---- | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | ---- | ---- | ---- | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 1.2 | 1.0 | ---- | ---- | ---- | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.03 | 4.57 | ---- | ---- | ---- | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | ---- | 0.01 | mg/L | 0.02 | 4.54 | ---- | ---- | ---- | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | ---- | ---- | ---- | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | 0.02 | <0.01 | ---- | ---- | ---- | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.02 | <0.01 | ---- | ---- | ---- | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 5.4 | 6.6 | ---- | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK14 | ---- | ---- | ---- |
|---|------------|------|-------|-------------------|-------------------|--------|--------|--------|------|
| Client sampling date / time | | | | 22-Jul-2015 07:10 | 22-Jul-2015 08:05 | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1526602-001 | ES1526602-002 | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 5.4 | 6.6 | ---- | ---- | ---- | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 1.63 | 1.96 | ---- | ---- | ---- | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.02 | 0.06 | ---- | ---- | ---- | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 92.6 | 120 | ---- | ---- | ---- | |
| ^ Total Cations | ---- | 0.01 | meq/L | 93.4 | 125 | ---- | ---- | ---- | |
| ^ Ionic Balance | ---- | 0.01 | % | 0.32 | 2.10 | ---- | ---- | ---- | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Total Organic Carbon | ---- | 1 | mg/L | 291 | 8 | ---- | ---- | ---- | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | 14 | 10 | ---- | ---- | ---- | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 786 | 22800 | ---- | ---- | ---- | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | ---- | ---- | ---- | |
| Ethane | 74-84-0 | 10 | µg/L | 34 | 2800 | ---- | ---- | ---- | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | ---- | ---- | ---- | |
| Propane | 74-98-6 | 10 | µg/L | <10 | 456 | ---- | ---- | ---- | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | ---- | ---- | ---- | |
| Butane | 106-97-8 | 10 | µg/L | <10 | 24 | ---- | ---- | ---- | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK14 | ---- | ---- | ---- |
|---|------------|-----|------|-------------------|-------------------|--------|--------|--------|------|
| Client sampling date / time | | | | 22-Jul-2015 07:10 | 22-Jul-2015 08:05 | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1526602-001 | ES1526602-002 | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074B: Oxygenated Compounds - Continued | | | | | | | | | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | ---- | ---- | ---- | |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK14 | ---- | ---- | ---- |
|--|------------|-----|------|------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | | 22-Jul-2015 07:10 | 22-Jul-2015 08:05 | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1526602-001 | ES1526602-002 | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | 1.6 | 2.5 | ---- | ---- | ---- | |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | 1.3 | 1.6 | ---- | ---- | ---- | |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | 30.9 | 66.5 | ---- | ---- | ---- | |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | ---- | ---- | ---- | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK14 | ---- | ---- | ---- |
|--|-------------------|-----|------|------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | | 22-Jul-2015 07:10 | 22-Jul-2015 08:05 | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1526602-001 | ES1526602-002 | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons - Continued | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | ---- | ---- | ---- | |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | ---- | ---- | ---- | |
| [^] Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | <0.5 | ---- | ---- | ---- | |
| [^] Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | <0.5 | ---- | ---- | ---- | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | 40 | 220 | ---- | ---- | ---- | |
| C10 - C14 Fraction | ---- | 50 | µg/L | 200 | <50 | ---- | ---- | ---- | |
| C15 - C28 Fraction | ---- | 100 | µg/L | 200 | <100 | ---- | ---- | ---- | |
| C29 - C36 Fraction | ---- | 50 | µg/L | 60 | <50 | ---- | ---- | ---- | |
| [^] C10 - C36 Fraction (sum) | ---- | 50 | µg/L | 460 | <50 | ---- | ---- | ---- | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | 40 | 220 | ---- | ---- | ---- | |
| [^] C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | <20 | 60 | ---- | ---- | ---- | |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | 240 | <100 | ---- | ---- | ---- | |
| >C16 - C34 Fraction | ---- | 100 | µg/L | 210 | <100 | ---- | ---- | ---- | |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | ---- | ---- | ---- | |
| [^] >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | 450 | <100 | ---- | ---- | ---- | |
| [^] >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | 240 | <100 | ---- | ---- | ---- | |
| EP262: Ethanolamines | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK14 | ---- | ---- | ---- |
|--|------------|-----|------|-------------------|-------------------|--------|--------|--------|------|
| Client sampling date / time | | | | 22-Jul-2015 07:10 | 22-Jul-2015 08:05 | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1526602-001 | ES1526602-002 | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP262: Ethanolamines - Continued | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | 29 | 26 | ---- | ---- | ---- | |
| Diethanolamine | 111-42-2 | 1 | µg/L | 26 | 10 | ---- | ---- | ---- | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | 40 | 11 | ---- | ---- | ---- | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 108 | 110 | ---- | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 5 | % | 124 | 120 | ---- | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 106 | 105 | ---- | ---- | ---- | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 34.0 | 29.1 | ---- | ---- | ---- | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 45.1 | 55.4 | ---- | ---- | ---- | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 38.7 | 53.8 | ---- | ---- | ---- | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 70.6 | 69.6 | ---- | ---- | ---- | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 74.2 | 74.4 | ---- | ---- | ---- | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 72.8 | 71.8 | ---- | ---- | ---- | |

CERTIFICATE OF ANALYSIS

| | |
|--|---|
| Work Order : ES1526604 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : DAVID WATSON Site : ---- Quote number : ---- | Page : 1 of 2 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 22-Jul-2015 11:55 Date Analysis Commenced : 22-Jul-2015 Issue Date : 22-Jul-2015 16:05 No. of samples received : 2 No. of samples analysed : 2 |
|--|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | AST2 | WK14 | ---- | ---- | ---- |
|--|-------------------|------------------|-------|-------------------|-------------------|--------|--------|--------|------|
| Client sampling date / time | | | | 22-Jul-2015 07:10 | 22-Jul-2015 08:05 | ---- | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1526604-001 | ES1526604-002 | ----- | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7950 | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 8 | 85 | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 9 | 80 | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 2 | 18 | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 5 | ---- | ---- | ---- | ---- |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 2 | 23 | ---- | ---- | ---- | ---- |
| ^ Sum of BTEX | ---- | 1 | µg/L | 19 | 188 | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 119 | 116 | ---- | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 115 | 116 | ---- | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 117 | 116 | ---- | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1526718 | Page | : 1 of 2 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 23-Jul-2015 12:15 |
| C-O-C number | : ---- | Date Analysis Commenced | : 23-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 23-Jul-2015 17:26 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 3 |
| | | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

∅ = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK12 | WK13 | ---- | ---- |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|--------|--------|
| Client sampling date / time | | | | 23-Jul-2015 07:10 | 23-Jul-2015 08:25 | 23-Jul-2015 08:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1526718-001 | ES1526718-002 | ES1526718-003 | ----- | ----- |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8000 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | ---- | ---- |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 5 | 1 | 71 | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 6 | <2 | 72 | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 12 | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 3 | ---- | ---- |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | <2 | 15 | ---- | ---- |
| ^ Sum of BTEX | ---- | 1 | µg/L | 11 | 1 | 158 | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 93.3 | 97.1 | 93.5 | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 108 | 109 | 101 | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 94.1 | 97.7 | 96.8 | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1526833 | Page | : 1 of 2 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 24-Jul-2015 23:50 |
| C-O-C number | : ---- | Date Analysis Commenced | : 24-Jul-2015 |
| Sampler | : DAVID WATSON | Issue Date | : 03-Aug-2015 10:12 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 3 |
| | | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

- This report has been amended as a result of misinterpretation of sample identification numbers (IDs). All analysis results are as per the previous report

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK14 | QA10 | ---- | ---- |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|--------|--------|
| Client sampling date / time | | | | 24-Jul-2015 07:15 | 24-Jul-2015 07:50 | 24-Jul-2015 07:15 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1526833-001 | ES1526833-002 | ES1526833-003 | ----- | ----- |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7720 | ---- | 8060 | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | ---- | ---- |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 6 | 59 | 6 | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 7 | 55 | 8 | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 2 | 14 | 2 | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 3 | <2 | ---- | ---- |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | 2 | 17 | 2 | ---- | ---- |
| ^ Sum of BTEX | ---- | 1 | µg/L | 15 | 131 | 16 | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 97.3 | 105 | 100 | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 99.2 | 100 | 101 | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 105 | 105 | 104 | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | |
|---|---|
| Work Order : ES1526838 Amendment : 1 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : DAVID WATSON Site : ---- Quote number : ---- | Page : 1 of 2 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 24-Jul-2015 12:00 Date Analysis Commenced : 27-Jul-2015 Issue Date : 03-Aug-2015 10:14 No. of samples received : 2 No. of samples analysed : 2 |
|---|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

- This report has been amended as a result of misinterpretation of sample identification numbers (IDs). All analysis results are as per the previous report

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK12 | ---- | ---- | ---- |
|--|-------------------|-----|-------|-------------------|-------------------|--------|--------|--------|
| Client sampling date / time | | | | 25-Jul-2015 08:25 | 25-Jul-2015 08:00 | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1526838-001 | ES1526838-002 | ----- | ----- | ----- |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8460 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 6 | 1 | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 8 | <2 | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | ---- | ---- | ---- |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | <2 | ---- | ---- | ---- |
| ^ Sum of BTEX | ---- | 1 | µg/L | 14 | 1 | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 123 | 117 | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 118 | 116 | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 124 | 121 | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1527015 | Page | : 1 of 4 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 28-Jul-2015 12:00 |
| C-O-C number | : ---- | Date Analysis Commenced | : 28-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 28-Jul-2015 16:22 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 6 |
| | | No. of samples analysed | : 6 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
ø = ALS is not NATA accredited for these tests.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | AST2 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 27-Jul-2015 13:30 | 27-Jul-2015 14:30 | 27-Jul-2015 14:00 | 28-Jul-2015 08:30 | 28-Jul-2015 07:10 | |
| Compound | CAS Number | LOR | Unit | ES1527015-001 | ES1527015-002 | ES1527015-003 | ES1527015-004 | ES1527015-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7220 | ---- | ---- | ---- | 7880 | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 5 | 57 | 68 | 55 | 5 | |
| Toluene | 108-88-3 | 2 | µg/L | 6 | 58 | 70 | 46 | 6 | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | <2 | <2 | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 16 | 17 | 11 | <2 | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 3 | 4 | 3 | <2 | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | 19 | 21 | 14 | <2 | |
| [^] Sum of BTEX | ---- | 1 | µg/L | 11 | 134 | 159 | 115 | 11 | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 97.7 | 121 | 111 | 111 | 110 | |
| Toluene-D8 | 2037-26-5 | 2 | % | 114 | 110 | 102 | 99.8 | 101 | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 116 | 114 | 102 | 102 | 100 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | WK13 | ---- | ---- | ---- | ---- |
|--|-------------------|-------------------|-------|---------------|--------|--------|--------|--------|--------|
| Client sampling date / time | | 28-Jul-2015 08:10 | | | ---- | ---- | ---- | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1527015-006 | ----- | ----- | ----- | ----- | ----- |
| | | | | Result | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | ---- | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | ---- | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 65 | ---- | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | 63 | ---- | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | 16 | ---- | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | 3 | ---- | ---- | ---- | ---- | ---- |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | 19 | ---- | ---- | ---- | ---- | ---- |
| [^] Sum of BTEX | ---- | 1 | µg/L | 147 | ---- | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 112 | ---- | ---- | ---- | ---- | ---- |
| Toluene-D8 | 2037-26-5 | 2 | % | 101 | ---- | ---- | ---- | ---- | ---- |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 105 | ---- | ---- | ---- | ---- | ---- |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1527133 | Page | : 1 of 9 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 29-Jul-2015 11:50 |
| C-O-C number | : ---- | Date Analysis Commenced | : 29-Jul-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 02-Sep-2015 12:47 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 3 |
| | | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS.
- EP005 : NPOC analysis was carried out for sample ID WK12 due to high inorganic carbon content.
- This report has been amended following the removal of BTEX from all samples and EC from sample AST2
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a,h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|--|-------------|--------|---------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 29-Jul-2015 07:15 | 29-Jul-2015 08:30 | 29-Jul-2015 07:45 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1527133-001 | ES1527133-002 | ES1527133-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA005P: pH by PC Titrator | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 9.18 | 7.85 | 8.47 | ---- | ---- | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | 7860 | 7670 | ---- | ---- | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5330 | 4570 | 4610 | ---- | ---- | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 42 | 13 | 22 | ---- | ---- | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 658 | 721 | 696 | ---- | ---- | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | ---- | ---- | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 750 | <1 | 150 | ---- | ---- | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 3180 | 3720 | 3380 | ---- | ---- | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3920 | 3720 | 3520 | ---- | ---- | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | <1 | <1 | ---- | ---- | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 487 | 499 | 504 | ---- | ---- | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 17 | 22 | 11 | ---- | ---- | |
| Magnesium | 7439-95-4 | 1 | mg/L | 4 | 4 | 2 | ---- | ---- | |
| Sodium | 7440-23-5 | 1 | mg/L | 2140 | 1920 | 1880 | ---- | ---- | |
| Potassium | 7440-09-7 | 1 | mg/L | 15 | 10 | 11 | ---- | ---- | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | 0.006 | 0.004 | 0.004 | ---- | ---- | |
| Boron | 7440-42-8 | 0.05 | mg/L | 6.93 | 3.18 | 2.81 | ---- | ---- | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 3.74 | 3.05 | 2.47 | ---- | ---- | |
| Barium | 7440-39-3 | 0.001 | mg/L | 5.91 | 2.74 | 2.64 | ---- | ---- | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | ---- | ---- | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Chromium | 7440-47-3 | 0.001 | mg/L | 0.003 | 0.005 | 0.001 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|---|------------|--------|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 29-Jul-2015 07:15 | 29-Jul-2015 08:30 | 29-Jul-2015 07:45 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1527133-001 | ES1527133-002 | ES1527133-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.003 | ---- | ---- | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.009 | 0.021 | 0.006 | ---- | ---- | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.009 | 0.004 | 0.009 | ---- | ---- | |
| Nickel | 7440-02-0 | 0.001 | mg/L | 0.002 | 0.001 | 0.002 | ---- | ---- | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | <0.005 | ---- | ---- | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.30 | 0.06 | 0.12 | ---- | ---- | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 1.4 | 1.0 | 1.9 | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | ---- | ---- | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 24.6 | 29.7 | 29.0 | ---- | ---- | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | ---- | ---- | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | ---- | ---- | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 1.2 | 1.1 | 2.2 | ---- | ---- | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.01 | 2.70 | 4.00 | ---- | ---- | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | ---- | 0.01 | mg/L | <0.01 | 2.69 | 3.84 | ---- | ---- | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | <0.01 | 0.03 | 0.01 | ---- | ---- | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.03 | 0.01 | ---- | ---- | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 9.5 | 3.6 | 6.3 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|---|------------|------|-------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 29-Jul-2015 07:15 | 29-Jul-2015 08:30 | 29-Jul-2015 07:45 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1527133-001 | ES1527133-002 | ES1527133-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 9.5 | 3.6 | 6.3 | ---- | ---- | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 2.69 | 1.55 | 2.55 | ---- | ---- | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.06 | 0.06 | 0.60 | ---- | ---- | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 92.0 | 88.4 | 84.5 | ---- | ---- | |
| ^ Total Cations | ---- | 0.01 | meq/L | 94.6 | 85.2 | 82.8 | ---- | ---- | |
| ^ Ionic Balance | ---- | 0.01 | % | 1.32 | 1.91 | 1.12 | ---- | ---- | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Total Organic Carbon | ---- | 1 | mg/L | 188 | ---- | 81 | ---- | ---- | |
| Nonpurgeable Organic Carbon | ---- | 1 | mg/L | ---- | 3 | ---- | ---- | ---- | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | <5 | <5 | <5 | ---- | ---- | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 494 | 12900 | 5560 | ---- | ---- | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Ethane | 74-84-0 | 10 | µg/L | 17 | 31 | 969 | ---- | ---- | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 173 | ---- | ---- | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 16 | ---- | ---- | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|---|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 29-Jul-2015 07:15 | 29-Jul-2015 08:30 | 29-Jul-2015 07:45 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1527133-001 | ES1527133-002 | ES1527133-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074B: Oxygenated Compounds - Continued | | | | | | | | | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 29-Jul-2015 07:15 | 29-Jul-2015 08:30 | 29-Jul-2015 07:45 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1527133-001 | ES1527133-002 | ES1527133-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| cis-1.4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | 1.4 | <1.0 | 1.1 | ---- | ---- | |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | <1.0 | 5.4 | ---- | ---- | |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | 24.2 | 13.5 | 62.5 | ---- | ---- | |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | <1.0 | 1.8 | ---- | ---- | |
| 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | <2.0 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 29-Jul-2015 07:15 | 29-Jul-2015 08:30 | 29-Jul-2015 07:45 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1527133-001 | ES1527133-002 | ES1527133-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| [^] Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| [^] Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 200 | ---- | ---- | |
| C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| [^] C10 - C36 Fraction (sum) | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 200 | ---- | ---- | |
| [^] C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | <20 | <20 | 70 | ---- | ---- | |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| [^] >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| [^] >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| EP262: Ethanolamines | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 29-Jul-2015 07:15 | 29-Jul-2015 08:30 | 29-Jul-2015 07:45 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1527133-001 | ES1527133-002 | ES1527133-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP262: Ethanolamines - Continued | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | 20 | 13 | 13 | ---- | ---- | |
| Diethanolamine | 111-42-2 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | 6 | 2 | 3 | ---- | ---- | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 91.1 | 86.9 | 98.2 | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 5 | % | 112 | 114 | 113 | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 107 | 105 | 106 | ---- | ---- | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 36.4 | 38.5 | 24.9 | ---- | ---- | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 46.2 | 71.3 | 59.7 | ---- | ---- | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 41.1 | 71.8 | 57.1 | ---- | ---- | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 67.8 | 71.8 | 67.4 | ---- | ---- | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 76.4 | 94.8 | 86.8 | ---- | ---- | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 74.0 | 85.2 | 76.8 | ---- | ---- | |

CERTIFICATE OF ANALYSIS

| | |
|---|---|
| Work Order : ES1527135 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : CAROLINA SARDELLA Site : ---- Quote number : ---- | Page : 1 of 2 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 29-Jul-2015 11:50 Date Analysis Commenced : 29-Jul-2015 Issue Date : 29-Jul-2015 15:28 No. of samples received : 4 No. of samples analysed : 4 |
|---|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | AST2 | WK12 | WK13 | QA11 | ---- | |
|--|-------------------|-------------------|-------|---------------|-------------------|---------------|-------------------|-------|---------------|------|
| Client sampling date / time | | 29-Jul-2015 07:15 | | | 29-Jul-2015 08:30 | | 29-Jul-2015 07:45 | | [29-Jul-2015] | ---- |
| Compound | CAS Number | LOR | Unit | ES1527135-001 | ES1527135-002 | ES1527135-003 | ES1527135-004 | ----- | Result | |
| | | | | Result | Result | Result | Result | | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7150 | ---- | ---- | ---- | ---- | ---- | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 | ---- | |
| EP080: BTEXN | | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 5 | <1 | 68 | <1 | ---- | ---- | |
| Toluene | 108-88-3 | 2 | µg/L | 5 | <2 | 62 | <2 | ---- | ---- | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | <2 | ---- | ---- | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 15 | <2 | ---- | ---- | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | 4 | <2 | ---- | ---- | |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | <2 | 19 | <2 | ---- | ---- | |
| ^ Sum of BTEX | ---- | 1 | µg/L | 10 | <1 | 149 | <1 | ---- | ---- | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | ---- | ---- | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 107 | 105 | 112 | 104 | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 2 | % | 113 | 111 | 119 | 114 | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 101 | 99.3 | 106 | 99.0 | ---- | ---- | |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1528258 | Page | : 1 of 2 |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 13-Aug-2015 10:30 |
| C-O-C number | : ---- | Date Analysis Commenced | : 13-Aug-2015 |
| Sampler | : CAROLINA SARDELLA | Issue Date | : 14-Aug-2015 14:37 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 3 |
| | | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | | AST2 | WK12 | WK13 | ---- | ---- |
|--|-------------------|------------------|-------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 12-Aug-2015 10:10 | 12-Aug-2015 08:30 | 12-Aug-2015 08:00 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1528258-001 | ES1528258-002 | ES1528258-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 9020 | ---- | ---- | ---- | ---- | |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | ---- | ---- | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 2 | <1 | 37 | ---- | ---- | |
| Toluene | 108-88-3 | 2 | µg/L | 3 | <2 | 32 | ---- | ---- | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | 7 | ---- | ---- | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | <2 | 7 | ---- | ---- | |
| ^ Sum of BTEX | ---- | 1 | µg/L | 5 | <1 | 76 | ---- | ---- | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 92.0 | 85.1 | 90.8 | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 2 | % | 108 | 102 | 111 | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 103 | 103 | 102 | ---- | ---- | |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1528259 | Page | : 1 of 10 |
| Amendment | : 1 | Laboratory | : Environmental Division Sydney |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Contact | : Loren Schiavon |
| Contact | : SEAN DAYKIN | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | E-mail | : loren.schiavon@alsglobal.com |
| E-mail | : SDaykin@pb.com.au | Telephone | : +61 2 8784 8503 |
| Telephone | : +61 02 92725100 | Facsimile | : +61-2-8784 8500 |
| Facsimile | : +61 02 92725101 | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Project | : 2268523B | Date Samples Received | : 13-Aug-2015 10:30 |
| Order number | : ---- | Date Analysis Commenced | : 13-Aug-2015 |
| C-O-C number | : ---- | Issue Date | : 02-Sep-2015 12:55 |
| Sampler | : ---- | No. of samples received | : 3 |
| Site | : ---- | No. of samples analysed | : 3 |
| Quote number | : ---- | | |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Raymond Commodore | Instrument Chemist | Sydney Inorganics |
| Sanjeshni Jyoti | Senior Chemist Volatiles | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS.
- EP005 : NPOC analysis was carried out due to high inorganic carbon content.
- This report has been amended following the removal of BTEX from all samples and EC from samples AST2.
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a,h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | Client sample ID | | AST2 | WK12 | WK13 | ---- | ---- | |
|--|-------------|-------------------|---------|-------------------|---------------|-------------------|--------|--------|------|
| Client sampling date / time | | 12-Aug-2015 10:10 | | 12-Aug-2015 08:30 | | 12-Aug-2015 08:00 | | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1528259-001 | ES1528259-002 | ES1528259-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA005P: pH by PC Titrator | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 9.13 | 7.98 | 8.61 | ---- | ---- | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | 7810 | 7410 | ---- | ---- | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 4510 | 3710 | 3920 | ---- | ---- | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 74 | 16 | 29 | ---- | ---- | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 694 | 720 | 668 | ---- | ---- | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | ---- | ---- | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 700 | <1 | 200 | ---- | ---- | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 3100 | 3600 | 3000 | ---- | ---- | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3800 | 3600 | 3200 | ---- | ---- | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | <1 | <1 | ---- | ---- | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 601 | 601 | 575 | ---- | ---- | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 21 | 28 | 10 | ---- | ---- | |
| Magnesium | 7439-95-4 | 1 | mg/L | 5 | 5 | 2 | ---- | ---- | |
| Sodium | 7440-23-5 | 1 | mg/L | 2350 | 2060 | 1990 | ---- | ---- | |
| Potassium | 7440-09-7 | 1 | mg/L | 15 | 10 | 11 | ---- | ---- | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | 0.01 | 0.01 | 0.01 | ---- | ---- | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | 0.005 | 0.004 | 0.004 | ---- | ---- | |
| Boron | 7440-42-8 | 0.05 | mg/L | 8.32 | 3.56 | 2.44 | ---- | ---- | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 3.76 | 3.52 | 2.12 | ---- | ---- | |
| Barium | 7440-39-3 | 0.001 | mg/L | 5.29 | 3.98 | 3.06 | ---- | ---- | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | ---- | ---- | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Chromium | 7440-47-3 | 0.001 | mg/L | 0.002 | 0.030 | 0.002 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|---|------------|--------|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 12-Aug-2015 10:10 | 12-Aug-2015 08:30 | 12-Aug-2015 08:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1528259-001 | ES1528259-002 | ES1528259-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | 0.001 | ---- | ---- | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.016 | 0.051 | 0.010 | ---- | ---- | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.007 | 0.002 | 0.008 | ---- | ---- | |
| Nickel | 7440-02-0 | 0.001 | mg/L | 0.002 | <0.001 | 0.001 | ---- | ---- | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | <0.005 | ---- | ---- | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.33 | 5.30 | 1.40 | ---- | ---- | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 1.1 | 0.6 | 1.6 | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | ---- | ---- | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 24.2 | 27.3 | 25.0 | ---- | ---- | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | ---- | ---- | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | ---- | ---- | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 1.7 | 1.5 | 3.0 | ---- | ---- | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.04 | 2.46 | 4.28 | ---- | ---- | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | ---- | 0.01 | mg/L | 0.03 | 2.44 | 3.97 | ---- | ---- | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | <0.01 | <0.01 | 0.02 | ---- | ---- | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | <0.01 | 0.02 | ---- | ---- | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 7.7 | 3.3 | 6.2 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|---|------------|------|-------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 12-Aug-2015 10:10 | 12-Aug-2015 08:30 | 12-Aug-2015 08:00 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1528259-001 | ES1528259-002 | ES1528259-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 7.7 | 3.3 | 6.2 | ---- | ---- | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 2.63 | 1.28 | 2.46 | ---- | ---- | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.06 | 0.01 | 0.16 | ---- | ---- | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 92.9 | 88.9 | 80.2 | ---- | ---- | |
| ^ Total Cations | ---- | 0.01 | meq/L | 104 | 91.7 | 87.5 | ---- | ---- | |
| ^ Ionic Balance | ---- | 0.01 | % | 5.62 | 1.48 | 4.32 | ---- | ---- | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Nonpurgeable Organic Carbon | ---- | 1 | mg/L | 178 | 4 | 26 | ---- | ---- | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | <5 | <5 | <5 | ---- | ---- | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 462 | 8900 | 21300 | ---- | ---- | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Ethane | 74-84-0 | 10 | µg/L | <10 | 21 | 3190 | ---- | ---- | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Propane | 74-98-6 | 10 | µg/L | <10 | <10 | 604 | ---- | ---- | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Butane | 106-97-8 | 10 | µg/L | <10 | <10 | 37 | ---- | ---- | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|---|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|--------|
| Client sampling date / time | | | | | 12-Aug-2015 10:10 | 12-Aug-2015 08:30 | 12-Aug-2015 08:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | | ES1528259-001 | ES1528259-002 | ES1528259-003 | ----- | ----- |
| | | | | | Result | Result | Result | Result | Result |
| EP074B: Oxygenated Compounds - Continued | | | | | | | | | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | | <50 | <50 | <50 | ---- | ---- |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | | <50 | <50 | <50 | ---- | ---- |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | | <50 | <50 | <50 | ---- | ---- |
| Chloromethane | 74-87-3 | 50 | µg/L | | <50 | <50 | <50 | ---- | ---- |
| Vinyl chloride | 75-01-4 | 50 | µg/L | | <50 | <50 | <50 | ---- | ---- |
| Bromomethane | 74-83-9 | 50 | µg/L | | <50 | <50 | <50 | ---- | ---- |
| Chloroethane | 75-00-3 | 50 | µg/L | | <50 | <50 | <50 | ---- | ---- |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | | <50 | <50 | <50 | ---- | ---- |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| Iodomethane | 74-88-4 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| Trichloroethene | 79-01-6 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| Dibromomethane | 74-95-3 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |
| cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | | <5 | <5 | <5 | ---- | ---- |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 12-Aug-2015 10:10 | 12-Aug-2015 08:30 | 12-Aug-2015 08:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1528259-001 | ES1528259-002 | ES1528259-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | 1.3 | <1.0 | <1.0 | ---- | ---- | |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | <1.0 | 4.7 | ---- | ---- | |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | 7.9 | 10.8 | 72.6 | ---- | ---- | |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | <1.0 | 1.3 | ---- | ---- | |
| 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | <2.0 | ---- | ---- | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 12-Aug-2015 10:10 | 12-Aug-2015 08:30 | 12-Aug-2015 08:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1528259-001 | ES1528259-002 | ES1528259-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons - Continued | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| [^] Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| [^] Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | 140 | ---- | ---- | |
| C10 - C14 Fraction | ---- | 50 | µg/L | 190 | 60 | 110 | ---- | ---- | |
| C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| [^] C10 - C36 Fraction (sum) | ---- | 50 | µg/L | 190 | 60 | 110 | ---- | ---- | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | 140 | ---- | ---- | |
| [^] C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | <20 | <20 | 60 | ---- | ---- | |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | 170 | <100 | <100 | ---- | ---- | |
| >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| [^] >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | 170 | <100 | <100 | ---- | ---- | |
| [^] >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | 170 | <100 | <100 | ---- | ---- | |
| EP262: Ethanolamines | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK12 | WK13 | ---- | ---- |
|--|------------|-----|------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 12-Aug-2015 10:10 | 12-Aug-2015 08:30 | 12-Aug-2015 08:00 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1528259-001 | ES1528259-002 | ES1528259-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP262: Ethanolamines - Continued | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | 16 | 10 | 11 | ---- | ---- | |
| Diethanolamine | 111-42-2 | 1 | µg/L | 3 | <1 | 3 | ---- | ---- | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 80.2 | 84.8 | 84.4 | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 5 | % | 90.8 | 104 | 104 | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 83.8 | 101 | 99.1 | ---- | ---- | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 25.1 | 31.0 | 42.6 | ---- | ---- | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 34.8 | 58.7 | 78.4 | ---- | ---- | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 28.8 | 50.3 | 67.2 | ---- | ---- | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 57.7 | 55.1 | 68.4 | ---- | ---- | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 38.1 | 56.1 | 85.4 | ---- | ---- | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 67.3 | 75.4 | 88.0 | ---- | ---- | |

CERTIFICATE OF ANALYSIS

| | |
|---|--|
| Work Order : ES1529385 Amendment : 1 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : ---- Site : ---- Quote number : ---- | Page : 1 of 10 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 27-Aug-2015 10:00 Date Analysis Commenced : 28-Aug-2015 Issue Date : 14-Oct-2015 17:45 No. of samples received : 3 No. of samples analysed : 3 |
|---|--|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Raymond Commodore | Instrument Chemist | Sydney Inorganics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine & Iodine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS.
- Ionic Balance out of acceptable limits due to analytes not quantified in this report.
- This report has been amended and re-released to allow the reporting of additional analytical data, specifically Antimony via EG020 analysis.
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a,h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|-------------|--------|---------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 26-Aug-2015 13:30 | 26-Aug-2015 13:00 | 26-Aug-2015 12:30 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1529385-001 | ES1529385-002 | ES1529385-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA005P: pH by PC Titrator | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 7.38 | 7.37 | 7.30 | ---- | ---- | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 489 | 557 | 522 | ---- | ---- | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 266 | 287 | 246 | ---- | ---- | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | <5 | 9 | 10 | ---- | ---- | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 98.2 | 109 | 108 | ---- | ---- | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | ---- | ---- | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | <1 | ---- | ---- | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 52 | 75 | 51 | ---- | ---- | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 52 | 75 | 51 | ---- | ---- | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 25 | 13 | 28 | ---- | ---- | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 66 | 74 | 72 | ---- | ---- | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 15 | 23 | 17 | ---- | ---- | |
| Magnesium | 7439-95-4 | 1 | mg/L | 11 | 12 | 12 | ---- | ---- | |
| Sodium | 7440-23-5 | 1 | mg/L | 55 | 57 | 59 | ---- | ---- | |
| Potassium | 7440-09-7 | 1 | mg/L | 3 | 6 | 3 | ---- | ---- | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | 0.01 | <0.01 | ---- | ---- | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | <0.05 | <0.05 | ---- | ---- | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 0.217 | 0.259 | 0.223 | ---- | ---- | |
| Barium | 7440-39-3 | 0.001 | mg/L | 0.054 | 0.048 | 0.060 | ---- | ---- | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | ---- | ---- | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|---|--------------|--------|------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 26-Aug-2015 13:30 | 26-Aug-2015 13:00 | 26-Aug-2015 12:30 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1529385-001 | ES1529385-002 | ES1529385-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.002 | 0.002 | ---- | ---- | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.045 | 0.093 | 0.094 | ---- | ---- | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.006 | 0.006 | ---- | ---- | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.10 | 0.33 | 0.18 | ---- | ---- | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 0.3 | 0.3 | 0.3 | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | ---- | ---- | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 6.11 | 3.28 | 4.13 | ---- | ---- | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | ---- | ---- | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | ---- | ---- | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 0.1 | 0.2 | 0.1 | ---- | ---- | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.01 | 0.06 | 0.10 | ---- | ---- | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | 14798-03-9_N | 0.01 | mg/L | <0.01 | 0.06 | 0.10 | ---- | ---- | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | 0.01 | 0.06 | <0.01 | ---- | ---- | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.01 | 0.06 | <0.01 | ---- | ---- | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 0.4 | 1.1 | 0.4 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|---|------------|------|-------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 26-Aug-2015 13:30 | 26-Aug-2015 13:00 | 26-Aug-2015 12:30 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1529385-001 | ES1529385-002 | ES1529385-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 0.4 | 1.2 | 0.4 | ---- | ---- | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 0.02 | 0.11 | 0.03 | ---- | ---- | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | 0.02 | <0.01 | ---- | ---- | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 3.42 | 3.86 | 3.63 | ---- | ---- | |
| ^ Total Cations | ---- | 0.01 | meq/L | 4.12 | 4.77 | 4.48 | ---- | ---- | |
| ^ Ionic Balance | ---- | 0.01 | % | 9.29 | 10.6 | 10.4 | ---- | ---- | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Total Organic Carbon | ---- | 1 | mg/L | 5 | 11 | 6 | ---- | ---- | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | <5 | 5 | <5 | ---- | ---- | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 11 | 46 | 12 | ---- | ---- | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Propane | 74-98-6 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Butane | 106-97-8 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|---|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 26-Aug-2015 13:30 | 26-Aug-2015 13:00 | 26-Aug-2015 12:30 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1529385-001 | ES1529385-002 | ES1529385-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074B: Oxygenated Compounds - Continued | | | | | | | | | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 26-Aug-2015 13:30 | 26-Aug-2015 13:00 | 26-Aug-2015 12:30 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1529385-001 | ES1529385-002 | ES1529385-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | <2.0 | <2.0 | ---- | ---- | |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | <2.0 | ---- | ---- | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 26-Aug-2015 13:30 | 26-Aug-2015 13:00 | 26-Aug-2015 12:30 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1529385-001 | ES1529385-002 | ES1529385-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons - Continued | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| ^ Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| ^ Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | <20 | ---- | ---- | |
| C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| ^ C10 - C36 Fraction (sum) | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | <20 | ---- | ---- | |
| ^ C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | <20 | <20 | <20 | ---- | ---- | |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| ^ >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| ^ >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| EP080: BTEXN | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 26-Aug-2015 13:30 | 26-Aug-2015 13:00 | 26-Aug-2015 12:30 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1529385-001 | ES1529385-002 | ES1529385-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP080: BTEXN - Continued | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| ^ Sum of BTEX | ---- | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP262: Ethanolamines | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Diethanolamine | 111-42-2 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 118 | 106 | 109 | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 5 | % | 125 | 104 | 108 | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 109 | 97.0 | 99.9 | ---- | ---- | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 23.3 | 14.6 | 19.6 | ---- | ---- | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 53.4 | 27.0 | 40.1 | ---- | ---- | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 34.7 | 32.7 | 27.6 | ---- | ---- | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 61.7 | 36.4 | 49.0 | ---- | ---- | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 66.2 | 57.2 | 52.4 | ---- | ---- | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 74.3 | 77.6 | 58.4 | ---- | ---- | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 121 | 109 | 112 | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 2 | % | 107 | 88.8 | 92.6 | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 116 | 104 | 106 | ---- | ---- | |

CERTIFICATE OF ANALYSIS

| | | | |
|--------------|--|-------------------------|---|
| Work Order | : ES1529387 | Page | : 1 of 10 |
| Amendment | : 2 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 27-Aug-2015 09:15 |
| C-O-C number | : ---- | Date Analysis Commenced | : 28-Aug-2015 |
| Sampler | : DAVID WATSON, SEAN DAYKIN | Issue Date | : 29-Sep-2015 12:07 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 5 |
| | | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |
| Raymond Commodore | Instrument Chemist | Sydney Inorganics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine & Iodine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS.
- EG020: LOR's have been raised due to matrix interference
- EP005 : NPOC analysis was carried out due to high inorganic carbon content.
- This report has been amended and re-released to allow the reporting of additional analytical data.
- This report has been amended following the removal of BTEX from all samples and EC from AST2.
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a.h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | QA12 |
|--|-------------|--------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 26-Aug-2015 08:00 | 26-Aug-2015 09:25 | 26-Aug-2015 10:35 | 26-Aug-2015 10:00 | 26-Aug-2015 10:00 | |
| Compound | CAS Number | LOR | Unit | ES1529387-001 | ES1529387-002 | ES1529387-003 | ES1529387-004 | ES1529387-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA005P: pH by PC Titrator | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 9.43 | 8.51 | 8.57 | 8.94 | 8.96 | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | 11900 | 8070 | 7670 | 7660 | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 4980 | 7170 | 4450 | 4100 | 3840 | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 37 | 50 | <5 | 75 | 17 | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 651 | 798 | 685 | 675 | 680 | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | <1 | <1 | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 900 | 200 | 200 | 350 | 400 | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 3020 | 6100 | 3550 | 3250 | 3050 | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3920 | 6300 | 3750 | 3600 | 3450 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <1 | <1 | <1 | <1 | <1 | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 471 | 552 | 489 | 542 | 550 | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 19 | 41 | 23 | <10 | <10 | |
| Magnesium | 7439-95-4 | 1 | mg/L | <10 | <10 | <10 | <10 | <10 | |
| Sodium | 7440-23-5 | 1 | mg/L | 2190 | 3330 | 2260 | 1960 | 2190 | |
| Potassium | 7440-09-7 | 1 | mg/L | 12 | 17 | 12 | 12 | 16 | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | <0.10 | <0.10 | <0.10 | <0.10 | <0.10 | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Boron | 7440-42-8 | 0.05 | mg/L | 6.99 | 8.08 | 4.00 | 2.67 | 2.60 | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 3.13 | 5.11 | 2.21 | 1.89 | 1.99 | |
| Barium | 7440-39-3 | 0.001 | mg/L | 4.86 | 8.54 | 2.00 | 2.76 | 3.03 | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0010 | <0.0010 | <0.0010 | <0.0010 | <0.0010 | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 | |
| Chromium | 7440-47-3 | 0.001 | mg/L | <0.010 | 0.015 | <0.010 | <0.010 | <0.010 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | QA12 |
|---|------------|--------|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 26-Aug-2015 08:00 | 26-Aug-2015 09:25 | 26-Aug-2015 10:35 | 26-Aug-2015 10:00 | 26-Aug-2015 10:00 |
| Compound | CAS Number | LOR | Unit | ES1529387-001 | ES1529387-002 | ES1529387-003 | ES1529387-004 | ES1529387-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.010 | 0.017 | <0.010 | <0.010 | <0.010 | <0.010 |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.017 | 0.047 | 0.026 | <0.010 | <0.010 | <0.010 |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | 0.011 | 0.011 | 0.011 |
| Nickel | 7440-02-0 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.10 | <0.10 | <0.10 | <0.10 | <0.10 | <0.10 |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 | <0.010 |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.10 | <0.10 | <0.10 | <0.10 | <0.10 | <0.10 |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.050 | <0.050 | <0.050 | <0.050 | <0.050 | <0.050 |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.53 | 0.25 | <0.10 | 0.34 | 0.73 | 0.73 |
| Bromine | 7726-95-6 | 0.1 | mg/L | 2.1 | 1.8 | <1.0 | 1.9 | 1.5 | 1.5 |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 18.4 | 35.8 | 25.1 | 24.6 | 25.3 | 25.3 |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 1.3 | 1.7 | 1.3 | 2.5 | 2.6 | 2.6 |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.03 | 5.74 | 2.76 | 4.46 | 4.44 | 4.44 |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | ---- | 0.01 | mg/L | 0.02 | 5.64 | 2.73 | 4.01 | 3.99 | 3.99 |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | <0.01 | 0.20 | <0.01 | <0.01 | <0.01 | <0.01 |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | <0.01 | 0.20 | <0.01 | <0.01 | <0.01 | <0.01 |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 6.7 | 6.9 | 2.8 | 5.6 | 5.2 | 5.2 |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | QA12 |
|---|------------|------|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 26-Aug-2015 08:00 | 26-Aug-2015 09:25 | 26-Aug-2015 10:35 | 26-Aug-2015 10:00 | 26-Aug-2015 10:00 | |
| Compound | CAS Number | LOR | Unit | ES1529387-001 | ES1529387-002 | ES1529387-003 | ES1529387-004 | ES1529387-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 6.7 | 7.1 | 2.8 | 5.6 | 5.2 | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 1.89 | 2.46 | 1.17 | 1.78 | 1.71 | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.08 | 0.11 | 0.03 | 0.12 | 0.16 | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 91.6 | 141 | 88.7 | 87.2 | 84.4 | |
| ^ Total Cations | ---- | 0.01 | meq/L | 96.5 | 147 | 99.8 | 85.6 | 95.7 | |
| ^ Ionic Balance | ---- | 0.01 | % | 2.54 | 1.97 | 5.80 | 1.02 | 6.17 | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Nonpurgeable Organic Carbon | ---- | 1 | mg/L | 101 | 123 | <1 | 25 | 23 | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | <5 | <5 | 6 | <5 | <5 | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 536 | 4140 | 2800 | 8330 | 8650 | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Ethane | 74-84-0 | 10 | µg/L | <10 | 652 | 15 | 1540 | 1590 | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Propane | 74-98-6 | 10 | µg/L | <10 | 107 | <10 | 304 | 300 | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Butane | 106-97-8 | 10 | µg/L | <10 | <10 | <10 | 12 | 11 | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | QA12 |
|---|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 26-Aug-2015 08:00 | 26-Aug-2015 09:25 | 26-Aug-2015 10:35 | 26-Aug-2015 10:00 | 26-Aug-2015 10:00 |
| Compound | CAS Number | LOR | Unit | | ES1529387-001 | ES1529387-002 | ES1529387-003 | ES1529387-004 | ES1529387-005 |
| | | | | | Result | Result | Result | Result | Result |
| EP074B: Oxygenated Compounds - Continued | | | | | | | | | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Chloromethane | 74-87-3 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Vinyl chloride | 75-01-4 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Bromomethane | 74-83-9 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Chloroethane | 75-00-3 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Iodomethane | 74-88-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Trichloroethene | 79-01-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Dibromomethane | 74-95-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | QA12 |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 26-Aug-2015 08:00 | 26-Aug-2015 09:25 | 26-Aug-2015 10:35 | 26-Aug-2015 10:00 | 26-Aug-2015 10:00 |
| Compound | CAS Number | LOR | Unit | | ES1529387-001 | ES1529387-002 | ES1529387-003 | ES1529387-004 | ES1529387-005 |
| | | | | | Result | Result | Result | Result | Result |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Pentachloroethane | 76-01-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromobenzene | 108-86-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromoform | 75-25-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | | <1.0 | 1.8 | <1.0 | <1.0 | <1.0 |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | | <1.0 | 1.6 | <1.0 | <1.0 | <1.0 |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | | <2.0 | <2.0 | <2.0 | 20.8 | 28.1 |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | | <2.0 | <2.0 | <2.0 | <2.0 | <2.0 |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | QA12 |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 26-Aug-2015 08:00 | 26-Aug-2015 09:25 | 26-Aug-2015 10:35 | 26-Aug-2015 10:00 | 26-Aug-2015 10:00 |
| Compound | CAS Number | LOR | Unit | | ES1529387-001 | ES1529387-002 | ES1529387-003 | ES1529387-004 | ES1529387-005 |
| | | | | | Result | Result | Result | Result | Result |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons - Continued | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Acenaphthylene | 208-96-8 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Acenaphthene | 83-32-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Fluorene | 86-73-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Phenanthrene | 85-01-8 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Anthracene | 120-12-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Fluoranthene | 206-44-0 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Pyrene | 129-00-0 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Chrysene | 218-01-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| [^] Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| [^] Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | | <20 | 160 | <20 | 100 | 110 |
| C10 - C14 Fraction | ---- | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| C15 - C28 Fraction | ---- | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| C29 - C36 Fraction | ---- | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| [^] C10 - C36 Fraction (sum) | ---- | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | | <20 | 150 | <20 | 90 | 100 |
| [^] C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | | <20 | 20 | <20 | <20 | 20 |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| >C16 - C34 Fraction | ---- | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| >C34 - C40 Fraction | ---- | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| [^] >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| [^] >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | | <100 | <100 | <100 | <100 | <100 |
| EP262: Ethanolamines | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | QA12 |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 26-Aug-2015 08:00 | 26-Aug-2015 09:25 | 26-Aug-2015 10:35 | 26-Aug-2015 10:00 | 26-Aug-2015 10:00 |
| Compound | CAS Number | LOR | Unit | ES1529387-001 | ES1529387-002 | ES1529387-003 | ES1529387-004 | ES1529387-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EP262: Ethanolamines - Continued | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | 24 | 103 | 72 | 36 | 37 | |
| Diethanolamine | 111-42-2 | 1 | µg/L | 35 | 6 | 1 | 4 | 6 | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | 4 | 7 | 3 | 3 | 4 | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 109 | 110 | 108 | 111 | 112 | |
| Toluene-D8 | 2037-26-5 | 5 | % | 116 | 104 | 122 | 118 | 118 | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 98.4 | 101 | 106 | 103 | 102 | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 22.7 | 22.8 | 23.0 | 27.8 | 16.0 | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 32.2 | 38.0 | 47.2 | 21.0 | 39.5 | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 39.3 | 70.2 | 41.8 | 29.8 | 38.2 | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 76.8 | 65.9 | 62.7 | 40.0 | 56.7 | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 81.4 | 72.2 | 64.5 | 57.0 | 64.3 | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 78.7 | 75.0 | 78.0 | 68.1 | 77.2 | |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1529589 | Page | : 1 of 2 |
| Amendment | : 2 | Laboratory | : Environmental Division Sydney |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Contact | : Loren Schiavon |
| Contact | : SEAN DAYKIN | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | E-mail | : loren.schiavon@alsglobal.com |
| E-mail | : SDaykin@pb.com.au | Telephone | : +61 2 8784 8503 |
| Telephone | : +61 02 92725100 | Facsimile | : +61-2-8784 8500 |
| Facsimile | : +61 02 92725101 | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Project | : 2268523B | Date Samples Received | : 28-Aug-2015 13:12 |
| Order number | : ---- | Date Analysis Commenced | : 28-Aug-2015 |
| C-O-C number | : ---- | Issue Date | : 02-Sep-2015 16:20 |
| Sampler | : SEAN DAYKIN | No. of samples received | : 5 |
| Site | : ---- | No. of samples analysed | : 5 |
| Quote number | : ---- | | |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

- This report has been amended to adjust the method for UHS to EK084.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK12 | WK13 | QA12 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | 26-Aug-2015 08:00 | 26-Aug-2015 09:25 | 26-Aug-2015 10:35 | 26-Aug-2015 10:00 | 26-Aug-2015 10:00 |
| Compound | CAS Number | LOR | Unit | ES1529589-001 | ES1529589-002 | ES1529589-003 | ES1529589-004 | ES1529589-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8490 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | 1 | 72 | 1 | 40 | 39 |
| Toluene | 108-88-3 | 2 | µg/L | <2 | 63 | <2 | 34 | 34 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | <2 | <2 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 13 | <2 | 5 | 6 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 3 | <2 | <2 | <2 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | 16 | <2 | 5 | 6 |
| ^ Sum of BTEX | ---- | 1 | µg/L | 1 | 151 | 1 | 79 | 79 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 98.8 | 98.1 | 95.8 | 99.3 | 94.3 |
| Toluene-D8 | 2037-26-5 | 2 | % | 117 | 108 | 107 | 108 | 103 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 112 | 112 | 105 | 108 | 106 |

CERTIFICATE OF ANALYSIS

| | | | |
|-------------------|--|-------------------------|---|
| Work Order | : ES1530616 | Page | : 1 of 2 |
| Amendment | : 1 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523A | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 09-Sep-2015 15:22 |
| C-O-C number | : ---- | Date Analysis Commenced | : 09-Sep-2015 |
| Sampler | : ---- | Issue Date | : 29-Sep-2015 12:09 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 5 |
| | | No. of samples analysed | : 5 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

- This report has been amended and re-released to allow the reporting of additional analytical data.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 |
| Compound | CAS Number | LOR | Unit | ES1530616-001 | ES1530616-002 | ES1530616-003 | ES1530616-004 | ES1530616-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 7880 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | <1 | 46 | <1 | 26 | 23 |
| Toluene | 108-88-3 | 2 | µg/L | <2 | 51 | <2 | 25 | 27 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | <2 | <2 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 14 | <2 | 5 | 6 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 3 | <2 | <2 | <2 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | 17 | <2 | 5 | 6 |
| ^ Sum of BTEX | ---- | 1 | µg/L | <1 | 114 | <1 | 56 | 56 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 82.5 | 79.7 | 84.2 | 82.3 | 80.8 |
| Toluene-D8 | 2037-26-5 | 2 | % | 105 | 103 | 104 | 101 | 107 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 108 | 108 | 108 | 107 | 108 |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1530625 | Page | : 1 of 17 |
| Amendment | : 4 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523A | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 09-Sep-2015 15:22 |
| C-O-C number | : ---- | Date Analysis Commenced | : 09-Sep-2015 |
| Sampler | : ---- | Issue Date | : 15-Oct-2015 13:35 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 10 |
| | | No. of samples analysed | : 10 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|--------------------------|-------------------------------|
| Alex Rossi | Organic Chemist | Sydney Organics |
| Andrew Epps | Senior Inorganic Chemist | Brisbane Organics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Matt Frost | Senior Organic Chemist | Brisbane Organics |
| Merrin Avery | Supervisor - Inorganic | Newcastle - Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS.
- EG020: Poor matrix spike recovery was obtained for Manganese on sample ES1530609 - #008 due to matrix interference. Confirmed by reanalysis.
- Sampling date not provided. For operational reasons an assumed date/time (3pm on date of receipt) is used. Sample results may be affected if the analysis falls outside of actual holding time.
- ED041G: LOR raised for Sulfate analysis on a few samples, due to matrix interferences.
- EK055G: LOR raised for Ammonia on sample ID (ES1530625-1) due to sample matrix.
- Ionic Balance out of acceptable limits due to analytes not quantified in this report.
- This report has been amended and re-released to allow the reporting of additional analytical data.
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a,h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------|--------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 | |
| Compound | CAS Number | LOR | Unit | ES1530625-001 | ES1530625-002 | ES1530625-003 | ES1530625-004 | ES1530625-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA005: pH | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 9.18 | 7.88 | 7.83 | 8.65 | 8.07 | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | 10800 | 7390 | 7140 | 12100 | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5320 | 7630 | 4820 | 4430 | 7610 | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 58 | 10 | 120 | 20 | <5 | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 671 | 770 | 662 | 659 | 2090 | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | <1 | <1 | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 1000 | <1 | <1 | 300 | <1 | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 2980 | 6150 | 3650 | 3700 | 4300 | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 3980 | 6150 | 3650 | 4000 | 4300 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | <10 | <10 | <10 | <10 | <10 | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 711 | 801 | 700 | 705 | 2200 | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 23 | 36 | 32 | 10 | 40 | |
| Magnesium | 7439-95-4 | 1 | mg/L | 5 | 4 | 5 | 2 | 15 | |
| Sodium | 7440-23-5 | 1 | mg/L | 2850 | 3750 | 2530 | 2160 | 3990 | |
| Potassium | 7440-09-7 | 1 | mg/L | 18 | 19 | 12 | 13 | 23 | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | 0.03 | 0.01 | 0.07 | <0.01 | <0.01 | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | 0.010 | 0.005 | 0.005 | 0.006 | 0.007 | |
| Boron | 7440-42-8 | 0.05 | mg/L | 7.13 | 5.31 | 3.28 | 2.65 | 3.06 | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 4.08 | 5.29 | 4.20 | 2.40 | 8.04 | |
| Barium | 7440-39-3 | 0.001 | mg/L | 5.83 | 8.82 | 5.15 | 3.34 | 9.24 | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | 0.001 | <0.001 | <0.001 | |
| Chromium | 7440-47-3 | 0.001 | mg/L | 0.006 | 0.026 | 0.026 | 0.001 | 0.010 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|---|--------------|--------|------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 | |
| Compound | CAS Number | LOR | Unit | ES1530625-001 | ES1530625-002 | ES1530625-003 | ES1530625-004 | ES1530625-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | 0.005 | 0.004 | <0.001 | <0.001 | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.013 | 0.028 | 0.039 | 0.010 | 0.046 | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.015 | 0.010 | 0.005 | 0.017 | 0.011 | |
| Nickel | 7440-02-0 | 0.001 | mg/L | 0.004 | 0.004 | 0.001 | 0.002 | 0.002 | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | 0.01 | <0.01 | <0.01 | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | 0.007 | 0.009 | <0.005 | 0.008 | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.57 | 0.48 | 3.61 | 0.53 | 2.99 | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 1.4 | 1.8 | 0.9 | 1.9 | 1.3 | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 18.0 | 31.9 | 23.2 | 23.5 | 32.5 | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 1.5 | 1.7 | 1.3 | 2.4 | 1.1 | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | <0.05 | 4.61 | 2.54 | 4.38 | 5.08 | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | 14798-03-9_N | 0.01 | mg/L | <0.05 | 4.55 | 2.51 | 4.30 | 4.95 | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | 0.05 | 0.01 | 0.01 | 0.01 | 0.01 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.05 | 0.01 | 0.01 | 0.01 | 0.01 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 8.2 | 6.8 | 3.3 | 5.9 | 6.1 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|---|------------|------|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 | |
| Compound | CAS Number | LOR | Unit | ES1530625-001 | ES1530625-002 | ES1530625-003 | ES1530625-004 | ES1530625-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 8.2 | 6.8 | 3.3 | 5.9 | 6.1 | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 2.12 | 2.66 | 0.38 | 1.79 | 1.52 | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.04 | 0.15 | 0.10 | 0.14 | 0.16 | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 99.6 | 145 | 92.7 | 99.8 | 148 | |
| ^ Total Cations | ---- | 0.01 | meq/L | 126 | 166 | 112 | 94.9 | 177 | |
| ^ Ionic Balance | ---- | 0.01 | % | 11.6 | 6.45 | 9.54 | 2.55 | 8.99 | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Total Organic Carbon | ---- | 1 | mg/L | 66 | 20 | 17 | 2 | <1 | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | <5 | <5 | 9 | <5 | <5 | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 2750 | 3570 | 5870 | 1140 | 2600 | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Ethane | 74-84-0 | 10 | µg/L | <10 | 615 | 24 | 228 | 248 | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Propane | 74-98-6 | 10 | µg/L | <10 | 79 | <10 | 35 | 64 | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Butane | 106-97-8 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|---|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 |
| Compound | CAS Number | LOR | Unit | | ES1530625-001 | ES1530625-002 | ES1530625-003 | ES1530625-004 | ES1530625-005 |
| | | | | | Result | Result | Result | Result | Result |
| EP074B: Oxygenated Compounds - Continued | | | | | | | | | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Chloromethane | 74-87-3 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Vinyl chloride | 75-01-4 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Bromomethane | 74-83-9 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Chloroethane | 75-00-3 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Iodomethane | 74-88-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Trichloroethene | 79-01-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Dibromomethane | 74-95-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 |
| Compound | CAS Number | LOR | Unit | | ES1530625-001 | ES1530625-002 | ES1530625-003 | ES1530625-004 | ES1530625-005 |
| | | | | | Result | Result | Result | Result | Result |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Pentachloroethane | 76-01-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromobenzene | 108-86-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromoform | 75-25-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074H: Naphthalene | | | | | | | | | |
| Naphthalene | 91-20-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | | <1.0 | 2.0 | <1.0 | <1.0 | <1.0 |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | 3.6 | <1.0 |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | | <2.0 | <2.0 | <2.0 | <2.0 | <2.0 |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 | |
| Compound | CAS Number | LOR | Unit | ES1530625-001 | ES1530625-002 | ES1530625-003 | ES1530625-004 | ES1530625-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EP075(SIM)A: Phenolic Compounds - Continued | | | | | | | | | |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | <2.0 | <2.0 | <2.0 | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | |
| ^ Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | |
| ^ Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | <50 | 60 | |
| C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | 1000 | <100 | 240 | |
| C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | 280 | <50 | 260 | |
| ^ C10 - C36 Fraction (sum) | ---- | 50 | µg/L | <50 | <50 | 1280 | <50 | 560 | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| ^ C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | <100 | <100 | <100 | |
| >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | 1190 | <100 | 400 | |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | 250 | <100 | 180 | |
| ^ >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | <100 | <100 | 1440 | <100 | 580 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 |
| Compound | CAS Number | LOR | Unit | ES1530625-001 | ES1530625-002 | ES1530625-003 | ES1530625-004 | ES1530625-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions - Continued | | | | | | | | | |
| ^ >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | <100 | <100 | <100 | <100 | <100 | <100 |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| ^ Sum of BTEX | ---- | 1 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| EP262: Ethanolamines | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | 7 | 9 | 7 | 8 | 6 | |
| Diethanolamine | 111-42-2 | 1 | µg/L | 15 | 3 | <1 | 3 | 3 | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | 8 | 20 | 6 | 5 | 15 | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | ---- | ---- | ---- | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 5 | % | ---- | ---- | ---- | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | ---- | ---- | ---- | ---- | ---- | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 26.4 | 21.8 | 34.6 | 19.1 | 26.0 | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 35.1 | 48.8 | 57.9 | 44.1 | 50.2 | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 20.4 | 47.8 | 51.3 | 29.8 | 44.2 | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 64.4 | 67.6 | 74.5 | 65.6 | 68.4 | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 50.8 | 62.5 | 60.2 | 53.7 | 57.0 | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 67.0 | 82.1 | 81.7 | 70.5 | 77.0 | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | ---- | ---- | ---- | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 2 | % | ---- | ---- | ---- | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | ---- | ---- | ---- | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|---|--------------|--------|------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 | |
| Compound | CAS Number | LOR | Unit | ES1530625-006 | ES1530625-007 | ES1530625-008 | ES1530625-009 | ES1530625-010 | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Manganese | 7439-96-5 | 0.001 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Nickel | 7440-02-0 | 0.001 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Lead | 7439-92-1 | 0.001 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Antimony | 7440-36-0 | 0.001 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Selenium | 7782-49-2 | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Tin | 7440-31-5 | 0.001 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Zinc | 7440-66-6 | 0.005 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Iron | 7439-89-6 | 0.05 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Bromine | 7726-95-6 | 0.1 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | 14798-03-9_N | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | ---- | ---- | ---- | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|---|------------|------|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 | |
| Compound | CAS Number | LOR | Unit | ES1530625-006 | ES1530625-007 | ES1530625-008 | ES1530625-009 | ES1530625-010 | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | ---- | ---- | ---- | ---- | ---- | |
| ^ Total Cations | ---- | 0.01 | meq/L | ---- | ---- | ---- | ---- | ---- | |
| ^ Ionic Balance | ---- | 0.01 | % | ---- | ---- | ---- | ---- | ---- | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Total Organic Carbon | ---- | 1 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | ---- | ---- | ---- | ---- | ---- | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| Ethene | 74-85-1 | 10 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| Ethane | 74-84-0 | 10 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| Propene | 115-07-1 | 10 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| Propane | 74-98-6 | 10 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| Butene | 25167-67-3 | 10 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| Butane | 106-97-8 | 10 | µg/L | ---- | ---- | ---- | ---- | ---- | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|---|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 |
| Compound | CAS Number | LOR | Unit | | ES1530625-006 | ES1530625-007 | ES1530625-008 | ES1530625-009 | ES1530625-010 |
| | | | | | Result | Result | Result | Result | Result |
| EP074B: Oxygenated Compounds - Continued | | | | | | | | | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Chloromethane | 74-87-3 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Vinyl chloride | 75-01-4 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Bromomethane | 74-83-9 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Chloroethane | 75-00-3 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | | <50 | <50 | <50 | <50 | <50 |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Iodomethane | 74-88-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Trichloroethene | 79-01-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Dibromomethane | 74-95-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 |
| Compound | CAS Number | LOR | Unit | | ES1530625-006 | ES1530625-007 | ES1530625-008 | ES1530625-009 | ES1530625-010 |
| | | | | | Result | Result | Result | Result | Result |
| EP075(SIM)A: Phenolic Compounds - Continued | | | | | | | | | |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Acenaphthylene | 208-96-8 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Acenaphthene | 83-32-9 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Fluorene | 86-73-7 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Phenanthrene | 85-01-8 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Anthracene | 120-12-7 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Fluoranthene | 206-44-0 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Pyrene | 129-00-0 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Chrysene | 218-01-9 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| ^ Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| ^ Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | | <20 | 140 | <20 | 60 | 70 |
| C10 - C14 Fraction | ---- | 50 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| C15 - C28 Fraction | ---- | 100 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| C29 - C36 Fraction | ---- | 50 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| ^ C10 - C36 Fraction (sum) | ---- | 50 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | | <20 | 150 | <20 | 60 | 70 |
| ^ C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | | <20 | <20 | <20 | <20 | <20 |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| >C16 - C34 Fraction | ---- | 100 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| >C34 - C40 Fraction | ---- | 100 | µg/L | | ---- | ---- | ---- | ---- | ---- |
| ^ >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | | ---- | ---- | ---- | ---- | ---- |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK12 | WK13 | WK14 |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 09-Sep-2015 07:45 | 09-Sep-2015 09:50 | 09-Sep-2015 09:15 | 09-Sep-2015 08:00 | 09-Sep-2015 08:50 |
| Compound | CAS Number | LOR | Unit | ES1530625-006 | ES1530625-007 | ES1530625-008 | ES1530625-009 | ES1530625-010 | ES1530625-010 |
| | | | | Result | Result | Result | Result | Result | Result |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions - Continued | | | | | | | | | |
| ^ >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | <1 | ---- | ---- | ---- | ---- | ---- |
| Toluene | 108-88-3 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | ---- | ---- | ---- | ---- | ---- |
| ^ Sum of BTEX | ---- | 1 | µg/L | <1 | ---- | ---- | ---- | ---- | ---- |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | ---- | ---- | ---- | ---- | ---- |
| EP262: Ethanolamines | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| Diethanolamine | 111-42-2 | 1 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | ---- | ---- | ---- | ---- | ---- | ---- |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 95.3 | 101 | 101 | 101 | 101 | 100 |
| Toluene-D8 | 2037-26-5 | 5 | % | 105 | 108 | 107 | 106 | 106 | 104 |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 98.4 | 100 | 102 | 101 | 101 | 102 |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | ---- | ---- | ---- | ---- | ---- | ---- |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | ---- | ---- | ---- | ---- | ---- | ---- |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | ---- | ---- | ---- | ---- | ---- | ---- |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | ---- | ---- | ---- | ---- | ---- | ---- |
| Anthracene-d10 | 1719-06-8 | 1 | % | ---- | ---- | ---- | ---- | ---- | ---- |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | ---- | ---- | ---- | ---- | ---- | ---- |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 99.8 | 106 | 106 | 106 | 106 | 105 |
| Toluene-D8 | 2037-26-5 | 2 | % | 99.1 | 102 | 101 | 100 | 100 | 98.4 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 96.2 | 99.5 | 99.5 | 100 | 100 | 100 |

CERTIFICATE OF ANALYSIS

| | |
|---|---|
| Work Order : ES1531965 Client : PARSONS BRINCKERHOFF AUST P/L Contact : SEAN DAYKIN Address : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 E-mail : SDaykin@pb.com.au Telephone : +61 02 92725100 Facsimile : +61 02 92725101 Project : 2268523B Order number : ---- C-O-C number : ---- Sampler : CAROLINA SARDELLA Site : ---- Quote number : ---- | Page : 1 of 2 Laboratory : Environmental Division Sydney Contact : Loren Schiavon Address : 277-289 Woodpark Road Smithfield NSW Australia 2164 E-mail : loren.schiavon@alsglobal.com Telephone : +61 2 8784 8503 Facsimile : +61-2-8784 8500 QC Level : NEPM 2013 Schedule B(3) and ALS QCS3 requirement Date Samples Received : 23-Sep-2015 15:03 Date Analysis Commenced : 23-Sep-2015 Issue Date : 24-Sep-2015 13:34 No. of samples received : 5 No. of samples analysed : 5 |
|---|---|

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|------------------------|-------------------------------|
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Pabi Subba | Senior Organic Chemist | Sydney Organics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 ø = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

| | | | | AST2 | WK11 | WK13 | WK14 | QA13 |
|--|-------------------|-----|-------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | 23-Sep-2015 07:30 | 23-Sep-2015 09:40 | 23-Sep-2015 08:15 | 23-Sep-2015 08:45 | 23-Sep-2015 08:45 |
| Compound | CAS Number | LOR | Unit | ES1531965-001 | ES1531965-002 | ES1531965-003 | ES1531965-004 | ES1531965-005 |
| | | | | Result | Result | Result | Result | Result |
| EA010P: Conductivity by PC Titrator | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 8350 | ---- | ---- | ---- | ---- |
| EK084: Un-ionized Hydrogen Sulfide | | | | | | | | |
| Unionized Hydrogen Sulfide | ---- | 0.1 | mg/L | <0.1 | <0.1 | <0.1 | <0.1 | <0.1 |
| EP080: BTEXN | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | <1 | 48 | 48 | 31 | 31 |
| Toluene | 108-88-3 | 2 | µg/L | <2 | 54 | 49 | 28 | 28 |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | <2 | <2 |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | 13 | 9 | 6 | 6 |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | 3 | <2 | <2 | <2 |
| ^ Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | 16 | 9 | 6 | 6 |
| ^ Sum of BTEX | ---- | 1 | µg/L | <1 | 118 | 106 | 65 | 65 |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 91.4 | 93.1 | 99.2 | 98.0 | 92.3 |
| Toluene-D8 | 2037-26-5 | 2 | % | 125 | 117 | 114 | 118 | 113 |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 108 | 107 | 108 | 108 | 102 |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|---|
| Work Order | : ES1532002 | Page | : 1 of 10 |
| Amendment | : 2 | Laboratory | : Environmental Division Sydney |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Contact | : Loren Schiavon |
| Contact | : SEAN DAYKIN | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | E-mail | : loren.schiavon@alsglobal.com |
| E-mail | : SDaykin@pb.com.au | Telephone | : +61 2 8784 8503 |
| Telephone | : +61 02 92725100 | Facsimile | : +61-2-8784 8500 |
| Facsimile | : +61 02 92725101 | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Project | : 2268523A | Date Samples Received | : 23-Sep-2015 15:03 |
| Order number | : ---- | Date Analysis Commenced | : 23-Sep-2015 |
| C-O-C number | : ---- | Issue Date | : 09-Oct-2015 10:14 |
| Sampler | : ---- | No. of samples received | : 5 |
| Site | : ---- | No. of samples analysed | : 5 |
| Quote number | : ---- | | |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Alison Graham | Supervisor - Inorganic | Newcastle - Inorganics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Lana Nguyen | Senior LCMS Chemist | Sydney Organics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS
- EP005 : NPOC analysis was carried out due to high inorganic carbon content.
- EK059G-EK058G-EK057G: LOR raised for NOx-Nitrate-Nitrite on sample 4 & 5 due to sample matrix
- TDS by method EA-015 may bias high due to the presence of fine particulate matter, which may pass through the prescribed GF/C paper.
- Samples not received in a suitable time frame to conduct the analysis EA005 within the recommended holding time.
- This report has been amended and re-released to allow the reporting of additional analytical data.
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a,h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA13 |
|--|-------------|--------|---------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 23-Sep-2015 07:30 | 23-Sep-2015 09:40 | 23-Sep-2015 08:15 | 23-Sep-2015 08:45 | 23-Sep-2015 08:45 | |
| Compound | CAS Number | LOR | Unit | ES1532002-001 | ES1532002-002 | ES1532002-003 | ES1532002-004 | ES1532002-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EA005: pH | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 9.42 | 7.95 | 8.42 | 7.72 | 7.75 | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | ---- | 10700 | 7190 | 12300 | 12200 | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 5160 | 6820 | 4440 | 8060 | 7680 | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | 72 | 73 | 7 | 14 | 12 | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 762 | 813 | 674 | 2130 | 2120 | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | <1 | <1 | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | 1250 | <1 | 100 | <1 | <1 | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 2850 | 5780 | 3280 | 4480 | 4400 | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 4100 | 5780 | 3380 | 4480 | 4400 | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 2 | <1 | <1 | <1 | <1 | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 758 | 801 | 687 | 2130 | 2140 | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 17 | 18 | 12 | 34 | 35 | |
| Magnesium | 7439-95-4 | 1 | mg/L | 4 | 2 | 2 | 12 | 12 | |
| Sodium | 7440-23-5 | 1 | mg/L | 2400 | 2480 | 1860 | 3150 | 3140 | |
| Potassium | 7440-09-7 | 1 | mg/L | 15 | 13 | 13 | 18 | 18 | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | 0.19 | <0.01 | 0.02 | <0.01 | <0.01 | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | 0.007 | 0.003 | 0.004 | 0.004 | 0.004 | |
| Boron | 7440-42-8 | 0.05 | mg/L | 7.37 | 2.16 | 2.57 | 3.03 | 3.00 | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 3.38 | 3.54 | 2.45 | 6.68 | 6.95 | |
| Barium | 7440-39-3 | 0.001 | mg/L | 4.28 | 5.93 | 3.69 | 7.50 | 8.12 | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Chromium | 7440-47-3 | 0.001 | mg/L | 0.002 | 0.015 | 0.002 | 0.006 | 0.007 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA13 |
|---|------------|--------|------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 23-Sep-2015 07:30 | 23-Sep-2015 09:40 | 23-Sep-2015 08:15 | 23-Sep-2015 08:45 | 23-Sep-2015 08:45 | |
| Compound | CAS Number | LOR | Unit | ES1532002-001 | ES1532002-002 | ES1532002-003 | ES1532002-004 | ES1532002-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | 0.003 | 0.002 | <0.001 | <0.001 | <0.001 | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.005 | 0.021 | 0.009 | 0.035 | 0.039 | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | 0.016 | 0.009 | 0.004 | 0.008 | 0.008 | |
| Nickel | 7440-02-0 | 0.001 | mg/L | 0.004 | 0.003 | 0.002 | 0.002 | 0.002 | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Antimony | 7440-36-0 | 0.001 | mg/L | 0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | <0.001 | <0.001 | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <0.01 | <0.01 | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | <0.005 | <0.005 | <0.005 | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.16 | 1.10 | 0.74 | 2.97 | 3.34 | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 1.0 | 1.2 | 1.3 | 0.9 | 0.9 | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | <0.0001 | <0.0001 | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 3.32 | 6.48 | 26.9 | 44.4 | 39.5 | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | <0.2 | <0.2 | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | 1.6 | 1.9 | 2.6 | 0.9 | 0.9 | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.02 | 4.67 | 0.02 | 4.94 | 4.85 | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | ---- | 0.01 | mg/L | <0.01 | 4.56 | 0.02 | 4.86 | 4.78 | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | <1.00 | <1.00 | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | 0.08 | 0.01 | 0.03 | <1.00 | <1.00 | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.08 | 0.01 | 0.03 | <1.00 | <1.00 | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 9.7 | 7.5 | 1.0 | 5.8 | 5.8 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA13 |
|---|------------|------|-------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 23-Sep-2015 07:30 | 23-Sep-2015 09:40 | 23-Sep-2015 08:15 | 23-Sep-2015 08:45 | 23-Sep-2015 08:45 | |
| Compound | CAS Number | LOR | Unit | ES1532002-001 | ES1532002-002 | ES1532002-003 | ES1532002-004 | ES1532002-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 9.8 | 7.5 | 1.0 | 5.8 | 5.8 | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 2.40 | 2.83 | 0.12 | 1.43 | 1.39 | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | 0.20 | 0.41 | 0.14 | 0.07 | 0.13 | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 103 | 138 | 86.9 | 150 | 148 | |
| ^ Total Cations | ---- | 0.01 | meq/L | 106 | 109 | 82.0 | 140 | 140 | |
| ^ Ionic Balance | ---- | 0.01 | % | 1.19 | 11.7 | 2.97 | 3.30 | 3.00 | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Nonpurgeable Organic Carbon | ---- | 1 | mg/L | 51 | 36 | 22 | 11 | 10 | |
| EP020: Oil and Grease (O&G) | | | | | | | | | |
| ^ Oil & Grease | ---- | 5 | mg/L | <5 | <5 | <5 | <5 | <5 | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 1500 | 30600 | 26400 | 23800 | 21200 | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Ethane | 74-84-0 | 10 | µg/L | <10 | 2760 | 3630 | 2160 | 1910 | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Propane | 74-98-6 | 10 | µg/L | <10 | 490 | 480 | 162 | 157 | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | <10 | <10 | |
| Butane | 106-97-8 | 10 | µg/L | <10 | 26 | <10 | <10 | <10 | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | <5 | <5 | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA13 |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 23-Sep-2015 07:30 | 23-Sep-2015 09:40 | 23-Sep-2015 08:15 | 23-Sep-2015 08:45 | 23-Sep-2015 08:45 |
| Compound | CAS Number | LOR | Unit | | ES1532002-001 | ES1532002-002 | ES1532002-003 | ES1532002-004 | ES1532002-005 |
| | | | | | Result | Result | Result | Result | Result |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| 1.1.2.2-Tetrachloroethane | 79-34-5 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.3-Trichloropropane | 96-18-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Pentachloroethane | 76-01-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromobenzene | 108-86-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.3-Dichlorobenzene | 541-73-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.4-Dichlorobenzene | 106-46-7 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2-Dichlorobenzene | 95-50-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.4-Trichlorobenzene | 120-82-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| 1.2.3-Trichlorobenzene | 87-61-6 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| Bromoform | 75-25-2 | 5 | µg/L | | <5 | <5 | <5 | <5 | <5 |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | | <1.0 | 1.8 | <1.0 | <1.0 | <1.0 |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | | <2.0 | 37.1 | 26.3 | 40.3 | 28.7 |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4-Dimethylphenol | 105-67-9 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4-Dichlorophenol | 120-83-2 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.6-Dichlorophenol | 87-65-0 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4.6-Trichlorophenol | 88-06-2 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| 2.4.5-Trichlorophenol | 95-95-4 | 1 | µg/L | | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | | <2.0 | <2.0 | <2.0 | <2.0 | <2.0 |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA13 |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|-------------------|-------------------|
| Client sampling date / time | | | | | 23-Sep-2015 07:30 | 23-Sep-2015 09:40 | 23-Sep-2015 08:15 | 23-Sep-2015 08:45 | 23-Sep-2015 08:45 |
| Compound | CAS Number | LOR | Unit | ES1532002-001 | ES1532002-002 | ES1532002-003 | ES1532002-004 | ES1532002-005 | ES1532002-005 |
| | | | | Result | Result | Result | Result | Result | Result |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons - Continued | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| [^] Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| [^] Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 | <0.5 |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | <20 | 180 | 180 | 130 | 110 | 110 |
| C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | <50 |
| C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | <100 | <100 | <100 |
| C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | <50 |
| [^] C10 - C36 Fraction (sum) | ---- | 50 | µg/L | <50 | <50 | <50 | <50 | <50 | <50 |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | 180 | 180 | 130 | 110 | 110 |
| [^] C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | <20 | 70 | 70 | 50 | 50 | 50 |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | <100 | <100 | <100 | <100 |
| >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | <100 | <100 | <100 |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | <100 | <100 | <100 |
| [^] >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | <100 | <100 | <100 | <100 | <100 | <100 |
| [^] >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | <100 | <100 | <100 | <100 | <100 | <100 |
| EP262: Ethanolamines | | | | | | | | | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | AST2 | WK11 | WK13 | WK14 | QA13 |
|--|------------|-----|------|-------------------|-------------------|-------------------|-------------------|-------------------|------|
| Client sampling date / time | | | | 23-Sep-2015 07:30 | 23-Sep-2015 09:40 | 23-Sep-2015 08:15 | 23-Sep-2015 08:45 | 23-Sep-2015 08:45 | |
| Compound | CAS Number | LOR | Unit | ES1532002-001 | ES1532002-002 | ES1532002-003 | ES1532002-004 | ES1532002-005 | |
| | | | | Result | Result | Result | Result | Result | |
| EP262: Ethanolamines - Continued | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | 17 | 44 | 38 | 23 | 33 | |
| Diethanolamine | 111-42-2 | 1 | µg/L | 36 | 18 | 4 | 10 | 9 | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | <1 | 16 | <1 | 39 | 44 | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 96.7 | 104 | 100 | 101 | 104 | |
| Toluene-D8 | 2037-26-5 | 5 | % | 103 | 105 | 105 | 107 | 99.8 | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 97.6 | 104 | 106 | 108 | 103 | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 18.9 | 20.3 | 14.4 | 21.5 | 21.5 | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 23.3 | 39.2 | 42.0 | 42.0 | 41.9 | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 20.4 | 30.1 | 28.9 | 32.8 | 31.9 | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 59.7 | 56.0 | 70.5 | 66.9 | 66.1 | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 51.4 | 50.6 | 58.1 | 55.0 | 54.0 | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 65.9 | 61.4 | 69.0 | 66.6 | 65.4 | |

CERTIFICATE OF ANALYSIS

| | | | |
|---------------------|--|--------------------------------|--|
| Work Order | : ES1532008 | Page | : 1 of 10 |
| Amendment | : 3 | | |
| Client | : PARSONS BRINCKERHOFF AUST P/L | Laboratory | : Environmental Division Sydney |
| Contact | : SEAN DAYKIN | Contact | : Loren Schiavon |
| Address | : GPO BOX 5394 SYDNEY NSW, AUSTRALIA 2001 | Address | : 277-289 Woodpark Road Smithfield NSW Australia 2164 |
| E-mail | : SDaykin@pb.com.au | E-mail | : loren.schiavon@alsglobal.com |
| Telephone | : +61 02 92725100 | Telephone | : +61 2 8784 8503 |
| Facsimile | : +61 02 92725101 | Facsimile | : +61-2-8784 8500 |
| Project | : 2268523B | QC Level | : NEPM 2013 Schedule B(3) and ALS QCS3 requirement |
| Order number | : ---- | Date Samples Received | : 23-Sep-2015 15:03 |
| C-O-C number | : ---- | Date Analysis Commenced | : 23-Sep-2015 |
| Sampler | : ANDREW FARINA, SEAN DAYKIN | Issue Date | : 28-Oct-2015 10:20 |
| Site | : ---- | | |
| Quote number | : ---- | No. of samples received | : 3 |
| | | No. of samples analysed | : 3 |

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

| <i>Signatories</i> | <i>Position</i> | <i>Accreditation Category</i> |
|--------------------|-------------------------------|-------------------------------|
| Alison Graham | Supervisor - Inorganic | Newcastle - Inorganics |
| Ankit Joshi | Inorganic Chemist | Sydney Inorganics |
| Ashesh Patel | Inorganic Chemist | Sydney Inorganics |
| Celine Conceicao | Senior Spectroscopist | Sydney Inorganics |
| Phalak Inthakesone | Laboratory Manager - Organics | Sydney Organics |
| Shobhna Chandra | Metals Coordinator | Sydney Inorganics |



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
LOR = Limit of reporting
^ = This result is computed from individual analyte detections at or above the level of reporting
∅ = ALS is not NATA accredited for these tests.

- EG020: Bromine quantification may be unreliable due to its low solubility in acid, leading to variable volatility during measurement by ICPMS
- Samples #2 and #3 not received in a suitable time frame to conduct the analysis EA005 within the recommended holding time.
- This report has been amended and re-released to allow the reporting of additional analytical data, specifically Tin via EG020 analysis.
- This report has been amended and re-released to allow the reporting of additional analytical data (tin on all three samples)
- Benzo(a)pyrene Toxicity Equivalent Quotient (TEQ) is the sum total of the concentration of the eight carcinogenic PAHs multiplied by their Toxicity Equivalence Factor (TEF) relative to Benzo(a)pyrene. TEF values are provided in brackets as follows: Benz(a)anthracene (0.1), Chrysene (0.01), Benzo(b+j) & Benzo(k)fluoranthene (0.1), Benzo(a)pyrene (1.0), Indeno(1.2.3.cd)pyrene (0.1), Dibenz(a,h)anthracene (1.0), Benzo(g,h,i)perylene (0.01). Less than LOR results for 'TEQ Zero' are treated as zero.



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|-------------|--------|---------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 23-Sep-2015 10:30 | 22-Sep-2015 17:00 | 22-Sep-2015 16:00 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1532008-001 | ES1532008-002 | ES1532008-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EA005: pH | | | | | | | | | |
| pH Value | ---- | 0.01 | pH Unit | 7.46 | 7.29 | 7.30 | ---- | ---- | |
| EA010P: Conductivity by PC Titrator | | | | | | | | | |
| Electrical Conductivity @ 25°C | ---- | 1 | µS/cm | 671 | 647 | 628 | ---- | ---- | |
| EA015: Total Dissolved Solids | | | | | | | | | |
| ^ Total Dissolved Solids @180°C | ---- | 10 | mg/L | 413 | 375 | 386 | ---- | ---- | |
| EA025: Suspended Solids | | | | | | | | | |
| ^ Suspended Solids (SS) | ---- | 5 | mg/L | <5 | <5 | <5 | ---- | ---- | |
| ED009: Anions | | | | | | | | | |
| Chloride | 16887-00-6 | 0.1 | mg/L | 152 | 145 | 145 | ---- | ---- | |
| ED037P: Alkalinity by PC Titrator | | | | | | | | | |
| Hydroxide Alkalinity as CaCO3 | DMO-210-001 | 1 | mg/L | <1 | <1 | <1 | ---- | ---- | |
| Carbonate Alkalinity as CaCO3 | 3812-32-6 | 1 | mg/L | <1 | <1 | <1 | ---- | ---- | |
| Bicarbonate Alkalinity as CaCO3 | 71-52-3 | 1 | mg/L | 72 | 103 | 80 | ---- | ---- | |
| Total Alkalinity as CaCO3 | ---- | 1 | mg/L | 72 | 103 | 80 | ---- | ---- | |
| ED041G: Sulfate (Turbidimetric) as SO4 2- by DA | | | | | | | | | |
| Sulfate as SO4 - Turbidimetric | 14808-79-8 | 1 | mg/L | 37 | 6 | 18 | ---- | ---- | |
| ED045G: Chloride by Discrete Analyser | | | | | | | | | |
| Chloride | 16887-00-6 | 1 | mg/L | 150 | 144 | 143 | ---- | ---- | |
| ED093F: Dissolved Major Cations | | | | | | | | | |
| Calcium | 7440-70-2 | 1 | mg/L | 21 | 33 | 25 | ---- | ---- | |
| Magnesium | 7439-95-4 | 1 | mg/L | 18 | 18 | 17 | ---- | ---- | |
| Sodium | 7440-23-5 | 1 | mg/L | 85 | 69 | 75 | ---- | ---- | |
| Potassium | 7440-09-7 | 1 | mg/L | 4 | 4 | 4 | ---- | ---- | |
| EG020F: Dissolved Metals by ICP-MS | | | | | | | | | |
| Aluminium | 7429-90-5 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Arsenic | 7440-38-2 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Boron | 7440-42-8 | 0.05 | mg/L | <0.05 | 0.05 | <0.05 | ---- | ---- | |
| Strontium | 7440-24-6 | 0.001 | mg/L | 0.375 | 0.386 | 0.320 | ---- | ---- | |
| Barium | 7440-39-3 | 0.001 | mg/L | 0.066 | 0.055 | 0.056 | ---- | ---- | |
| Beryllium | 7440-41-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Cadmium | 7440-43-9 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | ---- | ---- | |
| Cobalt | 7440-48-4 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Uranium | 7440-61-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Chromium | 7440-47-3 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|---|--------------|--------|------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 23-Sep-2015 10:30 | 22-Sep-2015 17:00 | 22-Sep-2015 16:00 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1532008-001 | ES1532008-002 | ES1532008-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EG020F: Dissolved Metals by ICP-MS - Continued | | | | | | | | | |
| Copper | 7440-50-8 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Manganese | 7439-96-5 | 0.001 | mg/L | 0.371 | 0.305 | 0.288 | ---- | ---- | |
| Molybdenum | 7439-98-7 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Nickel | 7440-02-0 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Lead | 7439-92-1 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Antimony | 7440-36-0 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Selenium | 7782-49-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Tin | 7440-31-5 | 0.001 | mg/L | <0.001 | <0.001 | <0.001 | ---- | ---- | |
| Vanadium | 7440-62-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| Zinc | 7440-66-6 | 0.005 | mg/L | <0.005 | <0.005 | <0.005 | ---- | ---- | |
| Iron | 7439-89-6 | 0.05 | mg/L | 0.11 | 0.10 | 0.18 | ---- | ---- | |
| Bromine | 7726-95-6 | 0.1 | mg/L | 0.3 | 0.2 | 0.2 | ---- | ---- | |
| EG035F: Dissolved Mercury by FIMS | | | | | | | | | |
| Mercury | 7439-97-6 | 0.0001 | mg/L | <0.0001 | <0.0001 | <0.0001 | ---- | ---- | |
| EG052G: Silica by Discrete Analyser | | | | | | | | | |
| Reactive Silica | ---- | 0.05 | mg/L | 3.08 | 3.66 | 2.65 | ---- | ---- | |
| EK010/011: Chlorine | | | | | | | | | |
| Chlorine - Free | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | ---- | ---- | |
| Chlorine - Total Residual | ---- | 0.2 | mg/L | <0.2 | <0.2 | <0.2 | ---- | ---- | |
| EK040P: Fluoride by PC Titrator | | | | | | | | | |
| Fluoride | 16984-48-8 | 0.1 | mg/L | <0.1 | 0.2 | 0.1 | ---- | ---- | |
| EK055G: Ammonia as N by Discrete Analyser | | | | | | | | | |
| Ammonia as N | 7664-41-7 | 0.01 | mg/L | 0.03 | 0.01 | 3.95 | ---- | ---- | |
| EK055G-NH4: Ammonium as N by DA | | | | | | | | | |
| ^ Ammonium as N | 14798-03-9_N | 0.01 | mg/L | 0.03 | <0.01 | 3.34 | ---- | ---- | |
| EK057G: Nitrite as N by Discrete Analyser | | | | | | | | | |
| Nitrite as N | 14797-65-0 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| EK058G: Nitrate as N by Discrete Analyser | | | | | | | | | |
| ^ Nitrate as N | 14797-55-8 | 0.01 | mg/L | 0.03 | 0.04 | 0.15 | ---- | ---- | |
| EK059G: Nitrite plus Nitrate as N (NOx) by Discrete Analyser | | | | | | | | | |
| Nitrite + Nitrate as N | ---- | 0.01 | mg/L | 0.03 | 0.04 | 0.15 | ---- | ---- | |
| EK061G: Total Kjeldahl Nitrogen By Discrete Analyser | | | | | | | | | |
| Total Kjeldahl Nitrogen as N | ---- | 0.1 | mg/L | 0.5 | 0.3 | 5.7 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|---|------------|------|-------|-------------------|-------------------|-------------------|--------|--------|------|
| Client sampling date / time | | | | 23-Sep-2015 10:30 | 22-Sep-2015 17:00 | 22-Sep-2015 16:00 | ---- | ---- | |
| Compound | CAS Number | LOR | Unit | ES1532008-001 | ES1532008-002 | ES1532008-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EK062G: Total Nitrogen as N (TKN + NOx) by Discrete Analyser | | | | | | | | | |
| ^ Total Nitrogen as N | ---- | 0.1 | mg/L | 0.5 | 0.3 | 5.8 | ---- | ---- | |
| EK067G: Total Phosphorus as P by Discrete Analyser | | | | | | | | | |
| Total Phosphorus as P | ---- | 0.01 | mg/L | 0.02 | 0.03 | 1.99 | ---- | ---- | |
| EK071G: Reactive Phosphorus as P by discrete analyser | | | | | | | | | |
| Reactive Phosphorus as P | 14265-44-2 | 0.01 | mg/L | <0.01 | <0.01 | <0.01 | ---- | ---- | |
| EN055: Ionic Balance | | | | | | | | | |
| ^ Total Anions | ---- | 0.01 | meq/L | 6.44 | 6.24 | 6.01 | ---- | ---- | |
| ^ Total Cations | ---- | 0.01 | meq/L | 6.33 | 6.23 | 6.01 | ---- | ---- | |
| ^ Ionic Balance | ---- | 0.01 | % | 0.88 | 0.10 | 0.03 | ---- | ---- | |
| EP005: Total Organic Carbon (TOC) | | | | | | | | | |
| Total Organic Carbon | ---- | 1 | mg/L | 8 | 4 | 7 | ---- | ---- | |
| EP033: C1 - C4 Hydrocarbon Gases | | | | | | | | | |
| Methane | 74-82-8 | 10 | µg/L | 30 | 247 | 177 | ---- | ---- | |
| Ethene | 74-85-1 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Ethane | 74-84-0 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Propene | 115-07-1 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Propane | 74-98-6 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Butene | 25167-67-3 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| Butane | 106-97-8 | 10 | µg/L | <10 | <10 | <10 | ---- | ---- | |
| EP074A: Monocyclic Aromatic Hydrocarbons | | | | | | | | | |
| Styrene | 100-42-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Isopropylbenzene | 98-82-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| n-Propylbenzene | 103-65-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,3,5-Trimethylbenzene | 108-67-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| sec-Butylbenzene | 135-98-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2,4-Trimethylbenzene | 95-63-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| tert-Butylbenzene | 98-06-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| p-Isopropyltoluene | 99-87-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| n-Butylbenzene | 104-51-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074B: Oxygenated Compounds | | | | | | | | | |
| Vinyl Acetate | 108-05-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 2-Butanone (MEK) | 78-93-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 4-Methyl-2-pentanone (MIBK) | 108-10-1 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 2-Hexanone (MBK) | 591-78-6 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 23-Sep-2015 10:30 | 22-Sep-2015 17:00 | 22-Sep-2015 16:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1532008-001 | ES1532008-002 | ES1532008-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074C: Sulfonated Compounds | | | | | | | | | |
| Carbon disulfide | 75-15-0 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074D: Fumigants | | | | | | | | | |
| 2,2-Dichloropropane | 594-20-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dichloropropane | 78-87-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| cis-1,3-Dichloropropylene | 10061-01-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,3-Dichloropropylene | 10061-02-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dibromoethane (EDB) | 106-93-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074E: Halogenated Aliphatic Compounds | | | | | | | | | |
| Dichlorodifluoromethane | 75-71-8 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Chloromethane | 74-87-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Vinyl chloride | 75-01-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Bromomethane | 74-83-9 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Chloroethane | 75-00-3 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| Trichlorofluoromethane | 75-69-4 | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| 1,1-Dichloroethene | 75-35-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Iodomethane | 74-88-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,2-Dichloroethene | 156-60-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1-Dichloroethane | 75-34-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| cis-1,2-Dichloroethene | 156-59-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,1-Trichloroethane | 71-55-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1-Dichloropropylene | 563-58-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Carbon Tetrachloride | 56-23-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dichloroethane | 107-06-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Trichloroethene | 79-01-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Dibromomethane | 74-95-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,2-Trichloroethane | 79-00-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,3-Dichloropropane | 142-28-9 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Tetrachloroethene | 127-18-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,1,2-Tetrachloroethane | 630-20-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| trans-1,4-Dichloro-2-butene | 110-57-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| cis-1,4-Dichloro-2-butene | 1476-11-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,1,2,2-Tetrachloroethane | 79-34-5 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2,3-Trichloropropane | 96-18-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Pentachloroethane | 76-01-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 23-Sep-2015 10:30 | 22-Sep-2015 17:00 | 22-Sep-2015 16:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1532008-001 | ES1532008-002 | ES1532008-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP074E: Halogenated Aliphatic Compounds - Continued | | | | | | | | | |
| 1,2-Dibromo-3-chloropropane | 96-12-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Hexachlorobutadiene | 87-68-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074F: Halogenated Aromatic Compounds | | | | | | | | | |
| Chlorobenzene | 108-90-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromobenzene | 108-86-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 2-Chlorotoluene | 95-49-8 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 4-Chlorotoluene | 106-43-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,3-Dichlorobenzene | 541-73-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,4-Dichlorobenzene | 106-46-7 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2-Dichlorobenzene | 95-50-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2,4-Trichlorobenzene | 120-82-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| 1,2,3-Trichlorobenzene | 87-61-6 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP074G: Trihalomethanes | | | | | | | | | |
| Chloroform | 67-66-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromodichloromethane | 75-27-4 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Dibromochloromethane | 124-48-1 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| Bromoform | 75-25-2 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP075(SIM)A: Phenolic Compounds | | | | | | | | | |
| Phenol | 108-95-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2-Chlorophenol | 95-57-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2-Methylphenol | 95-48-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 3- & 4-Methylphenol | 1319-77-3 | 2 | µg/L | <2.0 | <2.0 | <2.0 | ---- | ---- | |
| 2-Nitrophenol | 88-75-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2,4-Dimethylphenol | 105-67-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2,4-Dichlorophenol | 120-83-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2,6-Dichlorophenol | 87-65-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 4-Chloro-3-methylphenol | 59-50-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2,4,6-Trichlorophenol | 88-06-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| 2,4,5-Trichlorophenol | 95-95-4 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Pentachlorophenol | 87-86-5 | 2 | µg/L | <2.0 | <2.0 | <2.0 | ---- | ---- | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons | | | | | | | | | |
| Naphthalene | 91-20-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Acenaphthylene | 208-96-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Acenaphthene | 83-32-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |



Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 23-Sep-2015 10:30 | 22-Sep-2015 17:00 | 22-Sep-2015 16:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1532008-001 | ES1532008-002 | ES1532008-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP075(SIM)B: Polynuclear Aromatic Hydrocarbons - Continued | | | | | | | | | |
| Fluorene | 86-73-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Phenanthrene | 85-01-8 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Anthracene | 120-12-7 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Fluoranthene | 206-44-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Pyrene | 129-00-0 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(a)anthracene | 56-55-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Chrysene | 218-01-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(b+j)fluoranthene | 205-99-2 205-82-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(k)fluoranthene | 207-08-9 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(a)pyrene | 50-32-8 | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| Indeno(1.2.3.cd)pyrene | 193-39-5 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Dibenz(a.h)anthracene | 53-70-3 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| Benzo(g,h,i)perylene | 191-24-2 | 1 | µg/L | <1.0 | <1.0 | <1.0 | ---- | ---- | |
| [^] Sum of polycyclic aromatic hydrocarbons | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| [^] Benzo(a)pyrene TEQ (zero) | ---- | 0.5 | µg/L | <0.5 | <0.5 | <0.5 | ---- | ---- | |
| EP080/071: Total Petroleum Hydrocarbons | | | | | | | | | |
| C6 - C9 Fraction | ---- | 20 | µg/L | <20 | <20 | <20 | ---- | ---- | |
| C10 - C14 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| C15 - C28 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| C29 - C36 Fraction | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| [^] C10 - C36 Fraction (sum) | ---- | 50 | µg/L | <50 | <50 | <50 | ---- | ---- | |
| EP080/071: Total Recoverable Hydrocarbons - NEPM 2013 Fractions | | | | | | | | | |
| C6 - C10 Fraction | C6_C10 | 20 | µg/L | <20 | <20 | <20 | ---- | ---- | |
| [^] C6 - C10 Fraction minus BTEX (F1) | C6_C10-BTEX | 20 | µg/L | <20 | <20 | <20 | ---- | ---- | |
| >C10 - C16 Fraction | >C10_C16 | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| >C16 - C34 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| >C34 - C40 Fraction | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| [^] >C10 - C40 Fraction (sum) | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| [^] >C10 - C16 Fraction minus Naphthalene (F2) | ---- | 100 | µg/L | <100 | <100 | <100 | ---- | ---- | |
| EP080: BTEXN | | | | | | | | | |
| Benzene | 71-43-2 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Toluene | 108-88-3 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| Ethylbenzene | 100-41-4 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |












Analytical Results

| Sub-Matrix: WATER (Matrix: WATER) | | | | Client sample ID | WKS01 | WKS02 | WKS03 | ---- | ---- |
|--|-------------------|-----|------|------------------|-------------------|-------------------|-------------------|--------|------|
| Client sampling date / time | | | | | 23-Sep-2015 10:30 | 22-Sep-2015 17:00 | 22-Sep-2015 16:00 | ---- | ---- |
| Compound | CAS Number | LOR | Unit | ES1532008-001 | ES1532008-002 | ES1532008-003 | ----- | ----- | |
| | | | | Result | Result | Result | Result | Result | |
| EP080: BTEXN - Continued | | | | | | | | | |
| meta- & para-Xylene | 108-38-3 106-42-3 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| ortho-Xylene | 95-47-6 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| [^] Total Xylenes | 1330-20-7 | 2 | µg/L | <2 | <2 | <2 | ---- | ---- | |
| [^] Sum of BTEX | ---- | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Naphthalene | 91-20-3 | 5 | µg/L | <5 | <5 | <5 | ---- | ---- | |
| EP262: Ethanolamines | | | | | | | | | |
| Ethanolamine | 141-43-5 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Diethanolamine | 111-42-2 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| Methyl diethanolamine (MDEA) | 105-59-9 | 1 | µg/L | <1 | <1 | <1 | ---- | ---- | |
| EP074S: VOC Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 5 | % | 106 | 102 | 98.2 | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 5 | % | 102 | 106 | 105 | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 5 | % | 110 | 108 | 105 | ---- | ---- | |
| EP075(SIM)S: Phenolic Compound Surrogates | | | | | | | | | |
| Phenol-d6 | 13127-88-3 | 1 | % | 26.4 | 20.7 | 17.2 | ---- | ---- | |
| 2-Chlorophenol-D4 | 93951-73-6 | 1 | % | 44.6 | 38.7 | 36.3 | ---- | ---- | |
| 2,4,6-Tribromophenol | 118-79-6 | 1 | % | 38.7 | 31.8 | 29.7 | ---- | ---- | |
| EP075(SIM)T: PAH Surrogates | | | | | | | | | |
| 2-Fluorobiphenyl | 321-60-8 | 1 | % | 76.5 | 63.9 | 58.7 | ---- | ---- | |
| Anthracene-d10 | 1719-06-8 | 1 | % | 68.0 | 58.5 | 47.7 | ---- | ---- | |
| 4-Terphenyl-d14 | 1718-51-0 | 1 | % | 81.0 | 73.0 | 56.8 | ---- | ---- | |
| EP080S: TPH(V)/BTEX Surrogates | | | | | | | | | |
| 1,2-Dichloroethane-D4 | 17060-07-0 | 2 | % | 100 | 95.2 | 92.3 | ---- | ---- | |
| Toluene-D8 | 2037-26-5 | 2 | % | 104 | 108 | 106 | ---- | ---- | |
| 4-Bromofluorobenzene | 460-00-4 | 2 | % | 115 | 111 | 107 | ---- | ---- | |










Appendix I










Groundwater and surface water trend analysis

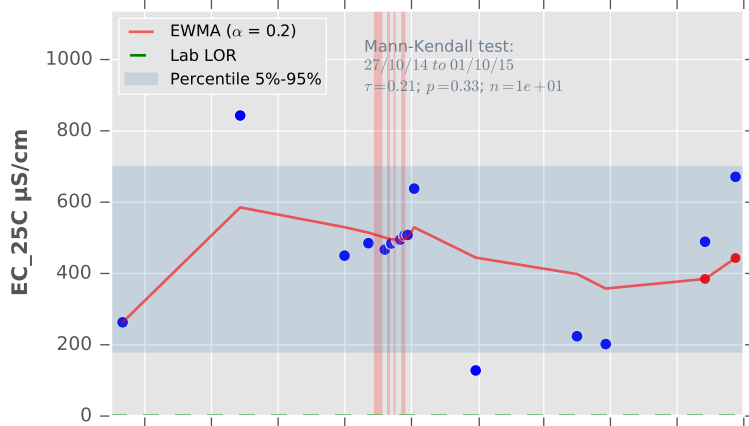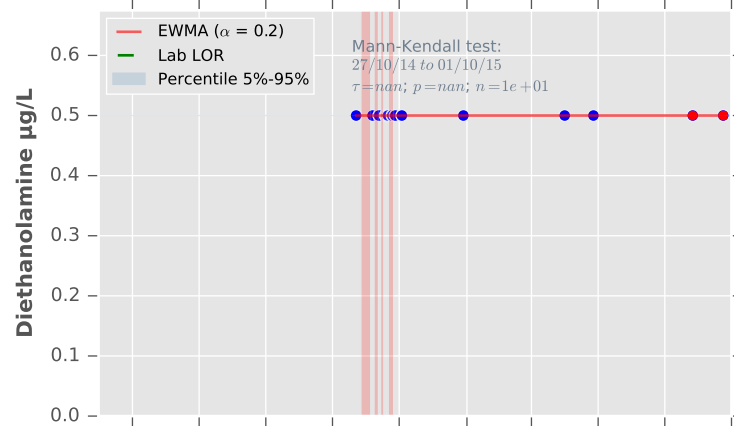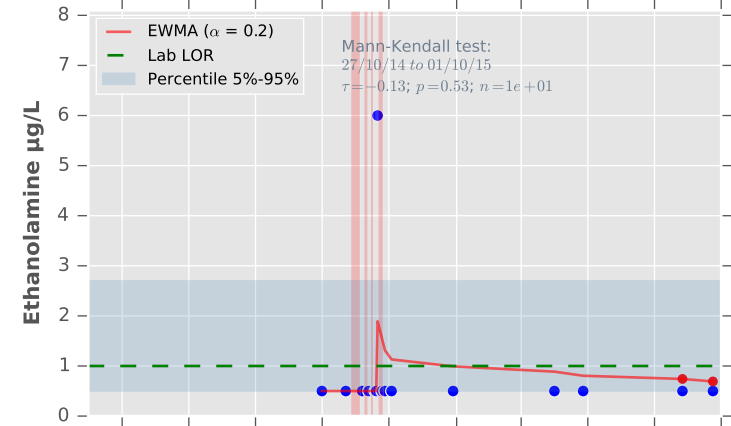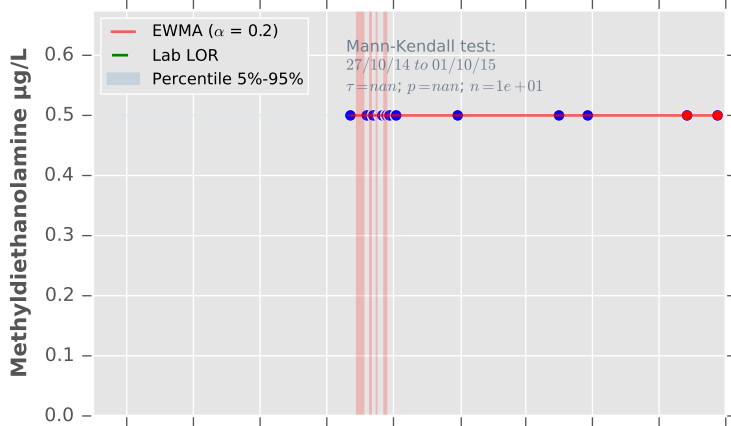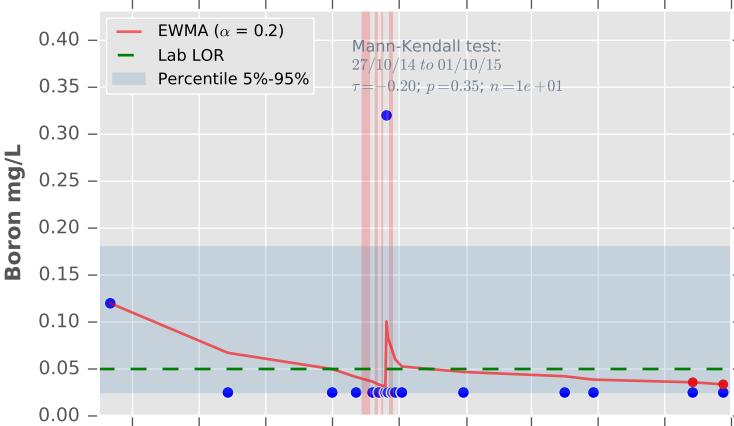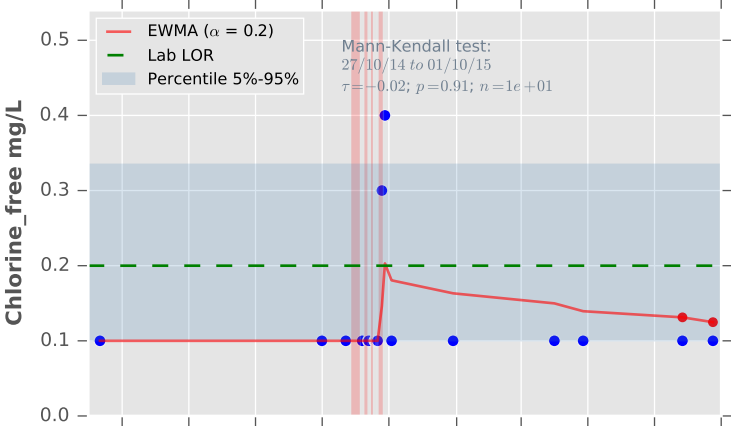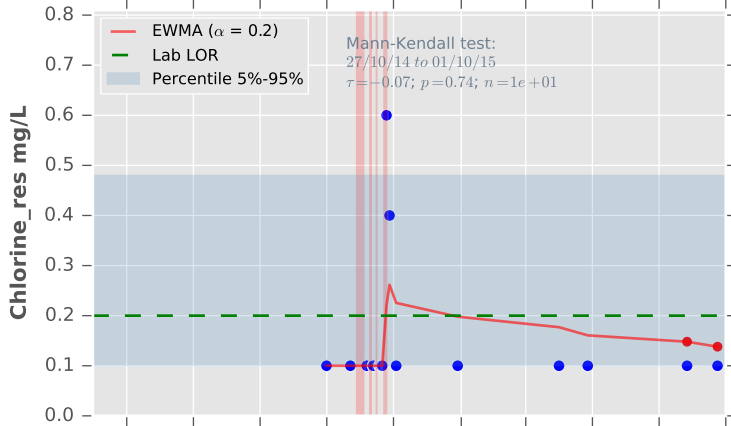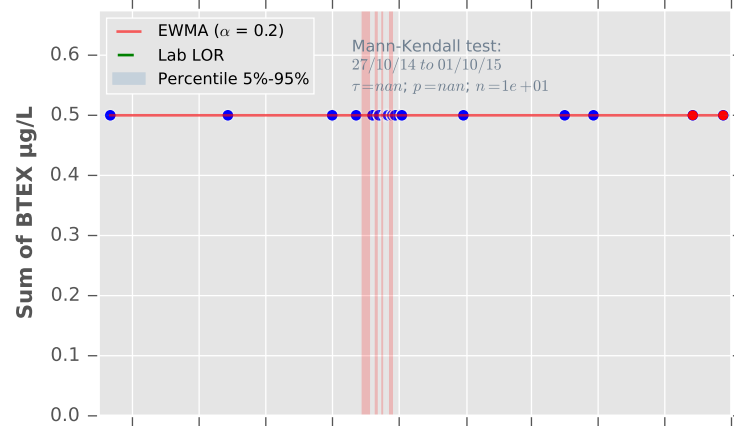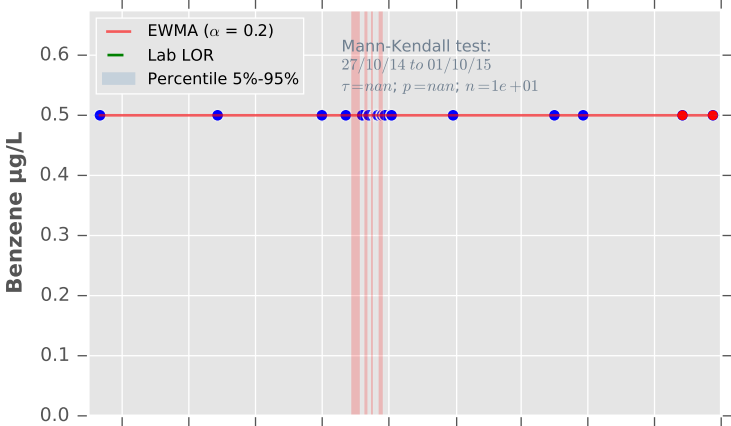

WKS01**WKS01****WKS01****WKS01****WKS01****WKS01****WKS01****WKS01****WKS01**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

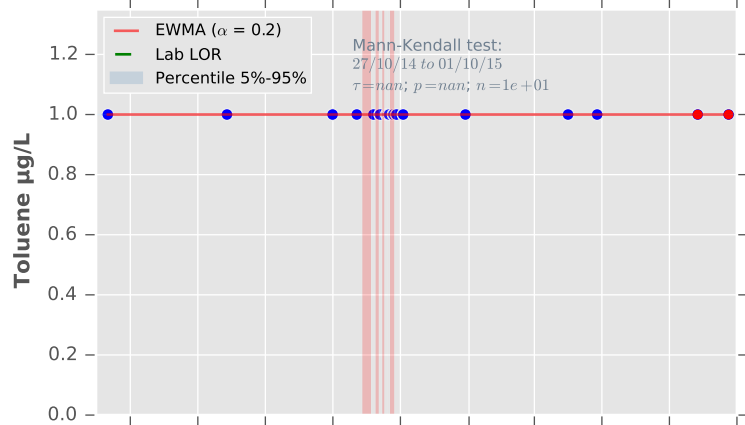
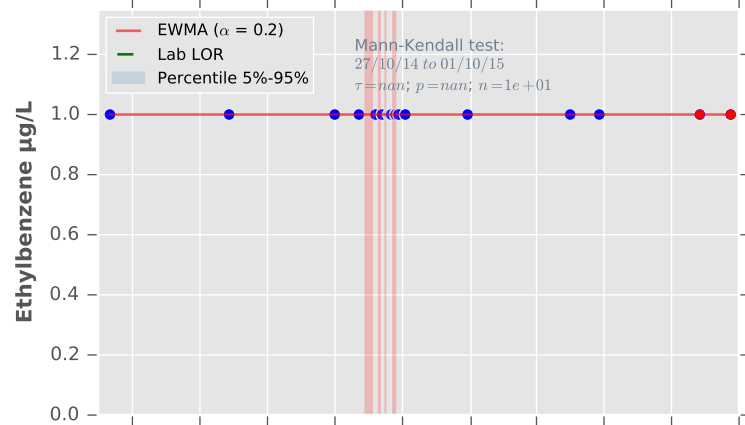
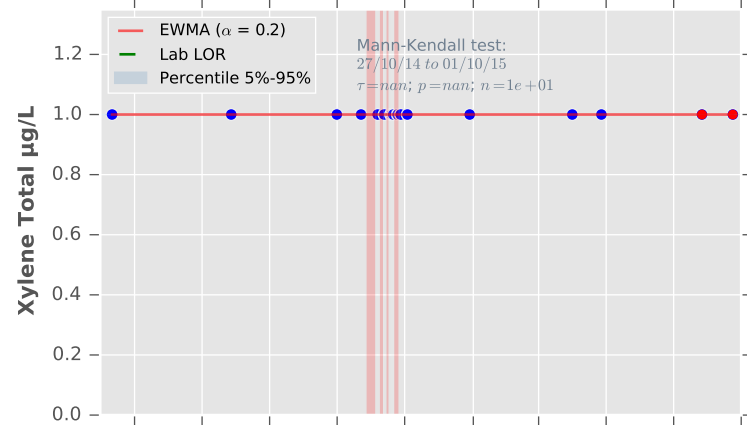
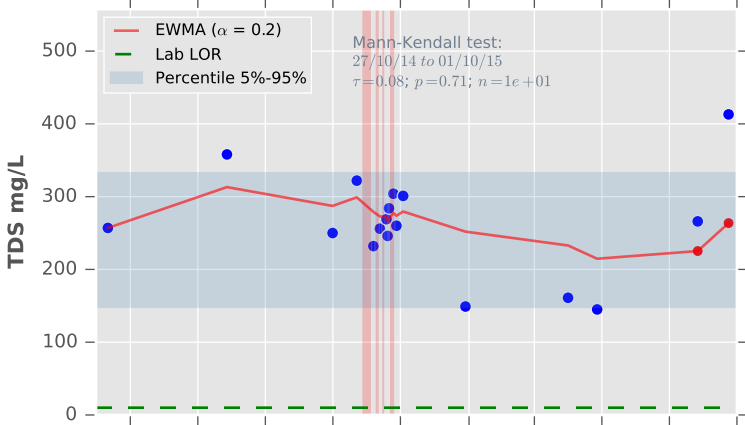
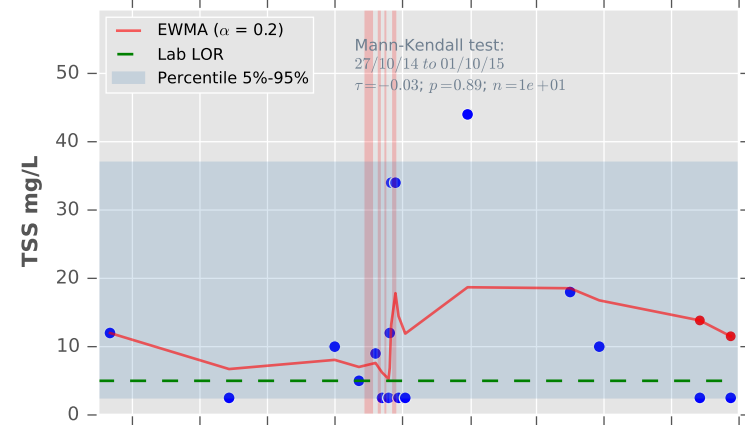
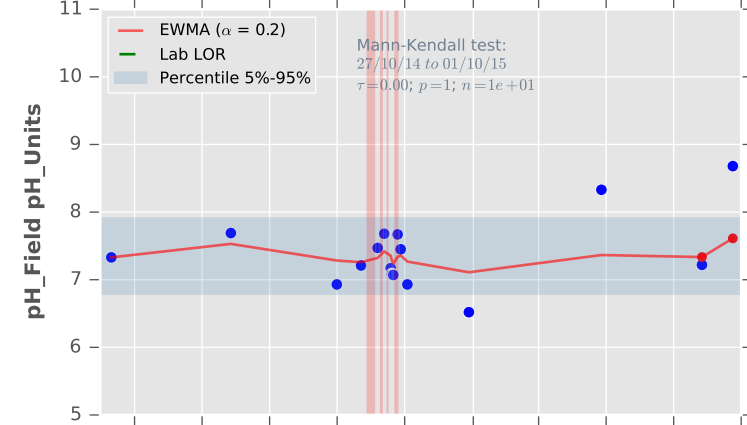
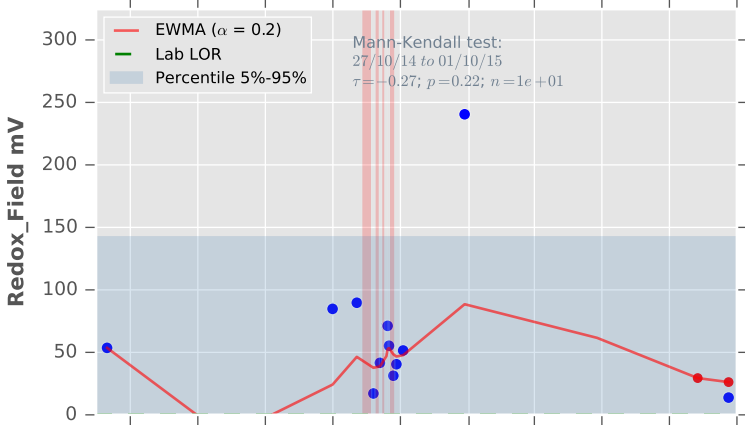
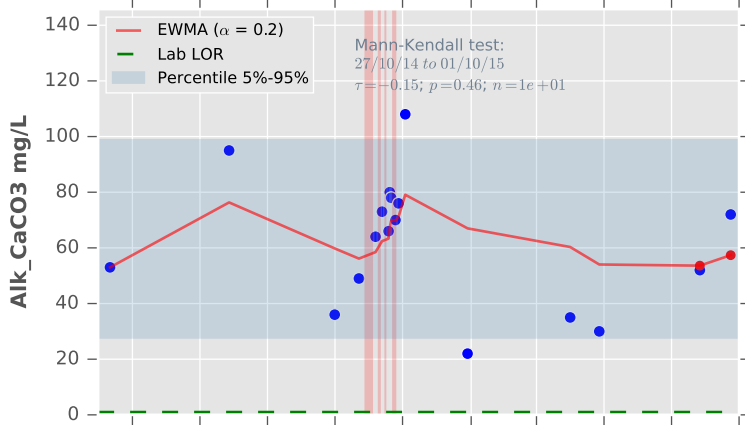
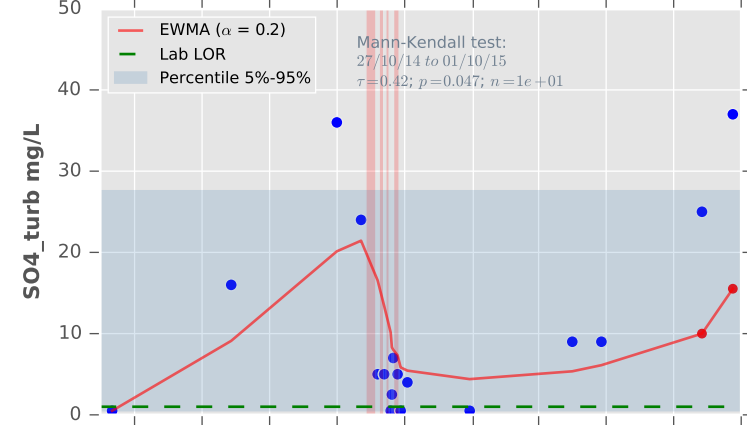
WKS01**WKS01****WKS01****WKS01****WKS01****WKS01****WKS01****WKS01****WKS01**

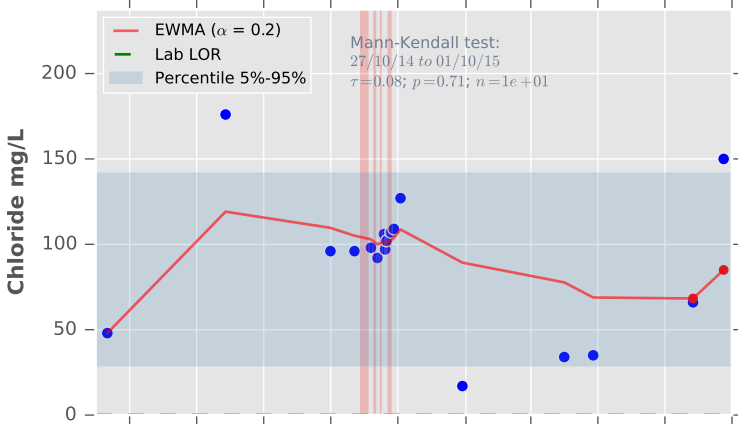
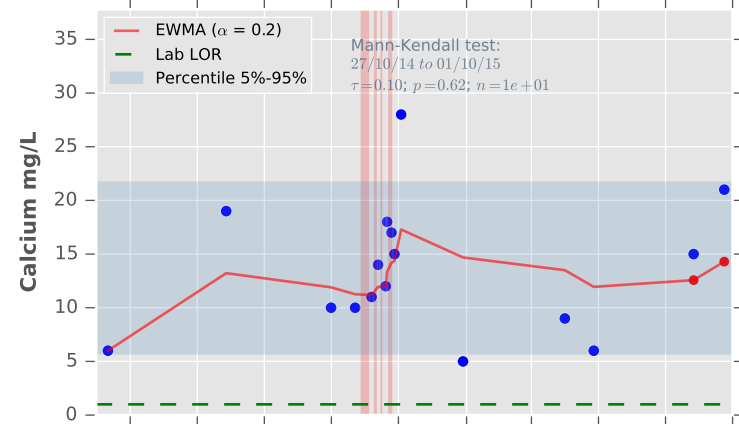
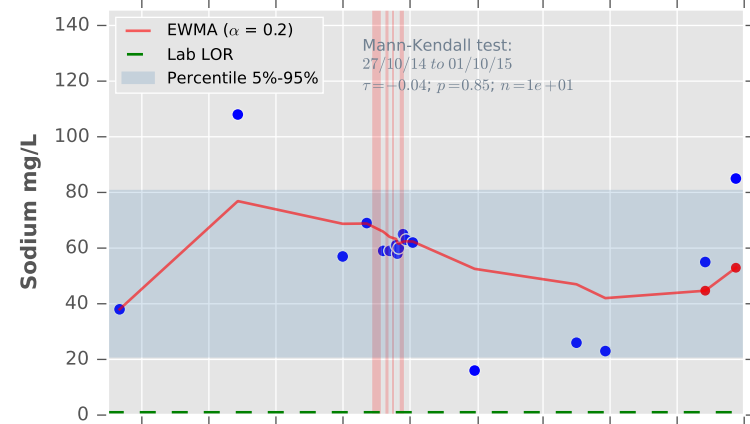
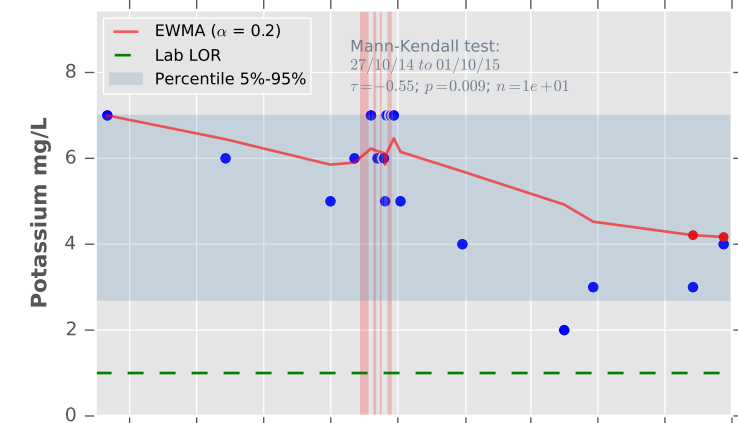
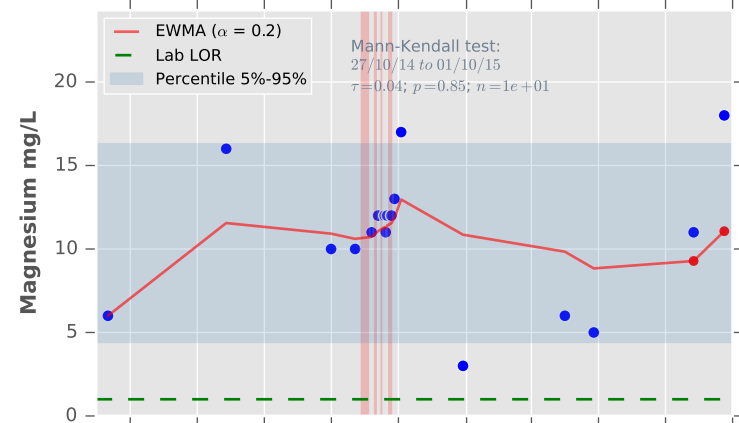
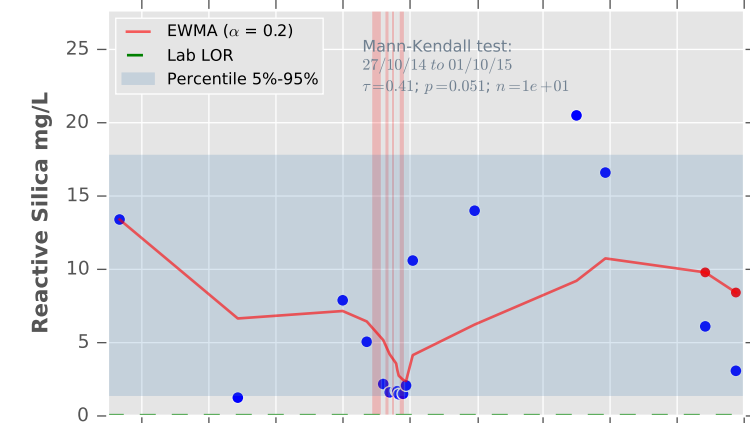
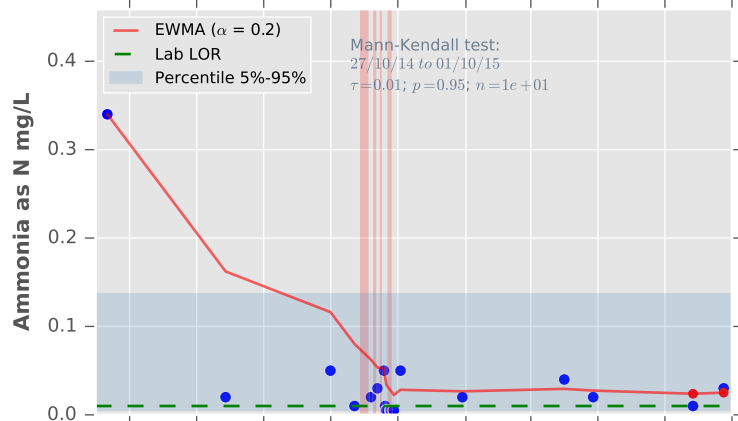
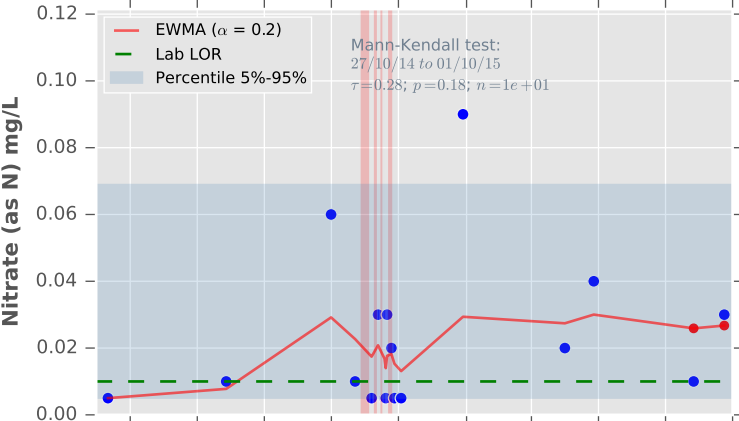
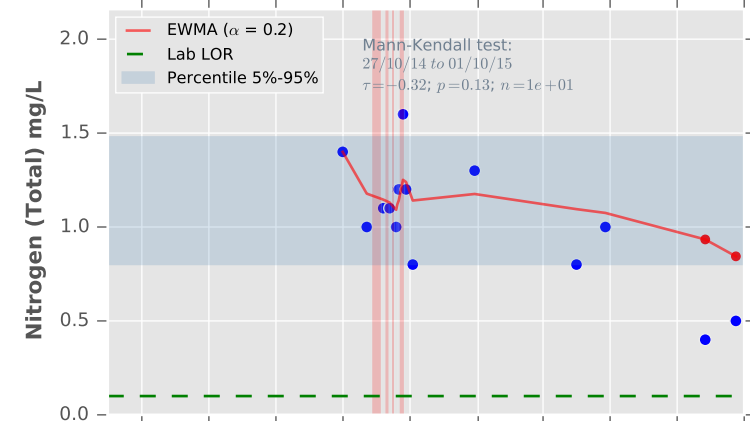
WKS01**WKS01****WKS01****WKS01****WKS01****WKS01****WKS01****WKS01****WKS01**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

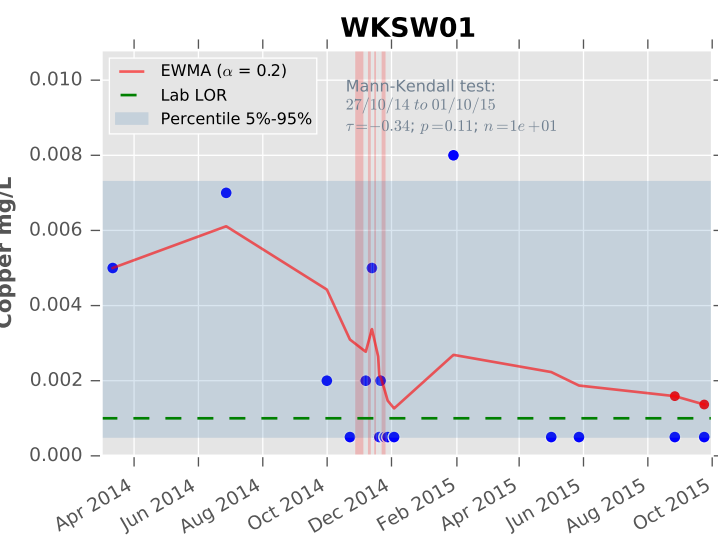
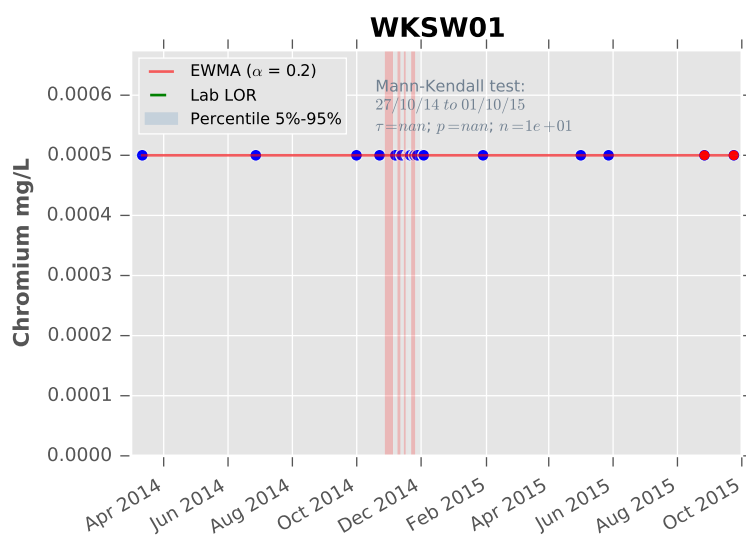
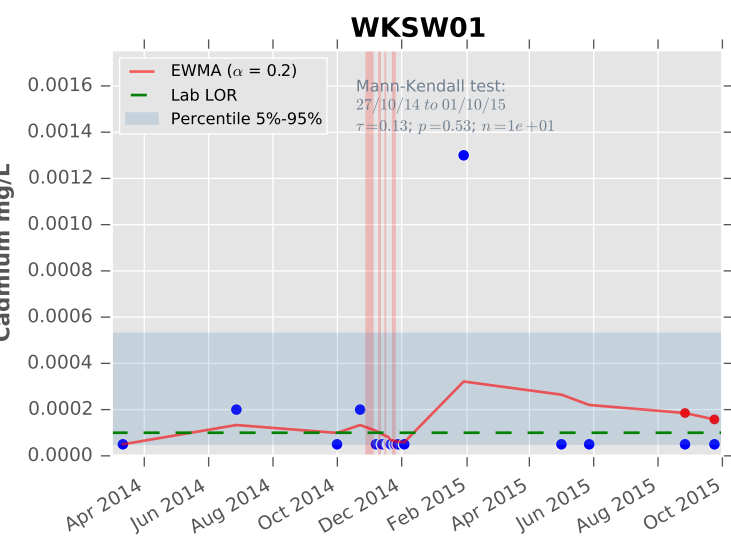
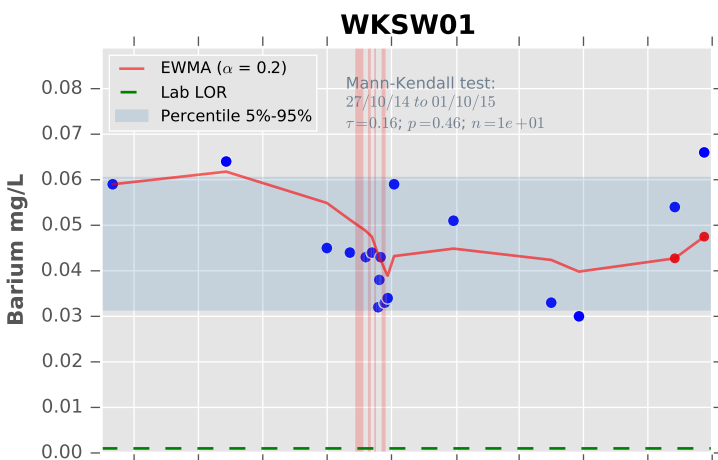
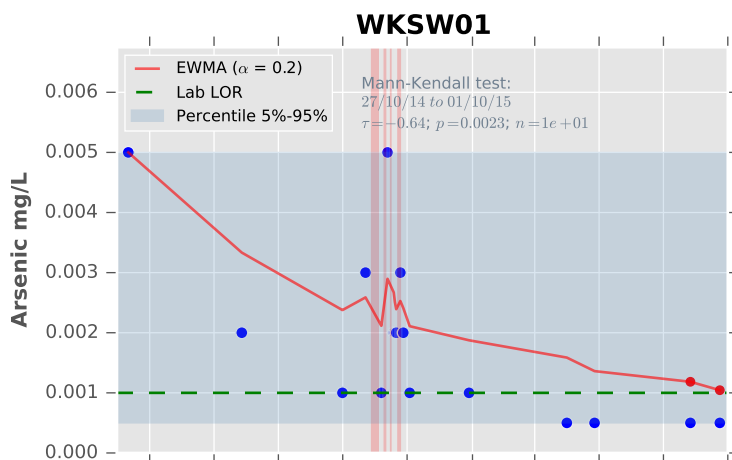
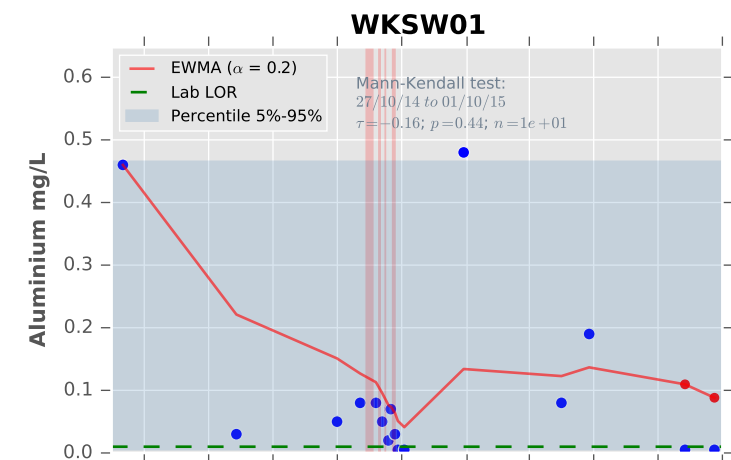
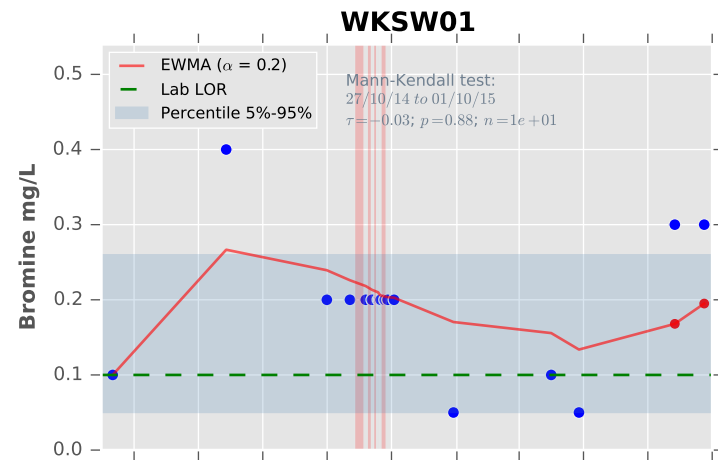
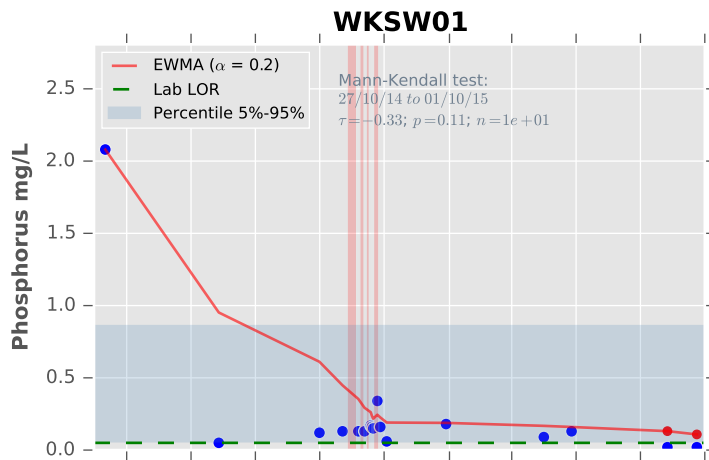
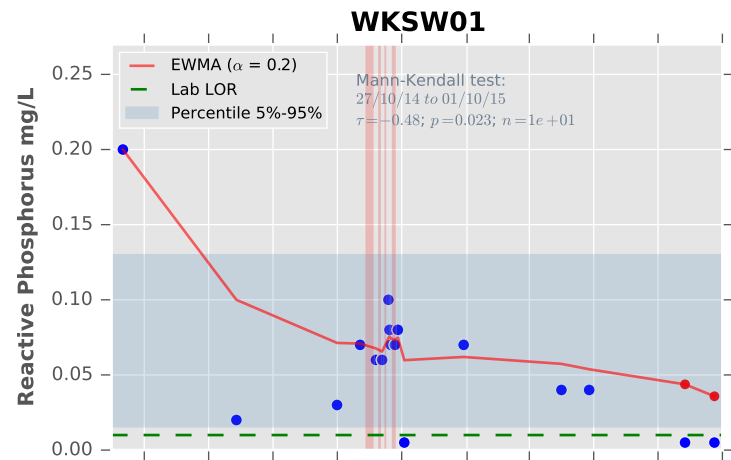


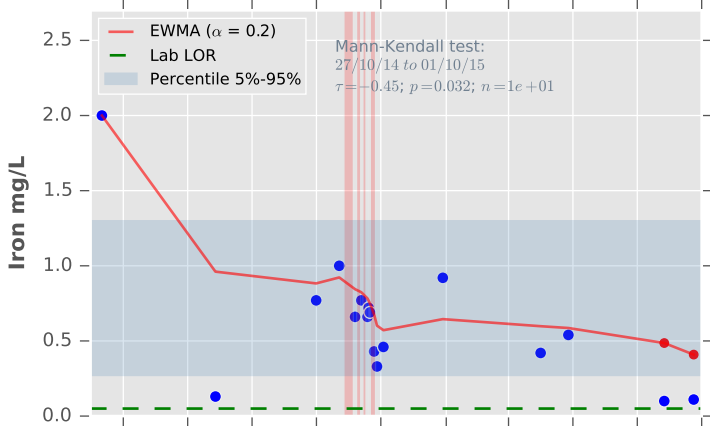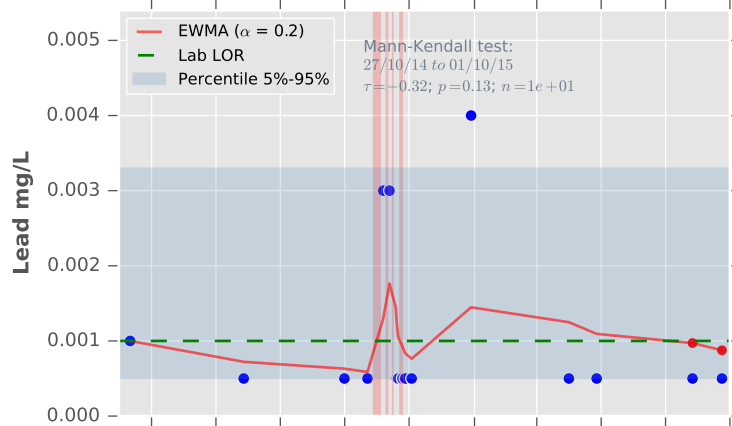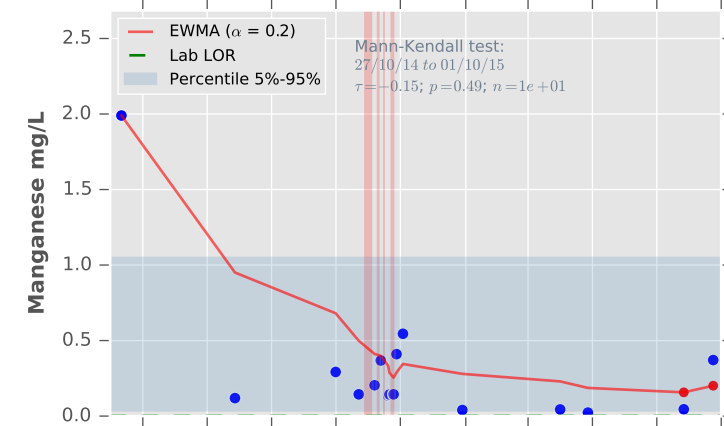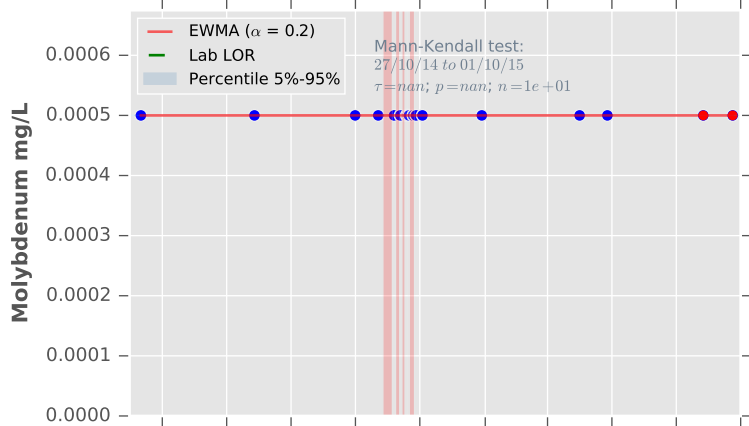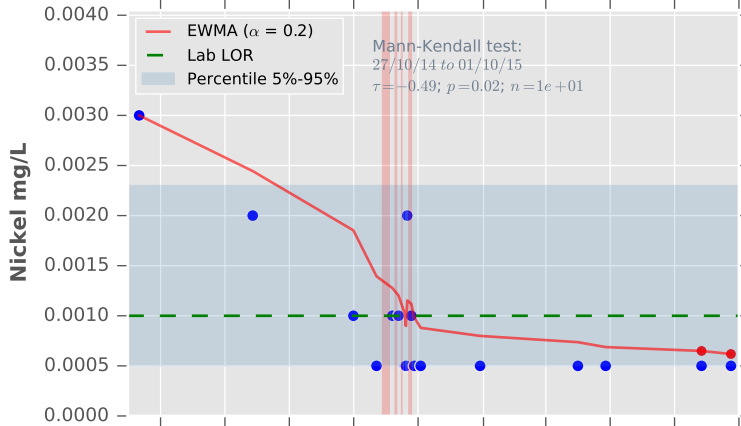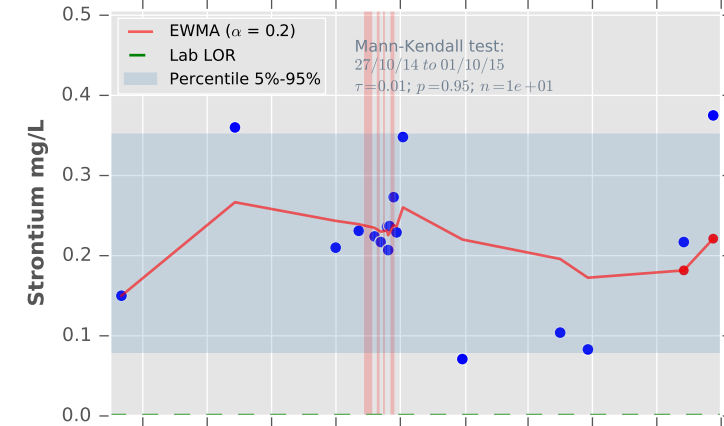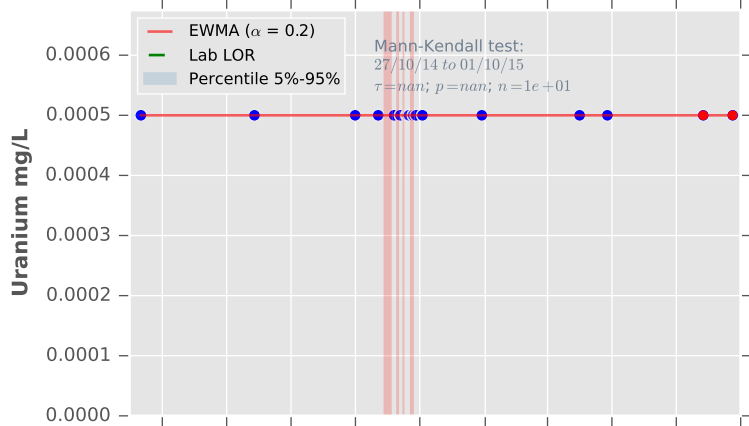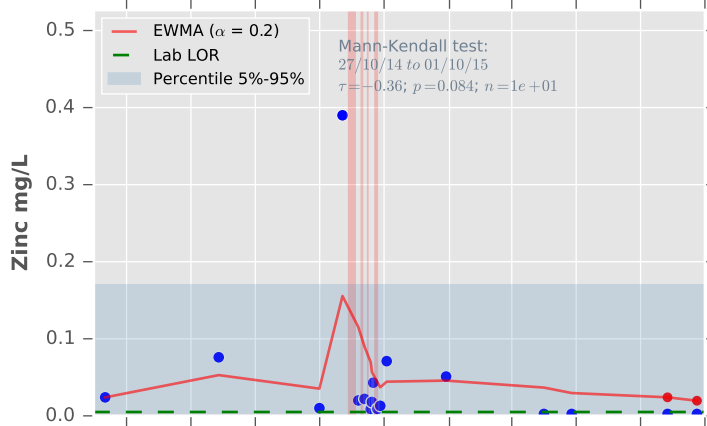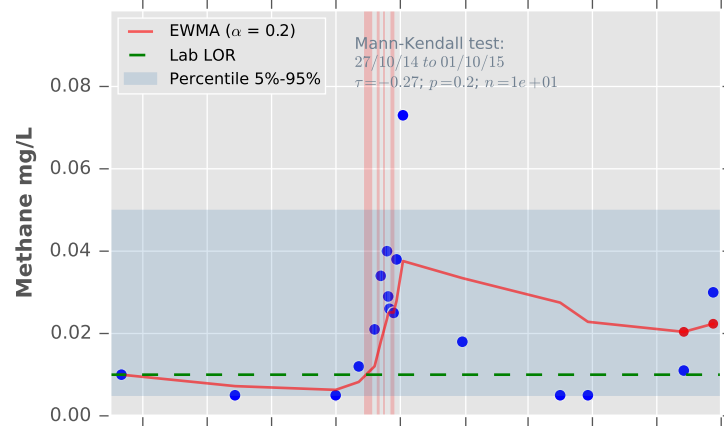WKSW01**WKSW01****WKSW01****WKSW01****WKSW01****WKSW01****WKSW01****WKSW01****WKSW01**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

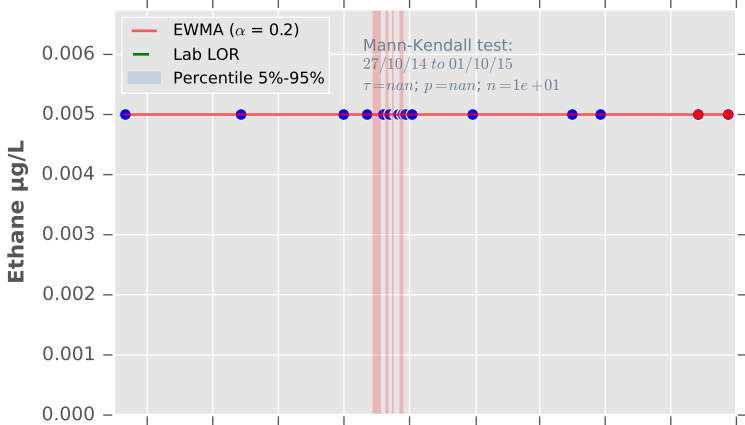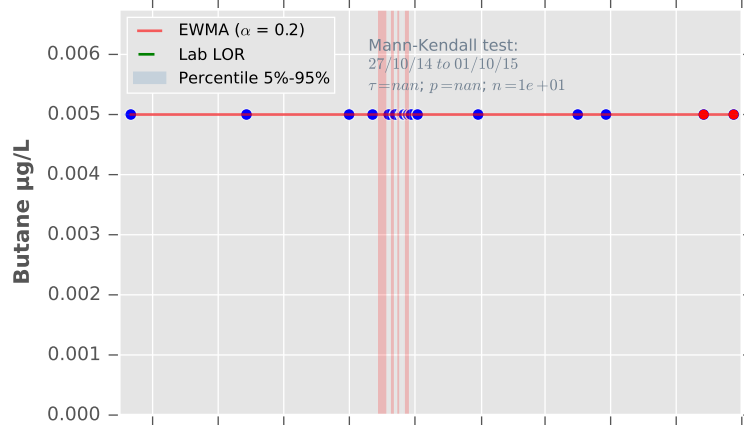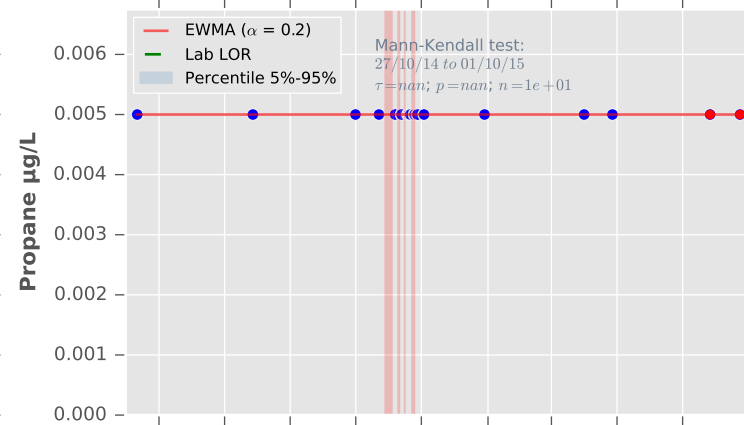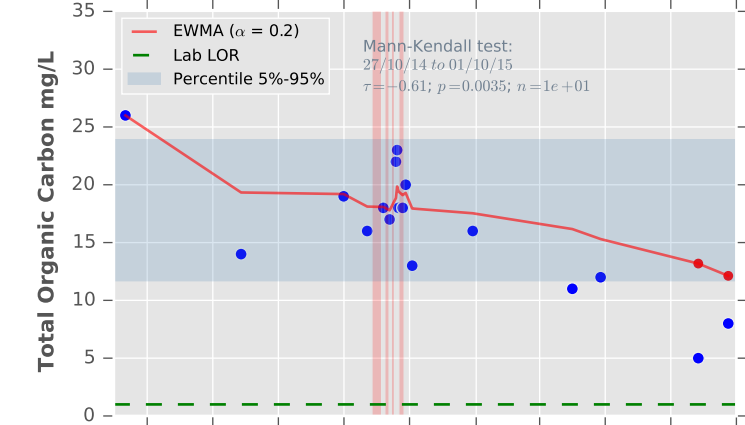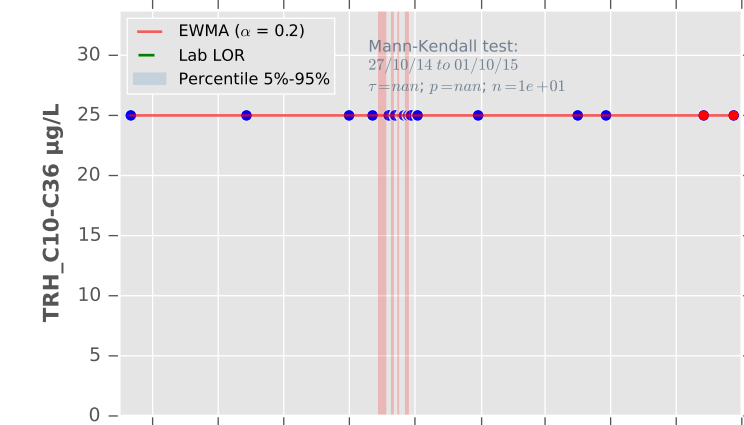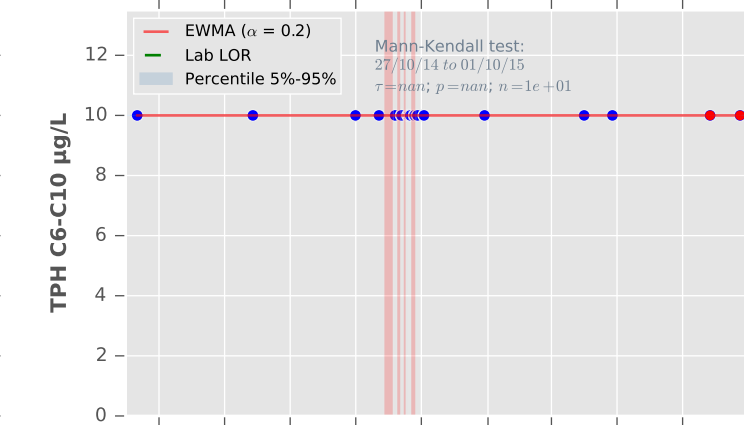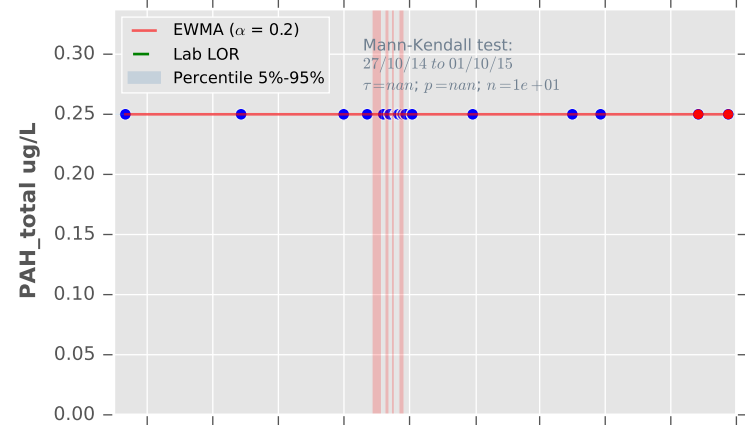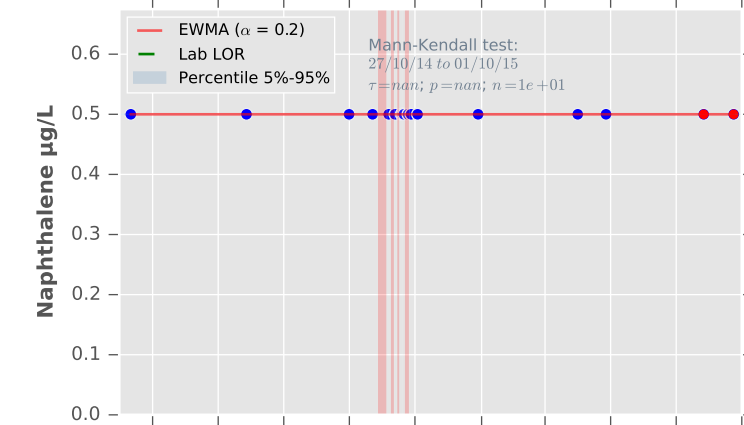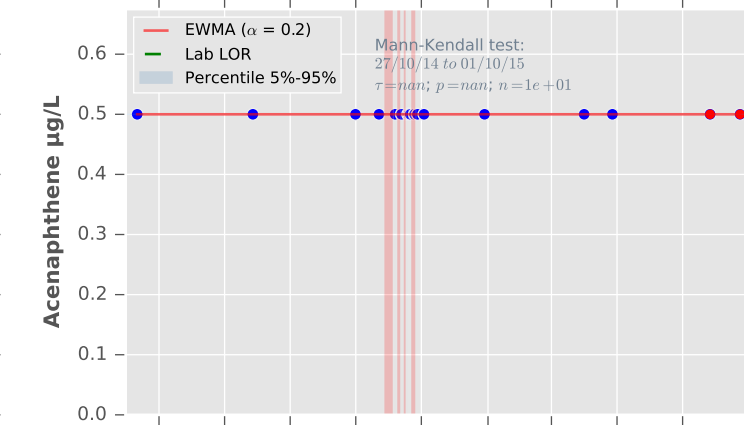WKS01**WKS01****WKS01****WKS01****WKS01****WKS01****WKS01****WKS01****WKS01**










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

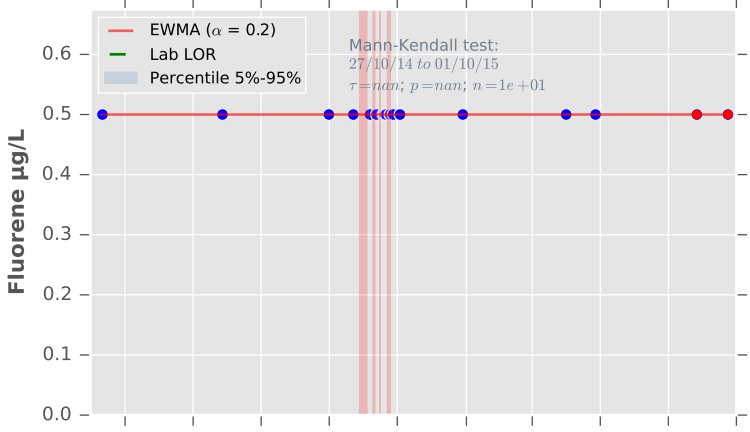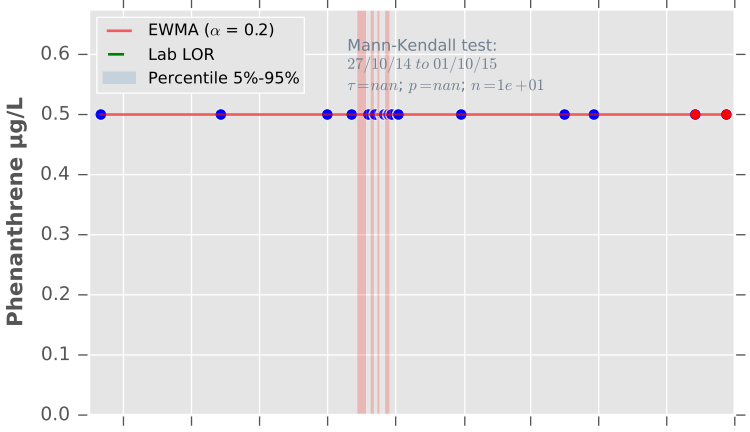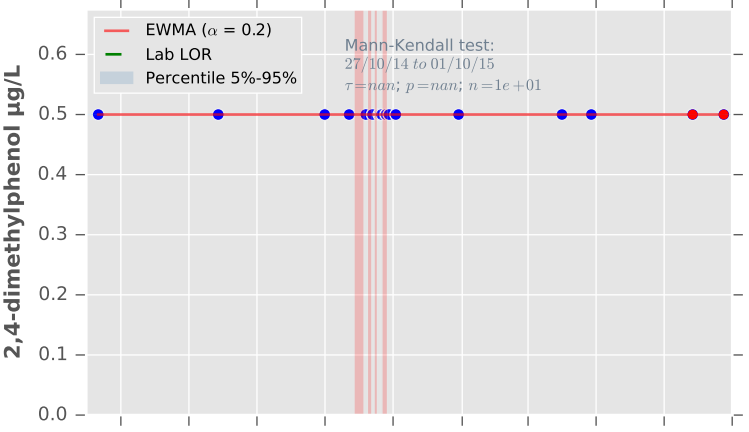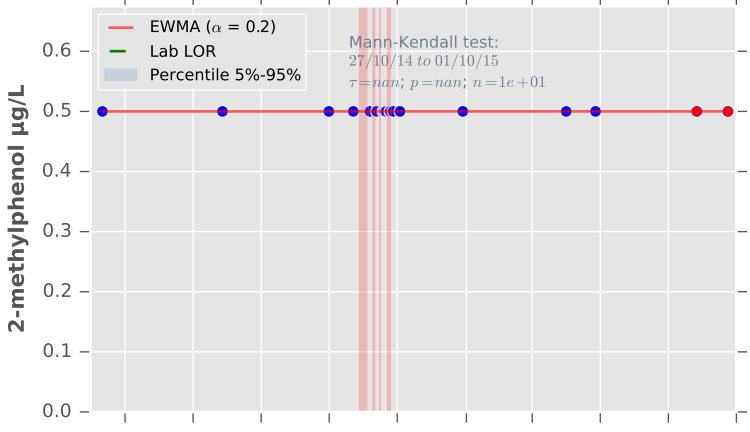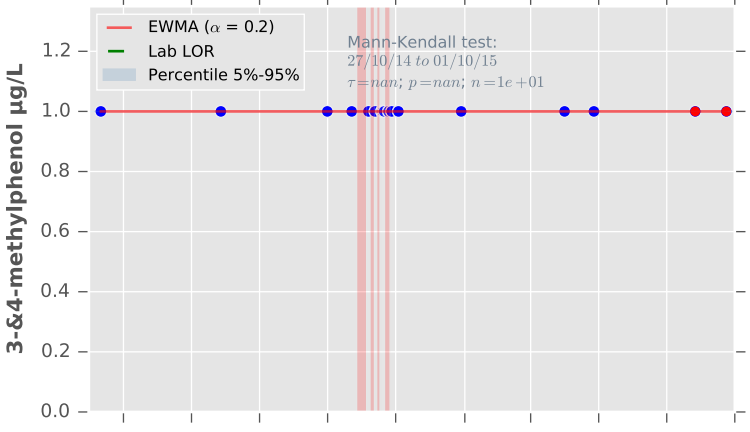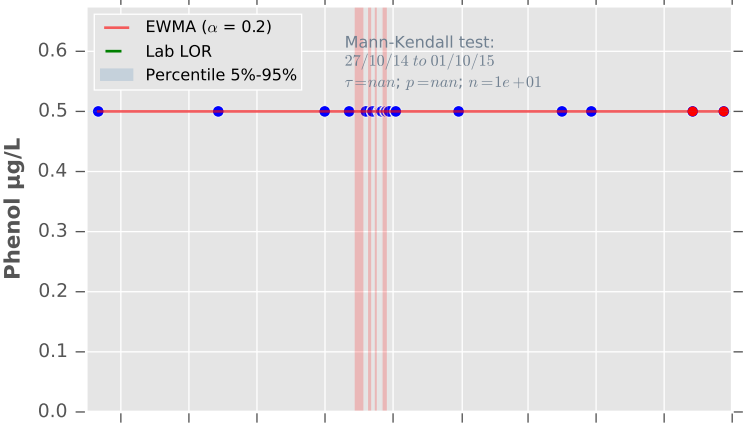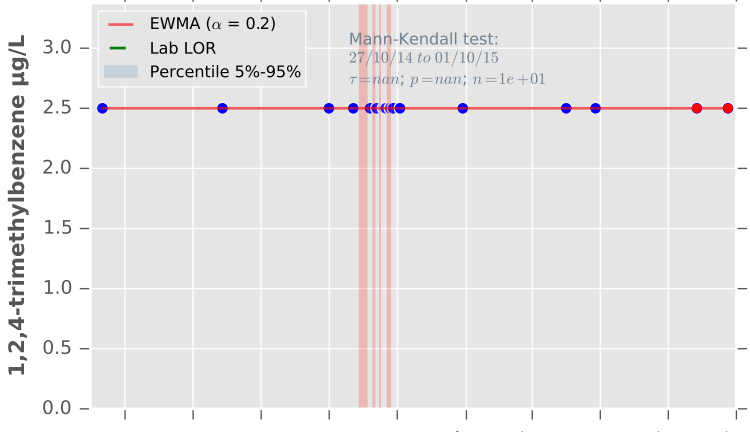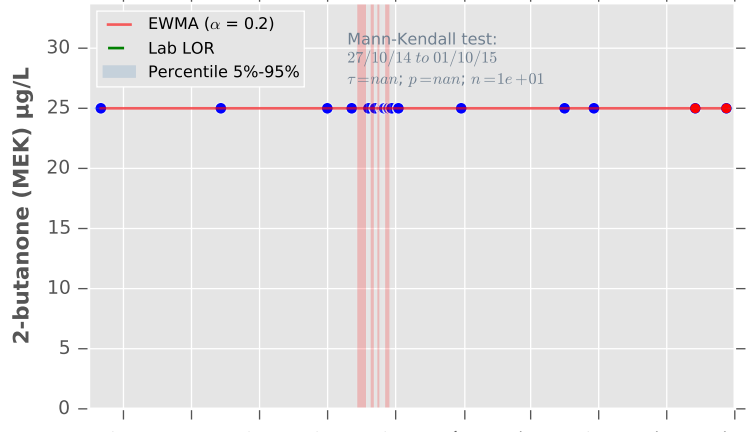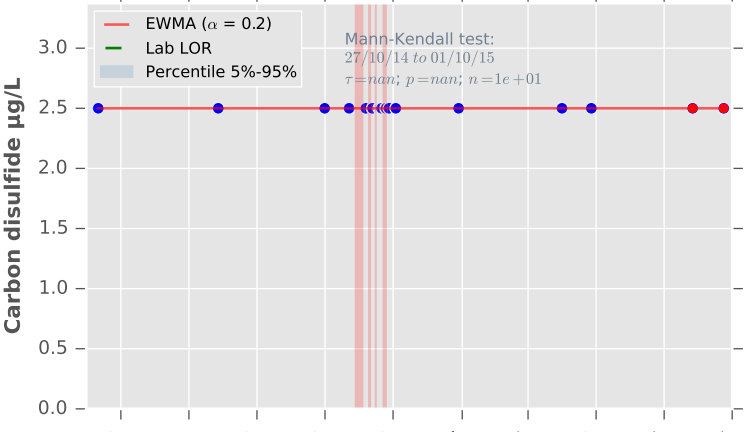WKSW01**WKSW01****WKSW01****WKSW01****WKSW01****WKSW01****WKSW01****WKSW01****WKSW01**










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

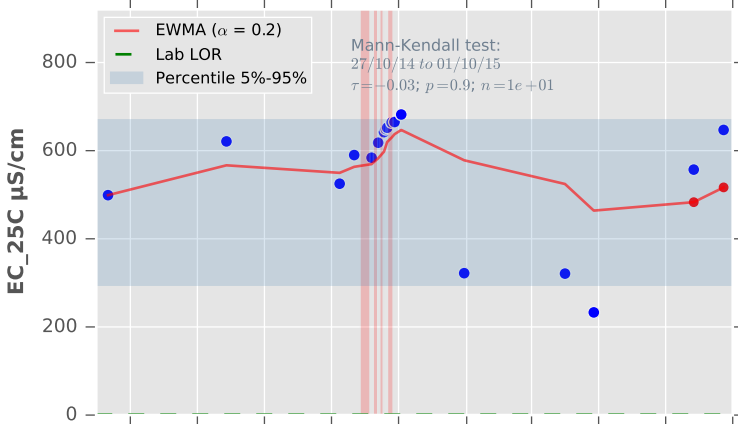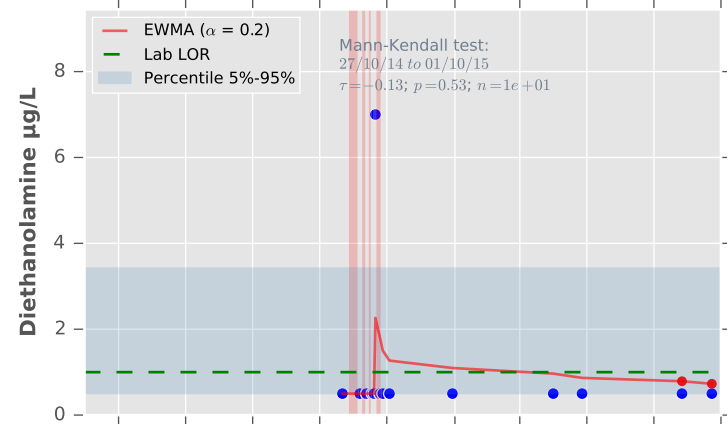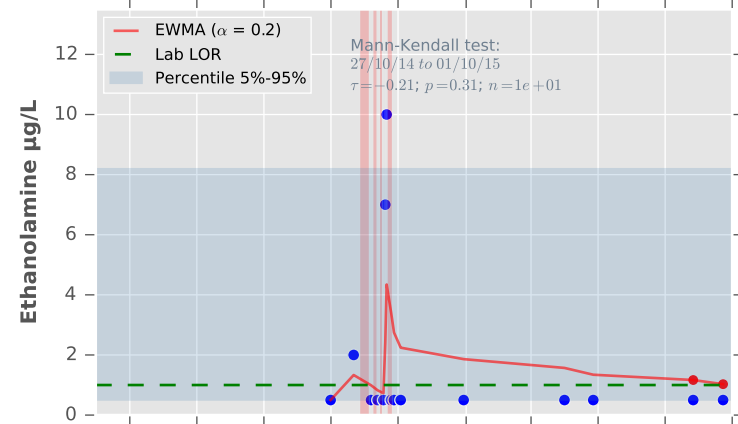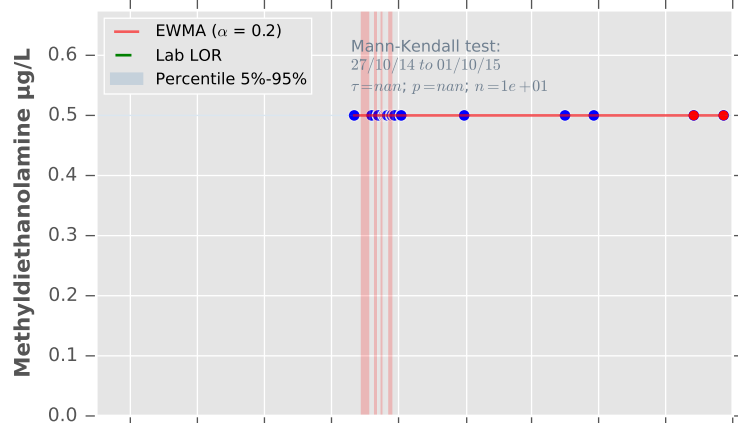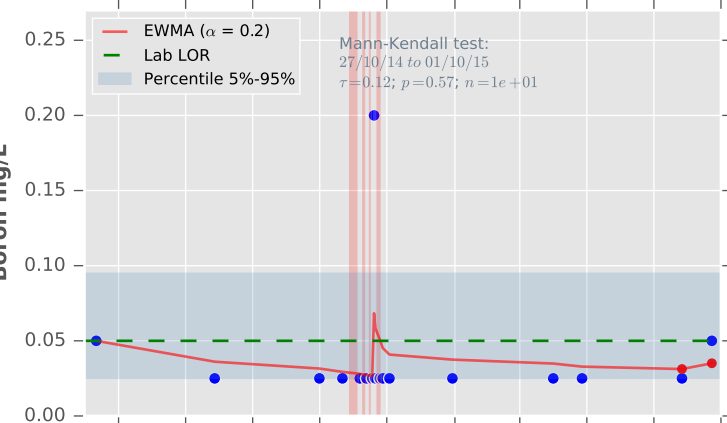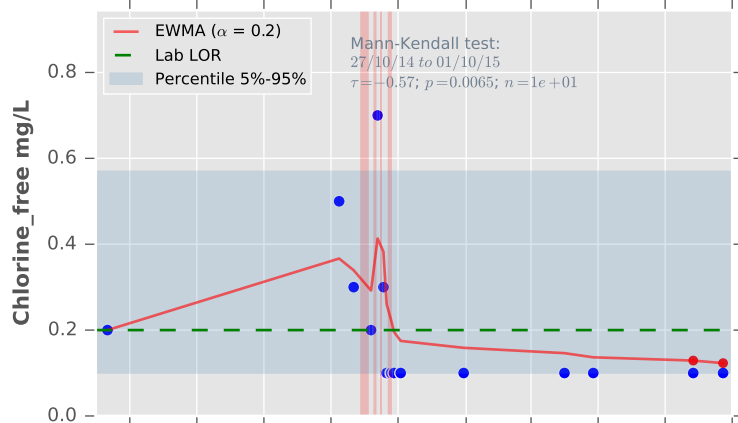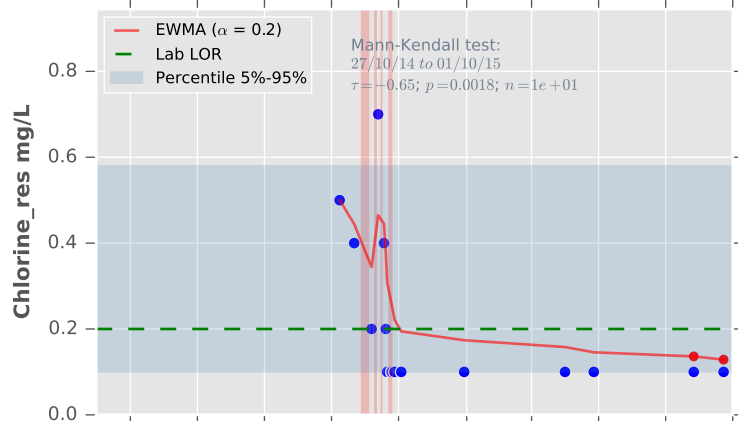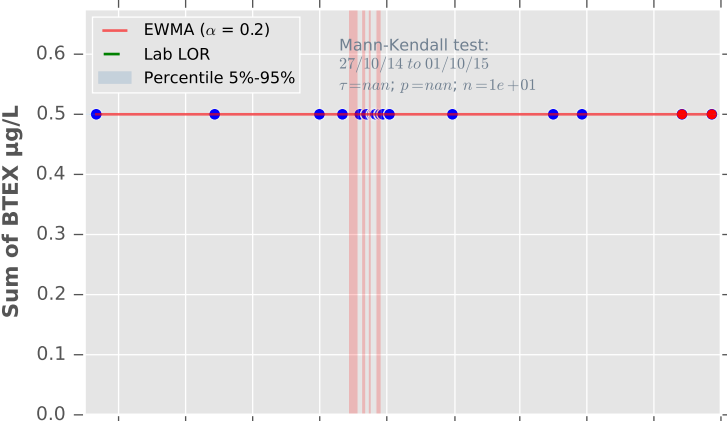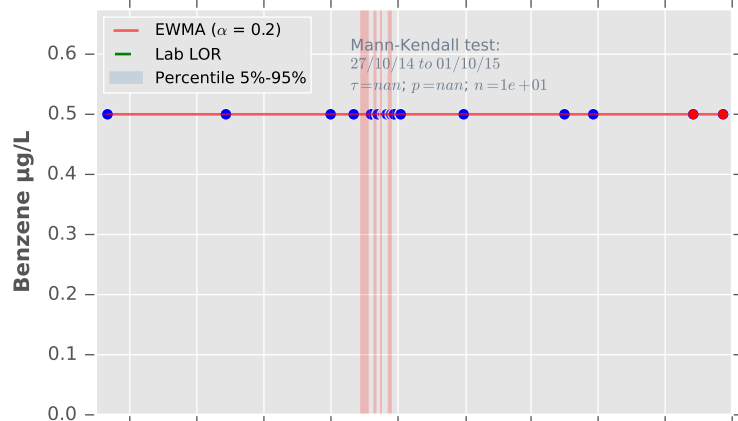WKS02**WKS02****WKS02****WKS02****WKS02****WKS02****WKS02****WKS02****WKS02**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

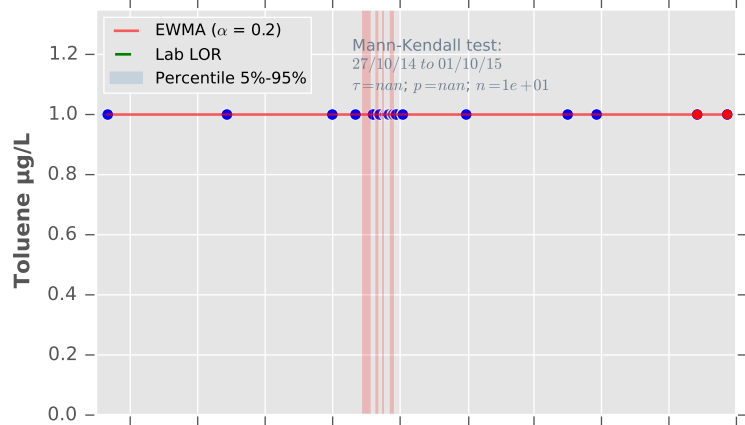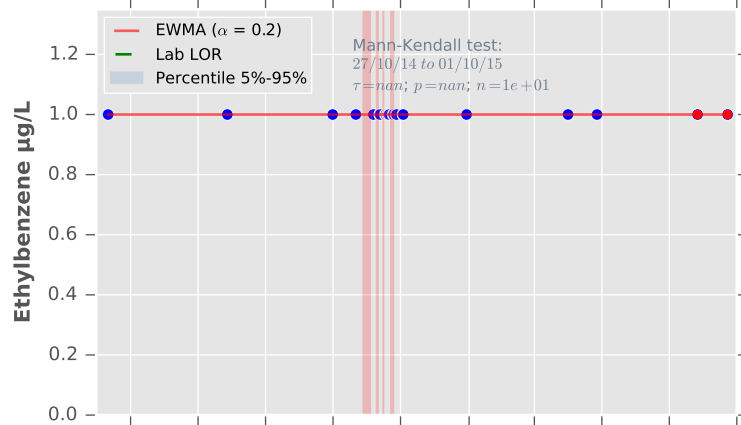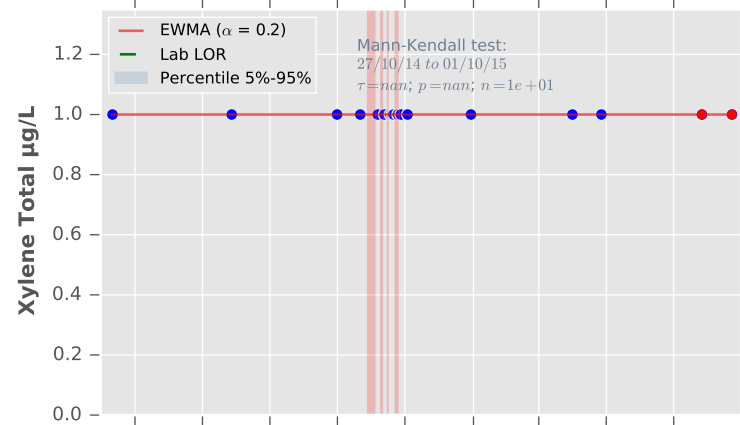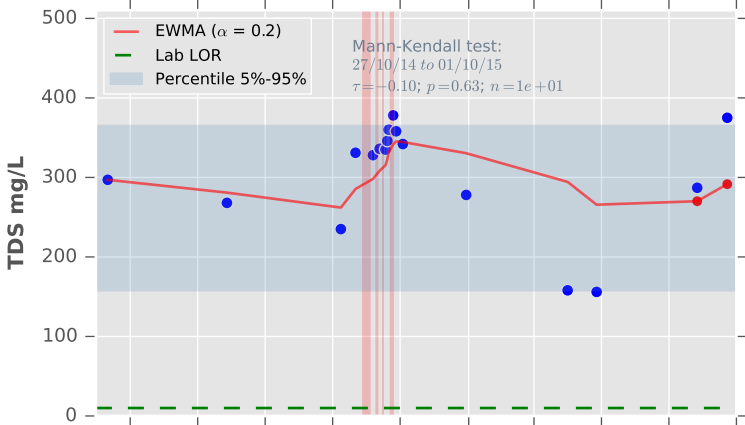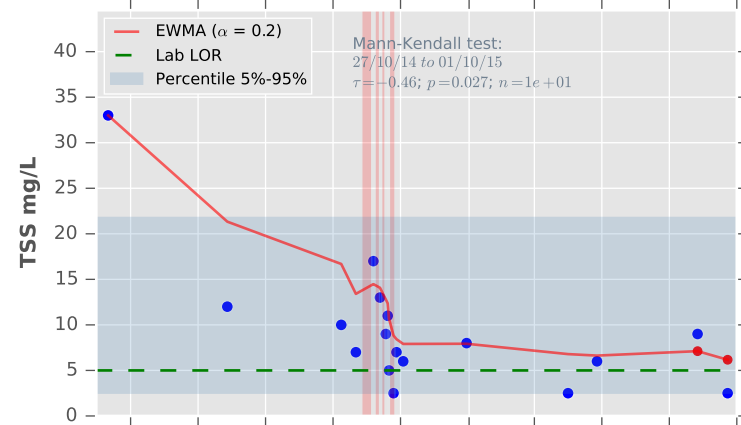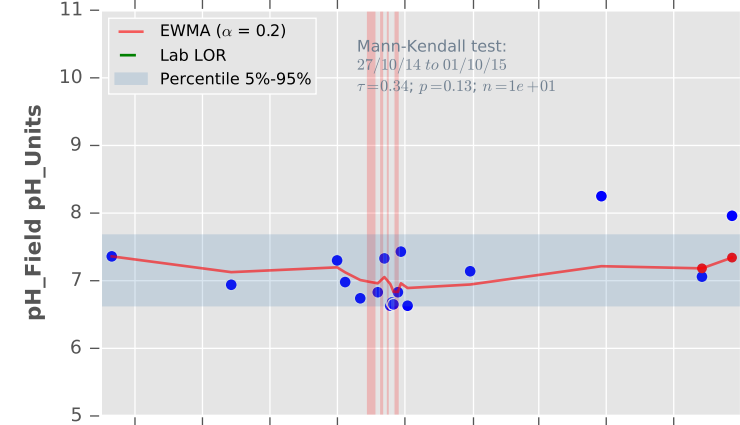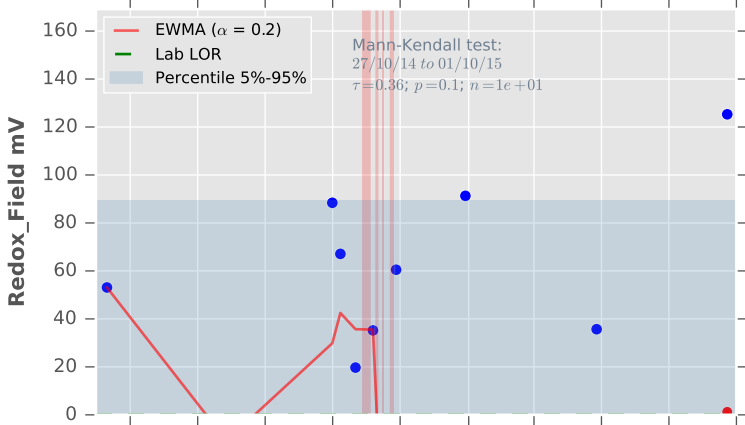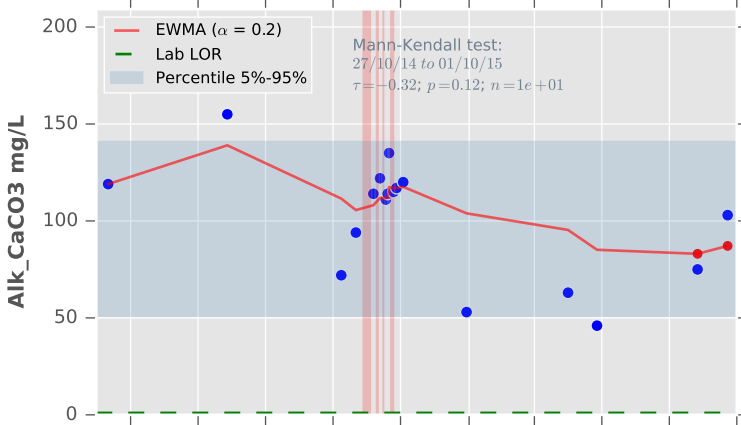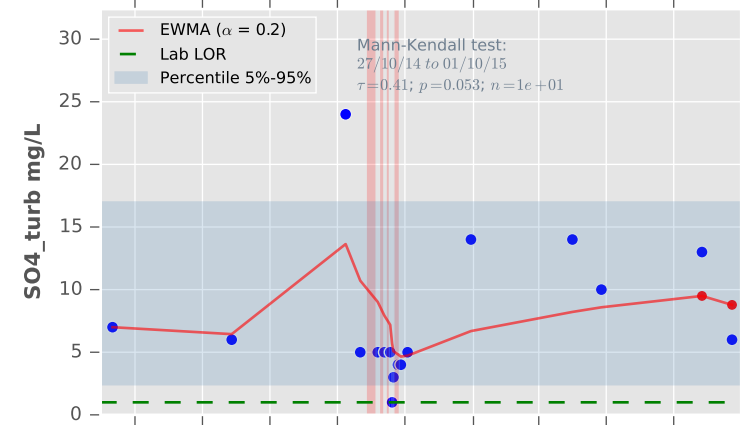WKS02**WKS02****WKS02****WKS02****WKS02****WKS02****WKS02****WKS02****WKS02**










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

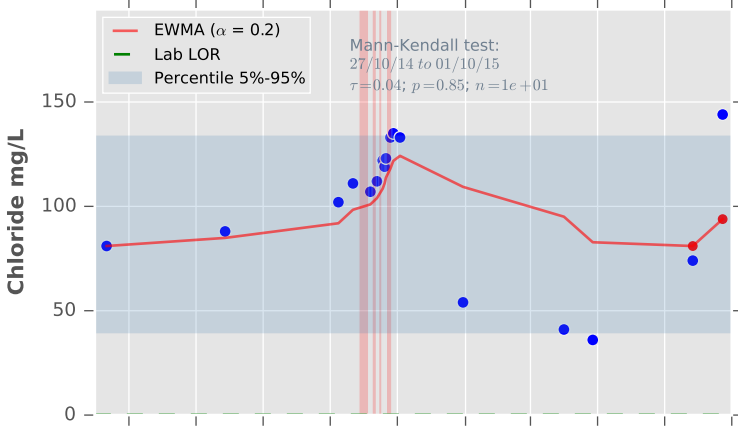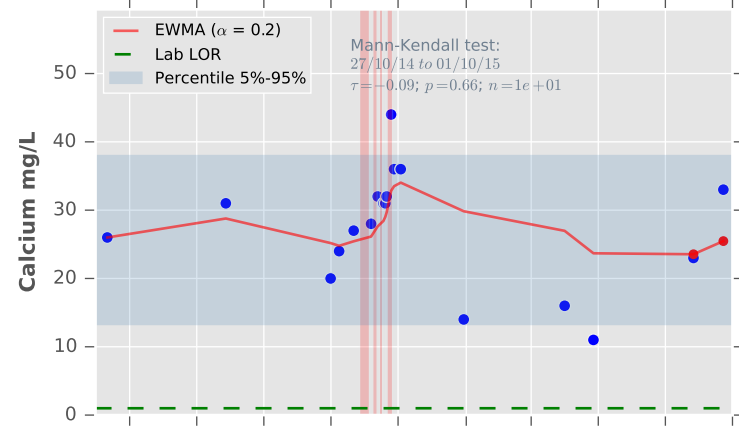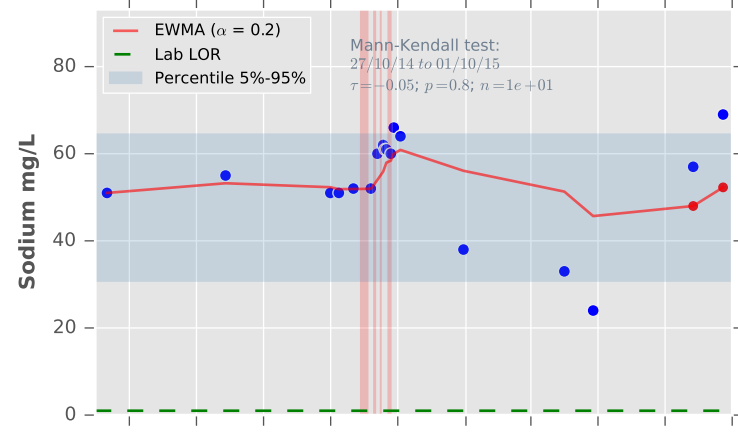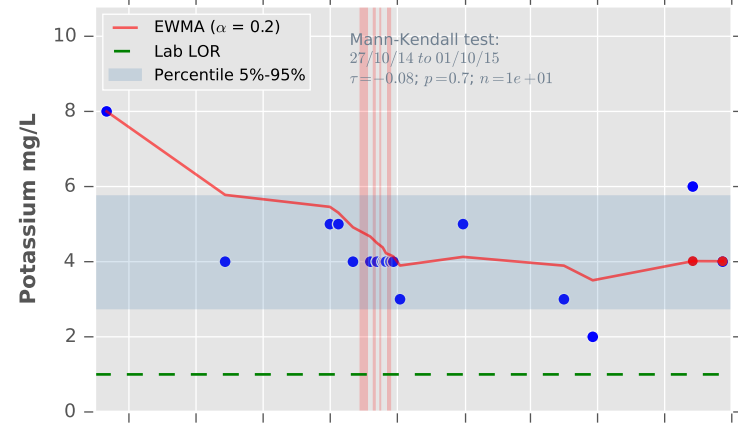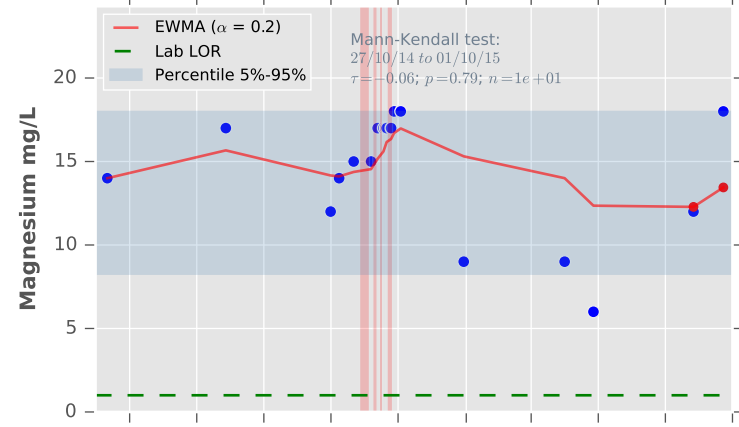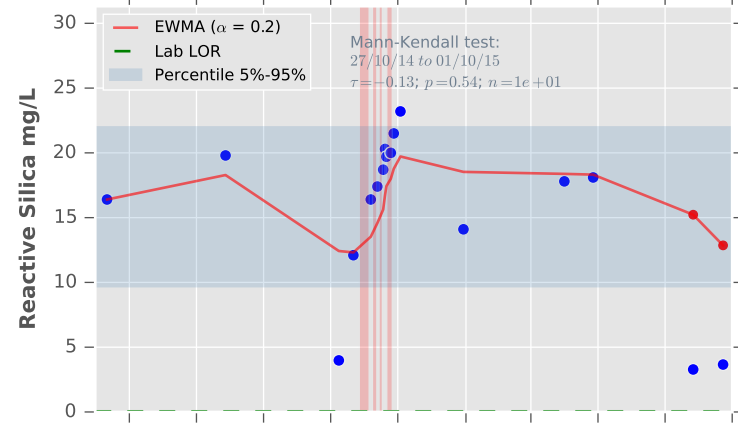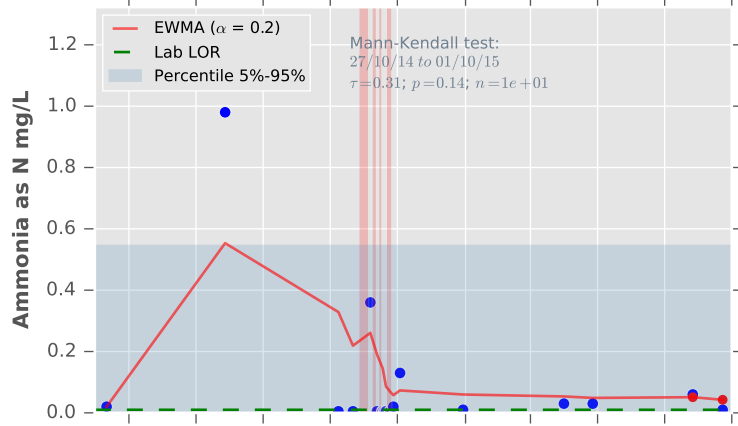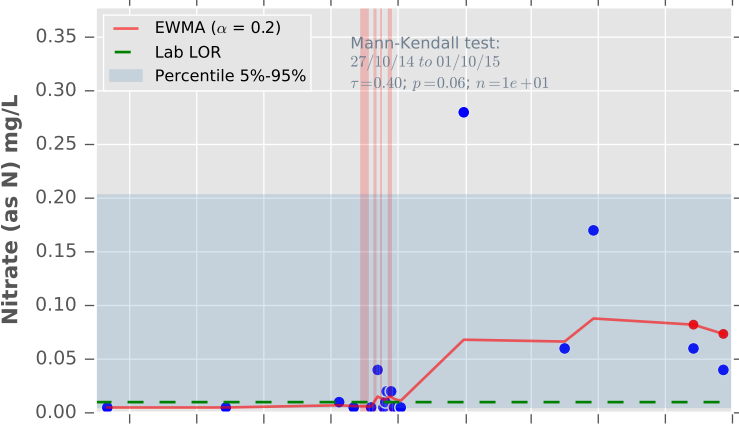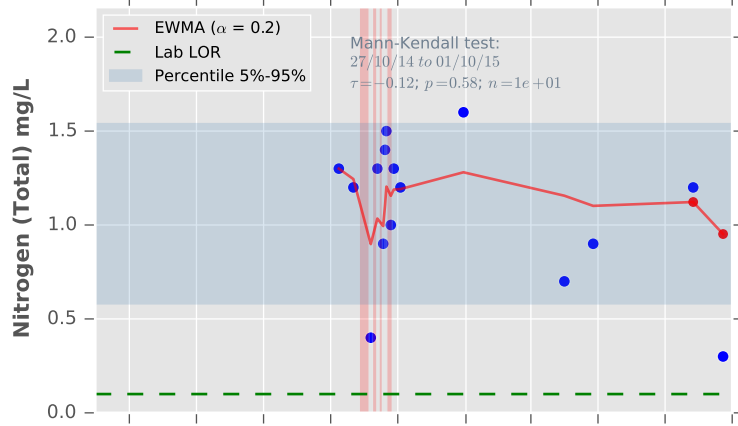WKS02**WKS02****WKS02****WKS02****WKS02****WKS02****WKS02****WKS02****WKS02**










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

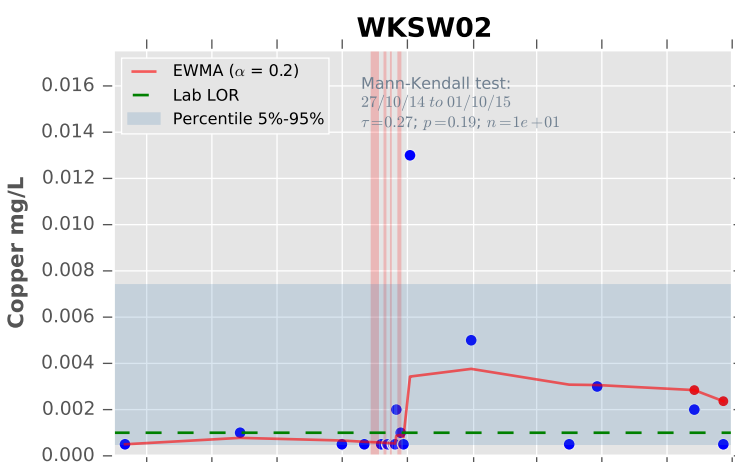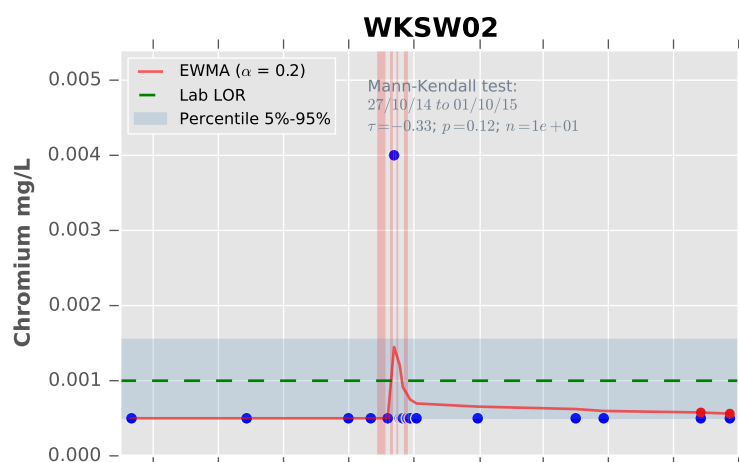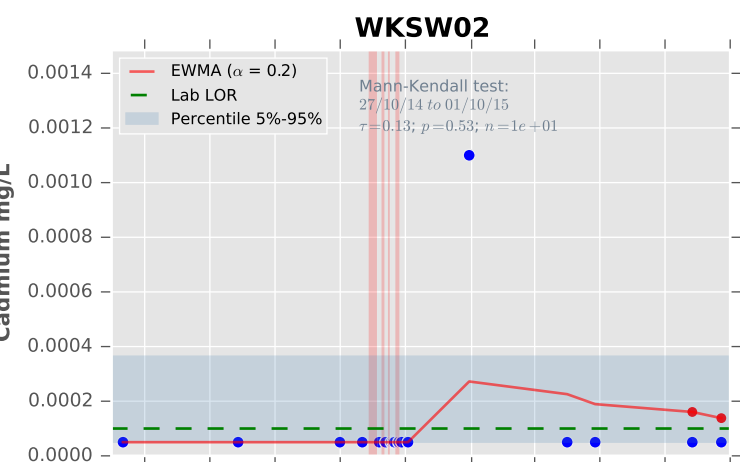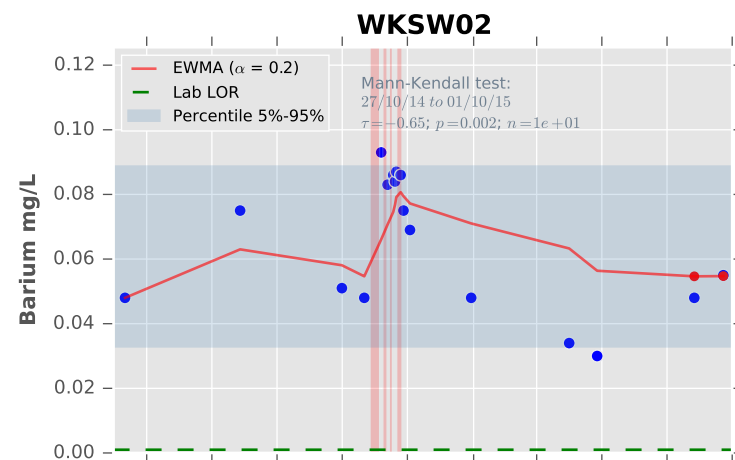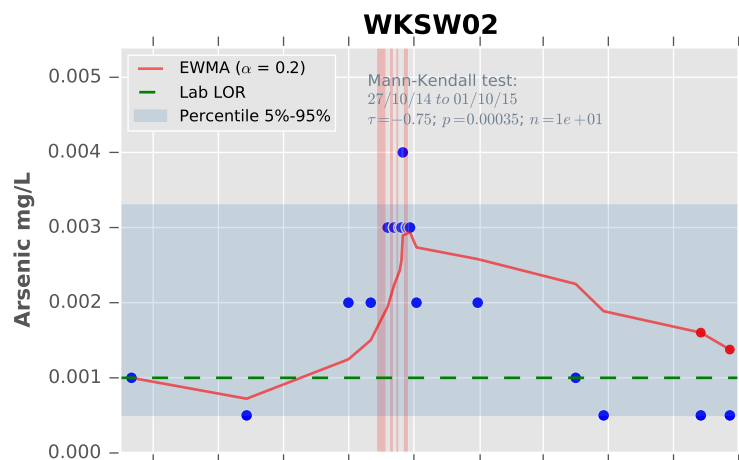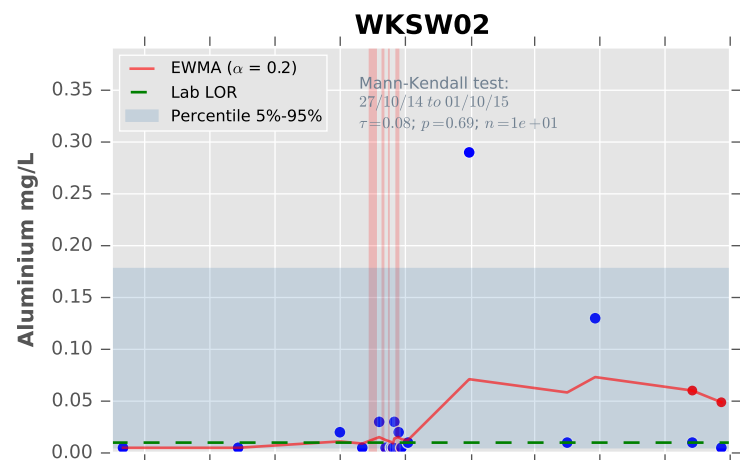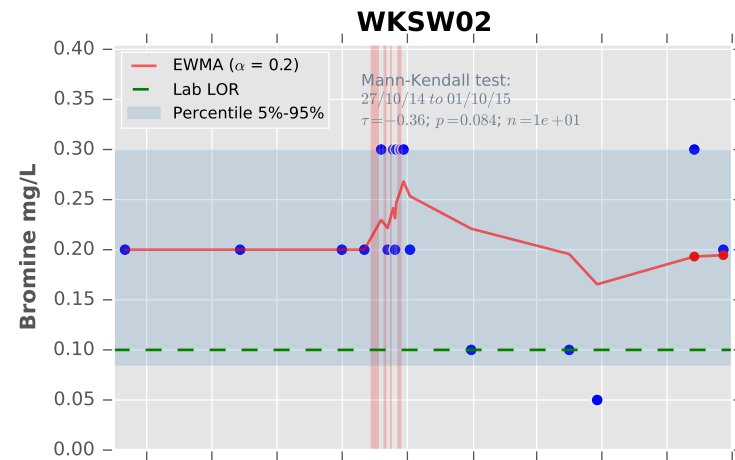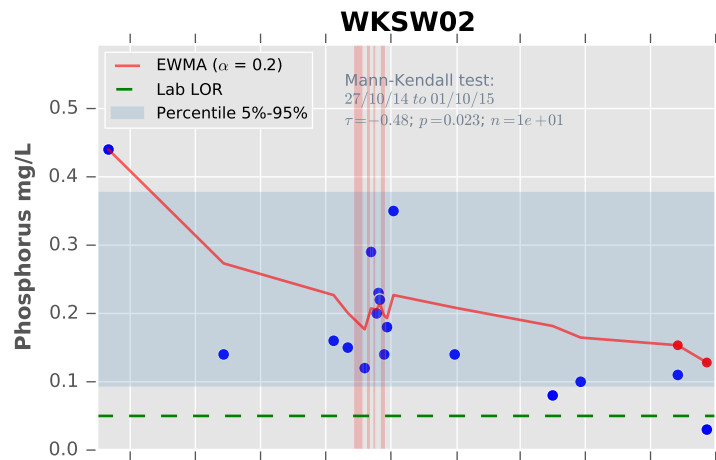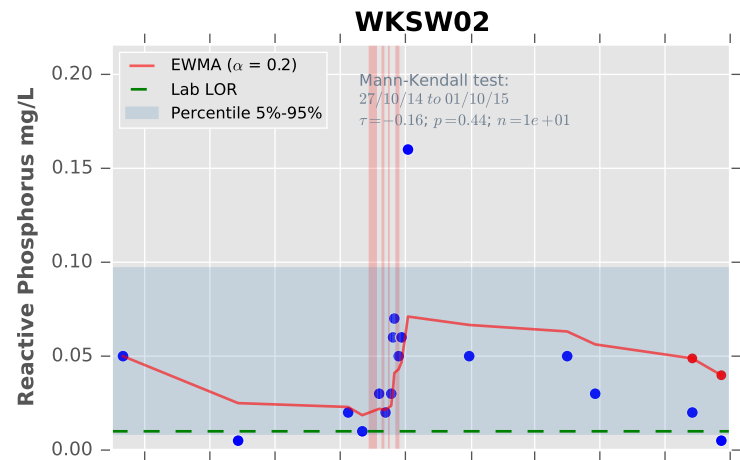

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

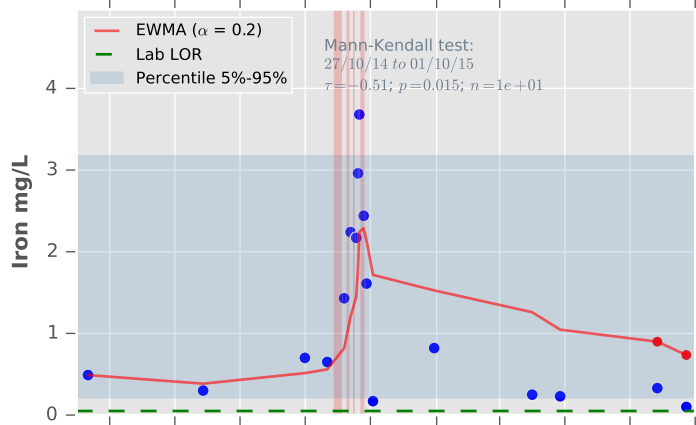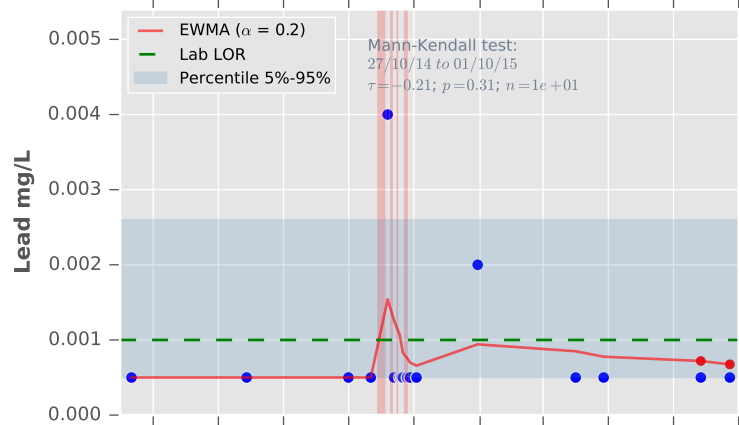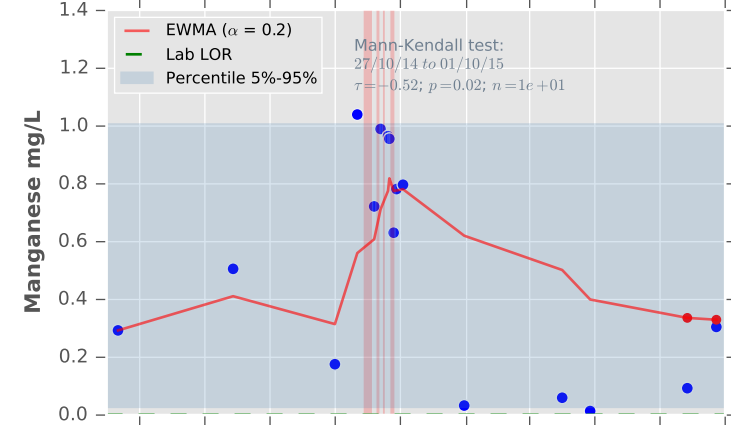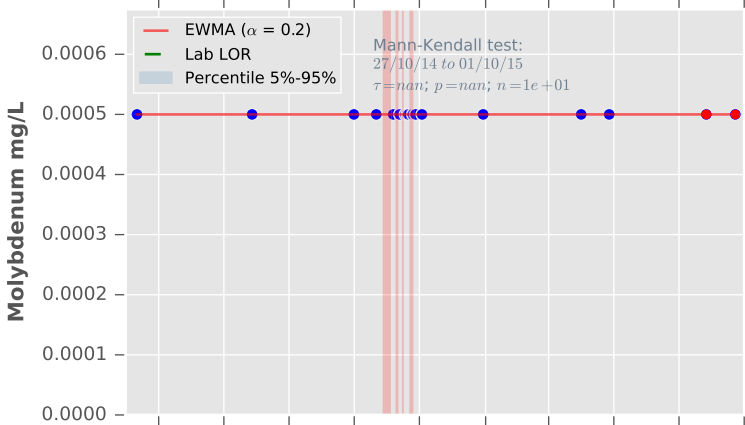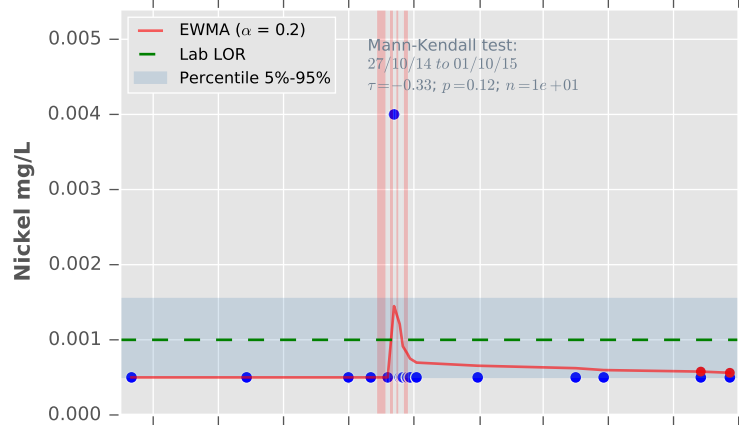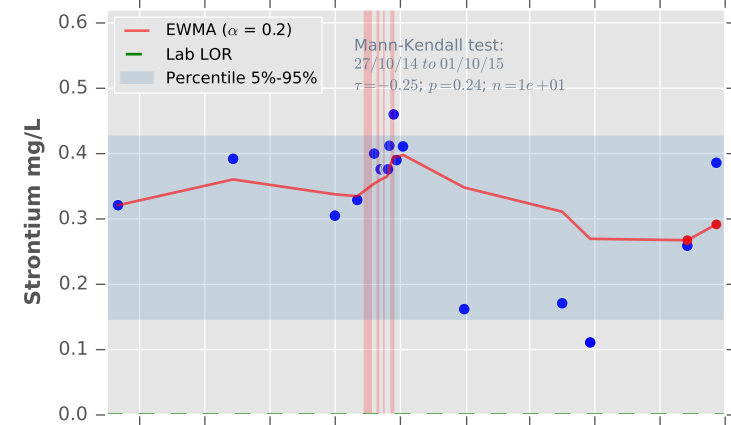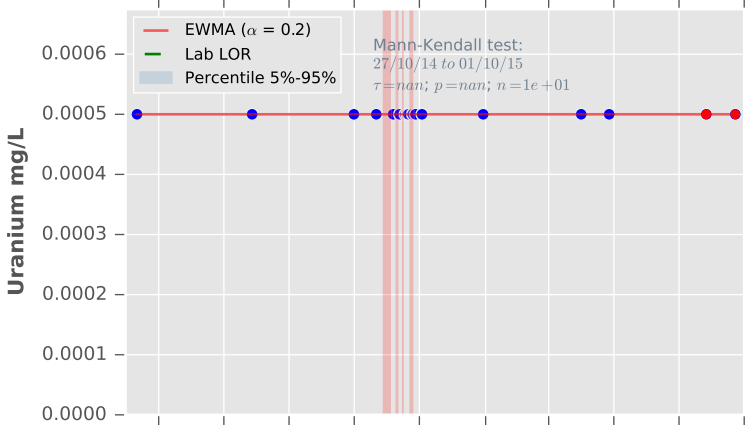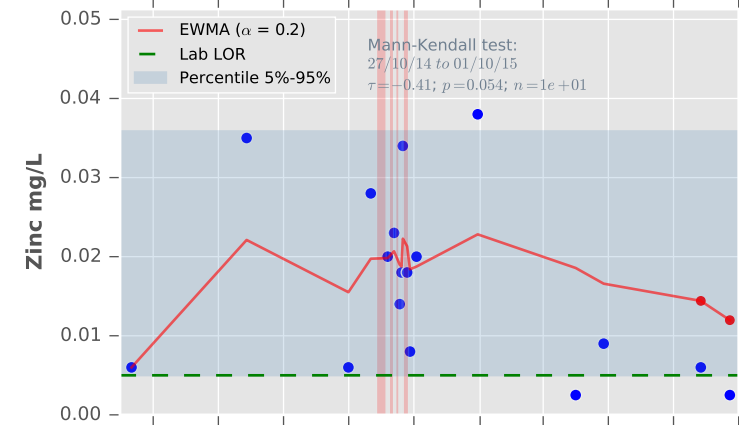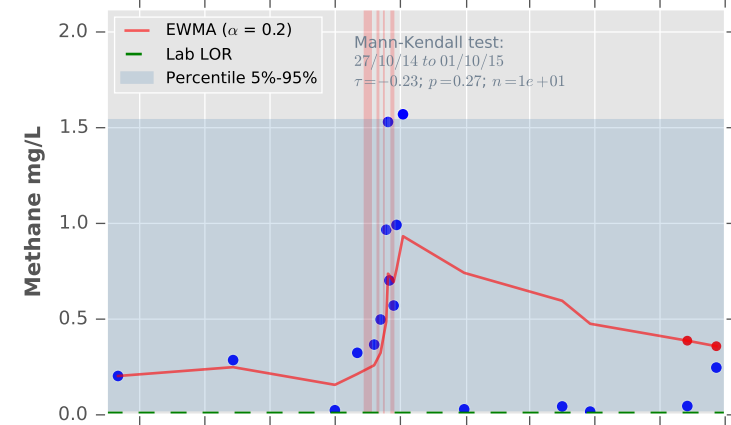
WKSU02**WKSU02****WKSU02****WKSU02****WKSU02****WKSU02****WKSU02****WKSU02****WKSU02**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015


Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015


WKS02

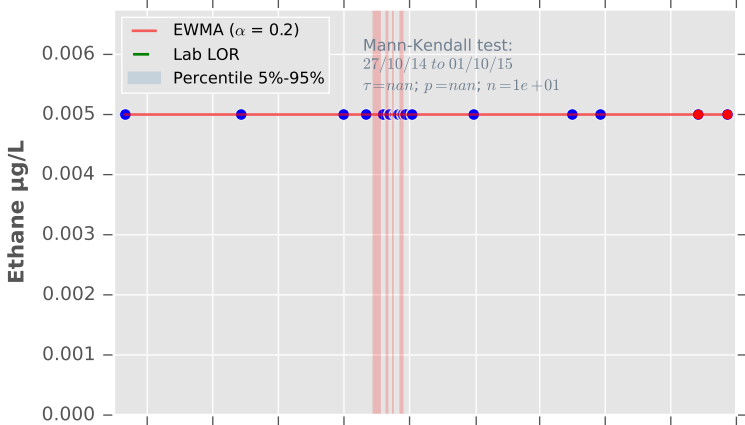


WKS02

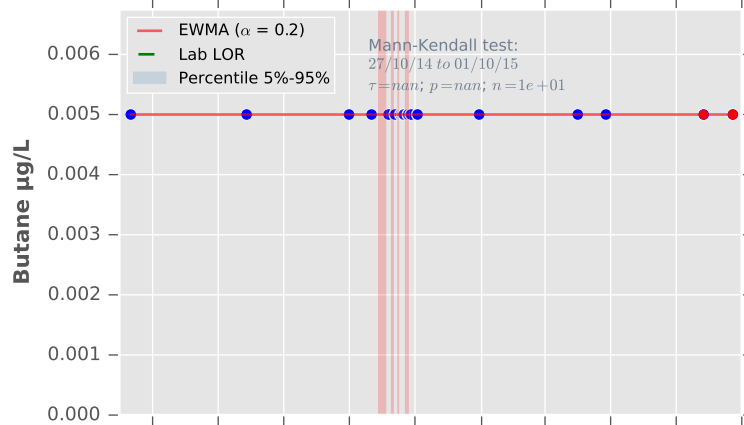


WKS02

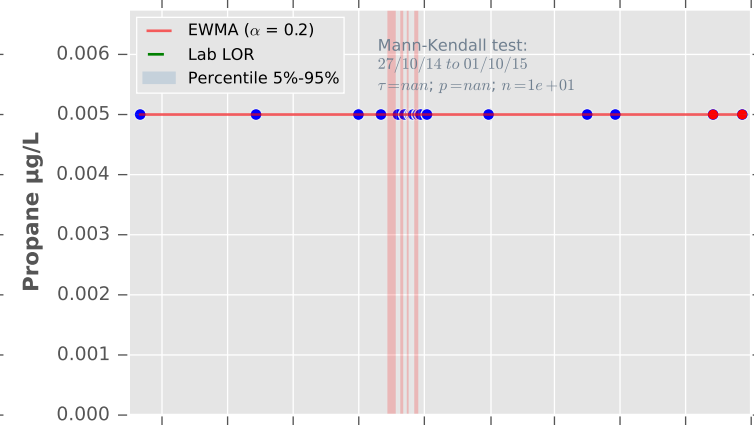


WKS02

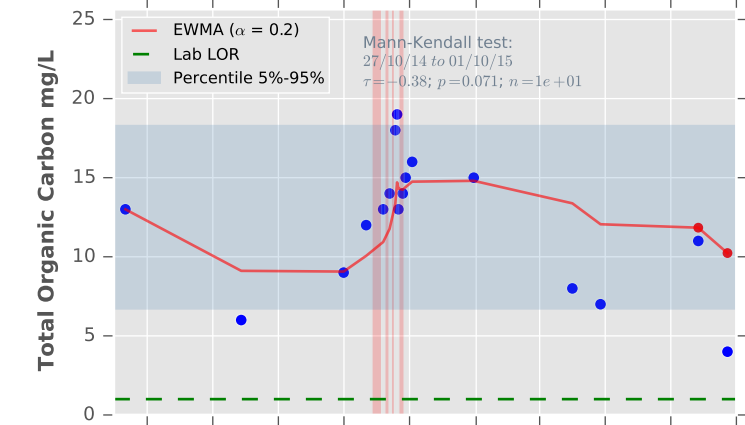


WKS02

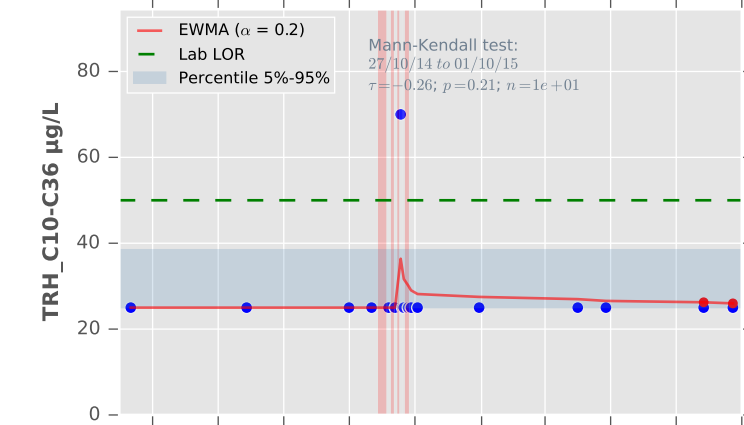


WKS02

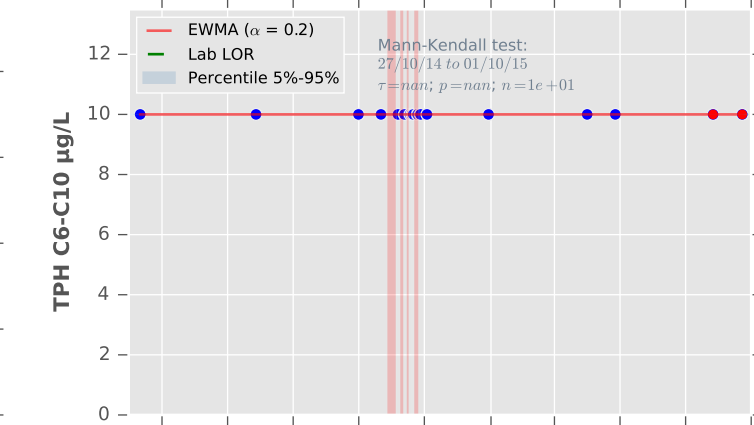


WKS02

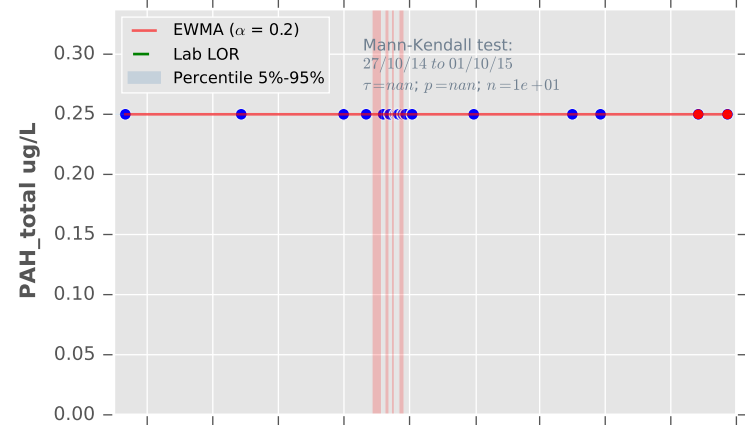

WKS02

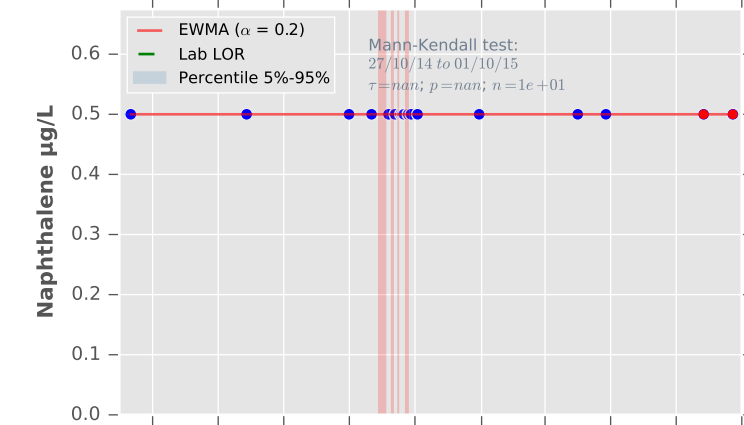










WKS02

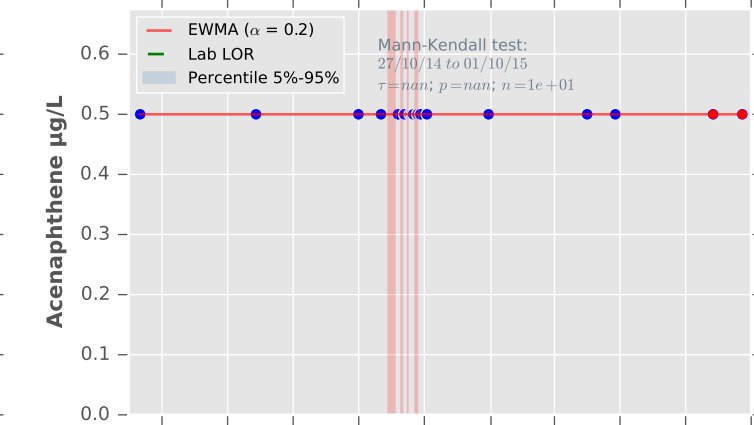










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

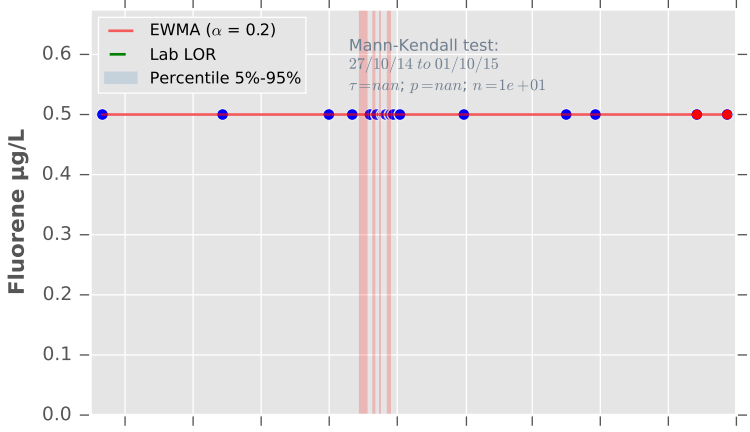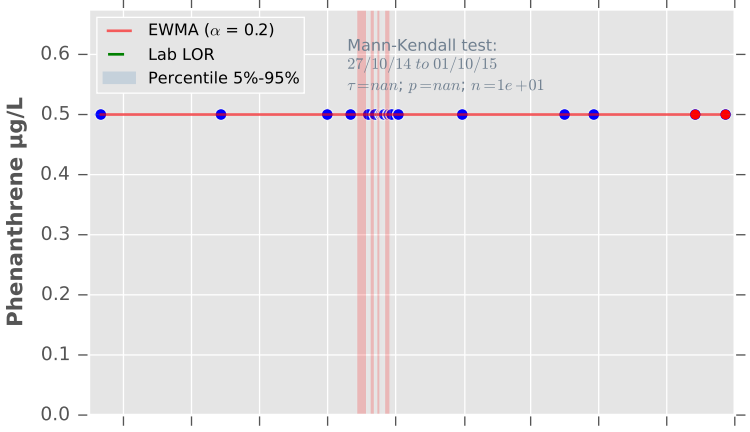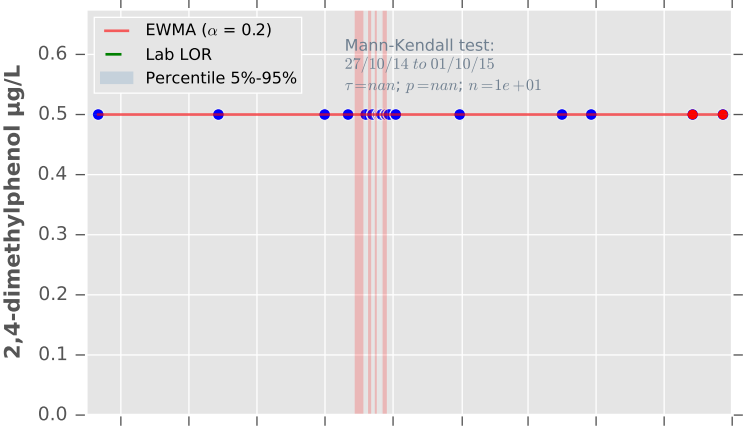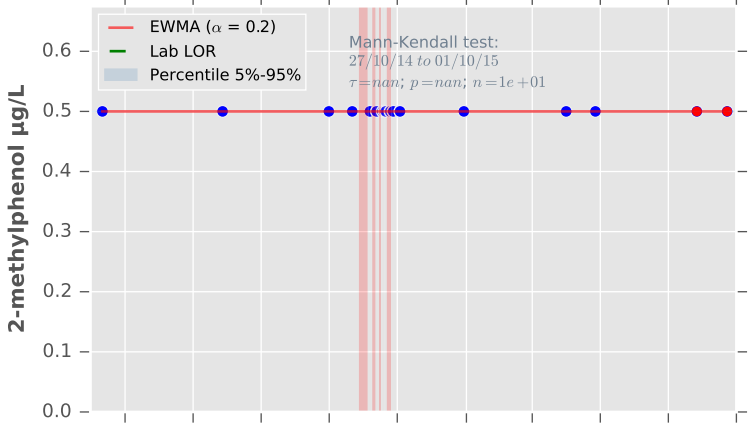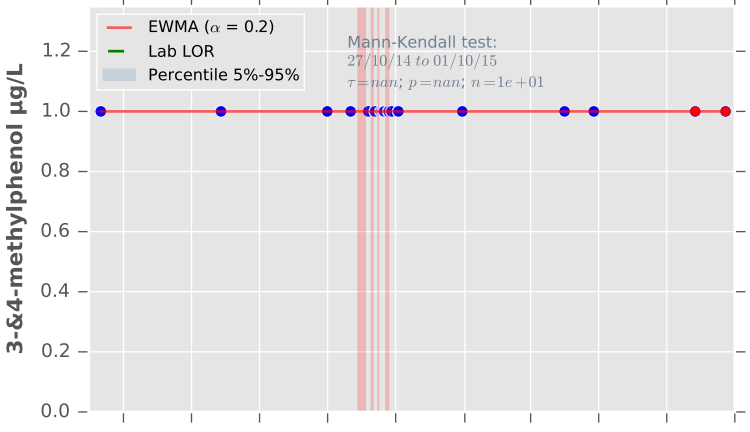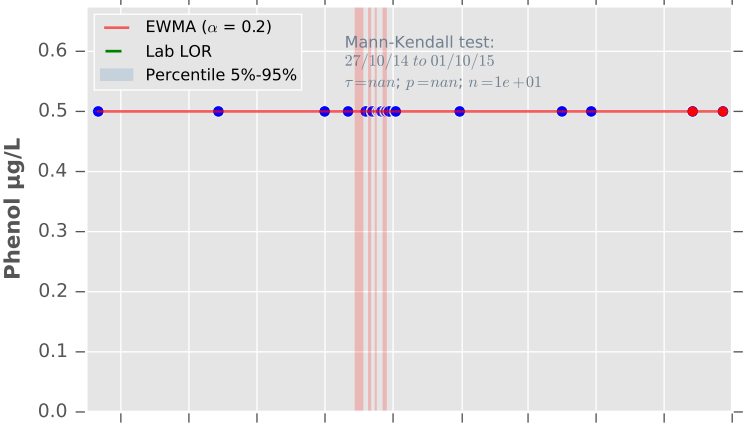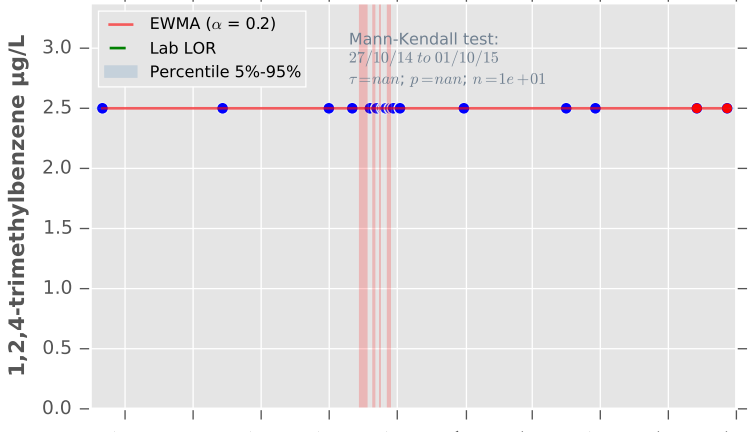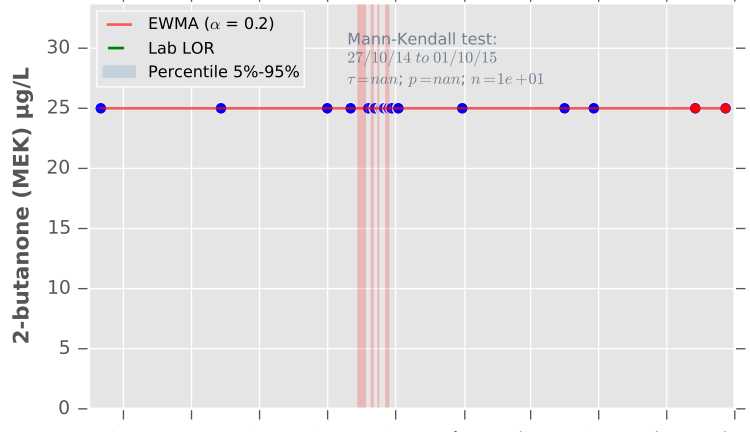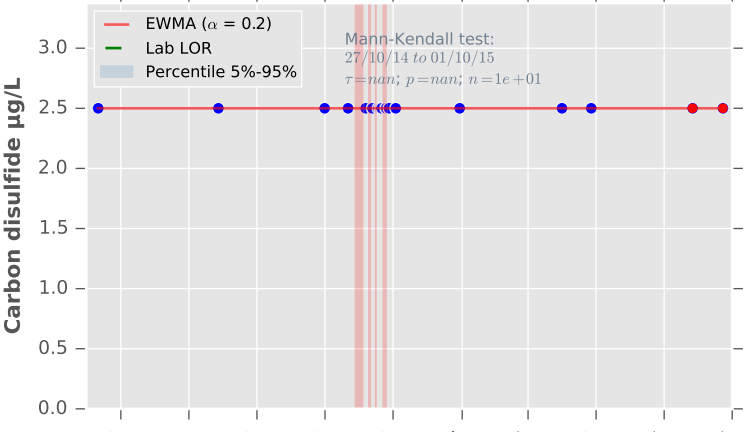WKS02**WKS02****WKS02****WKS02****WKS02****WKS02****WKS02****WKS02****WKS02**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

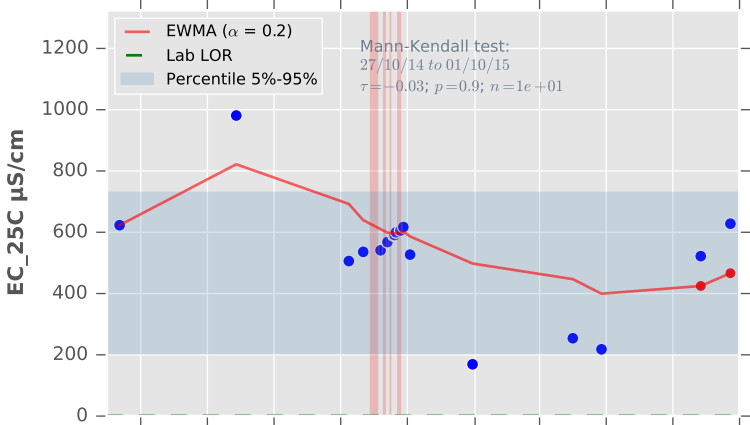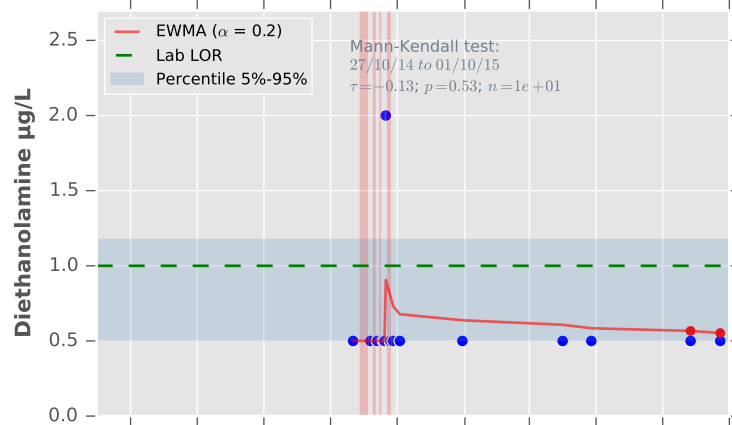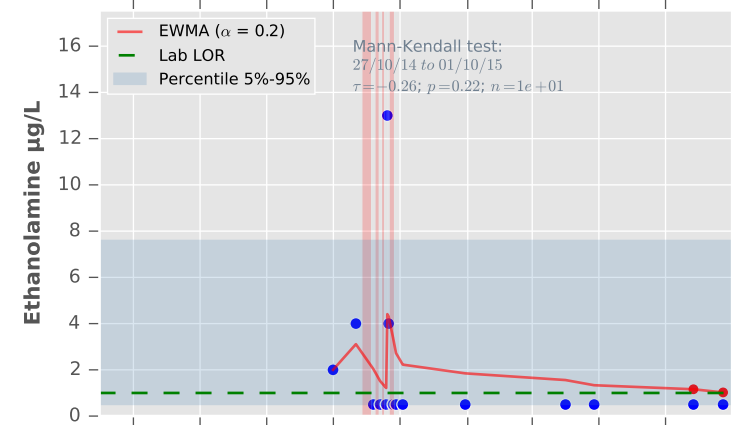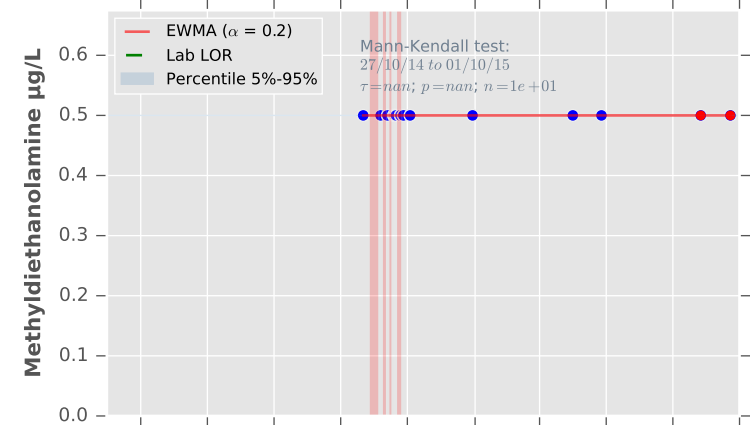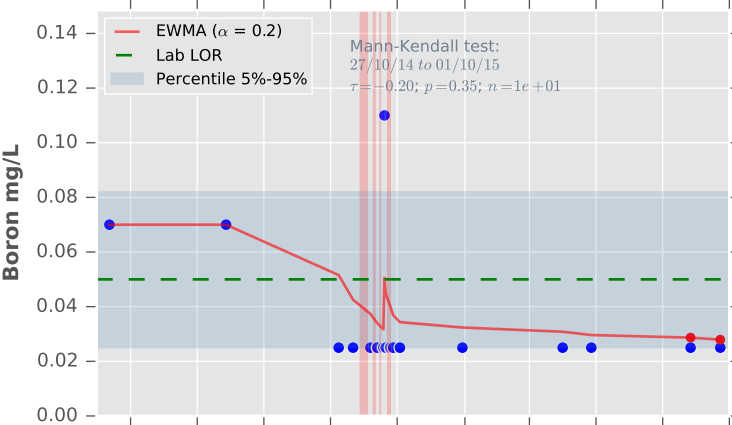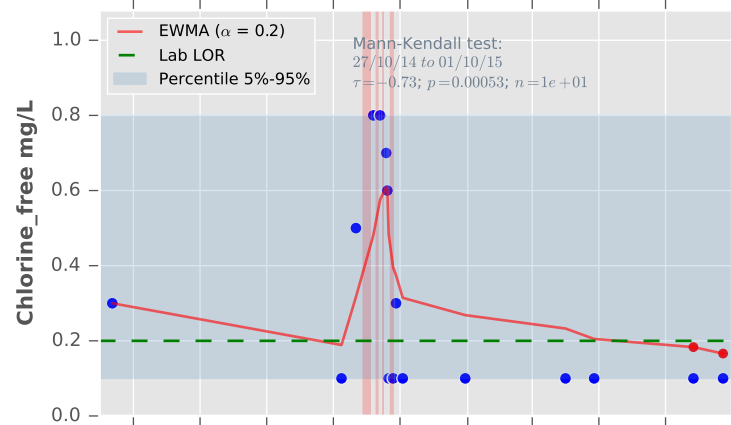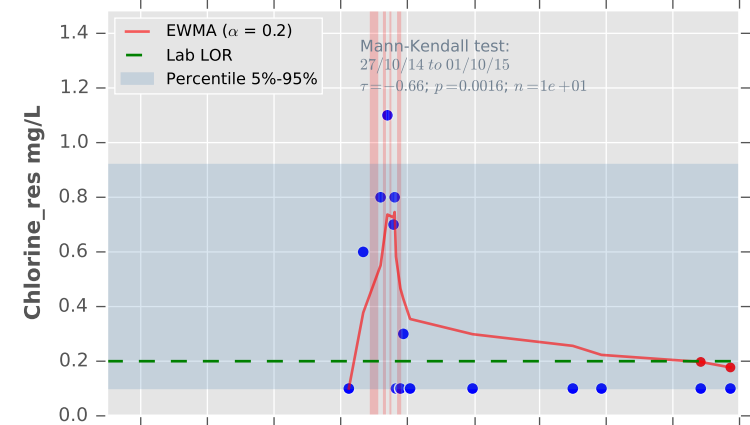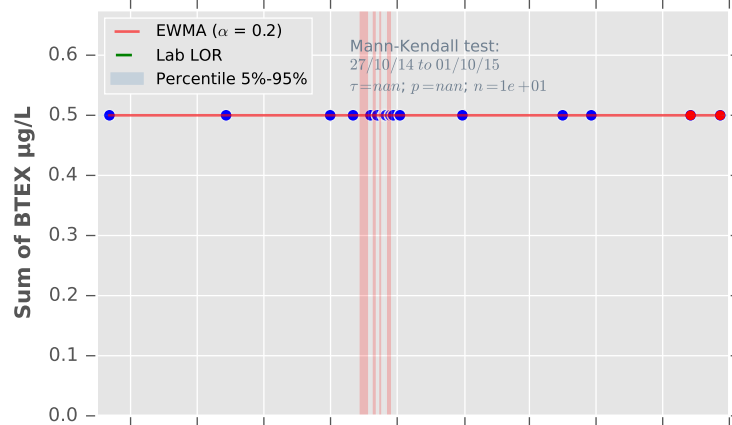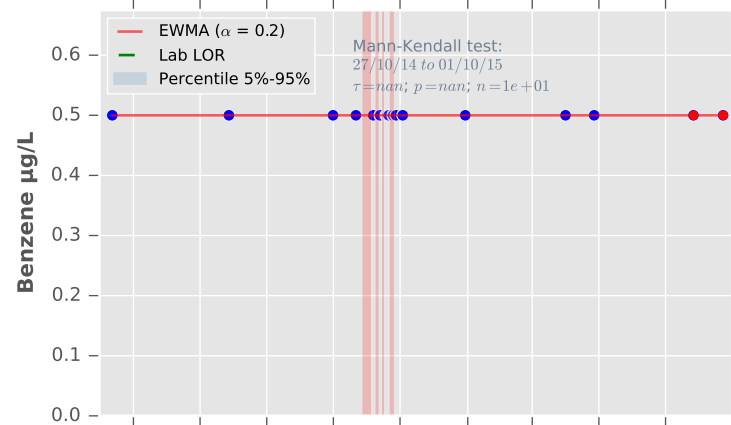WKS03**WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03**










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

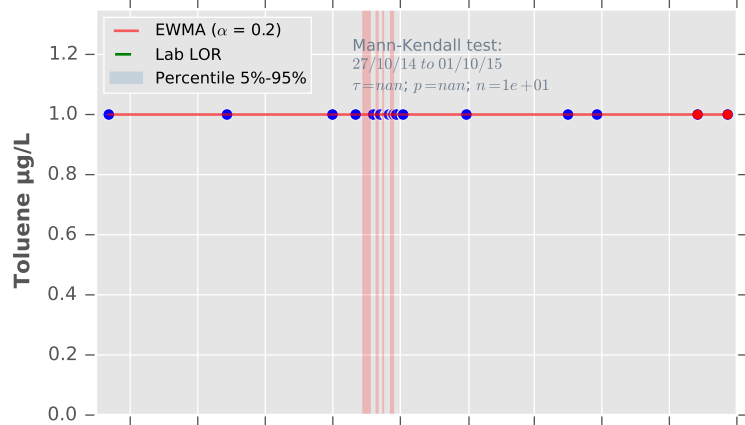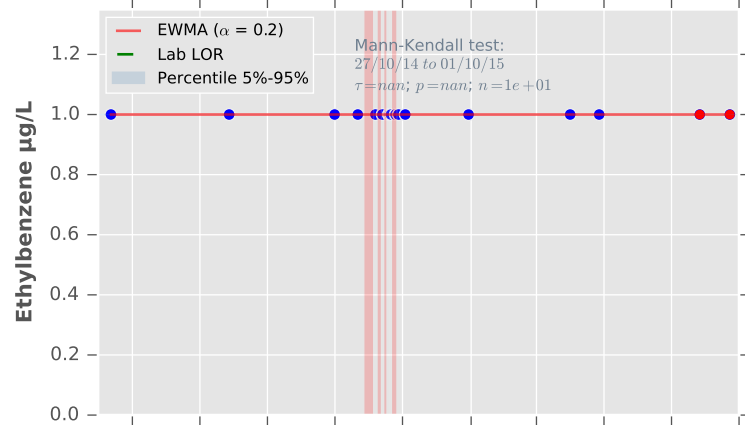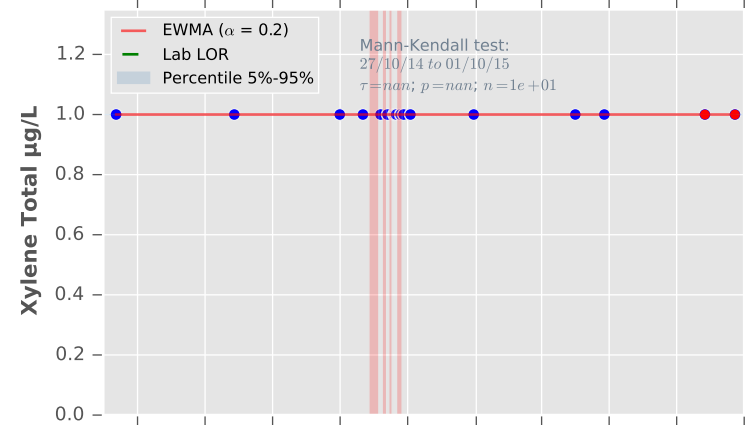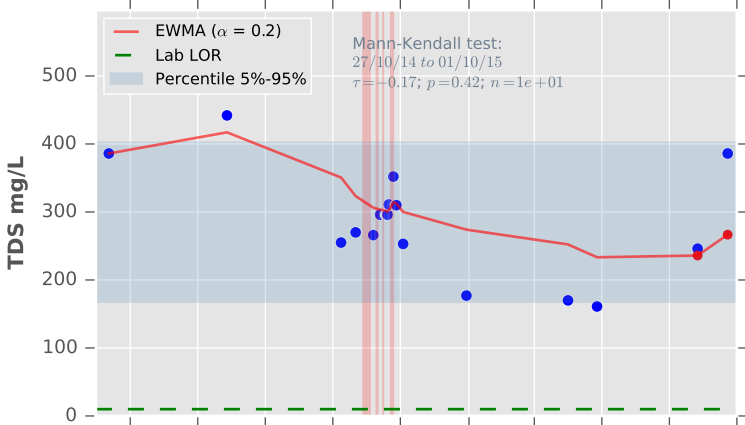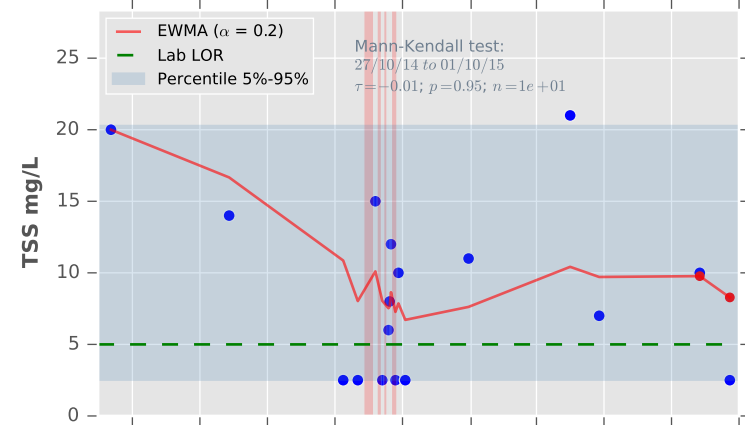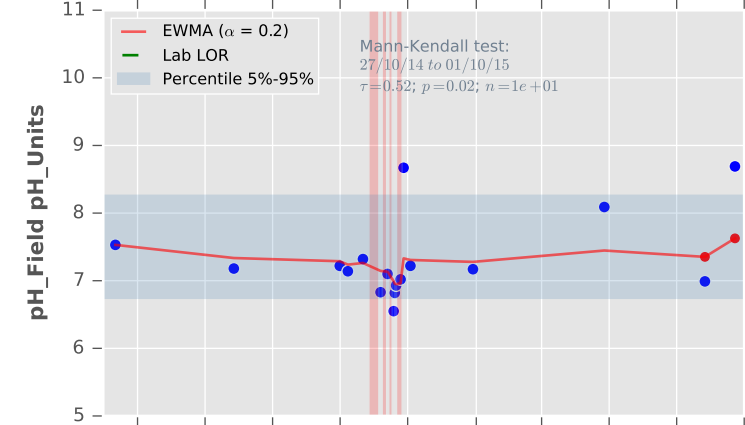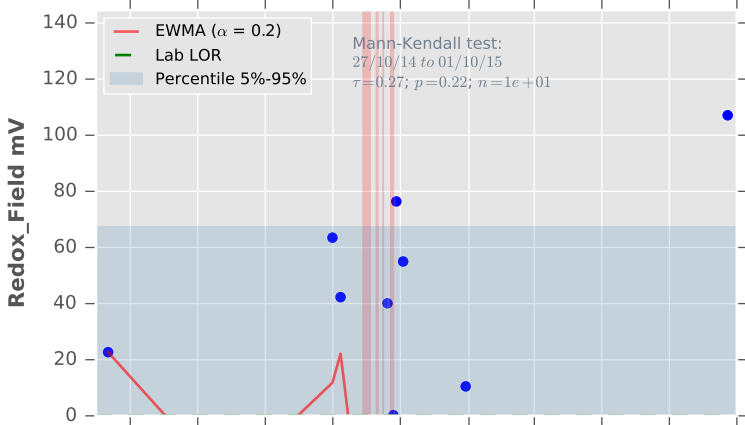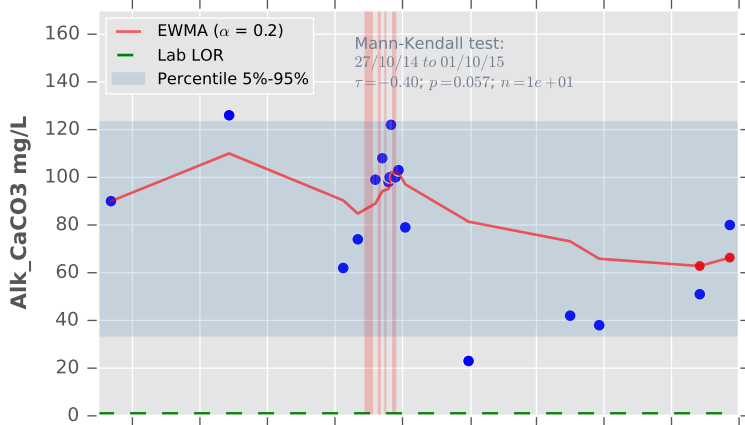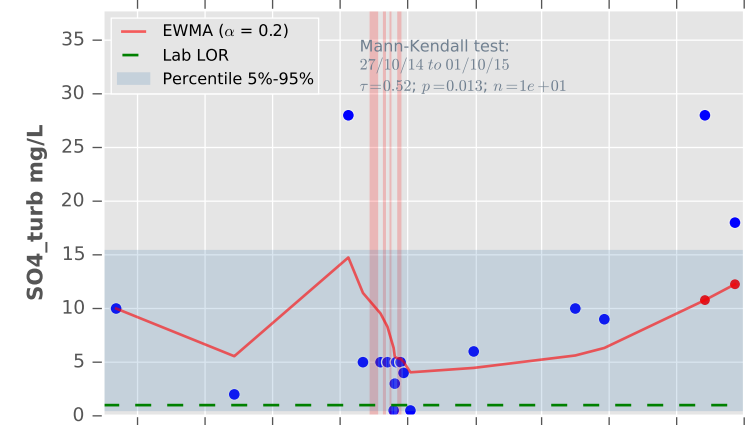WKS03**WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03**










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

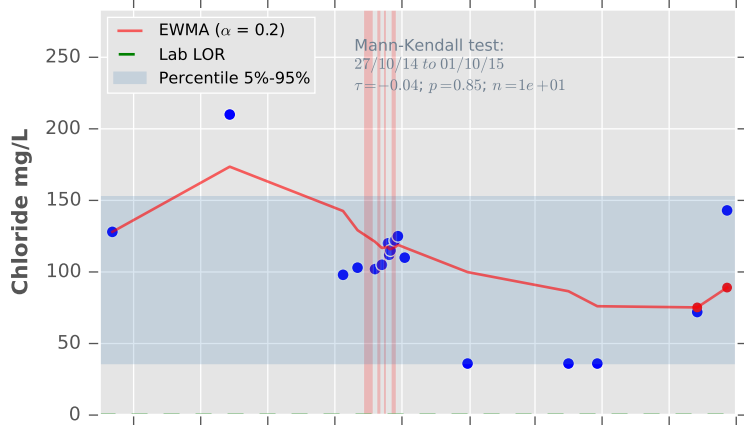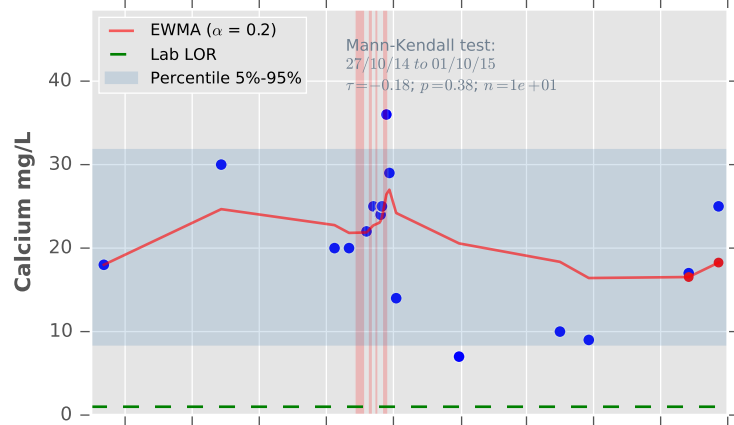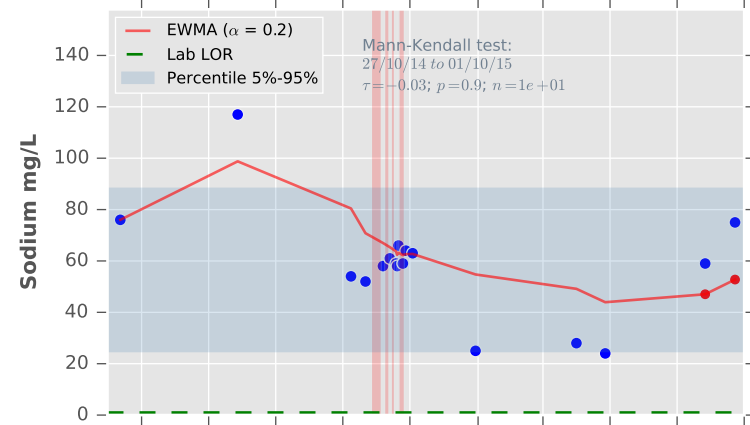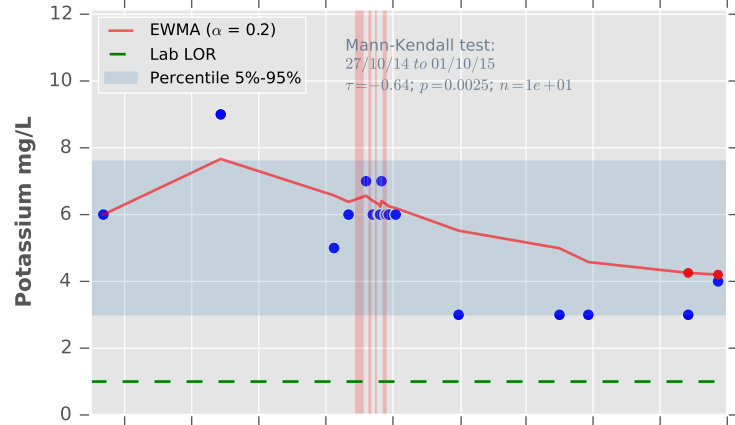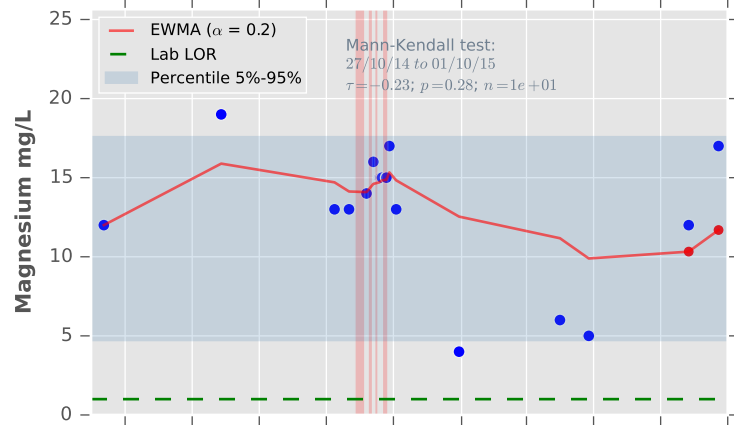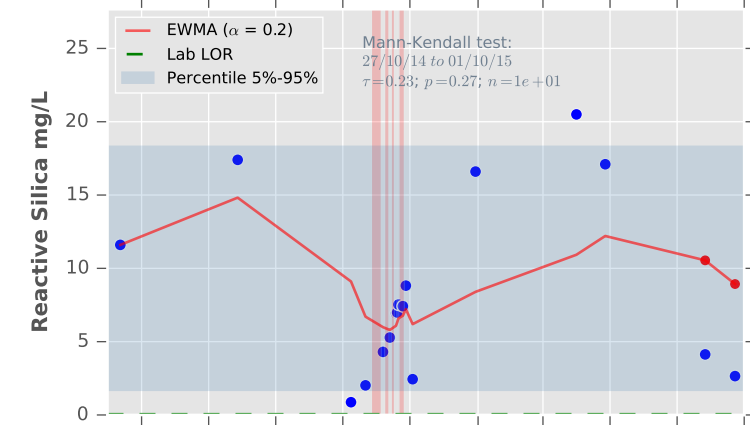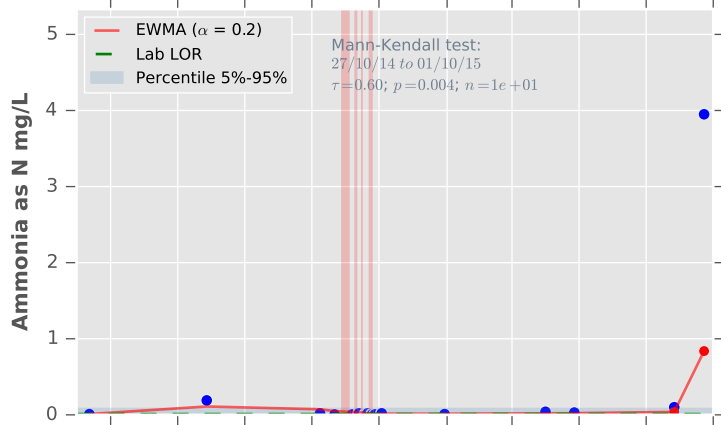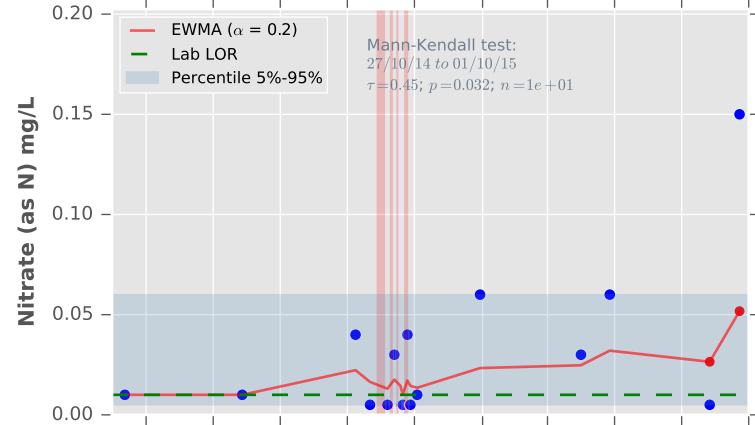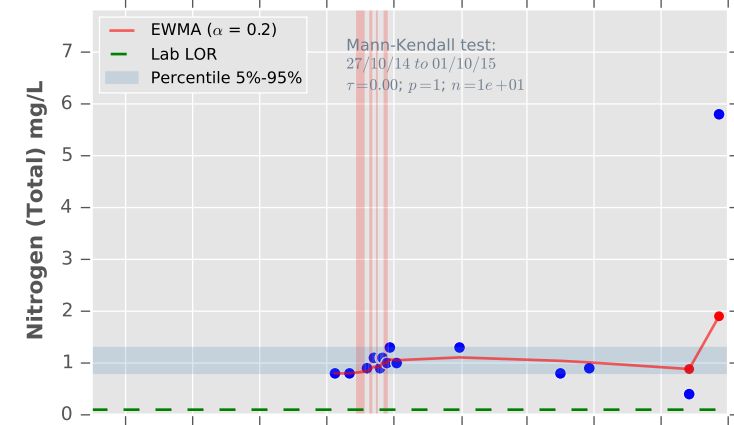WKS03**WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03**










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

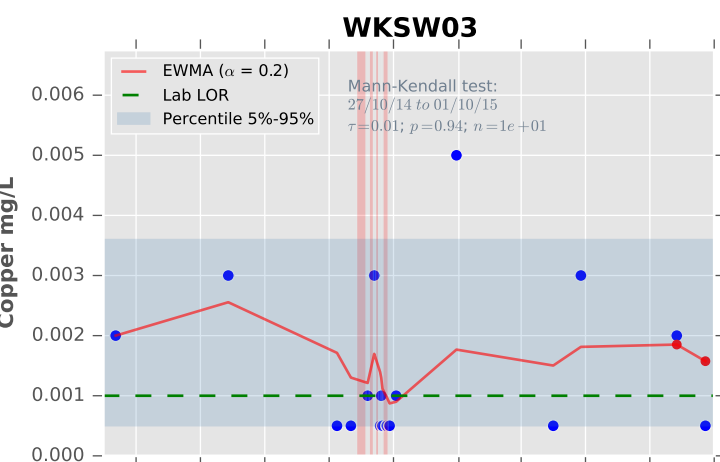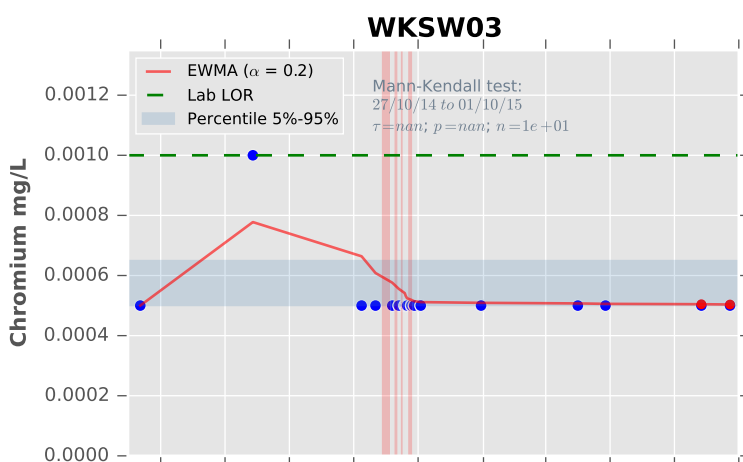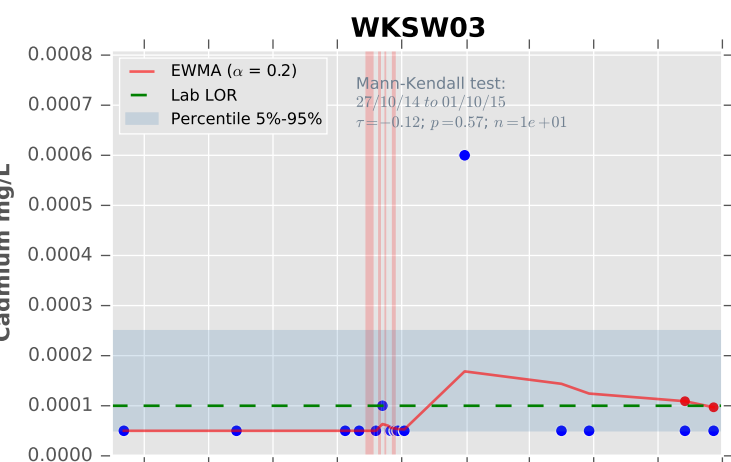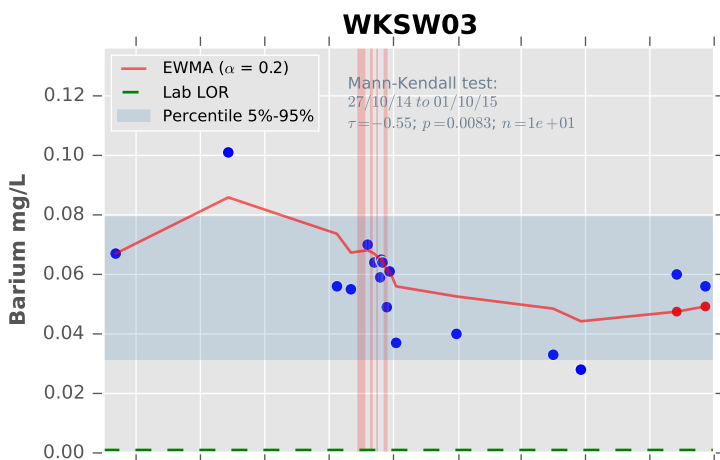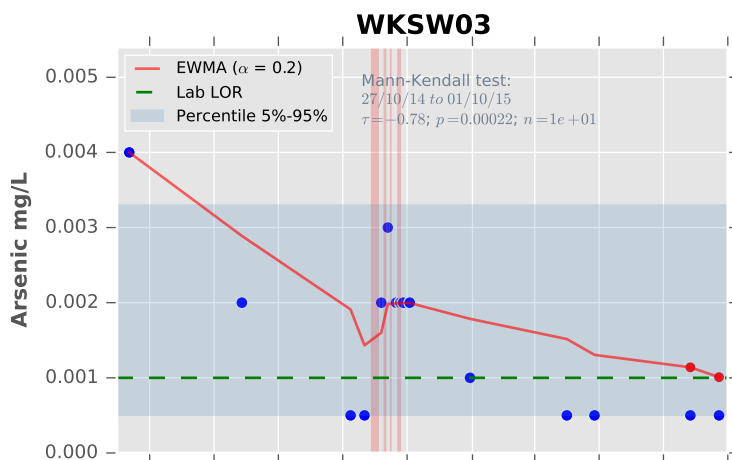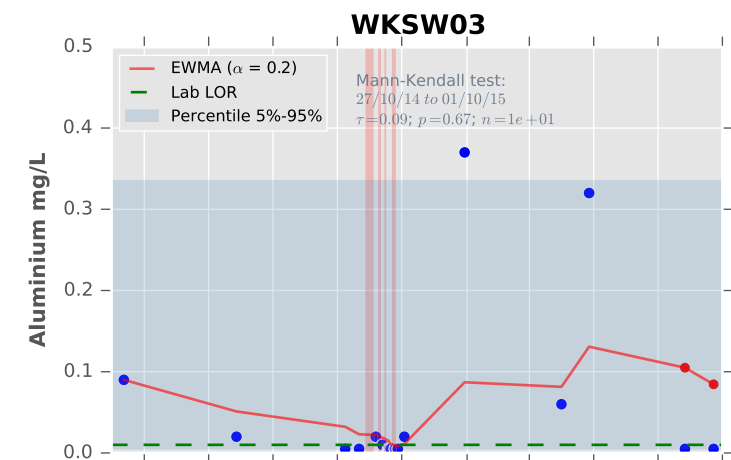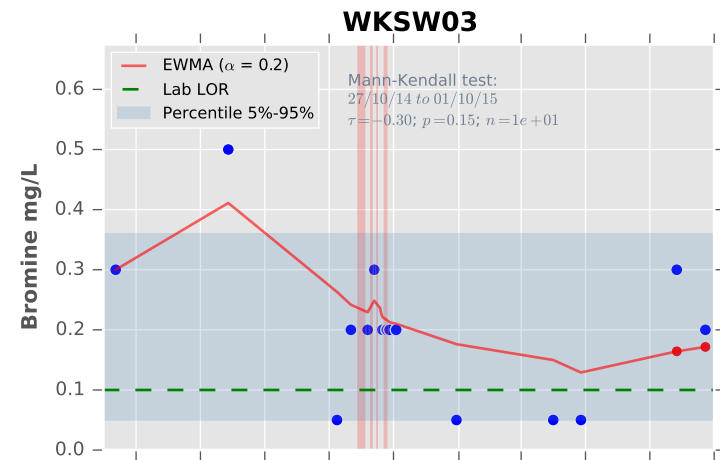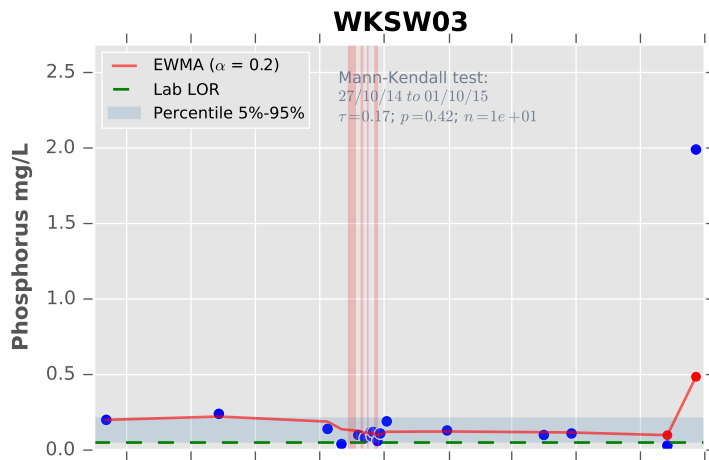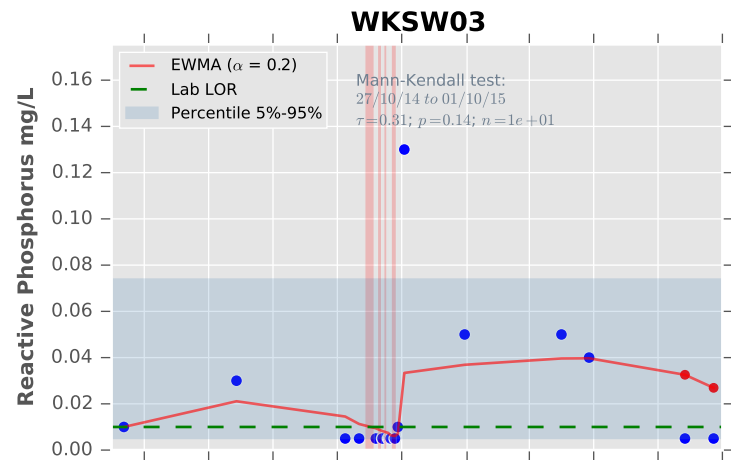

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

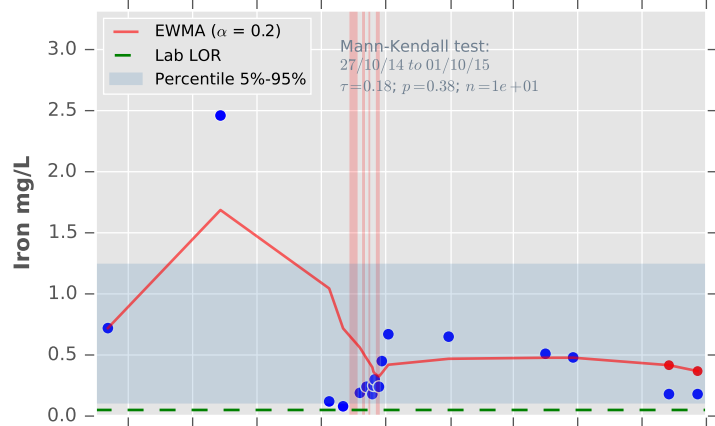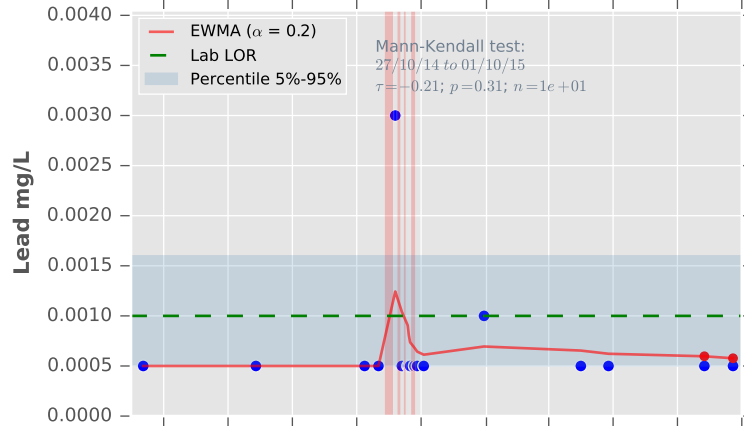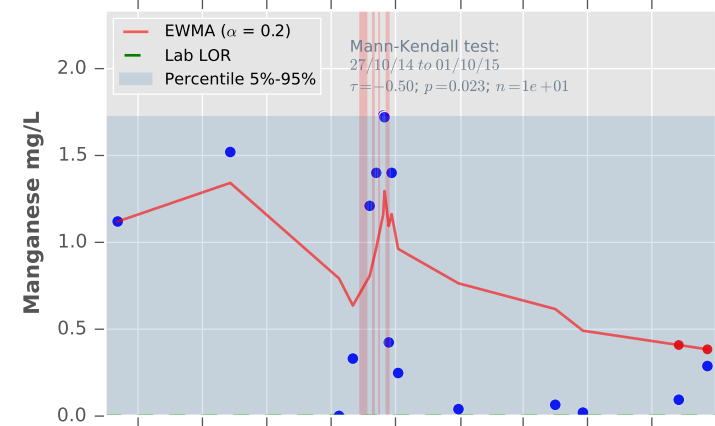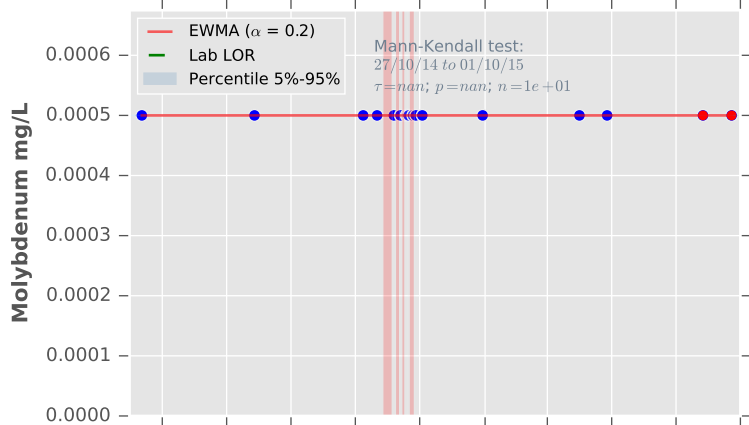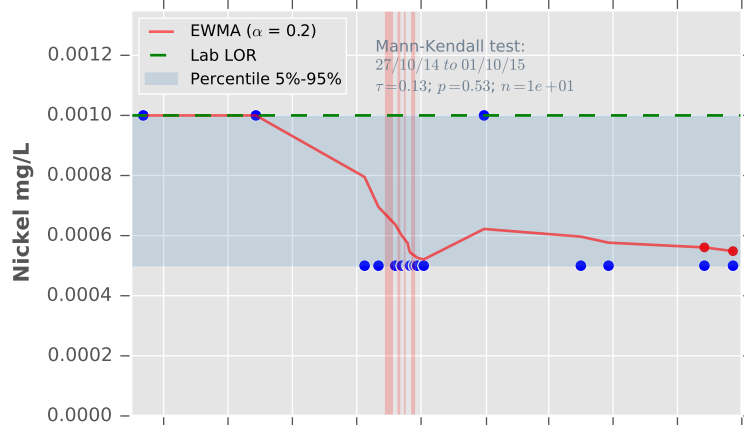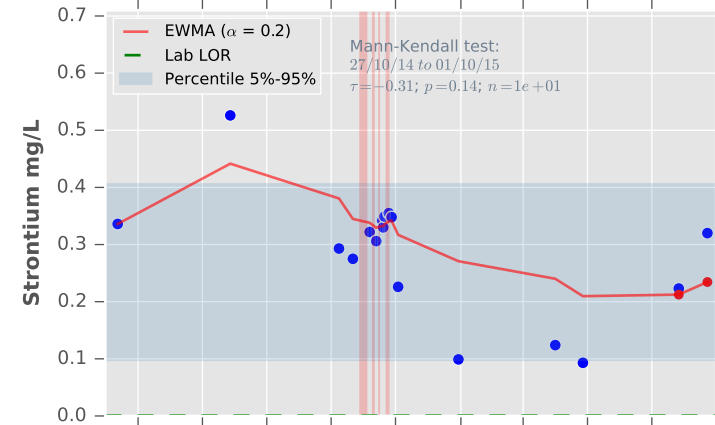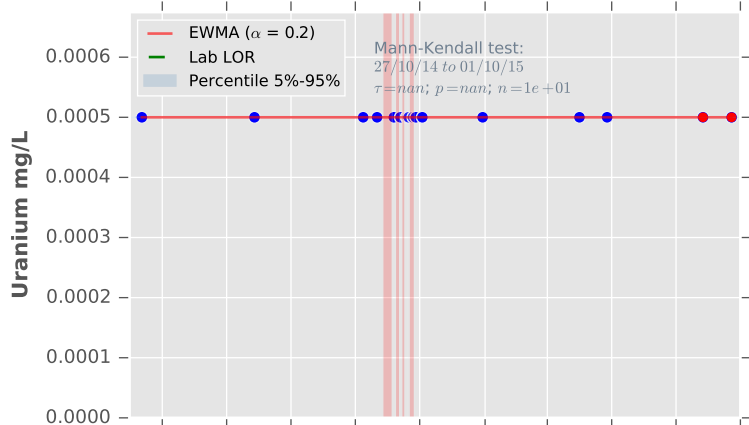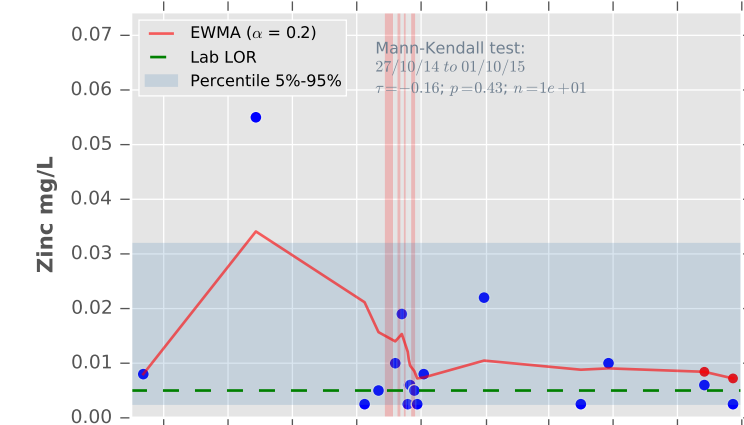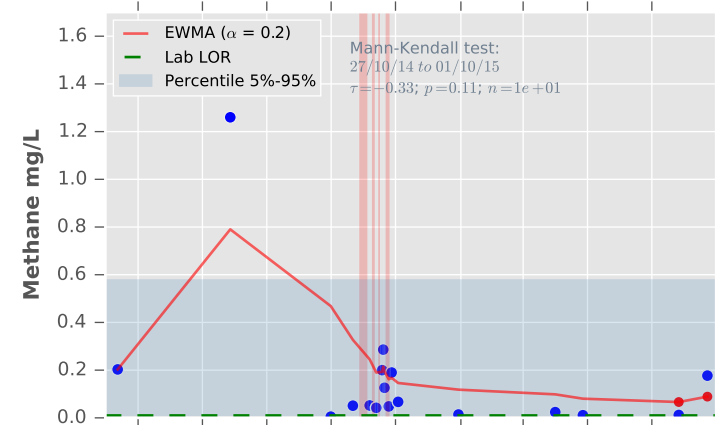WKSW03**WKSW03****WKSW03****WKSW03****WKSW03****WKSW03****WKSW03****WKSW03****WKSW03**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015










Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

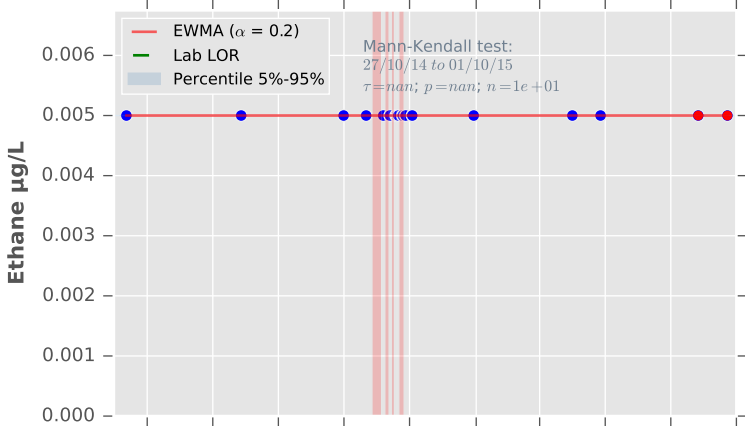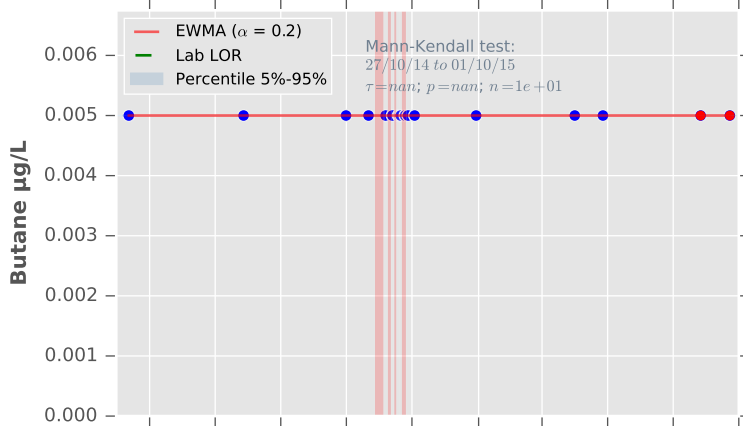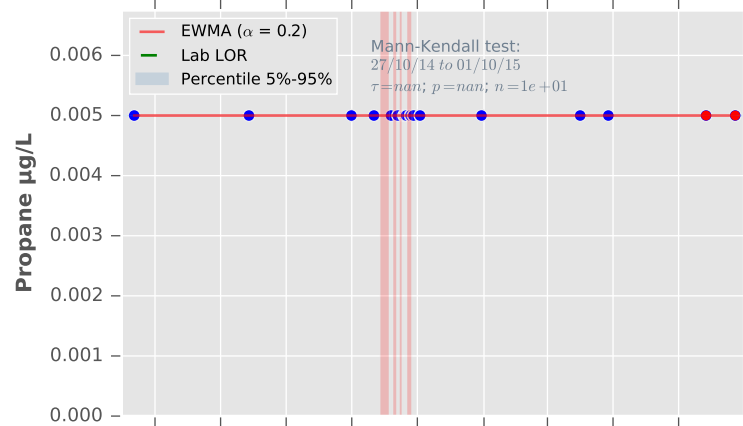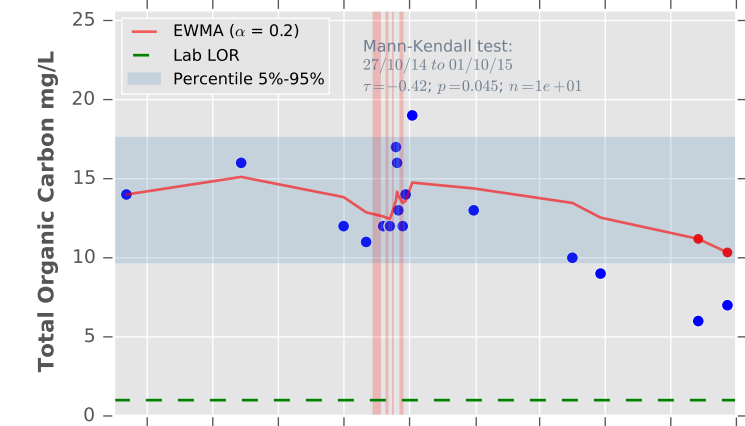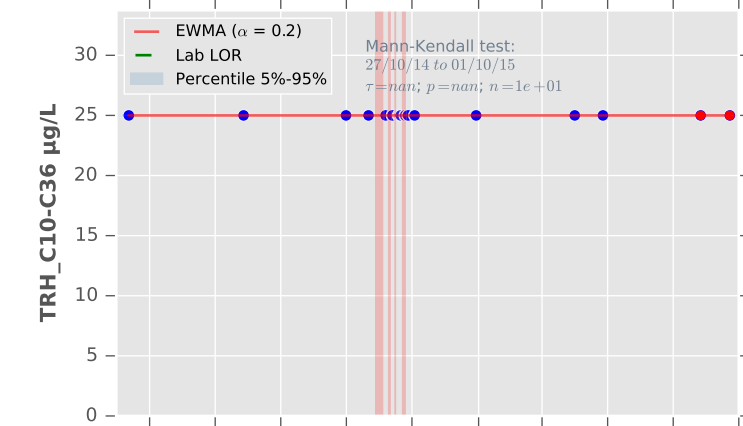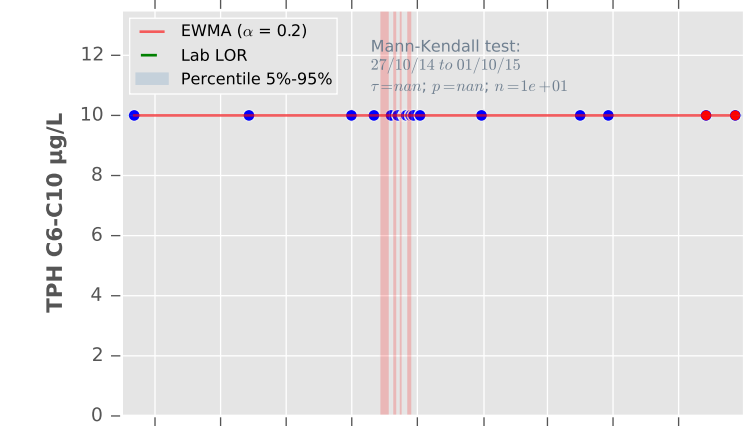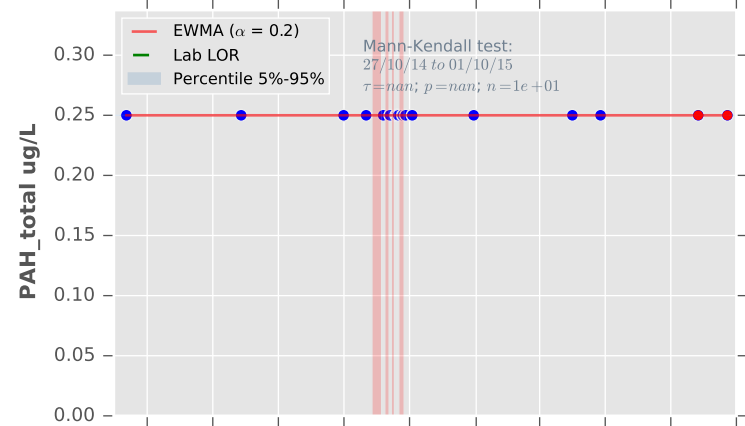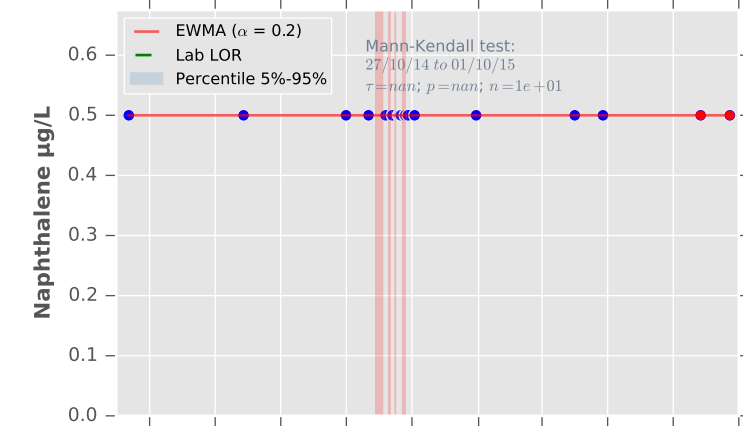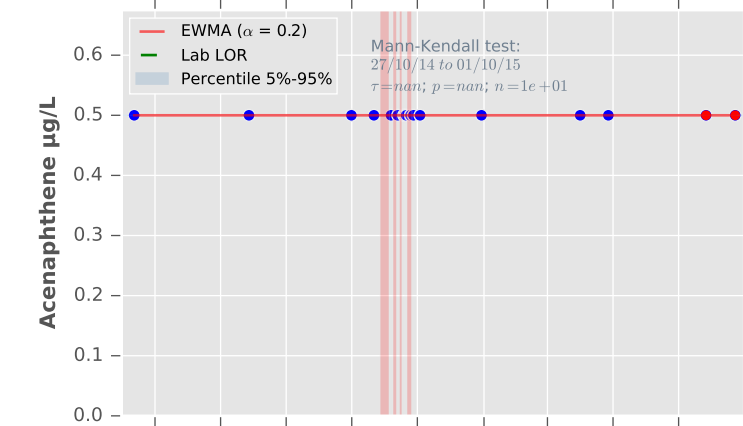WKS03**WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015

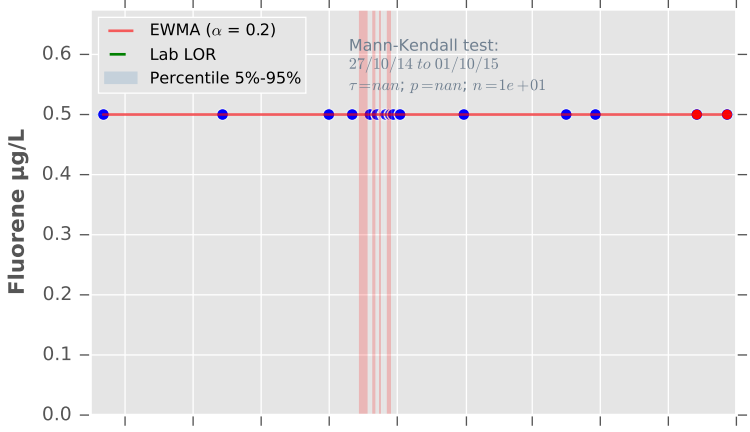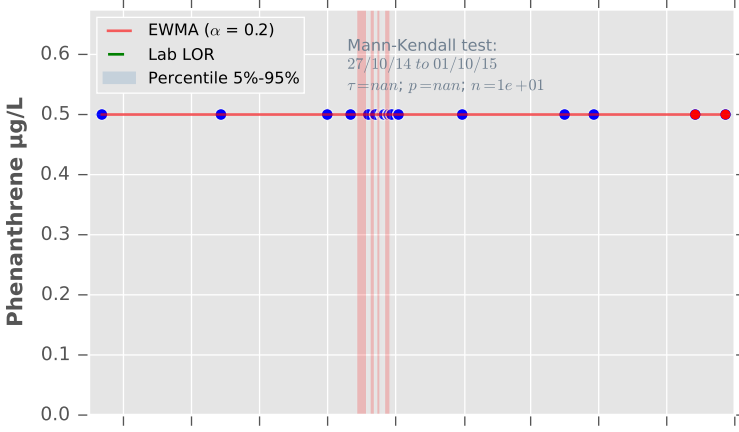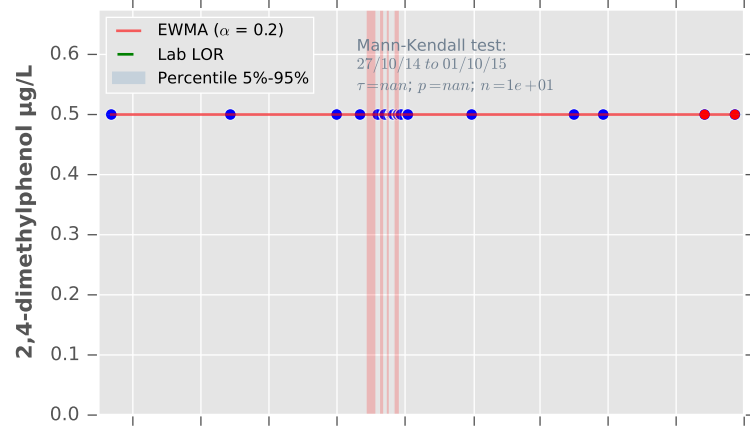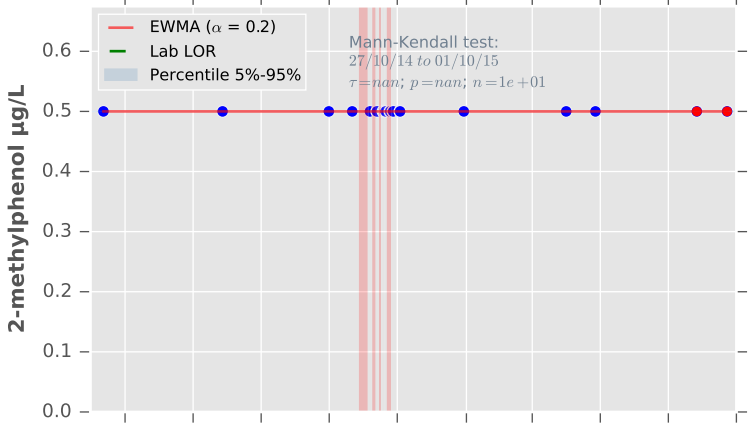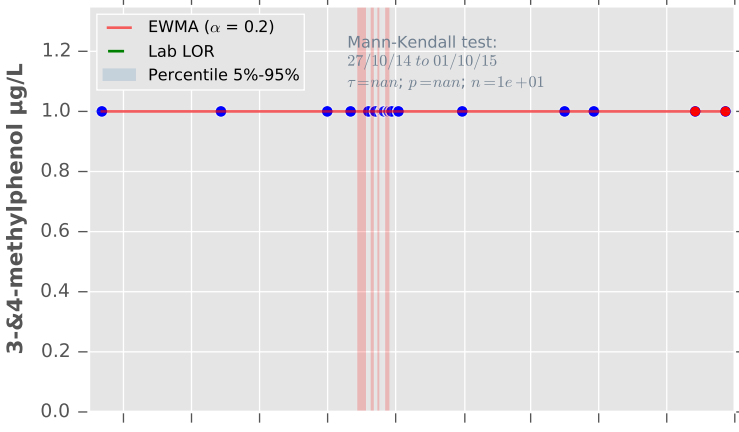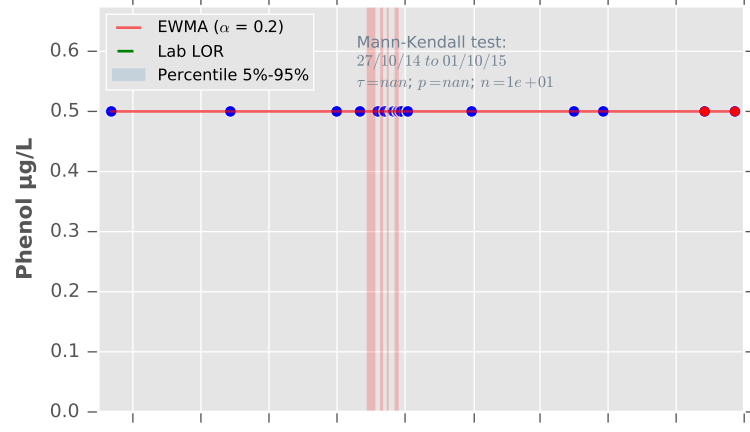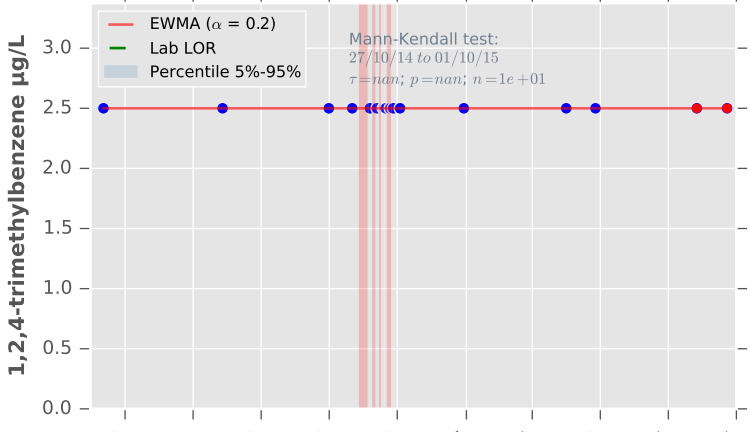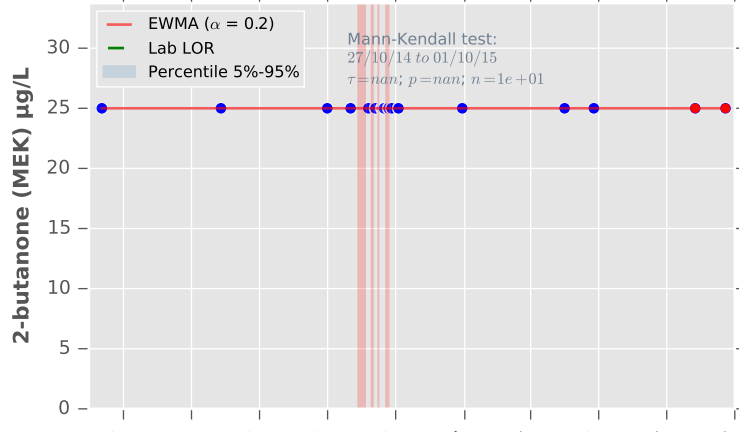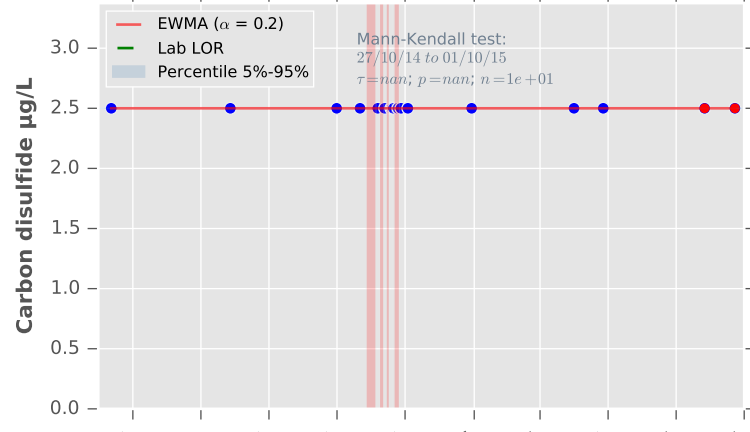WKS03**WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03****WKS03**

Apr 2014 Jun 2014 Aug 2014 Oct 2014 Dec 2014 Feb 2015 Apr 2015 Jun 2015 Aug 2015 Oct 2015