EPL779 Coal Ash Monitoring Report

FY 2026



Document Revision History

Date	Version	Author	Comments
16/10/2026	01	N Gardiner	Final
23/10/2026	02	A Speechly	Approved

Table of Contents

1. Introduction 3

2. Report 5

2.1. Quantity of Coal Used for Electricity Generation 5

2.2. Ash Generation 5

2.3. Ash Deposition 5

2.4. Ash Storage 9

2.5. Ash Transport 9

2.6. Management Measures 9

1. Introduction

AGL Macquarie (AGLM) holds Environment Protection Licence 779 (the EPL) for Bayswater Power Station. The EPL includes a requirement for the preparation of an Annual Coal Ash Monitoring Report.

This report has been prepared to meet the requirements of section R4.5 of the EPL for the Financial Year (FY) 2026 reporting period (1 July 2025 to 30 June 2026). The report will be uploaded to a relevant page linked to the AGLM website (https://www.agl.com.au/about-agl/operations/agl-in-the-hunter) and provided to the EPA via info@epa.nsw.gov.au by 31 October following the end of the reporting period.

The report has been prepared in accordance with the relevant EPL 779 conditions. Table 1 provides guidance on the sections where each of the conditions have been addressed.

Table 1: Relevant EPL 779 conditions and relevant sections

Relevant EPL 779 Conditions	Relevant Section
M10.4 For each licence reporting period, the licensee must monitor and record the following details regarding generation, deposition, storage, transport and reuse of coal ash generated at the premises:	This report
a) Quantity of coal used for electricity generation at the premises;	Section 2.1
b) Quantity of bottom ash; and quantity of fly ash, generated at the premises and the grade of fly ash produced (if the grade is known);	Section 2.2
c) Quantity of bottom ash; and quantity of fly ash, deposited, and/or stored at the premises with a description of how it is stored and the processes for managing the storage;	Section 2.3 Section 2.4 Table 3
d) Quantity of bottom ash; and quantity of fly ash, transported from the premises together with identification of the destination; and	Section 2.5 Table 3
e) Management measures used for coal ash repositories on the premises to maintain the viability of ash reuse, including identification of any other material being stored concurrently with newly deposited coal ash.	Section 2.66
Quantities are to be reported in tonnes.	This report
R4.5 The licensee must prepare an Annual Coal Ash Monitoring Report that details information required under condition M10.4 in respect of generation, deposition, storage, transport and reuse of coal ash generated at the premises for each Annual Return reporting period.	Section 1 This report
R4.6 By no later than 31 October of each year, the licensee must make the Annual Coal Ash Monitoring Report required by condition R4.5 publicly and prominently available on its website.	Section 1

Relevant EPL 779 Conditions	Relevant Section
R4.7 By no later 31 October each year, the licensee must send a copy of the Annual Coal Ash Monitoring Report required by condition R4.5 to the EPA at info@epa.nsw.gov.au.	Section 1

2. Report

2.1. Quantity of Coal Used for Electricity Generation

During the reporting period, Bayswater Power Station consumed 6.55 million tonnes (Mt) of coal for electricity generation.

2.2. Ash Generation

Table 2 details the total quantity of ash generated (fly ash and bottom ash) during the reporting period.

Table 2: FY 2026 Ash Generation

Ash Category	Quantity (Mt)
Bottom ash	0.237
Fly ash	1.459
Total ash produced	**1.697**

2.3. Ash Deposition

Ash produced at Bayswater Power Station is deposited and stored at the Bayswater Ash Dam (BWAD) and Ravensworth Void 5 (RWV5). The following quantities of ash were deposited in the BWAD and RWV5 during the reporting period:

Table 3: Ash Deposition Quantities FY 2026

Storage Location and Ash Category	Quantity (Mt)
BWAD	
Bottom Ash	0.007
Fly Ash	-0.142
RWV5	
Bottom Ash	0.230
Fly Ash	1.563

Note: Fly ash to BWAD is reported as a negative value due to fly ash harvesting operations, where material is extracted from BWAD and transferred to Void 5. During the reporting period, 0.041 Mt of fly ash was deposited into BWAD and 0.183 Mt was extracted from BWAD for transfer to Void 5.

2.3.1. Bayswater Ash Dam

The BWAD is located to the east of the Bayswater Power Station and is owned and operated by AGLM. The BWAD is formed in Pikes Gully and is confined by a Main Embankment along the eastern boundary, a Saddle Dam Embankment along the north-western corner of the site, a coal conveyor embankment along the western boundary and natural topography along the southern side of the site as illustrated in Figure 1.



Figure 1. BWAD Site Plan

The furnace ash including economiser grits are collected and crushed, then mixed with ash return water to create a suspension (slurry) and pumped to the north-western side of the dam. The bottom ash and fly ash is transported from the ash plant via above ground basalt lined pipes to a disperser located on a high point within the ash reservoir.

BWAD receives bottom ash as a lean mix slurry at up to 30% solids content. When fly ash is diverted to the BWAD, the percentage of solids varies from 0% to 40% based on the number of collection vessels diverted. The ash disposal system at BWAD comprises a closed water cycle of pumps and pipes to convey ash slurry to the dam. The decant water is either lost through evaporation and seepage or returned to the power station for reuse in conveying ash.

The ash deposition includes discharging ash from the western extents to either Pond 1, 2, 3 or dredge pond with beaching towards the decanting locations in the east of each cell. Deposition locations have been prescribed along the western wall for AGLM to manage once the deposition reaches the design ash level. The deposition locations however can be moved as required based on the observations of the ongoing deposition.

An updated Ash Management Plan is now operational which comprises of separate management areas for bottom ash and fly ash.

Bottom Ash

Bottom ash is deposited into a dedicated channel on the northern side of the dam, adjacent to the saddle dam. The extraction of bottom ash is managed in this channel which includes baffles to slow down the flow of the ash whilst encouraging the settlement of solids before passing through the decant structures into the decant pond. Three decant structures are operational at the end of the channel as the final step of removing ash from the water flowing into the decant pond.

Fly Ash

The deposition, drying and harvesting of fly ash occurs within four ponds on the BWAD. Two deposition points are installed in each fly ash cell with one on the A-line and the other one on the B-line. The fly ash management process will follow the sequence below:

i. Deposition of fly-ash in first pond until the capacity is exhausted or up to the recommended levels in the cell. To retain ash in the cells and decant water with very low Total Dissolved Solids (TDS), the decant structures will be progressively raised.

ii. When deposition in the first pond has been stopped, it is moved into the second pond until capacity is exhausted or up to the recommended levels in the cell. During this time, ash deposited in the first pond will be dried through some form of mud farming activities involving amphibious excavators and low ground pressure dozers. This process will involve extensive testing of the material to ensure safety of people and plant working in the cell. When it is deemed safe to commence extraction of dry ash from the pond, trucks, dozers and excavators will be used to move the ash from the pond to the dry stacking area ready for haulage to the rehabilitation areas.

iii. When the second pond reaches capacity, deposition is moved to the third pond and controlled drying and extraction process as highlighted in step 2 will commence in the second pond.

iv. Finally, deposition is moved to the fourth pond for drying, and then extraction of ash will commence in the third pond. This rotation will be repeated throughout the operational years of the Power Station.

An Ash Management contractor manages the deposition, drying, harvesting and hauling of both bottom and fly ash into and out of the ponds.

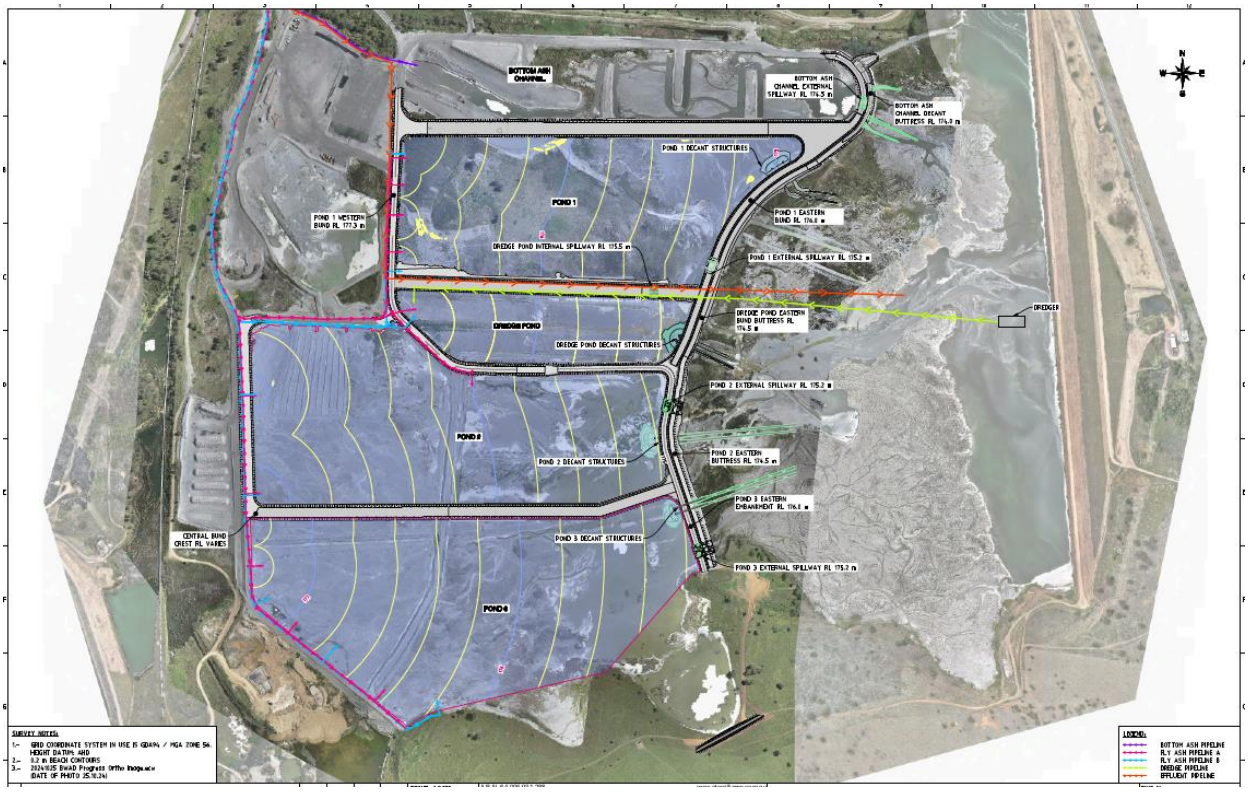


Figure 2. BWAD ash management ponds and channels

2.3.2. Ravensworth Void 5

The Ravensworth south-eastern ramp (Void 5 east) and final void (Void 5 north) are collectively known as Void 5. Both are located entirely within the Macquarie Generation Subdivision share of the Ravensworth South area, which is flanked on the south by land belonging to the Narama Open Cut, and in the west by land occupied by Ravensworth West Mine and Ravensworth Underground Mine (RUM).

The Ravensworth area is situated in the upper Hunter Valley, approximately halfway between the towns of Singleton and Muswellbrook adjacent to the New England Highway as shown in Figure 1.



Figure 3. Aerial image showing the general arrangement of RWV5.

The fly ash is transported by pipeline from Bayswater Power Station to RWV5.The system that transports fly ash from Bayswater Power Station to RWV5 conveys the ash from the station to silos located adjacent to BWAD using a pneumatic extraction system with dry compressed air as the transport medium. From the silos, the fly ash is mixed with water to form a dense phase concentration of around 60 to 65 % solids by weight. This slurry is subsequently pumped 12.2 kilometres (km) through steel pipelines to the RWV5 emplacement area.

The ash emplacement strategy involves two distinct stages:

- **Stage 1** comprised the emplacement of fly ash into each of the Void Arms up to full supply level (RL101 m). Both arms were fully utilised during Stage 1 ashing operations, by discharging from the northern and eastern extents of the northern and eastern arms respectively. Ash was prevented from entering the return water pond by constructing a series of low-level embankments, using an upstream raising methodology. Ash emplacement was cycled between the two Arms in the Void, such that one Arm was active, whilst the other one was drying, and construction of the next low-level embankment was occurring in the other Arm. Stage 1 ashing is now complete.

- **Stage 2** comprises the emplacement of fly ash in the remaining Void. Fly ash is currently being discharged from the southern and western void ridges to form a beach, that pushes the decant pond in a north-easterly direction to the inside corner of the Void. A series of sumps were constructed, following up the access road on the eastern side of the Northern Arm, as the ash level raises. These sumps are required to retain the ash beach to provide a clean pond for the return water pump. As the ash level rises, the return water pump will be raised up in level, to each successive sump.

2.4. Ash Storage

As described in Section 2.3 ash is stored in BWAD and RWV5.

2.5. Ash Transported from the Premise

The following quantities of ash were transported offsite for reuse by external vendors during the reporting period:

- **Bottom Ash**: 0 kilotons (kt) sold to offsite vendors.
- **Fly Ash**: 38.21 kt sold to offsite vendors.

2.6. Management Measures

AGL Macquarie has implemented several management measures to ensure the proper handling, storage, and reuse of ash:

- **Ash Storage and Deposition**: Refer to section 2.3. Ash is stored in the BWAD and RWV5 via hydraulic and mechanical methods. No mixing of fly ash and bottom ash occurred during the reporting period to maintain the viability of ash reuse.
- **Ash and Waste Segregation**: Refer to Figure 1, all Filter Bags and approved waste material have designated disposal areas (Filter Bag Disposal Area and Waste Disposal Area) and are not co-disposed of within the Fly Ash or Bottom Ash ponds or channels respectively.
- **Ash Reuse**: AGLM continued to promote the beneficial reuse of ash by selling fly ash to external vendors.
- **Monitoring and Compliance**: Regular monitoring and testing is conducted to ensure compliance with EPL 779, the Coal Ash Order and Exemption 2014, and the AGLM Bayswater Power Station Ash Dam Coal Ash Order and Exemption 2025. This ensures the safe reuse and disposal of ash in an environmentally responsible manner.